

**Fermi National Accelerator Laboratory**

**FERMILAB-TM-1981**

# **Fermilab Recycler Ring Technical Design Report**

**Gerry Jackson, Editor**

*Fermi National Accelerator Laboratory  
P.O. Box 500, Batavia, Illinois 60510*

**July 1996**

## **Disclaimer**

*This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.*

# **Fermilab Recycler Ring**

# **Technical Design Report**

**July 1996**

**Revision 1.1**

# TABLE OF CONTENTS

## **1. INTRODUCTION**

- 1.1. Role in the Fermilab III Program**
- 1.2. Performance**
- 1.3. Operational Modes**
- 1.4. Organization of this Report**

## **2. ACCELERATOR PHYSICS**

- 2.1. Operational Overview**
- 2.2. Lattice Issues**
- 2.3. Performance Projections and Modeling**
- 2.4. Beamlines and Beam Transfers**
- 2.5. Vacuum Issues**
- 2.6. RF System**
- 2.7. Impedances and Instabilities**
- 2.8. Intrabeam Scattering**
- 2.9. Stochastic Cooling**

## **3. TECHNICAL COMPONENTS**

- WBS 3.1.1. Magnets**
- WBS 3.1.2. Vacuum**
- WBS 3.1.3. Power Supplies**
- WBS 3.1.4. RF Systems**
- WBS 3.1.5. Electron Cooling**
- WBS 3.1.6. Kickers**
- WBS 3.1.7. Stochastic Cooling**
- WBS 3.1.8. Instrumentation**
- WBS 3.1.9. Controls**
- WBS 3.1.10. Safety System**
- WBS 3.1.11. Utilities**

## **4. CIVIL CONSTRUCTION**

- 4.1. Stochastic Cooling Penetrations**
- 4.2. Stochastic Cooling Telescope**
- 4.3. MI-30 Building Extension**

## **5. APPENDICES**

- 5.1. Lattice**
- 5.2. Cost Estimate**
- 5.3. Schedule**

# 1. INTRODUCTION

This report describes the technical design of the Fermilab Recycler Ring. The purpose of the Recycler is to augment the luminosity increase anticipated from the implementation of the Fermi III upgrade project, which has as its main component the Fermilab Main Injector construction project.

The Recycler is a fixed 8 GeV kinetic energy storage ring. It is located in the Main Injector tunnel directly above the Main Injector beamline, near the ceiling. The construction schedule calls for the installation of the Recycler ring before the installation shutdown of the Main Injector. This aggressive construction schedule is made possible by the exclusive use of permanent magnets in the ring lattice, removing the need for expensive conventional iron/copper magnet construction along with the related power supplies, cooling water system, and electrical safety systems. The location, operating energy, and mode of construction are chosen to minimize operational impacts on both Fermilab's ongoing High Energy Physics program and the Main Injector construction project.

## 1.1 ROLE IN THE FERMILAB III PROGRAM

The Tevatron Collider provides the highest energy collisions in the world. To fully exploit this unique tool, Fermilab is committed to a program of accelerator upgrades for the purpose of increasing the Collider luminosity. Over the past 7 years the luminosity has been increased from a peak of  $1.6 \times 10^{30} \text{ cm}^{-2} \text{ sec}^{-1}$  in 1989 to over  $2 \times 10^{31} \text{ cm}^{-2} \text{ sec}^{-1}$  during 1995. Note that the original design peak luminosity of the Tevatron Collider was  $1.0 \times 10^{30} \text{ cm}^{-2} \text{ sec}^{-1}$ .

The Main Injector will supply a larger flux of protons for antiproton production, more intense proton bunches for use in the Collider, and a higher efficiency acceleration of antiprotons. The role of the Recycler ring is to provide more antiprotons for the Tevatron, which proportionally increases the luminosity. This is accomplished by acting as a high reliability post-Accumulator and receptacle for recycled antiprotons from the previous Collider store. Prior to the development of the Recycler ring, the peak luminosity goal of the Fermi III upgrade program was  $8 \times 10^{31} \text{ cm}^{-2} \text{ sec}^{-1}$  in the Tevatron Collider. With the construction of the Recycler ring, a typical peak luminosity of  $2 \times 10^{32} \text{ cm}^{-2} \text{ sec}^{-1}$  is expected. This factor of 2-3 increase in luminosity comes from the availability of more antiprotons at Tevatron injection. This report documents the design of the new fixed-energy Recycler storage ring to be placed in the Main Injector tunnel which will provide the basis for an ultimate additional order of magnitude luminosity increase up to  $1 \times 10^{33} \text{ cm}^{-2} \text{ sec}^{-1}$ .

Figure 1.1 displays the history of the peak luminosity as a function of time since 1989, which shows an exponential growth with a doubling time of 1.5 years. With the addition of the Recycler ring and its commissioning along with the Main Injector, the Tevatron Collider will be able to remain on this exponential slope. The first open point represents the initial typical peak luminosity goal of the Main Injector project. The second open point represents the luminosity goal of  $2 \times 10^{32} \text{ cm}^{-2} \text{ sec}^{-1}$  during Collider Run II when the Recycler is added to the picture. It should be possible, with further accelerator upgrades, to achieve a luminosity of  $1 \times 10^{33} \text{ cm}^{-2} \text{ sec}^{-1}$ , which is the highest luminosity open point in figure 1.1.

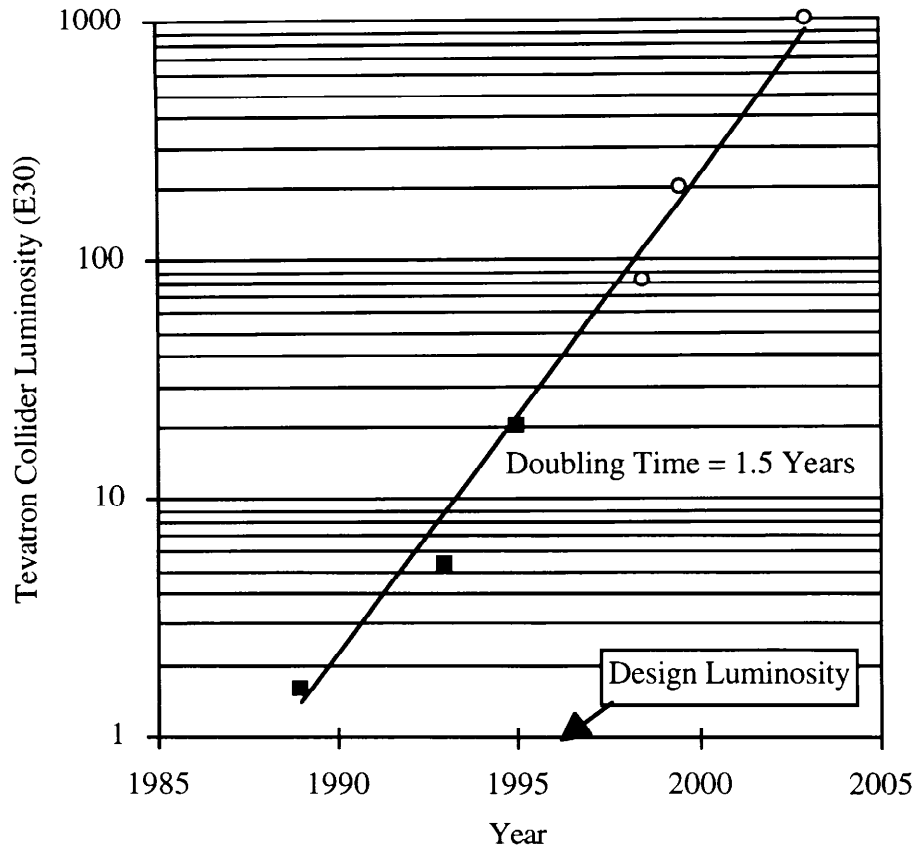


Figure 1.1: Tevatron Collider luminosity as a function of time. The filled circles are measured "best typical" peak luminosities, the line is an exponential fit to the data, and the open points represent goals for the future.

## 1.2. PERFORMANCE

The Recycler ring parameter list is given in table 1.1. The placement and design of the ring were chosen to minimize its impact on the existing high energy physics program.

This minimization takes place mostly in the areas of project cost and schedule. After the end of the present fixed target run, the only scheduled prolonged accelerator shutdown before the start of LHC operations at CERN is the 1998 Main Injector connection to the Tevatron. In the interest of accumulating the maximum amount of integrated luminosity before the LHC is publishing high energy physics results, an additional Tevatron shutdown for installation of the Recycler would be highly undesirable. By using as many of the already established Main Injector subsystem and lattice designs as possible, the ability to finish the Recycler installation before the completion of the Main Injector is made possible.

The other, more important, means of insuring prompt construction of the Recycler ring is to keep the cost very low. In order to achieve this feat, all subsystems must be designed to be simultaneously lower cost. For instance, the biggest cost savings comes from placing the Recycler ring in the Main Injector tunnel and avoiding civil

construction. Taking advantage of the fact that this ring operates at a fixed momentum, the magnets are built using permanent strontium ferrite magnets. By designing the magnets to require very little human labor in their construction, a substantial cost reduction is realized. Minimizing the number of magnets is accomplished by merging the quadrupole and dipole functions into gradient magnets. Because the magnetic field is permanent, no power supplies, LCW cooling systems, power distribution cables, or electrical safety systems are required. Since the permanent magnets are very stable against time and temperature, distributed correction magnets are also not needed.

Table 1.1: Recycler ring parameter list.

Circumference	3319.400	m
Momentum	8.889	GeV/c
Number of Antiprotons	$2.5 \times 10^{12}$	
Maximum Beta Function	54	m
Maximum Dispersion Function	1.9	m
Phase Advance per Cell	90	degrees
Nominal Horizontal Tune	26.2	
Nominal Vertical Tune	26.2	
Nominal Horizontal Chromaticity	-5	
Nominal Vertical Chromaticity	-5	
Transition Gamma	20.7	
Transverse Admittance	40	$\pi$ mmmr
Fractional Momentum Aperture	1%	
Superperiodicity	2	
Number of Straight Sections	8	
Number of Standard Cells in Straight Sections	18	
Number of Standard Cells in Arcs	54	
Number of Dispersion Suppression Cells	32	
Length of Standard Cells	34.576	m
Length of Dispersion Suppression Cells	25.933	m
Number of Gradient Magnets	108/108/128	
Length of Gradient Magnets	4.064/4.064/2.670	m
Bend Field of Gradient Magnets	1.523/1.523/1.523	kG
Quadrupole Field of Gradient Magnets	3.8/-3.8/7.5	kG/m
Sextupole Field of Gradient Magnets	3.5/-6.2/0	kG/m <sup>2</sup>
Number of Quadrupoles	72	
Length of Quadrupoles	0.5	m
Strength of Quadrupoles	30	kG/m

In addition, technological advancements in beam pipe preparation have led to superior vacuum pressures at lower cost. Stochastic cooling is employed to provide the phase space density necessary for Tevatron Collider operations. By recycling many of the components used in the Tevatron bunched beam stochastic cooling R&D project, and minimizing the design costs for the pickup and kicker tanks by copying old Accumulator tanks, the cost of this subsystem is also minimized. The cost of instrumentation is also

reduced through technological innovation, but these saving are reinvested back into the ring to provide more detailed and precise measurements of beam parameters.

The design kinetic energy of the Recycler ring is precisely 8.000 GeV. This is the design kinetic energy of the Accumulator, as well as the injection kinetic energy of the Main Injector and extraction kinetic energy of the Booster. In the past considerable debate has occurred regarding the measurement and synchronization of this energy between these accelerators. With the planned construction of the Recycler with fixed field permanent magnets, an unambiguous energy reference is installed into the Fermilab accelerator complex. All other accelerators will be energy matched to the Recycler.

### **1.3. OPERATIONAL ROLES**

The purpose of the Recycler is to further increase the luminosity of the Tevatron Collider over the luminosity goals of the Main Injector by itself. The majority of the luminosity improvement comes from the ability to inject more antiprotons into the Tevatron each store.

The first role of the Recycler is to act as a high reliability storage ring for antiprotons. Because there are no power sensitive components, there are virtually no mechanisms for inadvertent beam loss. Studying the data from the existing Antiproton Source complex, composed of the Debuncher and Accumulator rings, a couple of recent statistics ratify this concern.

In 35 weeks of running, the total number of antiprotons stacked was  $16.72 \times 10^{13}$ . In the same time interval, the total number of antiprotons lost or dumped was  $2.42 \times 10^{13}$ , which is 14.5% of antiprotons stacked. Additionally, there were 506 hours of Antiproton Source downtime out of a total of 9552 hours of operation (5.3% downtime). It is not impossible to lose the beam in the Recycler, so some of the types of failures found in the Accumulator will also occur in the Recycler. Therefore, the percentage improvement in antiproton availability with the use of the Recycler will not be the full 14.5%.

The second role of the Recycler is to act like a post-Accumulator ring. As the stack size in the Accumulator ring increases, there comes a point when the stacking rate starts to decrease. By emptying the contents of the Accumulator into the Recycler periodically, the Accumulator is always operating in its optimum antiproton intensity regime.

The third role of the Recycler, and by far the leading factor in luminosity increase, is to act as a receptacle for antiprotons left over at the end of Tevatron stores. By cooling these antiprotons and reintegrating them into the Recycler stack, the effective stacking rate, and hence the luminosity, is almost doubled.

### **1.4. ORGANIZATION OF THIS REPORT**

This report is organized into four chapters. Chapter 1 is the introduction. Chapter 2 is the summary of the accelerator physics issues of the Recycler ring and beamlines. Chapter 3 contains a description of the technical component subsystems as well as overviews of design specifications. Discussions and descriptions of technical component subsystems are organized to follow the Work Breakdown Structure (WBS) of the project. All technical components are contained in WBS category 3.1. The third digit of the WBS describes the component type: 1=magnets, 2=vacuum, 3=power supplies, etc. Chapter 4 summarizes the civil construction for the Recycler.



### 3. Technical Components

In this section the specific technical scope of the Recycler upgrade of the Main Injector project is described. For each category of components technical specifications and counts are reviewed.

#### **3.1. Magnets (WBS 3.1.1)**

Except for a small number of dipole and quadrupole correction magnets, all magnets in the Recycler ring and its associated injection and extraction beamlines are of the permanent variety. In this section the shape, weight, placement, strength, and tolerances of the magnets are described.

##### 3.1.1. Recycler Ring Overview

In the Recycler ring there are 8 unique major magnet types, all of which are permanent magnets. Table 3.1.1 contains name definitions for the magnet types. The two magnet categories which make up the majority of the magnets are gradient dipoles and pure quadrupoles. Figure 3.1.1 and 3.1.2 contains engineering cross-sectional drawings of these two categories.

Table 3.1.1: The definition of names representing magnet types.

Type	Name	Description
1	RGF	Focusing Gradient Dipole in a Normal Bend Cell
2	RGD	Defocusing Gradient Dipole in a Normal Bend Cell
3	RGS	Gradient Dipole in a Dispersion Suppression Cell
4	RQM	Straight Section Quadrupole
5	RQS(1-8)	MI-60 Trim Quadrupoles
6	RQPT(0-4)	MI-60 Phase Trombone Quadrupoles
7	RLA	Lambertsons at the Ends of Transfer Lines
8	RMG	Mirror Gradient Dipole near MI-30 Recycler Lambertsons

The number of gradient magnets in the ring, along with the design multipole strengths and lengths, are listed for each type of gradient magnet in table 3.1.2. Note that only the normal cell magnets in the region of nominal dispersion contain a sextupole component of the magnetic field in order to combat the natural chromaticity of the uncorrected lattice. It turns out that the present version of the Recycler lattice, version 6, has equal gradient and bend in the focusing and defocusing dispersion suppression gradient magnets. Therefore there are only three pole piece shapes in all of the gradient magnets in the Recycler ring.

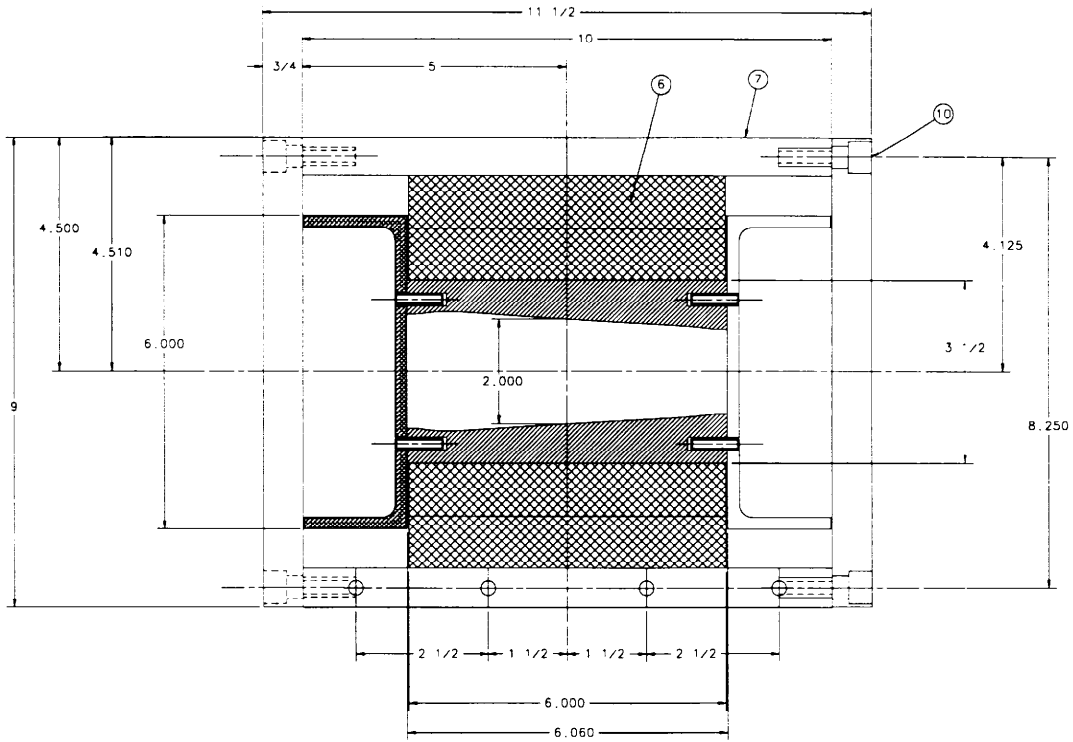


Figure 3.1.1: Gradient magnet profile. These magnets are composed of single bricks on top, on the bottom, and on each side of each pole.

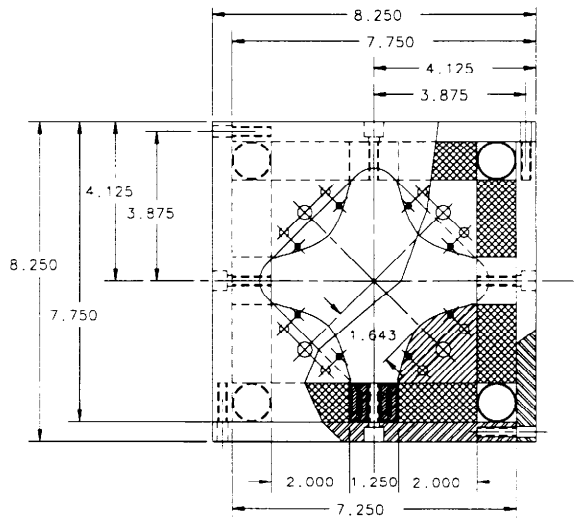


Figure 3.1.2: Quadrupole magnet profile. These magnets are composed of single bricks behind each pole.

The same information for the main quadrupoles in the ring is displayed in table 3.1.3. Note that the focusing and defocusing quadrupoles are identical except for a 90° rotation (or brick polarity reversal during fabrication).

Table 3.1.2: Number, magnetic lengths, and magnetic multipoles of gradient magnets in the Recycler ring. The dispersion suppression focusing and defocusing magnets are now identical. Therefore, there are only three different shape gradient magnet pole pieces in the entire ring.

Name	Length (m)	Number	B <sub>0</sub> (kG)	B <sub>1</sub> (kG/m)	B <sub>2</sub> (kG/m <sup>2</sup> )
RGF	4.064	108	1.52317	3.802	3.454
RGD	4.064	108	1.52317	-3.794	-6.225
RGS	2.709	128	1.52317	7.5203	0

Table 3.1.3: Number, lengths, and magnetic multipoles of quadrupole magnets in the Recycler ring. Note that only one pole shape is required in order to produce all of the magnets.

Name	Length (m)	Number	B <sub>0</sub> (kG)	B <sub>1</sub> (kG/m)	B <sub>2</sub> (kG/m <sup>2</sup> )
RQM (F)	0.5	28	0	27.807	0
RQM (D)	0.5	28	0	-27.807	0

Table 3.1.4: List of the vernier quadrupoles needed on either side of the MI-60 straight section to correct the lattice function distortions caused by the horizontal bypass of the Recycler around the Main Injector RF cavity power tubes.

Name	Length (m)	Number	B <sub>0</sub> (kG)	B <sub>1</sub> (kG/m)	B <sub>2</sub> (kG/m <sup>2</sup> )
RQS1	0.5	2	0	4.636	0
RQS2	0.5	2	0	-19.778	0
RQS3	0.5	2	0	1.523	0
RQS4	0.5	2	0	23.638	0
RQS5	0.5	2	0	-17.851	0
RQS6	0.5	2	0	-13.798	0
RQS7	0.5	2	0	8.687	0
RQS8	0.5	2	0	-6.161	0

At MI-60 the straight section is empty of specialty components except for the four RF cavities. Because of the cost of a distributed quadrupole circuit for betatron tune control of the Recycler, it has been decided to employ the phase trombone method of tune control. By adjusting 5 families of quadrupoles in the MI-60 straight section, the phase advances in the horizontal and vertical planes are independently adjustable while simultaneously maintaining the same Twiss parameter values at the ends. By keeping the end Twiss parameters constant, no lattice mismatches result and the straight section actually appears as a phase trombone. In tables 3.1.5 and 3.1.6 two different settings of

the phase trombone quadrupoles are displayed which set the Recycler tunes to very different values. While holding the maximum beta function in the straight section to under 200 m, a tune range of  $\pm 0.5$  tune units in either plane can be realized. This maximum beta function value represents a doubling of the beam size. A 4" diameter round beam tube will be used in the MI-60 straight section to preserve the admittance of the entire ring.

The implementation of these quadrupole strength variations has not yet been decided. Due to the high reliability mission of the Recycler, rolling two adjacent quadrupoles in a counter-phased manner using stepping motors is very attractive. Even if power is lost the tunes remain unchanged. Collaborators in Russia are presently designing the rotation stages for this possible implementation. Of course, it may be easier to just use correction quadrupoles powered by spare Main Ring correction dipole power supplies.

Table 3.1.5: Phase trombone quadrupole strengths at MI-60 in a lattice in which the standard phase advance of  $90^\circ$  per cell in each transverse plane is maintained.

Name	Length (m)	Number	$B_0$ (kG)	$B_1$ (kG/m)	$B_2$ (kG/m <sup>2</sup> )
RQPT0	0.5	2	0	-32.1044	0
RQPT1	0.5	4	0	32.1044	0
RQPT2	0.5	4	0	-32.1044	0
RQPT3	0.5	4	0	32.1044	0
RQPT4	0.5	2	0	-32.1044	0

Table 3.1.6: Phase trombone quadrupole strengths at MI-60 in a lattice in which the Accumulator fractional tunes are requested. The horizontal and vertical betatron tunes are both 26.2 in this configuration.

Name	Length (m)	Number	$B_0$ (kG)	$B_1$ (kG/m)	$B_2$ (kG/m <sup>2</sup> )
RQPT0	0.5	2	0	-29.4023	0
RQPT1	0.5	4	0	33.4852	0
RQPT2	0.5	4	0	-29.8883	0
RQPT3	0.5	4	0	35.6894	0
RQPT4	0.5	2	0	-29.8461	0

### 3.1.2. Transfer Line Overview

There are also a significant number of permanent magnets employed in the three transfer lines associated with the Recycler. The two transfer lines between the Main Injector and the Recycler at MI-30 have the largest number of magnets associated with them, since the transfer occurs over a segment of the tunnel which is bending. Table 3.1.7 contains a summary of the permanent magnets envisioned for both lines. The mirror gradient magnets are required in the Recycler and the beam line at the first (otherwise) normal defocusing gradient dipole downstream (upstream) of the Lambertson. The problem is that the transfer is taking place in a normal arc cell, and the distance between the Lambertson and the first permanent magnet gradient magnet is too

small to have both a ring and matching beamline gradient magnet stacked on top of one another. Since the mirror dipoles can be constructed such that there is only 0.75" of flux return for each magnet between the ring and transfer line beam pipes, the minimum separation of 4.5" at the leading edge of the magnets can be accommodated.

Table 3.1.7: Total number of magnets of each type required in both transfer lines at MI-30 between the Main Injector and the Recycler.

Name	Length (m)	Number	B <sub>0</sub> (kG)	B <sub>1</sub> (kG/m)	B <sub>2</sub> (kG/m <sup>2</sup> )
RLA	4.064	4	1.52317	0	0
RVD	4.064	4	1.52317	0	0
RMG	4.064	4	1.52317	-3.794	-6.225
RQM (F)	0.5	4	0	27.807	0
RQM (D)	0.5	2	0	-27.807	0
RGS	2.670	8	1.52317	7.5203	0

In the proton abort line three 20 mrad permanent magnet dipoles and two quadrupoles are necessary. In addition, a mirror dipole or permanent magnet Lambertson is also needed. These counts are summarized in table 3.1.8.

Table 3.1.8: Total number of magnets of each type required in the Recycler abort line.

Name	Length (m)	Number	B <sub>0</sub> (kG)	B <sub>1</sub> (kG/m)	B <sub>2</sub> (kG/m <sup>2</sup> )
RQM	0.5	4	1.52317	0	0
RLA	4.064	2	1.52317	0	0
RVD	4.064	3	1.52317	0	0

### 3.1.3 Permanent Magnet Design Features

The basic design of the permanent magnet dipole is shown in figure 3.1.3. It is a 1.5 kG gradient (combined-function) dipole with a 2 in. gap at the center, a 5.5 in. horizontal aperture and a 3.5 in. horizontal good-field aperture. Overall dimensions are 9.5 in. high by 11.5 in. wide by approximately 13 ft. long. The weight is typically 2000 lb. The magnets are straight and the sagitta of the beam inside a magnet is typically 1 cm. The beam pipe dimensions under vacuum are approximately 1.75 in. vertically and 3.75 in. horizontally. The precise parameter values for each of the individual gradient magnet types appear in table 3.1.9.

The design is a so-called "hybrid" permanent magnet in which the field is driven by permanent magnet material and the field shape is determined mainly by steel pole pieces. The field quality, which is shown in figure 3.1.4, is designed to give a vertical magnetic field error of less than  $1 \times 10^{-4}$  across the designated good field region. The permanent magnet bricks drive flux into (from) the pole tips from the top (bottom) (see figure 3.1.5). The entire assembly is enclosed in a flux return shell 0.75" thick. Solid "bar stock"

components are used throughout rather than laminations. The pole tip steel is 1008 low carbon steel and the flux return is construction grade (A36) steel.

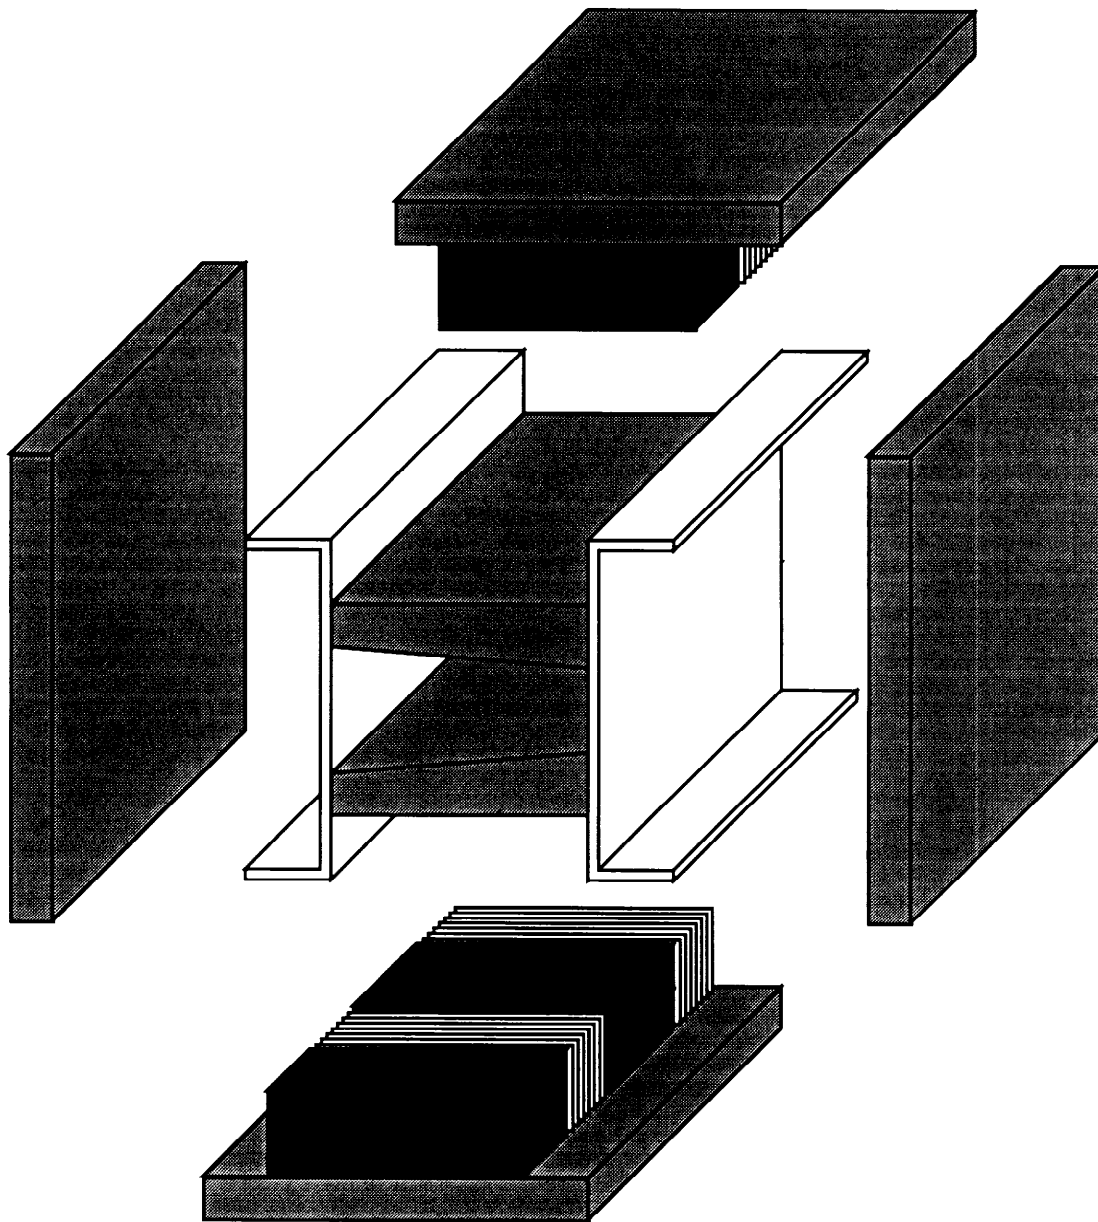


Figure 3.1.3: Permanent magnet gradient dipole components shown in an exploded view. The magnetization orientation of each permanent magnet brick is indicated with an arrow.

Table 3.1.9: Design and physical parameters of Recycler focusing (RGF), defocusing (RGD), and dispersion suppresser (RGS) gradient magnets.

Parameter	RGF	RGD	RGS
Magnet Width (in.)	9.560	9.560	9.560
Magnet Height (in.)	7.500	7.500	7.500
Physical Length (in.)	165.0	165.0	111.7
Total Weight (lb.)	2331	2331	1576
Magnetic Length (in.)	160.0	160.0	106.7
Bend Angle (mrad)	21	21	14
Beam Sagitta (mm)	10	10	5
Flux Return Weight (lb.)	1086	1086	735
Pole Tip Weight (lb.)	564	564	382
Ferrite Brick Weight (lb.)	508	508	342
Compensator Weight (lb.)	113	113	76
Stainless Steel Weight (lb.)	60	60	41

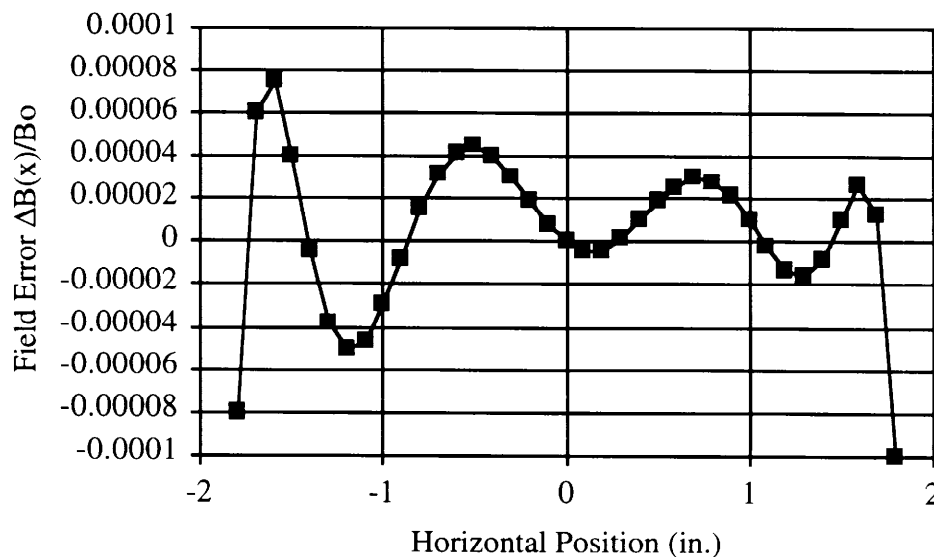


Figure 3.1.4: Design magnetic field imperfection across the horizontal aperture of a Recycler gradient magnet. Generated by Poisson, the ripple in the field is due to the finite extent of the poles and the trapezoidal approximation of the pole shape.

The end fields of the magnets are terminated by flux clamp/end plate assemblies which are magnetically connected to the flux return shell. As shown in figure 3.1.6, these plates prevent the stray flux from leaking out and saturating the mu-metal/soft iron shielding of the beam pipe between magnets. The end plates are removable to allow access to the ends of the pole tips for field quality shimming operations.

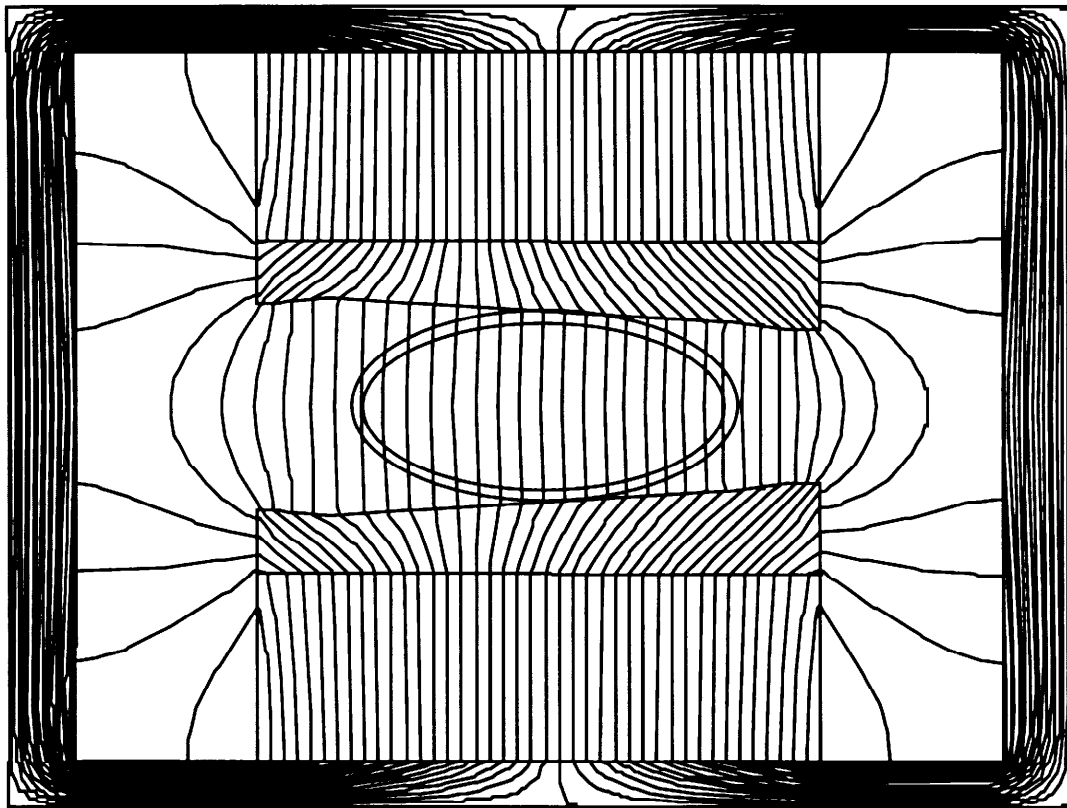


Figure 3.1.5: POISSON field map of a Recycler gradient dipole.

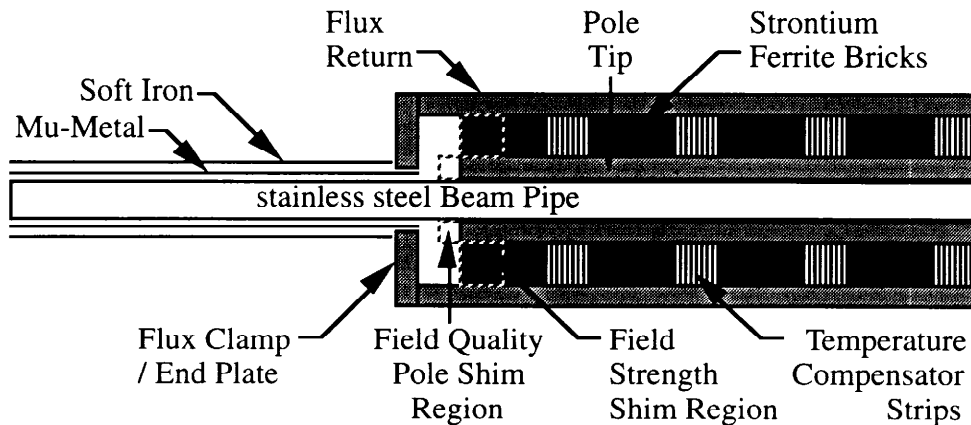


Figure 3.1.6: Side view of magnet, showing transition from magnetic shielding of naked beam pipe to magnet flux return. Also indicated are the regions at the ends of the pole tips devoted to shimming the field shape, and the ends of the ferrite bricks which are used to trim the strength of the magnet by adjusting the total amount of magnetic material.

### 3.1.4. Permanent Magnet Material

We have chosen Type 8 Strontium Ferrite (Type 8 Strontium Ferrite data sheets & specifications from Arnold, Crucible, and Hitachi) as the permanent magnet material



because of its low cost and high stability over time, temperature, and radiation. Strontium ferrite is the material of choice in automotive applications and is available at low cost in standard grades and sizes from multiple vendors. It has documented stability in applications such as NMR magnets and is commonly used in ion pumps in accelerator applications. Materials from the three major U.S. vendors were evaluated and performed well in the R&D program.

### 3.1.5. Magnetization and Strength Trimming

Ferrite bricks are shipped unmagnetized from the foundry and are magnetized immediately prior to assembly using a 2 Tesla dipole. The bricks are individually measured and assembled into "kits" each containing a specified total magnetic strength of brick. The magnet design is such that a magnet fully loaded with bricks of nominal strength is 3~5% stronger than required. Dummy bricks, fractional bricks and spacers are used to control the total strength of the "kits" to correct for brick-to-brick and lot-to-lot variations. A final strength trim is accomplished by adjusting the amount of ferrite at the ends of the magnet.

### 3.1.6. Temperature Compensation

The intrinsic temperature coefficient of the Ferrite material ( $-0.2\%/^{\circ}\text{C}$ ) is canceled [Dallas 1995 PAC papers on permanent magnets by Bertsche & Ostiguy, Foster & Jackson] by interspersing a "compensator alloy" (Carpenter Technologies Compensator 30 type 4 data sheets from Telcon data sheet, Eagle Alloys, Sumitomo Heavy metals) between the ferrite bricks above and below the pole tips. The compensator is an iron-nickel alloy with a low Curie temperature and therefore a permeability which depends strongly on temperature. This shunts away flux in a temperature dependent manner which can be arranged to null out the temperature dependence of the ferrite. We find that the degree of temperature compensation is linearly related to the amount of compensator material in the magnet. Thus the degree of compensation can be "fine tuned" to the required accuracy by adjusting the amount of compensator at the ends of the magnet in a manner similar to the strength trimming with the ferrite. For example, a 20-fold reduction of the temperature coefficient (from  $0.2\%/^{\circ}\text{C}$  to  $0.01\%/^{\circ}\text{C}$ ) requires that the amount of compensator in the magnet be adjusted correctly to 1 part in 20. This poses no difficulties for production.

The range and accuracy of the required temperature compensation is determined by the expected variation in tunnel temperature. Data from the Main Ring tunnel during a typical period of operations can act as a guide to predict Main Injector tunnel temperatures. Figure 3.1.7 contains data from a Main Ring sector which had the maximum temperature variation during the time plotted. Note that a  $\pm 1^{\circ}\text{C}$  temperature variation is a pessimistic estimate.

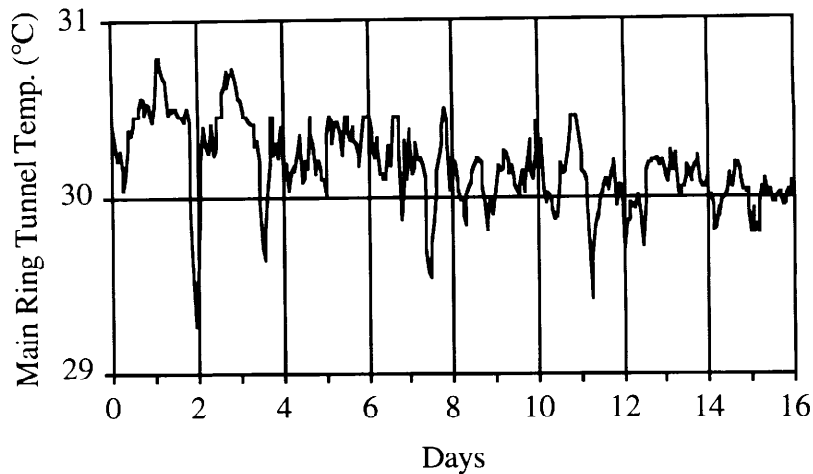


Figure 3.1.7: Measured Main Ring tunnel temperature during a typical period of operations. Note that on the second day the Main Ring was turned off for a few hour access.

The ultimate limit to the temperature range of the compensation technique is set by the nonlinearities of the opposing temperature coefficients. The ferrite material appears to be highly linear over the relevant temperature range. However, the compensator material tends to become weaker as it approaches its effective Curie temperature of approximately 55°C. Figure 3.1.8 indicates the degree of compensation achieved on a test magnet using ferrite and compensator materials from the 8 GeV line production (low bidder) vendors. Note that the maximum deviation is  $\pm 1 \times 10^{-4}$  over the range  $31 \pm 7$  °C.

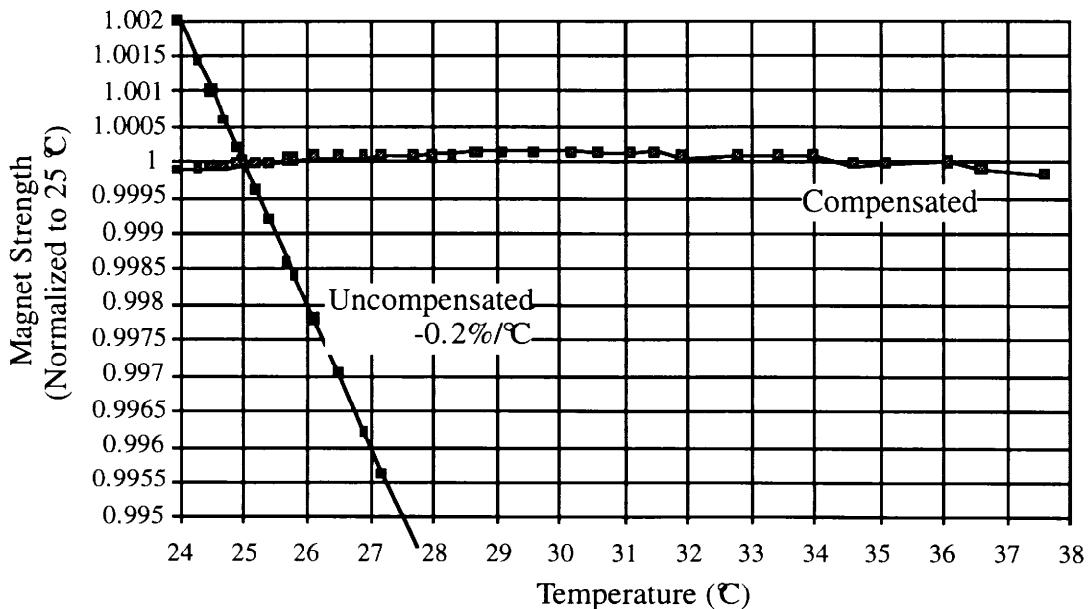


Figure 3.1.8: Field strength vs. temperature for a stability test magnet using pre-production samples from the selected vendors for compensator alloy and ferrite.

### 3.1.7. Magnet Assembly

The assembly sequence is as follows (see figure 3.1.3). The pole tips are machined from solid bar stock. The pole tip spacing is set by bolting them down against aluminum pole tip supports at either edge. Magnetized bricks are then epoxied to the top flux return plates. Strips of compensator alloy are interspersed between the bricks above and below the pole tips, and aluminum spacer bars are used to separate the "side bricks". The flux return plates are then lowered (carefully!) onto the pole tip assembly using mechanical fixturing to control the magnetic forces. The magnet is measured and, if necessary, shimmed by adding magnetic material or iron flux shunts at the ends of the pole tips. A steel end plate which terminates the flux lines is then bolted onto each end of the magnet.

### 3.1.8. Field Quality

The field quality of the Recycler magnets must be adequate for a storage ring, i.e. roughly  $\Delta B/B = \pm 0.01\%$  over a good-field aperture chosen to be 1.75 in. horizontal by 3.5 in. vertical, or  $\pm 0.02\%$  over  $\pm 25$  mm in the performance simulations. The basic manufacturing strategy is to maintain construction tolerances of a few times 0.001 in. for the iron pole tips of the magnets, which is sufficient to achieve roughly 0.1% field defect over the aperture. The field shape is then trimmed to an accuracy of 0.01% using additional metal pieces on the ends of the magnet pole tips. This procedure is considerably simplified since only the integrated field is of interest, and the shims only have to work at a single level of excitation (no saturation effects).

### 3.1.9. Stability Issues

In order to address the issue of long-term stability of strontium ferrite, 10 test dipoles "stability test magnets" were built and subjected to a variety of environmental conditions which could possibly have an impact on the magnetic stability. The effects studied included varying the ferrite and compensator suppliers (most of the stability magnets were built with Hitachi bricks and Carpenter type-4 compensator), heating and cooling effects, radiation, partial demagnetization of the bricks, and simple aging.

One effect which has so far been demonstrated to have an immediate and irreversible effect on the magnet strength is cooling below 0°C. A magnet was cooled from room temperature (20°C) to 10°C, and no decrease in strength was seen when warmed back up to room temperature. However, on freezing to 0°C, the magnet lost 0.05% of its original strength on warm-up. It was then cooled to -20 C, and it lost 0.1% of its original strength. This magnetization loss appears to be a one-time effect, provided one does not cool the magnet below the previous coldest temperature it has experienced. Thus, the magnet was cooled a second time to -20 C, and did not suffer any additional degradation in strength. This effect has been observed on two different magnets.

Some magnets were monitored for aging by measuring their strength (at the midpoint of the aperture, using an NMR probe) as a function of time since production. The data, shown for two magnets in figures 3.1.9 and 3.1.10, is consistent with an expected log-time aging [Kronenberg & Bohlmann, J. Appl. Phys. **31**, 82S (1960); Street & Wooley, Proc. Phys. Soc. **A62**, 562 (1949)], and the present upper limit on aging derived from this data ( $2.5 \times 10^{-4}$ /decade) corresponds to less than 0.05% of field change over a 20-year life

span for the magnets. Aging at this level can be easily accommodated by changing the energy of the Booster, Main Injector, Debuncher, and Accumulator rings to match the central energy of the Recycler.

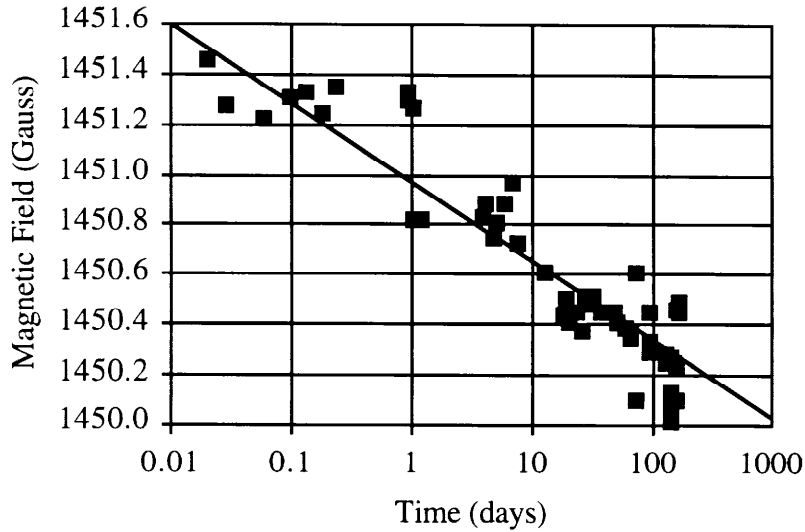


Figure 3.1.9: Field strength vs. time of a stability test magnet. Over 4 decades the data follows an expected log-time dependence. The line represents a log-time decay rate of  $2.2 \times 10^{-4}$ /decade.

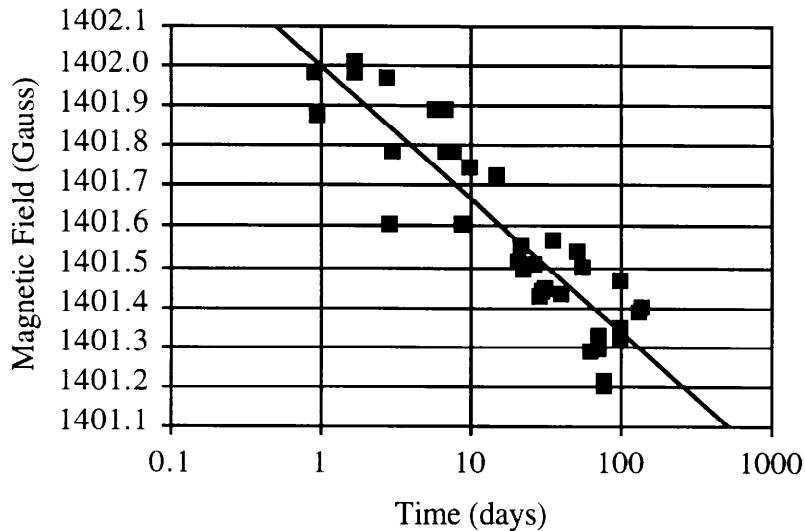


Figure 3.1.10: Field strength vs. time of a stability test magnet. This magnet was composed of bricks which were demagnetized by 5% before assembly. The line represents a log-time decay rate of  $2.4 \times 10^{-4}$ /decade.

One magnet was irradiated by a source putting out approximately 0.8 Mrad/hour for 268 hours. Taking into account down time, the net average flux to the magnet was about 0.3 Mrad/hour for about 100 Mrads. The observed change in magnet field is

approximately 0.5 Gauss out of 1465 Gauss, or  $\sim 3 \times 10^{-4}$  which is within the range of allowed variation. No change was seen in a series of low level initial doses. In addition, mechanical disturbance such as dropping the magnet had no measurable effect above 0.3 Gauss.

### 3.1.10. Magnet Measurement Requirements

A rotating coil probe has been built for measuring all of the dipole and gradient magnets for the 8 GeV and Recycler projects. This probe is a Morgan-style probe, having windings sensitive to dipole through 14-pole. It is 16 feet in length, which allows measurements of integrated strength of all the anticipated magnets. Morgan probes have the advantage of cleanly separating dipole, quadrupole, and higher-order harmonics, an essential feature for measuring gradient magnets. The probe has been tested on the two pre-production magnets, and has demonstrated the ability to meet the specified requirements of measuring the integrated strength to better than  $2 \times 10^{-4}$  and the harmonics to about 0.2 units (0.2 parts in 10,000 at 1 in.).

A redundant measurement system will use a single stretched wire to scan the horizontal aperture. This device will provide a second measurement of the strength, but will also map the field shape in a region inaccessible to the Morgan coil (beyond  $|x| > 0.8$  in.). This stretched wire system has been in use in measuring Main Injector quadrupoles.

A Hall probe system for making automated point measurements down the length of the aperture, as was done for the Main Injector, has been rejected for reasons of cost. A compromise system will allow for the insertion of a Hall probe through a number of side ports in the magnet at a small number of locations along the length of the magnet. This will allow us to monitor longitudinal variations due to manufacturing anomalies or variations in brick strength.

### 3.1.11. Field Shape Tuning

Using the two full length gradient magnets already produced for the 8 GeV line project, studies have been performed attempting to identify an algorithm for tuning the field harmonics to a level required by lattice and beam stability criterion. Because these magnets do not change in field, end packs shaped to eliminate unwanted field harmonic amplitudes are relatively simple to employ. Tests show that field deviations across the aperture as large as 0.1% can be corrected.

To date initial success has been achieved with shorter 1 m long prototype magnets in which the developed algorithm was used to actually reduce the magnitude of the field error across the horizontal aperture. This prescription calls for translating Morgan coil measurements at the magnetic center to a set of shim positions along the pole ends which accurately corrects the multipole harmonics. The results of a particularly crude but instructive experiment are shown in figure 3.1.11. The intent is to write a computer program in the very near future which performs this translation on-line, making the magnet measurements at the end of construction the point at which the field shape is corrected during full production. As shown in figure 3.1.12, the shimming is presently accomplished by adding 0.5 in. cubes at various altitudes with respect to the pole faces.

In order to automate the process and make the correction quasi-digital, a pre-formed and grooved guide will be designed to hold the cubes in preset and well defined positions.

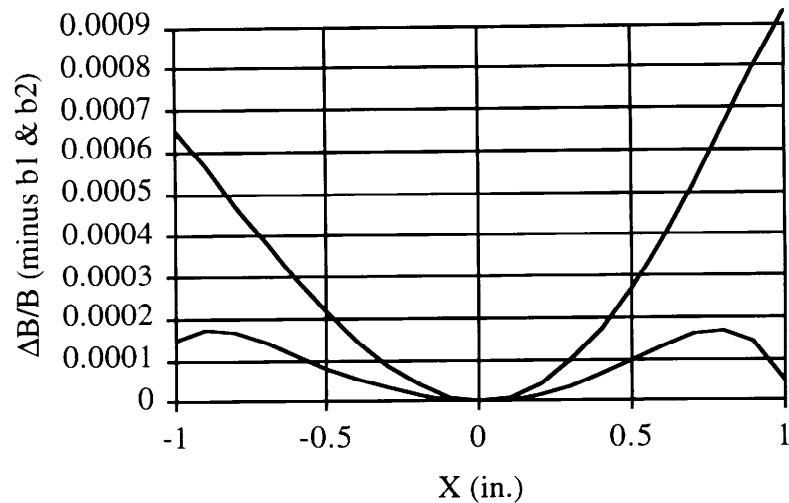


Figure 3.1.11: Short 1 m long prototype gradient magnet before (upper curve) and after (lower curve) end shims were attached to the magnet. Note that a field ripple of less than  $\pm 1 \times 10^{-4}$  was achieved.

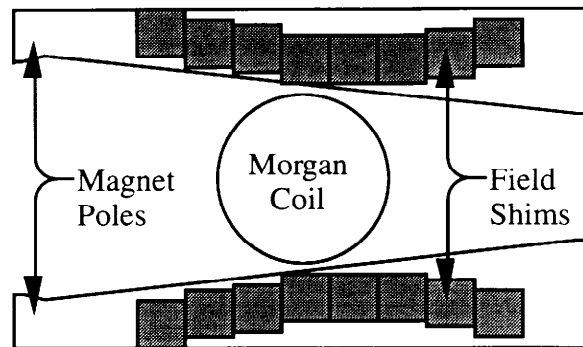


Figure 3.1.12: Sketch of the positioning of the end shim steel blocks with respect to the pole face. The position of the Morgan coil is also shown.

To summarize the production flow of permanent Recycler magnets, the first step is to perform the basic construction of a magnet. Second, the field strength at the center of the magnet is tuned by removing full or partial bricks at the ends until a manual flip coil determines that the field strength is within 0.1% of design. Third, the magnet is placed on the test stand with a Morgan coil to perform the field shape tuning.

### 3.1.12. Recycler Magnet Key Performance Specifications

The table below contains the basic key specifications for the Recycler permanent magnets. These are discussed, justified, and quantified at exhaustive length in MI-Note #150. Many of the values listed in this table, such as the design lifetime, are

rather arbitrary and are intended to guide engineers and technicians toward an appropriate level of care and ruggedness.

Table 3.1.10: Miscellaneous magnet performance specifications. Many of the specifications are quite far from anticipated parameter values and do not present concerns.

Design Lifetime	30 years
Operating Temperature	20°C (68°F) to 35°C (95°F)
Storage Temperature	5°C (41°F) to 50°C (120°F).
Humidity	0%-100%
Corrosion Resistance	All parts resistant, plated, or painted.
Bakeout Compatibility	Beam Pipe @ 150°C, Magnet @50°C
Temperature Stability of Field Strength	±0.05% full spread over 10-35°C
Temperature Stability of Field Shape	< ±1 unit in any multipole for ±10°C
Time Stability	$\Delta B/B < 0.05\%/yr.$
Radiation Resistance	$\Delta B/B < 1\%$ for 1E9 Rads
Shock & Vibration	$\Delta B/B < 0.1\%$ from normal handling
Radiation Activation	Comparable to steel/copper magnets
Good-Field Aperture	±1.75" at $ \delta B_y/B_0  < 1E-4$
Dipole Vertical Aperture	2.0" between the pole tips (at X=0)
Quadrupole Pole Tip Radius	1.643" (XY = 1.350 in <sup>2</sup> , same as MI)
Magnet Sagitta	Zero (straight magnets)
Beam Sagitta Inside Dipole	~1cm
Field Uniformity in Z	±5% (random) or better
Bend Center uncertainty	±2cm in Z (measured and surveyed)
Field Strength Modification	possible in range [+3%,-5%].
Field Shape Modification	+/- 10 units (modify end shims)
Magnetic Field in Flux Return	<1 Tesla
Magnetic Shielding of Beam Pipe	2-layer (μ-metal + iron foil)
Termination of End Fields	via Flux Clamp / End Plate of Magnets
End Fields	< 5 Gauss 2.5 cm past end of magnet
Beam Pipe Fixturing	allows ±1cm horiz. range of motion
Survey Fiducials	8 "nests" at corners of magnet
Mechanical Rigidity (sag)	< 0.020" for 25% , 75% support points

### 3.1.13. Permanent Magnet Quadrupoles

Two types of quadrupoles are required for the Recycler. The standard (small aperture) design has the same 1.643" pole tip radius as the Main Ring/Main Injector quadrupoles. All Recycler quadrupoles are 0.5 m long.

The quadrupoles have a hybrid design analogous to the gradient dipole. The field shaping is provided by machined steel pole tips and the field is driven by strontium ferrite

bricks. Temperature compensation of the ferrite is provided by interspersing strips of compensator alloy between the bricks along the length of the magnets. The overall strength of the magnet is trimmed by adjusting the amount of permanent magnet material behind each pole tip, and the field shape is trimmed by adding steel shims to the ends of the pole tips. A steel flux return shell surrounds the magnet, and “flux clamp” end plates are used to terminate the field at the ends of the magnet.

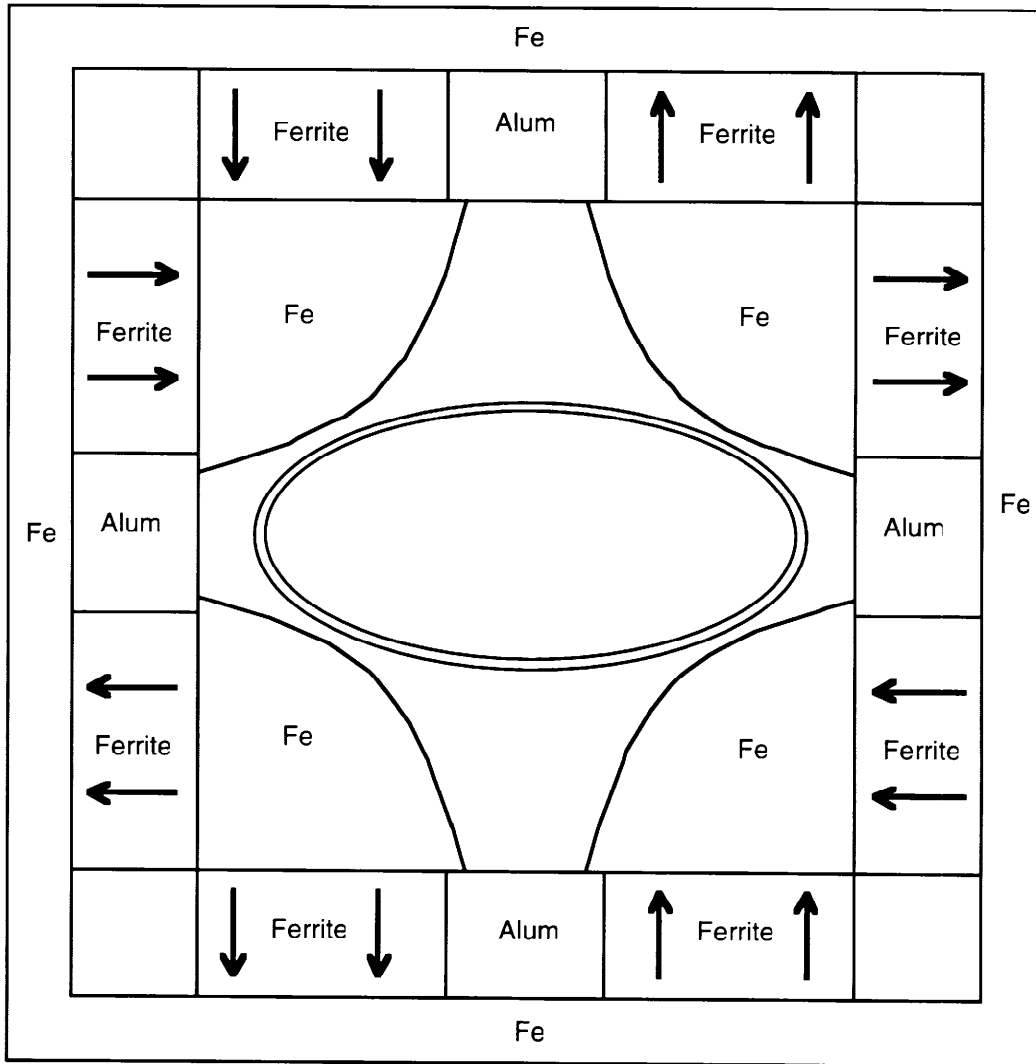


Figure 3.1.13: Cross-section of a rectangular quadrupole magnet.

Two versions of the quadrupole have been developed in the R&D program. The currently preferred design has a rectangular flux return shell of dimensions similar to the dipole flux return shell. An earlier design had a “diamond” shaped flux return shell. A 1 m prototype “diamond” quad has been produced, tested, and meets field quality requirements [quadrupole test results in “Permanent Magnet R&D Program” presented by H. Glass at the DoE Fermilab Main Injector Review, Sept 13, 1995] with minimal



shimming. The rectangular version is currently under fabrication, and is shown in figure 3.1.13.

### 3.1.14. Permanent Magnet Lambertsons

Transfer lines to and from the Recycler and 8 GeV line require a total of six Lambertson magnets. A standard design (2 kG, 3m long) has been adopted which provides a 21 mrad bend for the 8.9 GeV/c extracted or injected beam. In the typical application the circulating beam is in the field-free region and is kicked horizontally outwards into the bend region where it is deflected upwards or downwards.

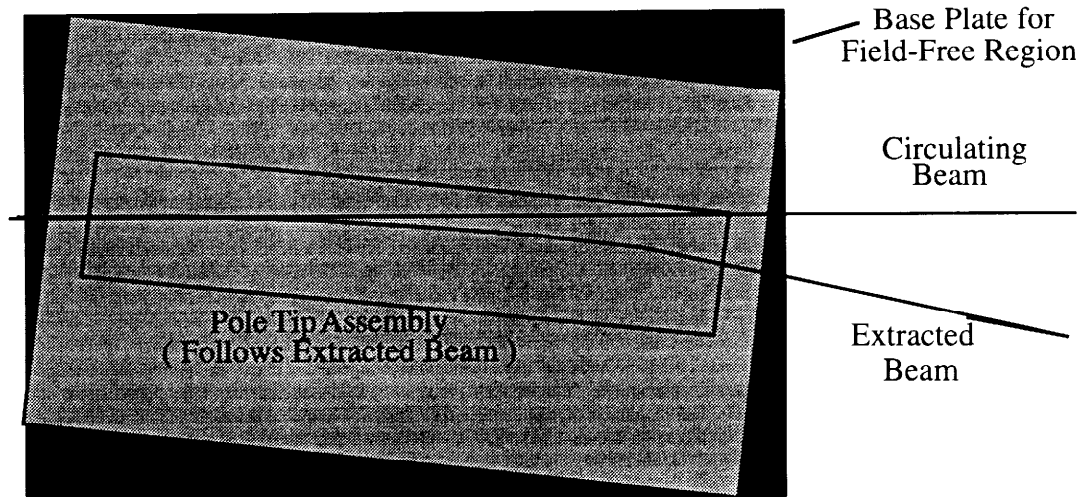


Figure 3.1.14: Side view of a Lambertson magnet showing the stored and extracted beam trajectories, and the slant in the extraction channel to minimize sagitta effects.

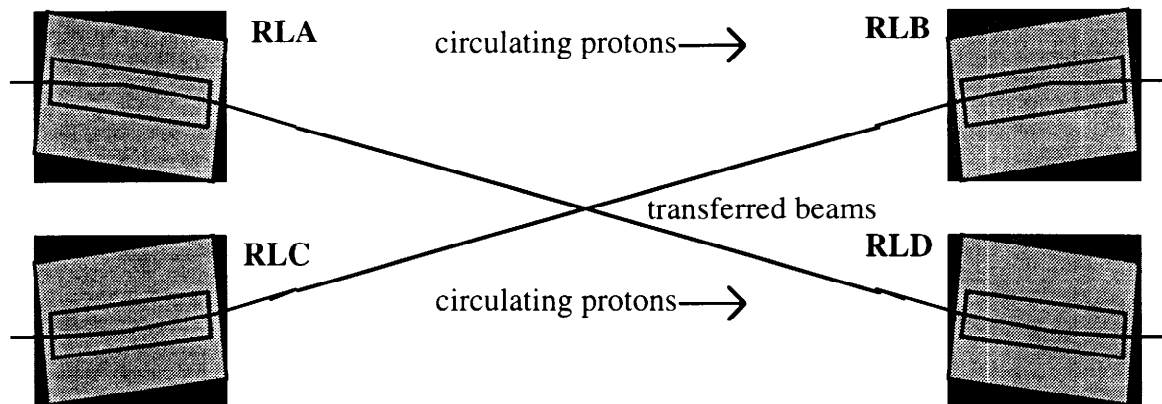


Figure 3.1.15: Lambertson construction geometries required to service all of the beam transfer needs of the Recycler.

To minimize sagitta and economize on magnet aperture, the pole tip assembly for the bend region follows (to first order) the trajectory of the deflected beam. The pole tip is therefore not parallel to the field-free trajectory, but is offset and canted by 1/2 of the

bend angle or approximately 10 mrad. See fig. below. This is easily accomplished since the cutout of the field free region is machined out of the solid plates used to piece together the “base plate” of the Lambertson. See figure 3.1.14 for a sketch of the Lambertson geometry.

Two polarities of permanent-magnet Lambertsons are required: one which deflects counterclockwise protons (and clockwise antiprotons) downwards, and one which deflects them upwards. For each polarity there are two possible orientations of the “base plate” containing the field-free cutout: one which deflects incoming beam from the left, and another from the right. Figure 3.1.15 summarizes these options.

Two successful prototype permanent Lambertsons (2.2 kG and 3.55 kG, each 1m long) have been produced and tested. The bend field uniformity was adequate and the average field in the “field-free” region was <0.5 Gauss. The cross-sectional view of the permanent Lambertson is shown in figure 3.1.16.

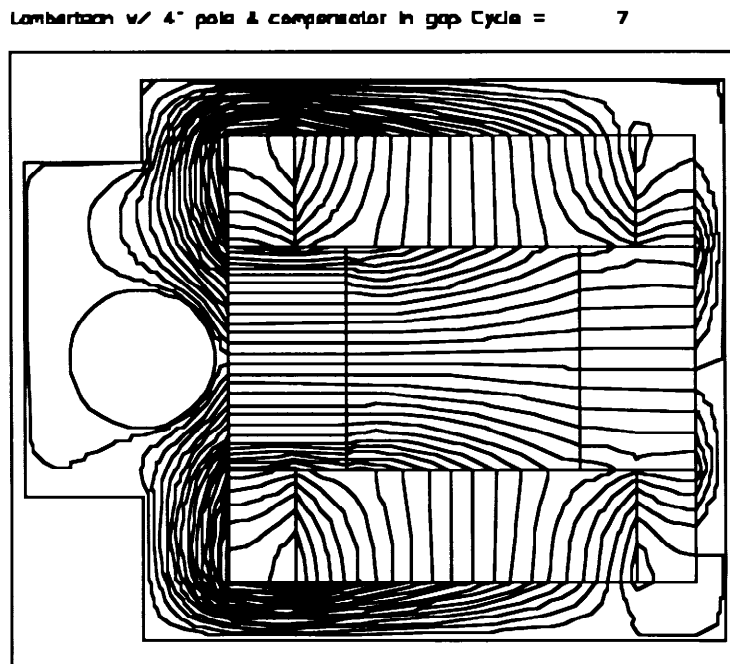


Figure 3.1.16: Permanent Lambertson magnet cross-section with POISSON field map superimposed. The field free circular region is the circulating beam aperture. The horizontal field in the extracted beam line steers the beam up or down.

### 3.1.16: Magnet Stands and Installation

The stands and installation for the Recycler are presently being modeled within the permanent magnet 8 GeV line project. It is expected that the magnets will be cheaper and easier to install than their Main Injector counterparts. For instance, each gradient dipole weighs approximately 1 ton, as compared to 20 tons in the Main Injector. The cross-section of the magnets are much smaller, and the magnets are shorter. The quadrupoles are expected to weigh approximately 200 lbs. each.

### 3.2. Vacuum (WBS 3.1.2)

There are 104 cells in the Recycler ring. Because of the low outgassing rates accessible with the hydrogen degassing technique described in chapter 2, a vacuum pressure two orders of magnitude lower than the Main Injector can be achieved with the same number of pumps. In this discussion the type, placement, and processing of Recycler ring vacuum components are reviewed.

#### 3.2.1. Geometry Overview

In the Main Injector there are 6 ion pumps per cell and the length of vacuum sectors is approximately 500' (150 m). In the Recycler there will be one ion pump per cell, for a total of 104 ion pumps. Between the ion pumps there will be 5 titanium sublimation pumps (TSPs) per cell to achieve an average of pressure of approximately  $1 \times 10^{-10}$  Torr. The benefit of TSPs are lower cost and lower ultimate pressures. Since the length of normal cells is 34 m and the length of dispersion cells is 26 m, the longest vacuum sector possible if the isolation valves are spaced every 8 cells apart is 270 m. Therefore, the total number of sector valves is  $104 \div 8 = 26$ . Figures 3.2.1 through 3.2.3 contain sketches of the vacuum system in normal arc cells, straight section cells, and dispersion suppression arc cells.

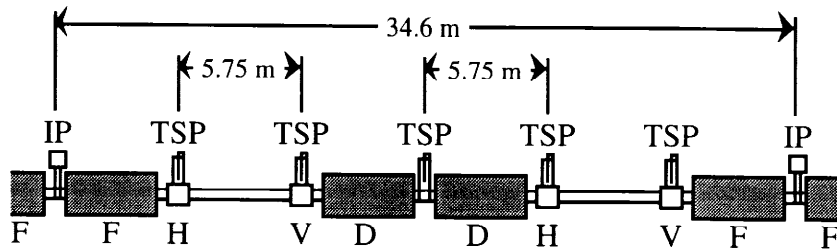


Figure 3.2.1: Sketch of the vacuum system in a normal arc cell. The horizontal (H) and vertical (V) beam position monitors have attached to them titanium sublimation pumps (TSP) in order to maintain a low average pressure and to minimize the number of welds in the tunnel.

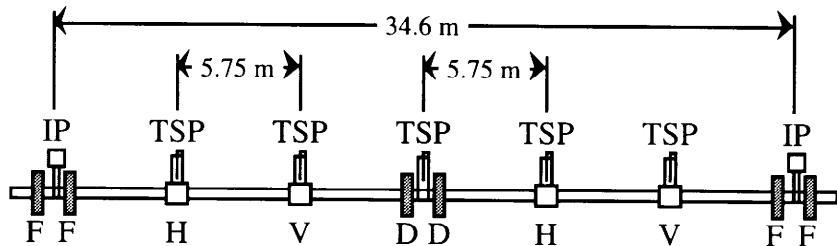


Figure 3.2.2: Sketch of the vacuum system in a normal straight section cell. Except for the fact that the quadrupoles are much shorter than the gradient magnets in the normal arc cell, nothing is different with respect to figure 3.2.1.

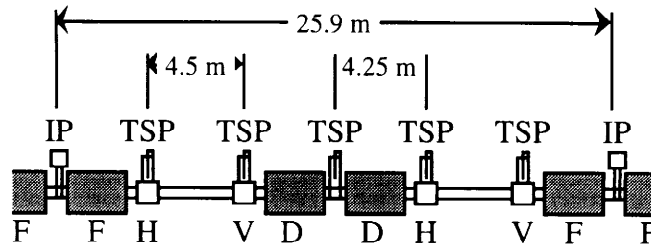


Figure 3.2.3: Sketch of the vacuum system in a dispersion suppresser cell.

With the exception of the MI-60 phase trombone straight cells which need additional vertical aperture and hence a round 3" O.D. beam tube, the Recycler vacuum tube is a 1.75" inside height by 3.75" inside width ellipse. It is produced by crushing a standard 3" O.D. beam tube with a wall thickness of 0.065".

### 3.2.2. Beam Position Monitor Assemblies

In order to minimize the cost of the vacuum system, it is necessary to minimize the number of welds in the tunnel. This means generating as many pre-fabricated assemblies in industry and staging areas as possible. In addition, if possible it is good to merge multiple functionalities into the same component. For instance, the beam position monitor (BPM) can also act as an ion clearing electrode. Another possibility which will depend on further surface physics research by personnel at FNAL, LBNL, and KEK is the use of titanium electrodes in order to get ion pumping from the BPM electrodes.

Because both protons and antiprotons are injected into the Recycler for operations, commissioning, and studies, the beam position monitors need to be bi-directional. Capacitive split-tube electrodes are optimum in a geometry where the transverse beam size is comparable to the electrode dimensions. Capacitive electrodes are also perfect for the creation of ion clearing electrodes. In order to minimize the impedance effects of the BPMs, the electrodes are shaped to match the vacuum chamber, the outer wall of the BPM is the same shape as the electrodes and only large enough to stand off the 700 V of ion clearing voltage. For the same reasons, the gaps between the electrodes and the vacuum chamber wall are as small as possible without compromising the capacitance (and hence sensitivity) of the electrodes.

As can be seen in figures 3.2.1 through 3.2.3, in every Recycler half cell there are always two BPMs separated by a straight, unoccupied section of vacuum pipe. At each of these BPM locations a bellows is required to absorb the length increase which occurs in the vacuum system when it is insitu baked at 150°C. In order to simplify the beam pipe positioning stands and installation, the bellows are always located to the outside of both BPMs. As shown in figure 3.2.4, between the BPMs and bellows are TSPs. The TSP port is a rectangular slot 4" long and 1" high centered on the horizontal edge of the chamber (see figure 3.2.5). The horizontal edge of the vacuum chamber supports the minimum of the image current distribution, so therefore this geometry has the lowest impedance impact while simultaneously maximizing the conductance to the pump itself.

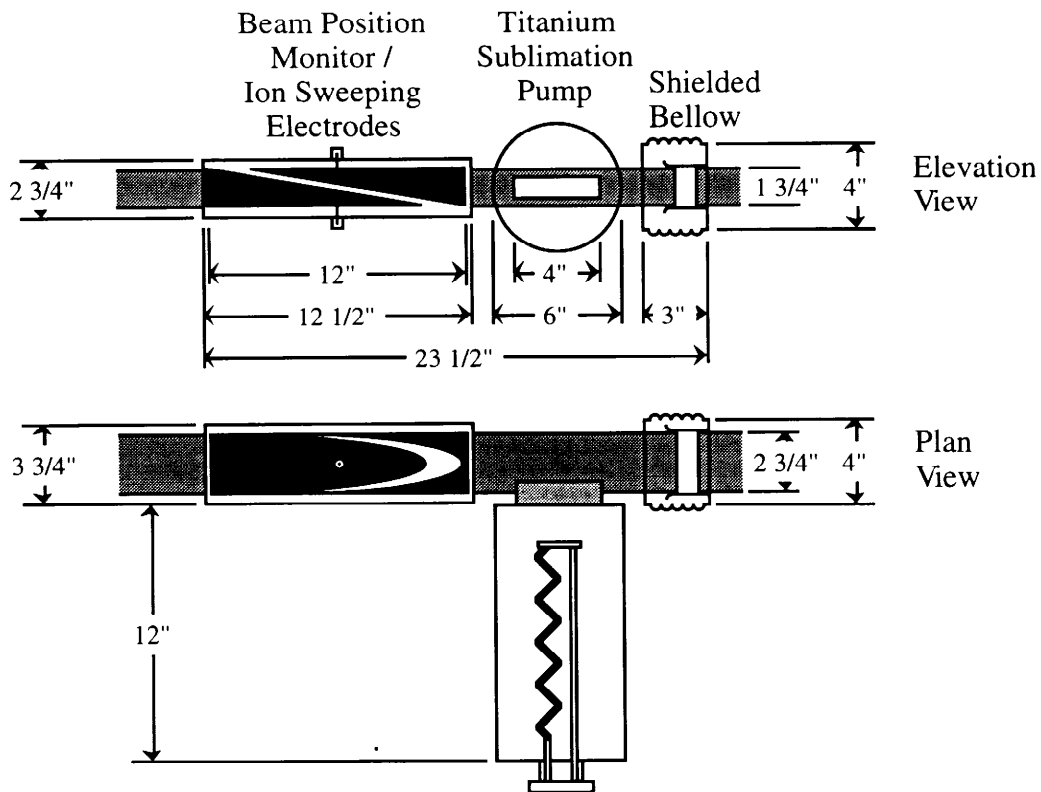


Figure 3.2.4: Elevation and plan views of the BPM assemblies which each include a TSP and shielded bellows. A vertical BPM is shown, which is on the downstream side of each half cell. The horizontal BPM, which is placed on the upstream side of each half cell, has a horizontally sensitive electrode and the entire assembly is rotated left for right.

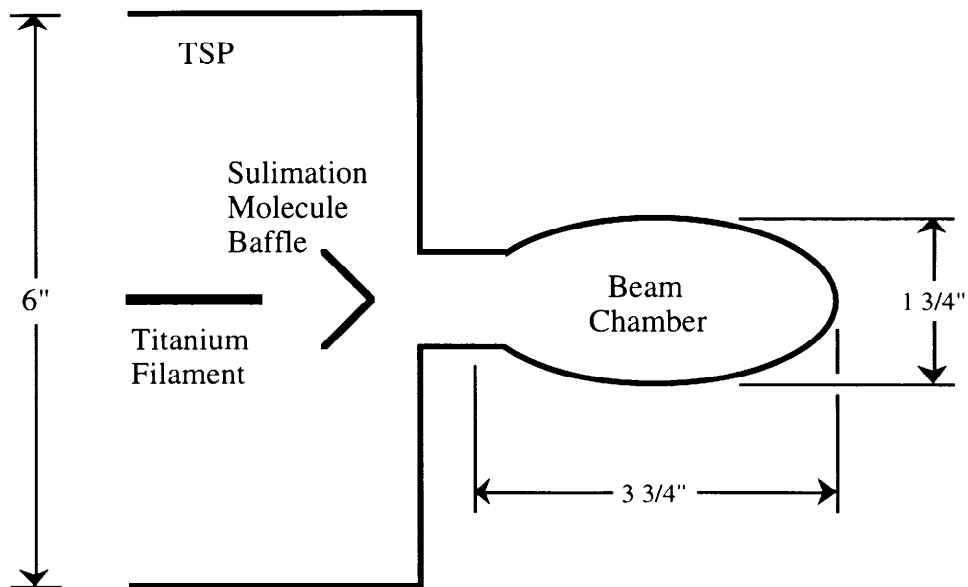


Figure 3.2.5: Beam's eye cross-section view of the TSP and its connection to the beam tube.

### 3.2.3: Hydrogen Degassing Oven

Before the hydrogen degassing is performed, the tubing is washed and cleaned internally with solvents. The tubing is then sent over to a former superconducting coil collar hydraulic press used for crushing the pipe into the correct elliptical shape. The design profile has an inner full height of 1.75 in. and a full width of 3.75 in.

In order to achieve this vacuum system configuration and achieve an average vacuum of approximately  $1 \times 10^{-10}$  Torr, it is necessary to hydrogen degas every component. The test oven shown in figure 3.2.6 will be used for specialty pieces such as 1.5" diameter tubing for gauges. The 3" diameter tubing used to generate the vacuum chamber itself needs to be processed at a rate of approximately one half cell per day in order to keep up with the projected rate of magnet production. This criterion requires three 20' pipes per day. As shown in figure 3.2.7, by creating a new oven which has a 12" diameter, a total of six pipes per day could be processed. Since the processing requires that the tubing stay at a temperature of 500°C for approximately 12 hours (or 900°C for 30 minutes for those who prefer the higher temperature approach) and the time constant of the heating and cooling is approximately 4 hours, one batch of six pipes per day is a convenient processing rate. This requires that a technician spend approximately 1 hour per day to empty the previous day's tubing, clean the oven, load the next batch, and then start the control system computer which automatically performs the processing.

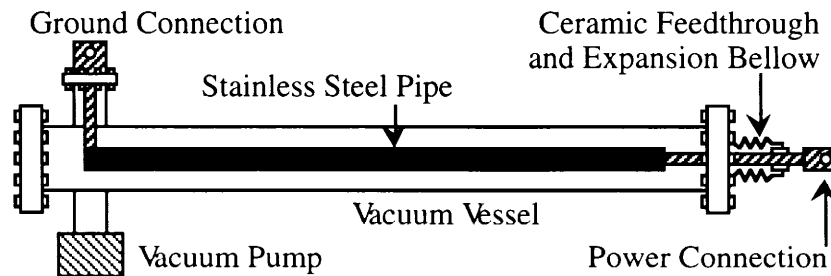


Figure 3.2.6: Sketch of the test oven which will still be used to process specialty tubing.

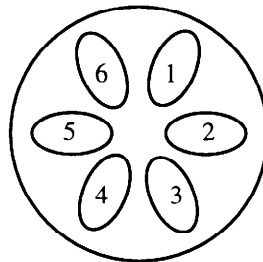


Figure 3.2.7: Profile of the crushed 3" tubing in the 12" diameter production oven proposed to generate an average of 2 half cells of tubing per day.

It is also necessary to hydrogen degas the tubing which makes up the beam position monitors, the titanium sublimation pumps, and also the shielded bellows. The split-plate capacitive pickups are created with the same 3" diameter tubing that makes up the rest of the vacuum system, unless the titanium electrode option is utilized. The 4.5" diameter tubing which forms the vacuum wall around the pickup electrodes, the 6" diameter tubing for the titanium sublimation pumps, and the bellows themselves are all hydrogen degassed before assembly. After the monitor, pump, and bellow has been assembled they are again baked to 500°C in order to burn off any surface hydrocarbons from the forming and assembly of the monitor, while simultaneously hydrogen degassing all of the miscellaneous steel parts such as end plates.

#### 3.2.4. Shielded Bellows

As shown in figure 3.2.4, associated with each BPM there is a bellow assembly. The bellows are shielded in a manner identical to the Main Injector. The reason for so many bellows is the 150°C bakeout which is necessary for initial vacuum commissioning. The coefficient of elongation of stainless steel tubing is 16  $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ . A normal half cell is 17 m long. Therefore, the 120°C temperature rise associated with the in-situ bake leads to a change in length of the beam tube of 33 mm or 1.25". Given that bakes are not expected to occur very often, a compression ratio of 2:1 is acceptable. Therefore, each half cell needs at least 2.5" of uncompressed bellow. Therefore, 2" of bellow at the horizontal BPM and 2" of bellow at the vertical BPM generate more than enough temperature change capacity. The other purpose of the bellows is to absorb approximately 0.5° of bend per bellow, since the pipe segments are straight.

#### 3.2.5. Insitu Bake System

After installation of the vacuum system it is necessary to heat it to 150°C for approximately 24 hours in order to purge the system of water vapor. But the entire 3.3 km circumference of the Recycler cannot be baked simultaneously. Instead, each vacuum sector is baked independently. As stated earlier, each vacuum sector is composed of 8 cells, or 16 half-cells.

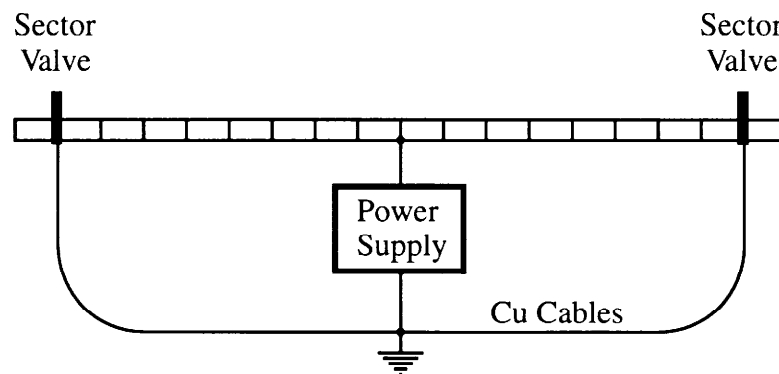


Figure 3.2.8: Sketch of the portable power supply connected across a vacuum sector used to heat the vacuum system to 150°C.

Just as the hydrogen degassing oven is based on the electrical resistivity of the stainless steel beam tube, the 150°C insitu bake system entails sending current through finished vacuum sector. Using low resistance copper cables, the current is connected into the center of the vacuum sector and returned from the ends. The cables from the end are grounded so as not to heat any vacuum chamber outside of the sector.

The thermal insulation around the vacuum chamber is integrated with the magnetic shielding around the chamber. As part of this system, there are 2 layers of insulation. In addition, the shining surface finish of the magnetic shielding also reflects back some heat.

In order for this scenario to work, a couple of conditions must be observed. First, the magnetic shielding around the beam pipe discussed in the next section must be electrically insulated from the beam pipe. Second, in order to evenly heat the vacuum chamber it is necessary to put in flexible copper ground straps across bellows to act as current bypasses. Thermal conduction through the stainless steel tubing is sufficient to heat the bellows.

### 3.2.6. Magnetic Shielding

Figure 3.1.6 contains a sketch of the magnetic shielding around the beam pipe at the edge of a permanent magnet. In order to prevent the Recycler beam from reacting to the Main Injector ramp, a hermetic magnetic seal around the Recycler vacuum chamber is required. In order to achieve a magnetic field reduction factor of 1000x, a layer of 4 mil thick mu-metal inside a 6 mil thick layer of soft iron is employed.

Between the vacuum chamber and mu-metal, and between the mu-metal and soft iron, are layers of thermal insulation. Not only is this insulation needed for the insitu bake system, but it is necessary to keep the mu-metal and soft iron from coming into contact in order to get the full magnetic field attenuation effect.

### 3.2.7. Beam Pipe Stands

It is necessary to build stands specifically for the vacuum system due to the long distances between the magnets. The magnets themselves act as vacuum chamber stands. In the center of the long sections between magnets the vacuum chamber stand holds the pipe in a fixed position. During bakes the vacuum chamber lengthens toward the bellows near the beam position monitors. The stands connected to these monitors have sliding joints which allow this expansion. Similarly, the pipe can slide within the magnets, but is held fixed at the end of the magnets at the 1 m short straights between the magnets. Figure 3.2.8 contains a sketch of this geometry.




Figure 3.2.8: Magnet and vacuum chamber stands for a normal cell. Note that the magnets themselves also act as vacuum chamber stands.



### 3.3. Power Supplies (WBS 3.1.3)

A total of 48 dipole correctors are needed in the Recycler ring and its dedicated transfer lines. The power supplies for these dipole correctors are only for limited orbit control around each of the 3 Lambertsons at MI-30 and MI-40 and their associated transfer lines. In addition, correctors are also needed at the kicker at MI-20. In order to generate an arbitrary position and angle in each plane, 8 dipole channels are required at each Lambertson in the Recycler. In addition, 4 horizontal and 4 vertical dipoles each separated by 90° of phase advance are necessary at each transfer line to adjust the position and angle into/out of the line. See figure 3.3.1 for a sketch of the locations of these correctors. At 6 Amps per channel and using the Main Ring corrector magnets, a deflection of 0.5 mr is achievable. Applied near a beta function maximum of approximately 50 m, a closed orbit motion of 25 mm is possible. Vertically this exceeds the 7/8" half height of the elliptical vacuum tube. The half width of the beam tube is just under 1-7/8", so only half the horizontal aperture can be probed by the beam center.

These power supplies are already existing Main Ring "ramped corrector" controllers which are not going to be used in the Main Injector. The correction magnets will also come from the Main Ring.

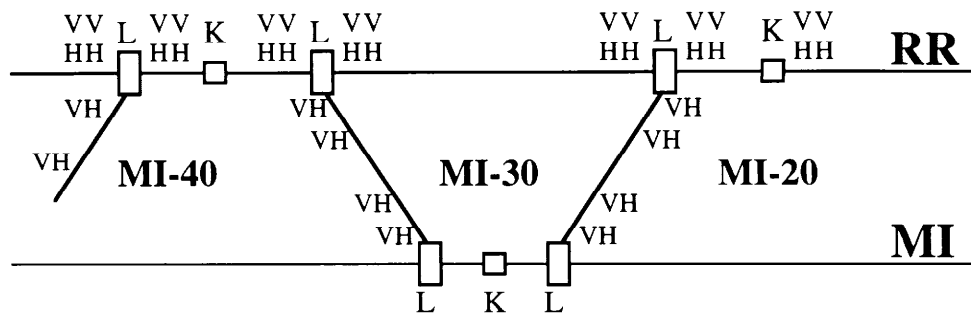


Figure 3.3.1: Locations of the horizontal (H) and vertical (V) dipole correctors in relationship with the kickers (K) and Lambertsons (L) required for the Recycler ring.

### 3.4. RF Systems (WBS 3.1.4)

The Recycler RF system is both very simple and highly complex. Because the Recycler ring is fixed energy, coordinated control of voltage, synchronous phase, radial position, tuning angle, cavity resonant frequency, grid bias, etc. is not necessary. On the other hand, the barrier bucket manipulations outlined in chapter 2 represent a quantum leap in phase agility and computer control.

#### 3.4.1. High Level System

The RF cavities for the Recycler acceleration system are actually 50Ω ceramic gaps which have sufficient inductance to pass frequencies above 10 kHz. Four of these cavities are used to generate the needed peak voltage of 2 kV.

Connected to each of these cavities is a 5 kW solid state amplifier and a gap monitor signal which feeds back into the feedback system which insures fidelity to the

programmed waveform and suppression of beam loading voltages. The amplifiers have a highpass cutoff frequency of 10 kHz and a lowpass cutoff frequency of 100 MHz. All of the amplifier feedback electronics and control electronics are in the MI-60 service building.

### 3.4.2. Low Level System

Most of the hardware, firmware, and software necessary for the Recycler RF system is already being generated for the Main Injector RF system. Therefore, the estimation of manpower and hardware do not represent as large a level of extrapolation as might be expected.

The system revolves around a very advanced direct digital synthesizer VME module which allows computer coordinated frequency changes which are phase continuous. By programming frequency ramps, arbitrary relative phases can be generated between neighboring synthesizers. Since all synthesizers run off of the same clock, frequency synchronization is a digital control with no phase lock loops or feedback systems necessary. By sending this 52.8 MHz sinusoid through a comparator and a divide by 588 counter, a turn marker can be generated which is extremely phase agile. By sending that pulse into a module which under computer control generates a pulse of arbitrary length and height, the full capability of the RF system described in chapter 2 is realized.

The Direct Digital Synthesizer (DDS) VXI LLRF platform component offers performance improvement and new implementation options for transfer synchronization. The DDS includes an AD21062 SHARC DSP, Harris Numerically Controlled Oscillators (NCO), and RF parts for SSB modulation. The DDS has three RF outputs;  $RF_1 = A \sin(\omega t + \Phi_1)$ ,  $RF_2 = A \sin(\omega t + \Phi_2)$ , and  $RF_3 = A \sin(\omega t + \Phi_3)$ . Under DSP control, the outputs are frequency and phase agile, with controlled  $\Phi_n$  and its first through third derivatives. The  $\omega t$  term is determined from a 720 Hz MDAT input, filtered, and updated at 100 kHz identically for all RF outputs. The DSP updates  $\Phi_n$  with 16.66 kHz and 100 kHz components that include absolute and relative phase terms.  $\Phi_n$  registers also sum a  $\Delta\Phi_n$  term for phase control at precise rates. This specifies cogging processes directly in the fundamental unit of interest, instead of the present cogging system's  $\Delta\Phi_{\text{cog}} = \int \Delta\Phi dt$ , taken over the cogging interval.

For the Recycler, two DDS modules are employed in parallel to generate six independent phase-variable waveforms which can be used to generate and manipulate barrier buckets. Figure 3.4.1 contains a block diagram of this system. All six waveforms are created by sending the DDS channel sine waves into comparators which generate pulses at 52.8 MHz. The divide-by-588 circuit generates a single pulse each turn, which in itself triggers an arbitrary waveform generator. All six waveforms are then summed before being delivered to the high level RF system.

Unlike the Main Injector, the Recycler store beams for long periods of time. Therefore, an added constraint for Recycler operations is that the phase and amplitude noise of the pulses be very small. Measurements of the spectral purity of the output of the comparator are very promising.

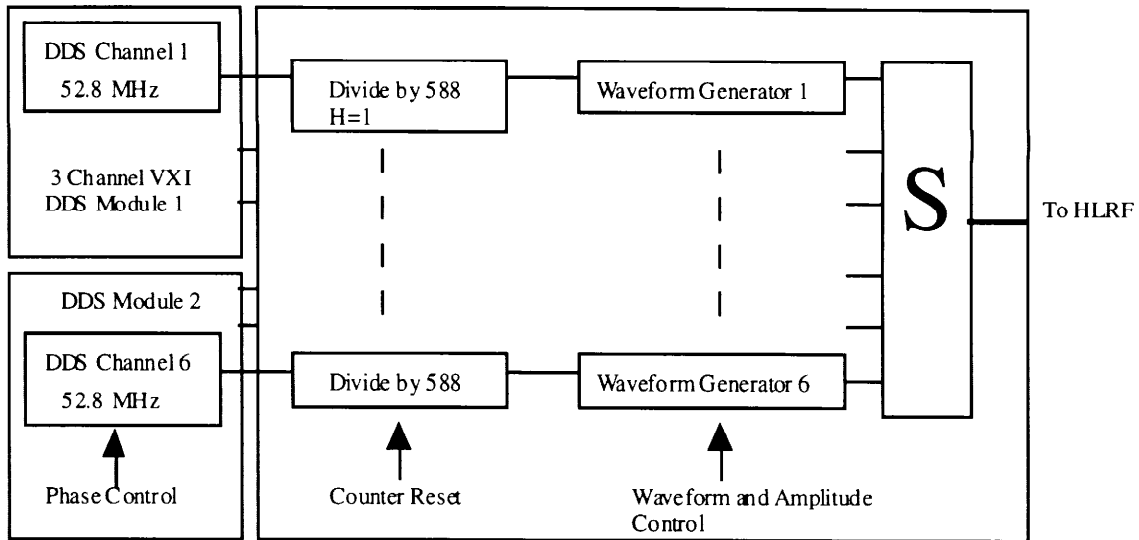


Figure 3.4.1: Block diagram of the Recycler low-level RF system.

### **3.6. Kickers (WBS 3.1.6)**

The specifications for the kicker magnets needed for Recycler operations are listed in table 3.6.1. In order to keep costs low, the kicker in the Recycler ring should build on the Main Injector design experience as much as possible.

Table 3.6.1: Specifications for the Recycler magnet kickers and the transfer kicker in the Main Injector for injection/extraction with respect to the Recycler.

Location	Direction	Kick	Risetime	Falltime	Flattop	Recharge
RR-20	Horz	300 G-m	1-2 $\mu$ s	1-2 $\mu$ s	1.6 $\mu$ s	10 sec
MI-30	Horz	300 G-m	1-2 ns	1-2 $\mu$ s	1.6 $\mu$ s	10 sec
RR-40	Horz	300 G-m	1-2 $\mu$ s	1-2 $\mu$ s	1.6 $\mu$ s	10 sec

A design which comfortably attains the specifications has been produced. Parts from old Main Ring systems and the production of systems similar enough to the Main Injector to share spare capacity have been designed. No unusual technology was invoked to reach the above parameters.

### **3.7. Stochastic Cooling (WBS 3.1.7)**

There are 4 stochastic cooling systems envisioned for the Recycler ring. The two transverse systems are 2-4 GHz bandwidth betatron cooling systems. Providing momentum cooling are a pair of systems; a 1-2 GHz and 0.5-1 GHz filter cooling system.

### 3.7.1. Pickup and Kicker Placement

As shown in figure 3.7.1, an amplitude modulated laser beam is used to cut a chord across a portion of the ring to transmit the signals from the pickups to the kickers. The laser beams should propagate down evacuated tubes in order to prevent excessive laser attenuation during periods of poor weather. Another benefit of laser propagation through an evacuated tube is the insensitivity of time-of-flight to humidity and air pressure changes.

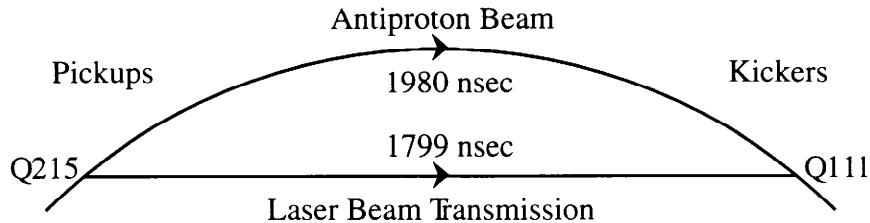


Figure 3.7.1: The chord cut by the stochastic cooling systems in order to minimize the bad mixing between the pickup and kicker.

The placement of the pickup tanks around Q215 is shown in figure 3.7.2. The pre-amplifiers are attached to the pickup tanks, while the power amplifiers and optical fiber transmitters are placed over the permanent gradient magnets for radiation shielding against Main Injector losses. At Q111 the relative tank placements are identical, and the fiber optic receiver and power amplifiers are again over permanent gradient magnets. The final power amplifiers, planned to be travelling wave tubes (TWTs), are attached to the kicker tanks themselves.

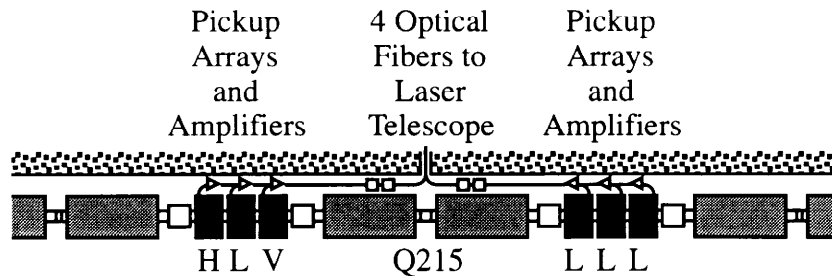


Figure 3.7.2: The relative placement of the horizontal (H), vertical (V), and momentum (L) pickup tanks with respect to the magnets. Note that the pre-amplifiers are attached to the tanks, while the laser driver for the optical fiber signal transmission are placed over the permanent magnets in order to obtain some radiation shielding from Main Injector losses.

### 3.7.2. Arrays and Tanks

The number of pickup and kicker tanks and pickup and kicker electrodes are listed in table 3.7.1. As the frequency of the system increases, the size of the electrodes and their spacing along the beam shrink. Therefore, the higher frequency systems have a higher longitudinal density of electrodes.

Table 3.7.1: Number of pickup and kicker tanks and electrodes required to fulfill the cooling requirements outlined in chapter 2.

Plane	Band (GHz)	Pickup Tanks	Kicker Tanks	Pickup Electrodes	Kicker Electrodes
Horz	2-4	1	1	32	32
Vert	2-4	1	1	32	32
Mom	1-2	2	2	32	32
Mom	0.5-1	2	2	16	16
	Total	6	6		

The standard length of a tank is 48". A typical array is 1 m long. Therefore, only three tanks per half cell fit into an unmodified section of Recycler lattice.

### 3.7.3. Laser Telescope

The laser telescope is composed of two passive elements per beam, each pair on either side of the telescope. First, in order to minimize the laser beam divergence the beam radius is increased via large aperture telescope lens systems at either end of the evacuated tubes. With a 20:1 expansion ratio, the laser beam can be as large as 2" in diameter. Second, the transitions of the laser light from fiber optic cable to air and back are accomplished with a light launcher composed of a polished fiber end coupled to a point-to-parallel collimating lens.

As shown in figure 3.7.3, there are also X-Y micro-positioning stages to move the light launcher transversely with respect to the beam expander and to steer the entire beam in either dimension. These stages are operated via remote control and/or feedback loops to set and maintain a high quality optical link across the arc of the Recycler.

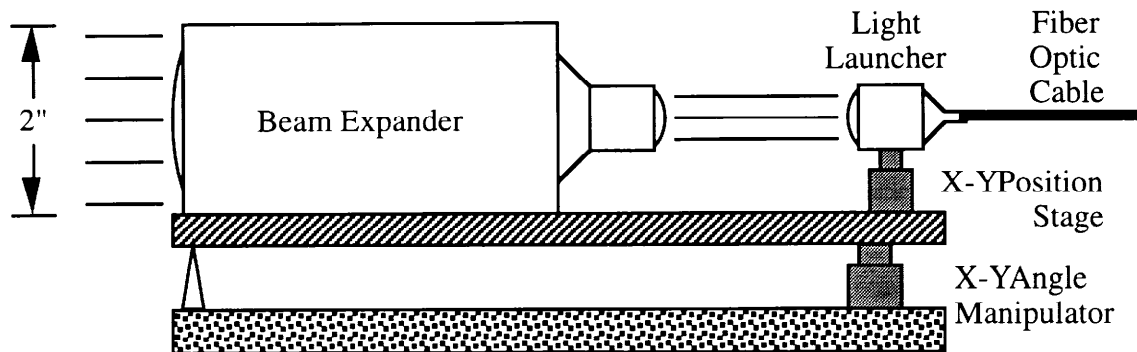


Figure 3.7.3: Sketch of the optics involved in the laser telescope. The passive optical hardware is identical on both sides of the telescope.

## 3.8. Instrumentation (WBS 3.1.8)

The Recycler Ring instrumentation will closely resemble much of the Main Injector instrumentation. The beamline intensity monitors and both the longitudinal and transverse wideband detectors will be identical. Some changes will occur in the

transverse Schottky system to take advantage of the stationary revolution frequency of the Recycler. A commercial beam current measurement system will be purchased. Due to costs and unusual beam signals, the beam position monitor system is very unique.

### 3.8.1. Beam Position Monitor System

The BPM (Beam Position Monitor) detectors will be used for both position information and ion clearing. In the Recycler ring 416 detectors located at the 1/3 and 2/3 boundaries of each half cell will provide 8 detectors per betatron wavelength in both the horizontal and vertical planes. Split-plate detectors will provide output linear with displacement in one plane at a time. Three flavors of detector will be required: one horizontal and one vertical elliptical detector, covering most of the ring; and one round detector, rotated to measure the desired plane. Detector edges will be rounded to prevent arcing of the ion-clearing high voltage.

The BPM system will have two measurement modes. The first measures injected beam from the Booster or Main Injector, while the second measures the closed orbit of the stack. The beam stack in the Recycler will be DC beam, except for an injection gap equal to 1/7th of the circumference. For both modes, the resulting harmonics of the 89.8 kHz revolution frequency lead to an AC-coupled pulse for low frequency processing.

The low and medium frequency response of the detector resembles that of a highpass filter. The low frequency corner is inversely proportional to both the terminating resistance and the system capacitance. For long cable runs terminated in high impedance, sensitivity is inversely proportional to the cable capacitance. These two factors dictate the use of high-impedance pre-amplifier buffers in the tunnel. A series resistance before the pre-amp reduces the system bandwidth and noise. The radiation resistance of possible pre-amp candidates is being tested in the Booster dump. Manufacturer testing [Analog Devices, Inc., Radtest Data Service, November 1995] claims radiation resistances of 25-50 and 200 kRad for two possible chips. Other possibilities, including discrete transistors, are being considered.

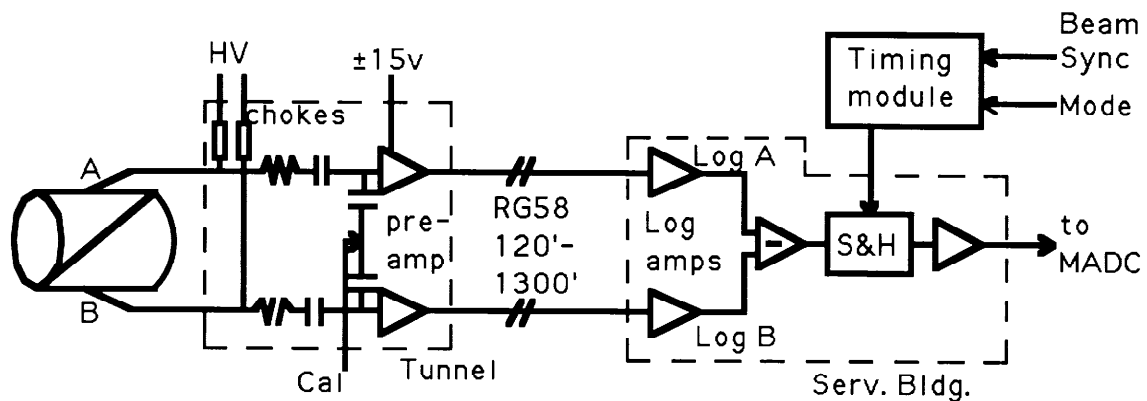


Figure 3.8.1: Block Diagram of the Recycler BPM System.

Short cables will connect detector feedthroughs to a small shielding box for the pre-amps and other components. The box, shared by two neighboring detectors, may be mounted above the Recycler magnets for enhanced radiation shielding. A high resistance couples the high DC voltages to the detector plates for ion clearing. The high voltages are daisy-chained for all the detectors in a sector. Current monitoring takes place at the source of these voltages, in the service buildings. A calibration signal, resembling a typical signal pulse, will also be daisy-chained throughout a sector. When activated, it will be loosely coupled equally to the two signal paths.

The low signal frequencies enable use of inexpensive RG58 50Ω cable for the 120'-1300' cable runs. Additional cables are needed for the two pre-amp DC supplies, the ion-clearing high voltage, and the calibration signal. Dual use of cables for DC and AC signals is being considered. Figure 3.8.1 contains a sketch of the BPM system.

The cost constraints of the Recycler project and the nature of the detector signals demand a new, inexpensive processing scheme and control system interface. Innovations in analog processing technology and the Fermilab control system make that possible.

The position can be derived from the signals of a linear detector by

$$\frac{x[\text{mm}]}{b[\text{mm}]} = \left( \frac{A - B}{A + B} \right) \approx \frac{\text{Ln}10}{2} (\log A - \log B) \quad , \quad (3.8.1)$$

where A and B are amplitudes of the two plate signals and b is the detector radius. Recent improvements in logarithmic amplifiers [Analog Devices, Inc., AD640 and AD608 data sheets, Analog Devices Design-In Reference Manual, 1994] enable a large dynamic range and high bandwidth. Laboratory tests on a simulated Recycler signal show a dynamic range near 50 dB. These chips approximate the log function. Log nonconformance, which leads to errors, is expected to fall within the accuracy specification. Subtraction by a differential op-amp results in a voltage which is converted to position after system (detector and electronics) offset subtraction and scaling. This can be carried out in the control system.

The position signal will be digitized using standard MADC-compatible ADCs from the Controls Department. The result is interfaced to the control system with the CAMAC 290 MADCs. The differing signal occurrence times at the BPMs (a range of 2 μs per sector for both protons and antiprotons) and the two operating modes (injection and stack) require a sample-and-hold circuit with correct timing. From the 1.6 μs minimum signal length, acquisition time, and other factors, it is anticipated that 6 distinct timing signals are needed per house. These will be created with CAMAC 279 modules, synchronized to the Recycler Ring Beam Sync clock.

The digitized signals are converted into ACNET database devices with scaling as described above. Standard acquisition types will be available, including "snapshot" (closed-orbit), "flash" (single-turn), and turn-by-turn (TBT). Note that only one TBT channel is possible per MADC, and current plans call for two MADCs per house. An application page will control acquisition modes and timings, as well as calibrations done during beam-off times.

### 3.8.2. Beam Loss Monitor System

The Recycler Ring will use the beam loss monitor system of its neighbor, the Main Injector. There will be no additional monitoring for the Recycler.

### 3.8.3. Longitudinal Wideband Pickup

One resistive wall current longitudinal pickup will be built for the Recycler and placed in the MI-30 region. The design will be identical to that used for the Main Injector. It will be used for studies and any possible longitudinal monitoring systems.

The basic design of this resistive wall current monitor is to insert a ceramic gap shunted with resistance in the vacuum pipe and measure the voltage induced by the beam wall current [R. Webber, "Longitudinal Emittance an Introduction to the Concept and Survey of Measurement Techniques Including Designing of a Wall Current Monitor", AIP Acc. Instr. Conf. Proc. #212, 1989]. The ultimate bandwidth of such a detector is limited by the spreading of the electric field lines between the beam and the image charge on the inside wall. For the monitor's 5" circular aperture and the relativistic Recycler beam, the bandwidth limit is 23 GHz.

In practice the detector response is difficult to maintain above the microwave cutoff frequency of the beam pipe, estimated to be 1.4 GHz for the 5" diameter. Spurious electromagnetic energy, generated by various discontinuities and guided along the beam pipe, corrupts the image current signal. Microwave absorber material is placed inside a 6" vacuum pipe up and downstream of the detector to reduce this noise by 20 dB. The absorbing material is an epoxy-based Resin Systems RS4825 core. It is placed outside a 5" aperture ceramic sleeve to preserve vacuum specifications without lessening the absorbing properties. This solution is cheaper and more readily available than the previous vacuum-friendly absorber.

The detector maintains a 3 kHz low frequency cutoff with a series of toroids shunting the resistance across the gap. An impedance of  $1\Omega$  (122 resistors of  $112\Omega$  each) terminates a radial transmission line formed by the 140 mil ceramic gap. Four signal pickoff points spaced evenly around the gap are summed to reduce position dependence and azimuthal signals. The result is a position-independent longitudinal monitor with  $\pm 1$  dB flat response from 3 kHz to 6 GHz, as measured with a tapered  $50\Omega$  transmission line test setup. An identical, reciprocal port can be used for calibration.

### 3.8.4. Transverse Wideband Pickups

The Main Injector transverse wideband pickup design will be used in the Recycler. Two pickups, one for each plane, will be placed at MI-30 for studies purposes.

Standard striplines are planned for both the horizontal and vertical planes. Feedthroughs at both ends will be used to observe both proton and antiproton signals. The plate length of 55",  $\lambda/4$  at 53 MHz, will be used to increase signal and to maximize doublet separation when viewing proton injections. In the frequency domain, zeroes in transmission will occur at those frequencies where the plate is  $\lambda/2$  long.

### 3.8.5. Transverse Profile Monitors

The Ionization Profile Monitor (IPM) system [Zagel, J., "Fermilab Booster Ion Profile Monitor System Using LabView", AIP Acc. Instr. Conf. Proc. #333, 1994], used in the



Booster and Main Ring/Main Injector, is planned for the Recycler Ring. Two systems are needed to handle the transverse planes. The IPM uses a microchannel plate to collect and amplify ions produced when the beam passes through residual gas in the detector. The high quality vacuum in the Recycler may necessitate an intentional, localized, calibrated gas leak at the IPM detector.

The 8 kV clearing field of the Booster IPM sweeps the ions across the 10 cm aperture onto a microchannel plate, which amplifies the current and deposits it onto a grid of 1.5 mm spaced conductors etched into a printed circuit card. The current induced in each conductor is amplified, digitized, and stored each turn. The amplifiers have a gain of  $2.5 \times 10^6$  volts per amp and 100 kHz bandwidth. The digitizers are commercial 4 channel 12 bit VME cards which have 64 Kwords of memory for each channel. A National Instruments MXI adapter is used to access the VME cards with a Macintosh computer running LabView software. The Main Ring IPMs use a 20 kV clearing field across the 10 cm aperture with 0.5 mm conductor spacing on the collection grid.

A flying wire system is not being included due to the high reliability demanded of the Recycler ring. The possibility of the failure mode of the wire getting stuck in beam was considered too great.

### 3.8.6. Transverse Schottky Monitor

The Recycler Ring transverse Schottky monitor system [Chou, P., "Transverse Schottky Detector for Antiproton Recycle Ring", internal Fermilab note] will be similar to the new Main Ring system but with much higher sensitivity. The primary system output is a two channel (for two planes) spectrum analyzer display in the main control room. Various beam parameters can be calculated from information provided by transverse Schottky signals, including fractional tune, transverse emittance, momentum spread, chromaticity, and presence of trapped ions [Peterson, D., "Schottky Signal Monitoring at Fermilab", AIP Acc. Instr. Conf. Proc. #229, 1990].

The two Schottky detectors, to be located at MI-30, will be round, split-plate capacitive pickups. A box in the tunnel will contain a transformer, designed to resonate the detector at 79.263 MHz and to couple to the output cable. The resonant frequency was chosen at the harmonic number  $n=882.5$ , halfway between the first two harmonics of the Main Injector RF system. A bandwidth of 90 kHz (one revolution harmonic) requires a loaded quality factor  $QL=880$ . To enable this high Q and maintain stability, suitable feedthroughs must be found and temperature drift effects must be small. The detector sensitivity is given by

$$S_{\perp} = \frac{l}{2bc} \sqrt{\frac{R_o \omega_c Q_o}{C_t}} \quad , \quad (3.8.2)$$

where  $l$  is length, nominally 40 cm,  $b$  is aperture radius,  $c$  is speed of light,  $R_o$  is the receiver's  $50\Omega$  termination,  $\omega_c$  is radian resonant frequency,  $Q_o$  is unloaded Q, and  $C_t$  is total capacitance. Design calculations estimate a sensitivity of  $22 \Omega/\text{mm}$ , much higher than the Main Ring system ( $0.9 \Omega/\text{mm}$ ) and comparable to the Tevatron's ( $27 \Omega/\text{mm}$ ). Low-loss heliax  $50\Omega$  cables will be used to bring the signals upstairs.

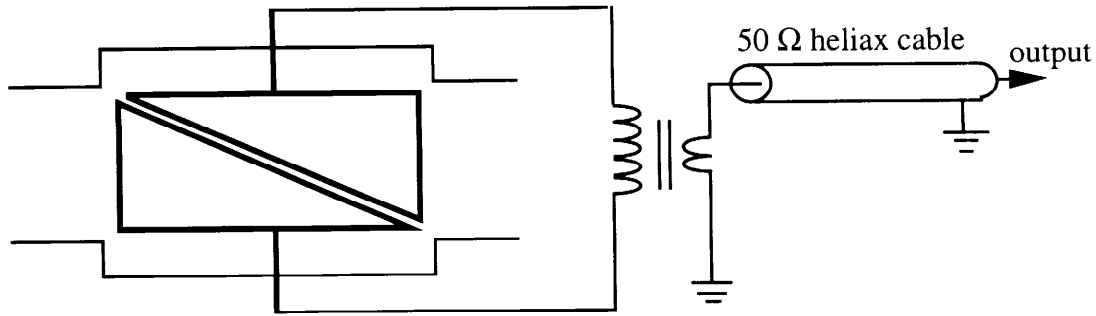


Figure 3.8.2: Sketch of the Recycler transverse Schottky electrical model. The split plate pickup provides a linear position response function. The system is resonated at 79.263 MHz ( $n=882.5$ ).

The Schottky receiver down-converts the signal bandwidth to baseband for use with a low frequency spectrum analyzer. A Trontech ultra-low noise amplifier provides 60 dB of gain. Variable attenuators tune the gain. Custom crystal bandpass filters from Piezo Technology, Inc. set the signal bandwidth at 100 kHz. The local oscillator signal might be generated by a Main Injector injection frequency oscillator, if available, or a fixed custom oscillator. Unlike the Main Ring/Main Injector, the Recycler energy is constant at 8.9 GeV. Thus, its revolution harmonics will remain fixed and no frequency tracking is needed. A mixer down-converts the signal before a final low-pass filter and gain stage. A long length of RG-8 low loss cable brings the outputs to the Main Control Room and the spectrum analyzer. Given that a horizontal and vertical system are needed, this implies 2 cables to the control room and two channels of FFT capable digitizers.

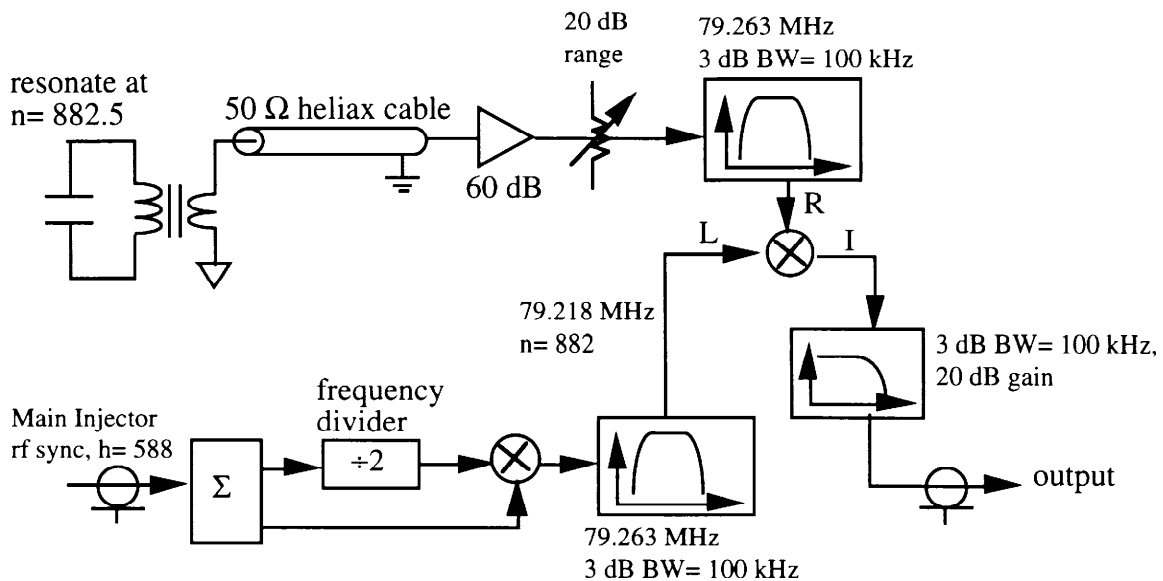


Figure 3.8.3: Sketch of the beam processing electronics which conditions the RF signal from the detector to a low frequency signal a signal analyzer can measure.

### 3.8.7. Ring Current Monitor (DCCT)

The DC Current Transformer, or parametric current transformer, uses the second harmonic detection principle to measure the DC beam current in series with an AC transformer to extend the bandwidth (Unser, K., "The Parametric Current Transformer, a beam current monitor developed for LEP", AIP Acc. Instr. Conf. Proc. #252, 1991). Fermilab does have a number of versions of the DCCT, but a commercial version will be purchased for a Recycler unit at MI-30. The Bergoz current monitor (Bergoz, Parametric Current Transformer data sheet) is 4.25" long and offers several apertures from 2" to 7". At this time, a 3" pipe is anticipated at MI-30. A ceramic break is required for use with the Bergoz monitor. Radiation damage can be reduced by selecting the radiation hard sensor option and locating the tunnel front-end electronics (maximally 5 m from the sensor) where radiation dosage is less than  $10^4$  rad/year.

The DC current monitor is relied upon for absolute beam current calibrations. The Bergoz monitor specifies a frequency response from DC-20 (optionally 100) kHz, dynamic range of  $2 \times 10^7$  for each full scale range, resolution optionally to 0.5  $\mu$ A, and absolute accuracy and linearity of 0.05% and 0.01%, respectively. The  $\pm 10$ V output is digitized and interfaced to the controls system with the MADC.

### 3.8.8. Transverse Dampers

The Recycler damper system will be a copy of the Accumulator system. The only substantial difference is that a battery backup unit capable of sustaining damper operations for one hour will be added. The purpose of this backup unit is to maintain beam stability against the resistive wall instability during power outages, which otherwise have no effect on the survival of the beam.

### 3.8.9. Toroids

Toroid systems are AC-coupled intensity monitors that are cheaper than DCCTs and appropriate during transient events such as injections and extractions. The present toroid design used Pearson Electronics, Inc. model number 3100 current monitors. The aperture is 3.5" and the output signal is 0.5 volts/amp into  $50\Omega$  with a bandwidth of 40 Hz to 7 MHz. At the toroid output the signal is 85 mV for  $10^{10}$  ppb. The toroid is electrically isolated from ground in the enclosure and good quality cable such as LDF4-50A is required to avoid noise problems. The toroid must be placed over a ceramic break in the vacuum pipe. To reduce the RF energy radiated into the environment a ground connection is required across the break but external to the toroid.

The signal is transported to the service building where the electronics amplifies, limits the bandwidth, and integrates the signal to provide a voltage representing the total charge. The present design [Vogel, G., "Toroid Integrator User Guide", internal Fermilab note] in use includes a baseline subtraction circuit, a fixed length integration window, and an A/D and D/A used to form a sample and infinite hold. The toroid integrator has a bandwidth of 100 Hz to 400 kHz and selectable gains of  $2 \times 10^{11}$ ,  $2 \times 10^{10}$ , and  $2 \times 10^9$  particles/volt.

There are 6 toroid systems required due to the addition of the Recycler Ring. Figure 3.8.4 shows the relative locations of these systems. For each transfer between the Main Injector and the Recycler there are 3 toroids; one to determine the initial intensity,

one record the transfer line intensity, and finally one to measure the final intensity. For the abort line there is an initial intensity and an abort line intensity.

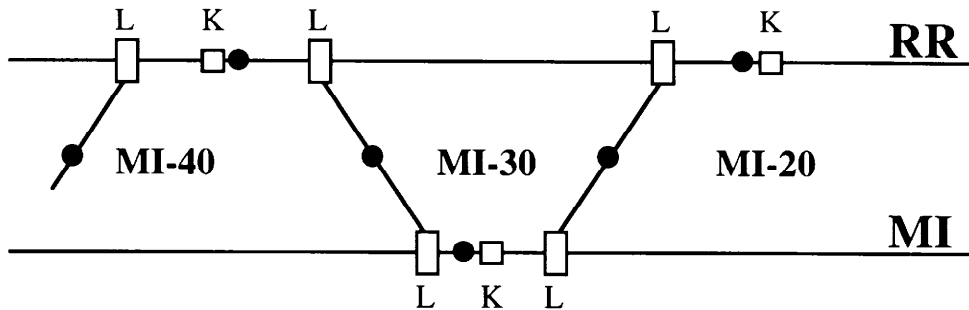


Figure 3.8.4: Sketch of the placement and number of toroids in the Main Injector and Recycler to service the instrumentation needs of the Recycler transfers. The Lambertsons (L), kickers (K), and toroids (black dots) are shown with respect to the service building the reside in.

### **3.9. Controls (WBS 3.1.9)**

Controls requirements have been the focus of a number of cross-departmental discussions. Because of the novel nature of many of the technologies employed in the Recycler ring, it is important that a thorough exploration of hidden demands on controls be identified. Just as in the case of beam instrumentation, it is vital for efficient commissioning of the Recycler that all control software and hardware be installed and tested before actual accelerator commissioning commences. Below is the result of these scope explorations.

#### **3.9.1. Stochastic Cooling System**

Existing equipment will be moved from the present Tevatron bunched beam stochastic cooling R&D implementation. CAMAC equipment now residing at F0 TeV crates \$60, \$61, \$62 will be moved to their new locations at MI-20 and MI-30.

#### **3.9.2. Power Supplies**

The two kickers in the Recycler and one kicker in the Main Injector will need power supply controllers - CAMAC C118 cards and beam synch triggers supplied by C279 cards. All associated Lambertsons are built with permanent magnets and do not require power supply controls.

There are a number of dipole correctors required in the Recycler ring and its transfer lines. Around each of the 3 Recycler Lambertsons a 4-bump orbit offset is required in both planes. This requirement alone involves 24 correctors. In the transfer and abort lines another 20 correctors are required. Figure 3.3.1 contains a sketch of the corrector count and placement.

All correctors will utilize existing MR corrector power supplies and existing corrector coils, each chassis controls 6 correction elements. A total of 8 of these supplies are required: 2 at MI-20, 4 at MI-30, and 2 at MI-40. It should be noted that additional bulk

power supply control in addition to what CAMAC 053 cards can provide is required. Six CAMAC 118 cards will be included to cover this need.

### 3.9.3. RF Systems

The low level RF system developed for the Recycler RF system, which is a copy of the VXI MI LLRF system, will be located at MI-60. It will need an accelerator controls ethernet connection to the VXI platform.

### 3.9.4. GPIB Interfaces

Stochastic cooling, RF, and instrumentation all need GPIB connections. There will be an interface at MI-20, MI-30, and MI-60 (assuming up to 32 devices per connection). A high speed and reliable VME based interface will be used.

### 3.9.5. Vacuum System

There will be one ion pump for every 2 half cells (104 total) for the Recycler itself. There will also be 4 pumps for each of the transfer lines (16 total). Each pump requires control and monitoring. No automatic valves (other than the safety critical devices) will be allowed in the Recycler in order to eliminate the chance of accidental antiproton stack loss. All of the valves will be manually operated. The positions of these manual valves will not be electronically monitored. Instead, valve motion will only be allowed via the insertion of keys which can only be removed when the valves are in the out position. The keys are put in a low-tech key tree to make up a permit. The requirement for gauges is two ion gauges per vacuum sector (every 8 cells for a total of 13 sectors and 26 gauges). CIA crates are the best way to effect control of Recycler pumps. Spare control channels are available in planned Main Injector CIA crates at 4 of the 6 service buildings. Two CIA crates (and ARCNET controllers) will be purchased for the other service buildings. One CIA card can control 6 pumps. Some spare gauge channels will be used by the Recycler. Sharing CIA crate space with the Main Injector vacuum system will not present any software problems. Summary of ring and transfer line (XL) pumps and their geographical position are summarized in table 3.9.1.

Table 3.9.1: Summary of the Recycler pump controller locations around the ring. Transfer line (XL) pumps are also included in the count.

Service Bldg	# of Cells	Ring Pumps	XL Pumps	Total Pumps
MI-10	16	16	0	16
MI-20	16	16	0	16
MI-30	20	20	8	28
MI-40	16	16	2	18
MI-50	16	16	0	16
MI-60	20	20	0	20
Totals	104	104	10	114

### 3.9.6. Beam Position Monitors (BPM)

It is possible to support the Recycler BPM system with existing multiplexed ADC (MADC) and CAMAC 290 card controllers dedicated to this function. Scans of the closed orbit can occur every 1 to 2 seconds. Turn-by-turn beam position acquisition is also supported. For turn-by-turn data taking, the MADCs (and controllers) must be fast enough to accommodate the Recycler's 90 kHz revolution frequency. A minimum 12 bit resolution for the MADC has been specified.

There is one horizontal and one vertical BPM every half cell, for a total of 416 Recycler ring beam position measurements. Intensity signals will not be provided by the BPM RF modules. Horizontal and vertical monitors are distributed to separate MADCs to facilitate acquiring turn-by-turn data. This will require at least two MADC systems per house (service building). Connection to the sample and hold analog outputs of the BPMs should be direct and use 16 twisted pair cable for direct connection to the MADC. Avoiding use of an Analog Entry Box will save costs.

Associated control of BPM data acquisition requires generation of a "sample" signal triggered by a RRBS event. Also required at each service building are four CAMAC 279 cards listening for the sample event to provide appropriately timed triggers to the BPM module's sample-and-hold (S&H) circuit. The data taking mode of the CAMAC 290 cards is controlled by TCLK events and software. A timing resolution of 1  $\mu$ sec is required for BPM signal sampling.

There are also BPMs associated with each of the transfer lines. These are included in table 3.9.2 as "XL BPM", with half being horizontal and the other half vertical. The ring beam sync timing will also serve to trigger the S&H circuits of the transfer line BPMs.

Table 3.9.2: Summary of BPM MADC system counts and locations.

Service Bldg	# Cells	Horz BPMs	Vert BPMs	XL BPMs	Total BPMs
MI-10	16	32	32	0	64
MI-20	16	32	32	0	64
MI-30	20	40	40	28	108
MI-40	16	32	32	8	72
MI-50	16	32	32	0	64
MI-60	20	40	40	0	80
Totals	104	208	208	36	452

### 3.9.7. Control System Front Ends

Recycler controls requirements do not require an additional front end computer. Specialized instrumentation systems such as residual gas ionization profile monitors using Macintosh computers running the LabView software are connected directly to the ethernet link around the ring.

### 3.9.8. Accelerator Control Consoles

An MI-30 control room for Recycler commissioning and electron cooling research, development, and eventual commissioning will need two consoles.

### 3.9.9. Beam Permit System:

Because of the precious nature of antiprotons, the beam permit system will only be applied to protons during commissioning. The Recycler beam permit system status will be applied to the beam switch sum box (BSSB) to adjudicate injection of protons. CAMAC 200 cards, input panels, and repeaters will be installed at each of the 6 Main Injector service buildings and the main control room. All equipment should be available from the MR system after decommissioning. The beam permit will be physically implemented with a spare optical fiber.

### 3.9.10. Recycler Ring Beam Sync Clock (RRBS)

The low level RF system will provide: a revolution marker (53 MHz/588); 7.5 MHz (53 MHz/7), and 53 MHz. Various CAMAC modules are necessary for clock generation and have been added to the WBS. These will be located at MI-60 and include two CAMAC 377 cards, a CAMAC 280, 175, and 276 card. These signals will be supported ring-wide and at the main control room, so at least 12 fiber repeaters are necessary. RRBS will use a spare optical fiber.

### 3.9.11. Software

Unlike the Main Injector, in which most systems existed previously in the Main Ring, the Recycler relies on new subsystems, new geometries, and hence new software. Because of the traditional tendency to underestimate software manpower requirements, serious discussions of the scope of software requirements have been held. Below are the results of these discussions.

*Database entries:* The stochastic cooling system gets transferred from the Tevatron. Everything else is created new. Because of the use of permanent magnets, the non-existence of distributed corrector systems, and the lack of utilities, the total number of database entries is <1000. A new "R" index page will be created and R:xxxxxx database entries will be facilitated.

*Applications:* After studying the applications driving the other Fermilab accelerators, a list of programs relevant to the Recycler ring has been developed. Some of the applications are rather generic, such as DataLogger, vacuum readback, and parameter pages. The orbit control/magnet move program is very important, and is already applied to Fermilab accelerators. With the addition of the Recycler lattice to the program database, it will be able to function with minimal modification. Similarly, the stochastic cooling software already exists from the Tevatron Collider bunched beam cooling effort. New programs for low level RF control and beam position measurement must be written. Just as the number of database entries is orders of magnitude smaller than other accelerators, the number of application programs is similarly low.

### **3.10. Safety System (WBS 3.1.10)**

The additional safety system components necessary to support the Recycler are quite limited. To insure the termination of the coasting beam in the Recycler, two gravity activated fail safe vacuum isolation gate valves will be used. These valves are necessary because permanent magnets cannot be readily turned off and interlocked. The safety system WBS includes two gate valves and the fail safe electronic monitoring and control of these gate valves.

### **3.11. Utilities (WBS 3.1.11)**

Besides a limited amount of conventional power, the only utility being used by the Recycler is LCW. The subsystems which consume this water are described below. All usages are in service buildings. Note that the total water flow required by the Recycler is approximately 40 gallons/minute. There are sometimes leaks in the Main Ring that are larger than this!

#### **3.11.1. Dipole Corrector Supplies**

The dipole corrector supplies at MI-10, MI-30, and MI-40 require 4 gallons/minute per chassis. Each chassis services 6 correctors. Table 3.11.1 summarizes this usage.

Table 3.11.1: Summary of LCW water usage rates at each service building in which a need exists for the Recycler ring and its dedicated transfer lines.

Location	# Chassis	LCW Need
MI-20	2	8 gal/min
MI-30	4	16 gal/min
MI-40	2	8 gal/min

#### **3.11.2. Stochastic Cooling Traveling Wave Tubes**

The stochastic cooling kickers at MI-30 are driven by traveling wave tubes (TWT) which require a couple of gallons per minute per tube. Given that there are three cooling channels, a total of approximately 6 gal/minute is required.

#### **3.11.3. Moving Existing LCW Pipes**

There are a limited amount of valves, pipes, and air dehumidifiers which have already been installed in the MI-60 straight section which will have to be moved because of the addition of the Recycler. In addition, in order to build the MI-22 and MI-32 transfer lines between the Main Injector and Recycler the LCW headers in the regions between Q212 & Q222 and Q320 & Q330 need to be moved.



## 4. Civil Construction

In this section the civil construction associated with the Recycler project is described. The purpose of this work is to construct the penetrations for the stochastic cooling fiber optic cable and laser telescope for signal transmission between the pickup and kicker tanks and to extend the MI-30 service building to house the stochastic cooling, kicker, and instrumentation power supplies and controls located in the MI-30 straight section.

### 4.1. Stochastic Cooling Penetrations

The penetrations for the stochastic cooling system are situated at quadrupole locations Q215 and Q111. As shown in figure 4.1.1, a 2" diameter pipe between the berm toe line and the tunnel is inserted in order to provide a conduit for alignment control cables and fiber optic signal transmission lines. This pipe is placed in a hole bored by a drilling crew. If already installed, the Main Injector and Recycler magnets in these areas must be removed prior to drilling.

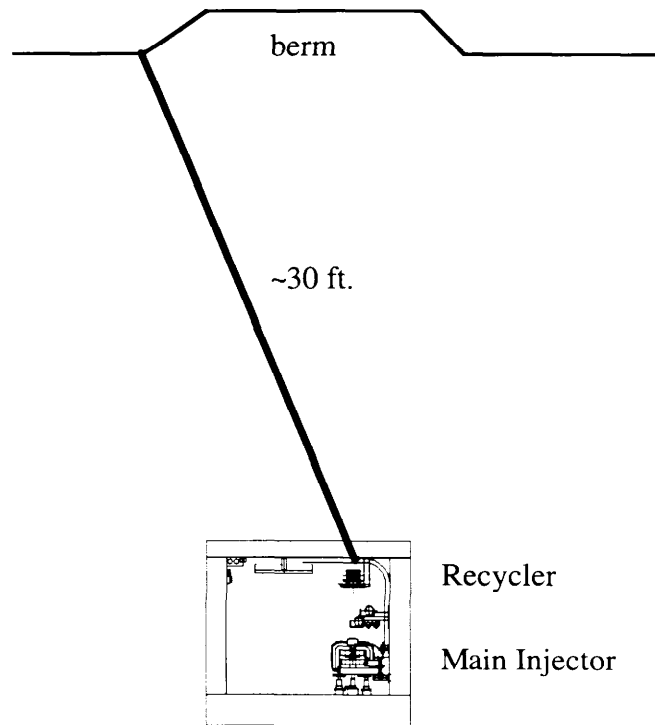


Figure 4.1.1: Tunnel and berm cross-section with a 2" diameter conduit for stochastic cooling signal transmission via optical fibers. In addition, the alignment control cables for aiming the laser beams from the pickup penetration to the kicker penetration are also placed in this conduit.

## 4.2. Stochastic Cooling Telescope

At the surface near Q215 the horizontal, vertical, and two momentum stochastic cooling signals, transmitted as AM modulation on four separate laser beams, are aimed toward the Q111 location. The transition from optical fiber to a 1" diameter laser beam (and back to fiber optic again) is accomplished with commercial optical components. All of these components are passive and do not require power. The lasers are aimed through windows into evacuated tubes for signal transmission. The laser beam is approximately 1" in diameter. Assuming a placement and ground motion tolerance of 2", each PVC pipe has a diameter of at least 5 inches.

In order to aim the laser beams, it is necessary to have remote stepping motor control. The power, control, and diagnostic readback cables for aiming come from the tunnel. The exact location of this optical transition/aiming hardware is at present designed to be approximately 8 feet underground. In order to assure maximum stability against transverse pipe motion, the pipe is buried below the frost line. Because the aiming mechanism is below ground, and that hardware must be installed and maintained, a manhole accessed underground enclosure is required on both sides of the telescope. These enclosures require sump pumps in order to keep the aiming hardware and optical fibers dry. The power for the sump pumps also comes from the tunnel via the stochastic cooling penetrations discussed in section 4.1. A sketch of an enclosure appears in figure 4.2.1.

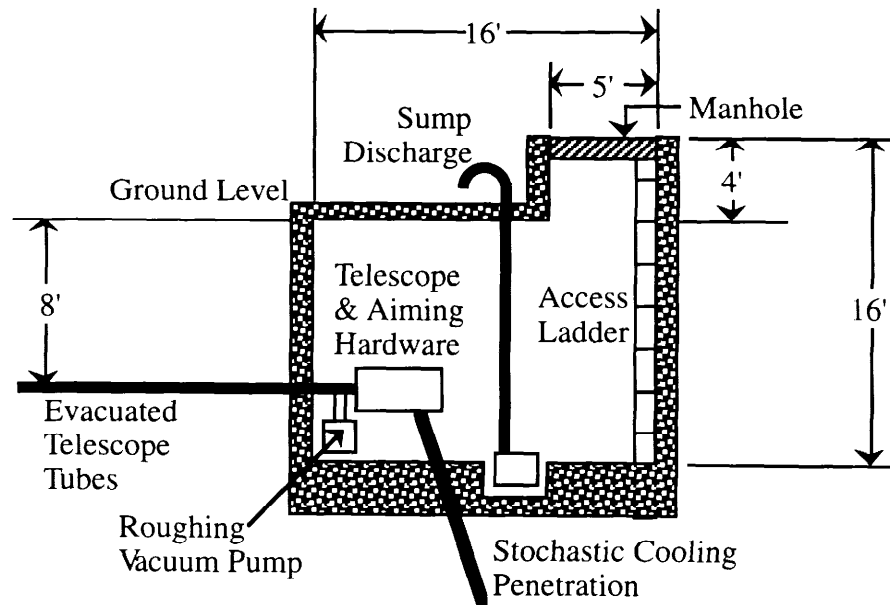


Figure 4.2.1: Sketch of one of the enclosures required at each end of the stochastic cooling signal telescope. One inexpensive model for this enclosure is a sewer access manhole constructed of round, pre-fabricated concrete components.

Therefore, the civil construction implications of the stochastic cooling telescope are;  
1) the excavation of an 8 ft. deep and 1800 ft. long trench for burial of the signal

transmission pipes, and 2) the construction of two human accessible underground enclosures on either side of the telescope.

#### **4.3. MI-30 Building Extension**

In order to house the extra hardware for kickers and instrumentation required by the Recycler, the MI-30 service building needs to be expanded. The concept is to add another standard section which is 50' by 50'. The design of this section contains a loading bay door necessary to allow access to the already existing LCW pump room. Enough space is anticipated to allow the installation of a remote control room during Recycler commissioning studies.