

Beam Dynamics Simulations and Measurements at the Project X Test Facility *

E. Gianfelice-Wendt, V.E. Scarpine, R.C. Webber[†], Fermilab, Batavia, IL 60510, USA

Abstract

Project X, under study at Fermilab, is a multitask high-power superconducting RF proton beam facility, aiming to provide high intensity protons for rare processes experiments and nuclear physics at low energy, and simultaneously for the production of neutrinos, as well as muon beams in the long term. A beam test facility - former known as High Intensity Neutrino Source (HINS) - is under commissioning for testing critical components of the project, e.g. dynamics and diagnostics at low beam energies, broadband beam chopping, RF power generation and distribution. In this paper we describe the layout of the test facility and present beam dynamics simulations and measurements.

INTRODUCTION

The former HINS, now Project-X Test Facility, has undergone various changes following the evolution of the Fermilab intensity frontier plan, which now calls for a 3 GeV CW SRF linac with 1 mA average current (80 % chopped beam, 5 mA bunch current), followed by a 3-8(6) GeV pulsed SRF linac, with up to 4 % duty cycle [1].

The Test Facility main goals are:

- Demonstrate beam acceleration using superconducting spoke type cavities.
- Demonstrate the use of high power RF vector modulators to control multiple RF cavities by a single high power klystron for acceleration of a non-relativistic beam.
- Demonstrate beam halo and emittance growth control by the use of solenoidal focusing.
- Demonstrate broadband beam chopping technologies for 162.5 and/or 325 MHz bunched beams of 2-2.5 MeV.

PX TEST FACILITY LAYOUT

The original Project-X Test facility layout includes a H^- source, a Low Energy Beam Transport (LEBT) section, a 2.5 MeV RFQ, a Medium Energy Beam Transport (MEBT), followed by a series of superconducting single spoke resonator cryo-modules. More details on the test facility are given in [2].

Until recently the Project X Test Facility consisted out of a 50 keV proton source, followed by a LEBT, injecting into

a 325 MHz 2.5 MeV pulsed RFQ; first beam measurements are reported in [3].

The following MEBT section has been extended with a section including 3 quadrupoles and a spectrometer magnet, and is equipped with various beam diagnostics to tune the machine and quantify the beam parameters.

The complete proposed layout of the MEBT section is shown in Fig. 1, while Fig. 2 shows the current status of the facility.

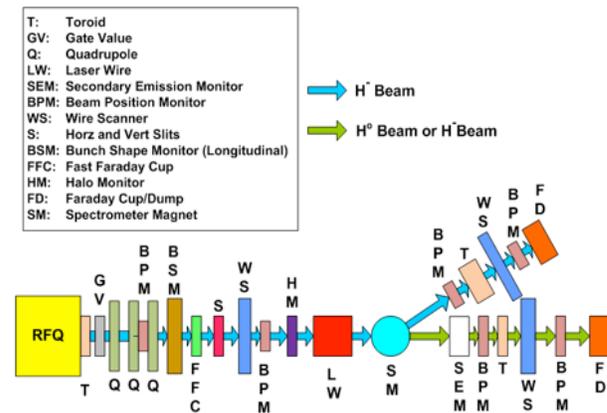


Figure 1: Layout of the PX-Test facility beam line.

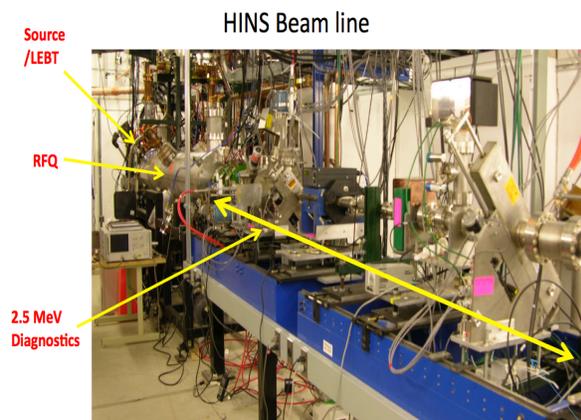


Figure 2: Current layout of the PX-Test facility beam line.

* Work supported by Fermi Research Alliance LLC. Under DE-AC02-07CH11359 with the U.S. DOE

[†] eliana@fnal.gov

Energy and energy spread measurement.

Initially RFQ beam energy was intended to be measured from the time-of-flight between two BPMs downstream the RFQ. The continuous nature of the beam through the RFQ make this impossible, unless the RFQ is purposely sparked to kill the beam quickly and generate a sharp beam edge visible in both BPMs. This has been indeed done in past measurements [3].

The MEBT line will be equipped with a spectrometer magnet and the beam energy will be just measured from the position of the center of the deflected beam measured by a Wire Scanner (WS). This kind of measurement should not pose problems.

The possibility of measuring, in addition, the energy spread of the beam has been studied in detail.

The beam size includes two terms

$$\sigma = \sqrt{\epsilon\beta + D^2 \left(\frac{\Delta p}{p}\right)^2} \equiv \sqrt{\sigma_\beta^2 + \sigma_p^2} \quad (1)$$

If, for instance, a horizontal dipole is introduced downstream the RFQ for creating horizontal dispersion, the energy spread may be measured from the beam size.

Owing to the fact that the WS measures the beam total width, this would require the knowledge of horizontal emittance and betatron function at the WS location. In order to simplify the data analysis, we have looked at the possibility of avoiding having such information by a proper optimization of the experimental beam line.

From Eq.(1) it is clear that the best location for the WS is where $\sigma_{x,p}^2/\sigma_{x,\beta}^2$ is maximum.

The three quadrupoles at the RFQ exit therefore must provide a minimum of β_x at the WS while a relatively strong dipole ensures large horizontal dispersion at the WS location. With the same bending angle a sector magnet is more convenient as it provides extra horizontal focusing. The dispersion downstream the dipole is

$$D = D_0 + D'_0 s$$

with (sector magnet)

$$D_0 = \rho(1 - \cos \phi_b) \quad \text{and} \quad D'_0 = \sin \phi_b$$

(D_0 and D'_0 being the values at the exit of the dipole). Therefore large ϕ_b and ρ are preferred. The focusing being $M_{21} = -\sin \phi_b/\rho$, the bending radius is determined by a balance between focusing and dispersion.

Moreover the dipole minimum horizontal aperture, $\delta = \rho[1 - \cos(\phi_b/2)]$, limits how large may be the bending radius chosen. At the Project-X test facility, logistic reasons limit the bending angle to about 30° ; moreover for obvious economic reason, we would like to make use of one of the many magnets already available in storage.

The program currently used for matching the Project-X linac, TraceWin [4], does not distinguish between betatron and synchrotron motion. This makes our optimization cumbersome. Therefore, as the part of the line under

consideration does not include RF cavities, we have preferred to carry out the optics optimization with MAD-X. The resulting quadrupole strengths are introduced in the TraceWin beam line input for performing tracking studies in presence of space charge.

In the MAD-X input a macro has been introduced for defining the beam size at the WS. Several sets of values for the three quadrupoles may be found depending on the ratio $\sigma_{x,p}^2/\sigma_{x,\beta}^2$ and the overall maximum β_x and β_y we are asking for. After ruling out some magnet ‘‘candidates’’ as too weak, the choice is fallen on an existing 0.306 m long sector magnet. With $\hat{B}=0.29$ T, it provides $\phi_b=22^\circ$ at 2.5 MeV. The width of the magnet, 100 mm, is large enough to let the unbend beam go through. Fig. 3 shows the Twiss functions and the horizontal dispersion starting from RFQ exit; the middle of the spectrometer magnet is at 1.94 m and the WS is at 4.44 m. After optimization it is $\sigma_{x,p}^2/\sigma_{x,\beta}^2=4$.

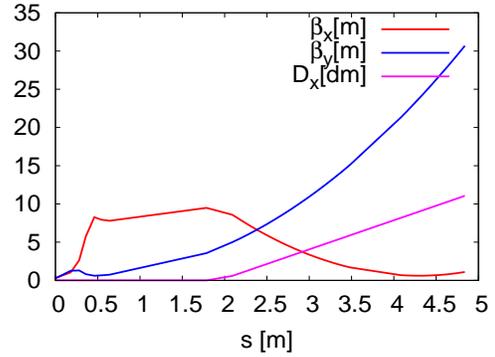


Figure 3: MAD-X Twiss functions and dispersion.

Fig. 4 shows the 3σ horizontal (top) and vertical (bottom) envelopes computed by TraceWin between RFQ exit and WS.

The tracking includes space charge. The beam current is 5 mA. The (nominal) starting normalized emittances and Twiss parameters are quoted in Table 1.

Table 1: Starting Twiss parameters and normalized emittances

| | x | y | z |
|------------------------|-------|-------|-------|
| β (m) | 0.30 | 0.27 | 0.69 |
| α | -1.27 | -1.57 | -0.20 |
| ϵ_N (mm mrad) | 0.25 | 0.25 | 0.49 |

The horizontal beam size at the WS computed by TraceWin is 3.398 mm. Dispersion and horizontal β are 0.954 m and 0.643 at the WS, while the expected $\Delta p/p$ is 3.2×10^{-3} . Thus when using Eq.(1) for determining the energy spread ignoring the betatron contribution the error is about 11%.

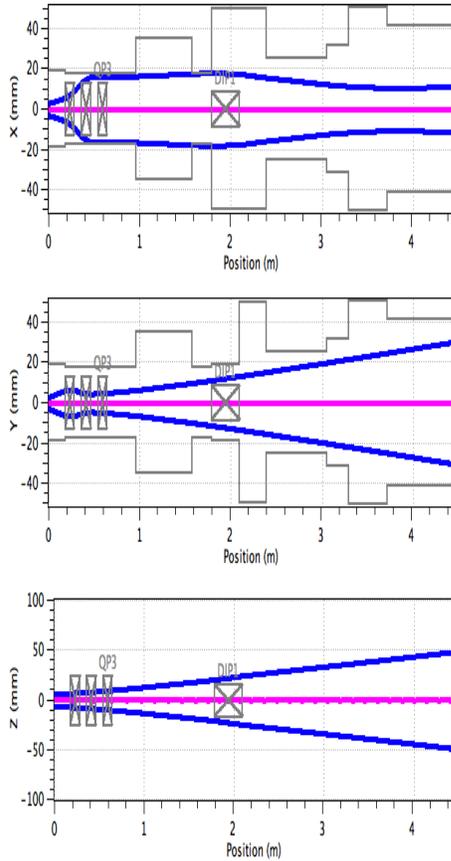


Figure 4: 3σ envelope computed by TraceWin for $I=5$ mA.

This can be improved by inserting a slit upstream of the dipole cutting away particles with large horizontal offset at the slit. Of course, particles having a small offset but large angle will make their way to the WS and the error may even increase. A second slit at $\pi/2$ horizontal phase advance would be needed, but this would make the beam line un-feasible long.

However, owing to the fact that the beam divergence at the slit is small, a second slit is actually not needed.

Fig. 5 shows again TraceWin computed 3σ horizontal (top) and vertical (bottom) envelopes (this time with $I=0$) in the presence of a 30 mm long slit just in front of the dipole, with a width of ± 5 mm. 40% of the beam is intercepted by the slit. The horizontal size decreases to 3.275 mm and the error is reduced to 2.3%.

SUMMARY AND OUTLOOK

Initial beam measurements have been made on the Project-X Test Facility RFQ. These basic measurements indicate that the RFQ is operating within the design specifications. However, additional improved measurements will be needed to characterize fully the RFQ. Among those, we propose the insertion of a relatively strong dipole magnet in the MEBT line for measuring beam energy spread, in addition to beam energy. For this measurement, however,

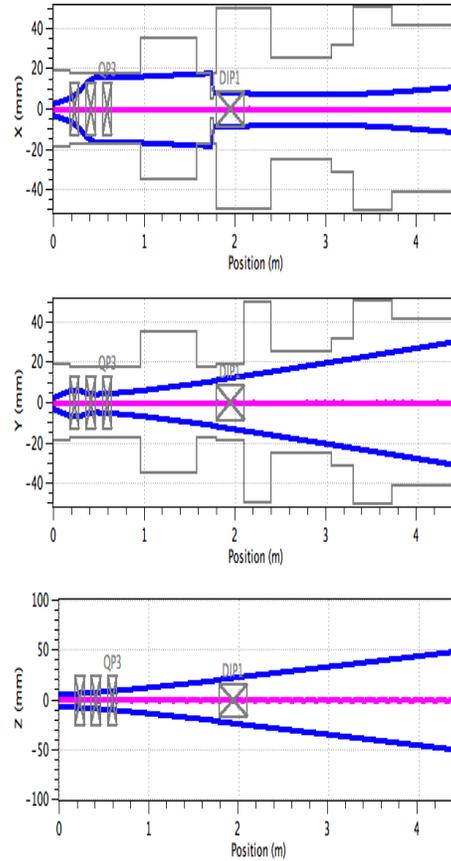


Figure 5: 3σ envelope computed by TraceWin for $I=5$ mA with closed slit.

the beam line optics must be changed by using the three quadrupoles at the exit of the RFQ.

ACKNOWLEDGMENTS

The help of B. Hanna who provided us with the spectrometer magnet and its parameters is warmly acknowledged.

REFERENCES

- [1] S. Nagaitsev et al., "Project X New Multi Megawatt Proton Source at Fermilab", These Proceedings.
- [2] J. Steimel et al., "Status and specifications of a Project X front end accelerator test facility at Fermilab", These Proceedings.
- [3] V.E. Scarpine et al., Proc. BIW10, p.359.
- [4] D. Uriot, CEA, France, didier.uriot@cea.fr, <http://irfu.cea.fr/Sacm/logiciels/index3.php>.