

Correspondent: Michael J. Longo  
Physics Department  
University of Michigan

FTS/Off-net 313-769-7100  
764-6191

LIBRARY

Copy # 12 of 20

NEUTRON-PROTON DIFFRACTION SCATTERING AND NEUTRON  
TOTAL CROSS SECTIONS UP TO 200 GEV

Michael J. Longo, Lawrence W. Jones, Oliver E. Overseth  
The University of Michigan

Bruce Cork  
Argonne National Laboratory

May, 1970

---

Neutron-Proton Diffraction Scattering and Neutron  
Total Cross Sections up to 200 GeV

ABSTRACT

We propose to use the  $0^\circ$  neutral beam planned for Experimental Area 2 to measure differential cross sections for np elastic scattering in the diffraction region over the energy range of from 40 to 200 GeV and also total cross sections for neutrons on protons, deuterons, and other nuclei over the same energy range.

The proposed experiments would use techniques previously developed by the authors in similar experiments at the Bevatron and the AGS. Most of the apparatus already exists. The two experiments could be run in the same beam, either simultaneously or sequentially. The experiments are simple and place very modest demands on accelerator performance.

Michael J. Longo, Lawrence W. Jones, Oliver E. Overseth  
The University of Michigan

Bruce Cork  
Argonne National Laboratory

May, 1970

Correspondent: Michael J. Longo

---

## II. Physics Justification

The np elastic scattering experiment will measure cross sections with good accuracy at least out to  $2 (\text{GeV}/c)^2$  and at incident neutron energies up to  $\approx 200 \text{ GeV}$ . There is a good chance that no np experiments will take place at Serpukhov before turnon at NAL because of the lack of a suitable neutral beam. The NAL experiment would then extend our previous studies of np elastic scattering at the AGS<sup>1a</sup> by a factor of approximately 7 in neutron energy. Such measurements of elastic differential cross sections are basic to any theory of strong interactions at high energies. Major points of interest are a comparison of pp and np cross sections, possible shrinkage of the diffraction peak, or possible structure in the diffraction peak such as that found by Allaby et al.<sup>2</sup> near  $t = 1.5(\text{GeV}/c)^2$  in pp scattering at  $19.3 \text{ GeV}/c$ .

The np and n-nucleus total cross section measurements would yield total cross sections to  $\approx 2\%$  accuracy over the energy range 40 to 200 GeV. We note that direct measurements of np total cross sections with a neutron beam eliminate the uncertainty in the np total cross sections caused by the uncertainty in the screening corrections if a pd-pp subtraction is used. (This uncertainty is especially serious when extrapolating present experience to such high energies because of the possibility of coherent inelastic effects as discussed by Pumplin and Ross<sup>3</sup>.) Furthermore a comparison of np, pp and nd (or pd) total cross sections allows an experimental

---

determination of the screening correction which would serve as a test for the existence of effects like those considered by Pumplin and Ross.

The energy dependence of the n-nucleus cross sections would also provide a test for such effects. These can be done very simply with very little running time. The data analysis can be done very quickly so that these total cross section measurements will be almost immediately available to give a "preview" of possible new effects at very high energies which can be investigated in other experiments soon after turnon.

Another very important aim of the experiment is to gain experience with high-energy neutral beams at NAL. In addition to those proposed here, there are several very interesting experiments that could be done with a neutron beam at NAL. Since they are somewhat more difficult and less certain to succeed they might be considered "second generation" experiments. Two such experiments which have been considered by Longo<sup>4</sup> and Jones<sup>5</sup> in NAL summer studies are np charge-exchange scattering and neutron diffraction dissociation ( $n + \text{nucleus} \rightarrow n^* + \text{nucleus}$ ). Our group is currently studying np charge-exchange scattering up to 30 GeV at the AGS and plan an exploratory experiment to determine the feasibility of neutron diffraction dissociation measurements in the near future. These experiments are of great theoretical interest, and prospects for extending them to NAL energies are good.

---

Both the total cross section and the diffraction scattering experiment would make use of a total absorption spectrometer to measure the neutron energy. Our group has pioneered in this technique in previous experiments at the AGS<sup>6</sup> and Bevatron<sup>7</sup> and also in cosmic ray experiments<sup>8</sup>. At high energies the potential energy resolution of such devices is very good ( $\sim \pm 4\%$  at 200 GeV)<sup>9</sup>, and we believe they will find many important applications at NAL. Another significant goal of the experiment is therefore to develop and gain experience with total absorption spectrometers at NAL energies.

### III. Experimental Arrangement

#### A. Neutron beam

The main requirement for the neutron beam is that the takeoff angle be small,  $\leq 2\text{mr}$ . It is our understanding that a small-angle neutral beam will be available in Experimental Area 2. The desirability of a small takeoff angle has been emphasized by Jones<sup>5</sup> and Longo<sup>4</sup>. The main advantage is the much higher flux of neutrons near 200 GeV in the smaller angle beams. Fig. 1 shows a comparison of expected neutron spectra at 0 mr and 3 mr from Jones' paper<sup>5</sup>. This assumes the inelastic neutron spectrum is similar to that for inelastic protons which is estimated on the basis of the Hagedorn-Ranft model.

Details of the neutron beam will be considered in conjunction with NAL staff. Available neutron fluxes should be more than adequate. With a 1" diameter aperture at 1000 ft. we estimate a neutron flux of  $\sim 10^7$  neutrons (between 160 GeV

---

and 200 GeV) per  $10^{12}$  protons. This is at least an order-of-magnitude more than needed so that a means for varying the size of the defining collimator should be provided.

#### B. The np diffraction scattering experiment

Fig. 2 shows the proposed layout for the elastic scattering experiment. The neutron beam is incident on a hydrogen target. The forward scattered neutrons are detected in an arrangement of spark chambers interspersed with steel plates and scintillators, shown in detail in Fig. 2A. This array serves two purposes. The vertex of the neutron's interaction in the steel plates at the upstream part of the array gives a point on the neutron trajectory which, when connected to the point of interaction in the hydrogen target, gives the neutron scattering angle. The whole array also functions as a total absorption spectrometer (TAS) so that the summed pulses from the scintillation counters give a measure of the neutron energy. Extrapolating from our previous experience at the AGS<sup>6</sup> and the Bevatron<sup>7</sup> we anticipate an energy resolution  $\approx \pm 6\%$  at 100 GeV and  $\approx 4\%$  at 200 GeV. This is more than adequate for our needs. This array would be mounted on rails so that it could be moved to cover different ranges of  $t$ .

The recoil proton from the hydrogen target would be detected in a standard wire-chamber spectrometer. This gives the proton momentum and angle. Since the only unknown is the incident neutron energy, we have a 3-constraint fit to the hypothesis of an elastic scattering. This will provide a

very powerful means of discriminating against inelastic events. With this and the anti shield around the hydrogen target to further reduce inelastic background we expect to be able to make measurements to  $t \geq 2(\text{GeV})^2$ . As in our previous experiments<sup>1</sup> we would simultaneously measure cross sections over the whole range of incident neutron energies with the events later binned according to energy.

Except for the anti shield around the target and the use of the TAS incorporated into the neutron detector, the technique is identical to that employed by our group at the AGS<sup>1a</sup> and the Bevatron<sup>1b</sup> to study np elastic scattering. The technique extrapolates very nicely to higher energies, and in many respects the experiment becomes easier. The identification and measurement of the neutron vertices becomes simpler and the greatly improved energy resolution of the TAS provides a very effective means for measuring neutron energies. The increased neutron fluxes available at higher energies allows the use of a smaller diameter neutron beam with correspondingly better resolution in neutron scattering angle.

The use of a neutron detector with good energy resolution has an important advantage in normalizing the data. The number of events (per monitor count) at a given setting is proportional to the product of the cross section, the number of beam neutrons, and the neutron detector efficiency. The product of the number of beam neutrons (per monitor count) and the detector efficiency can be measured directly for each

---

incident neutron energy range by placing the neutron detector in the beam. Thus the cross sections can be normalized in a straightforward manner.

C. The total cross section experiment

Figure 3 shows the proposed layout for the total cross section experiment. The standard transmission technique is employed. The neutron detector is a total absorption spectrometer, which could be the same as that used for the diffraction scattering except that the spark chambers would not be used. The TAS would be preceded by a converter plate and transmission counters as shown. Cross sections would be measured for each transmission counter and the results extrapolated to "zero solid angle" in the usual way.

Again the technique extrapolates very nicely from AGS energies and again there are significant advantages at higher energies. The improved energy resolution of the TAS allows the simultaneous measurement of cross sections over a very wide range of neutron energies with  $\approx 5\%$  energy resolution. The higher beam fluxes make possible the use of a very small diameter beam which allows measurements at very small four-momentum transfers (much smaller than feasible with charged particles because of the absence of Coulomb scattering) so that the correction to the cross sections for the finite solid angle subtended is very small.

---



Both the total cross section and the diffraction scattering experiment have been discussed by Longo<sup>4</sup> and Jones<sup>5</sup>. It is interesting to note that it would be quite easy to extend the total cross section experiment to 500 GeV if a 500 GeV proton beam, even of very low intensity ( $10^{10}$  to  $10^{11}$  protons per pulse), were available in Area 2.

#### IV. Apparatus

All of the spark chambers for the diffraction scattering experiment would be wire chambers with magnetostrictive readout. The chamber array for the neutron detector already exists and is presently being set up as a gamma detector at the Berkeley cyclotron. This array, as used for gamma detection, consists of 60 wire planes (30 gaps) interspersed with lead plates. The readout technique employed can handle a large number of sparks per plane, limited only by the size of the pulses from the magnetostrictive lines. These chambers have been tested extensively and perform very well. Spurious sparks with no tracks in the chambers are very rare even at high operating voltages. This chamber array was designed in such a way that it is a simple matter to replace the lead plates with steel plates, more suitable for a neutron detector.

We have our own HP 2115A computer with software for reading out the chambers and monitoring their operation. We also have programs available for the determination of gamma vertices from the spark locations. These can be modified fairly easily to find neutron vertices.

We also have a TAS currently in operation at the AGS. With small modifications it can be incorporated into the neutron detector.

We would prefer to run the total cross section and diffraction scattering experiment sequentially so that the same neutron detector could be used for both. However, the TAS is a relatively inexpensive device (~\$3000 replacement cost) and its potential for future experiments at NAL is great enough that we would be quite willing to build a second one if necessary.

It would be helpful if we could obtain some fast electronics and other general purpose equipment such as power supplies and scalars from an equipment pool at NAL. We would also need access to a "large" computer (e.g., - PDP-10) to do some preliminary analysis of the data during the run.

Our requirements on accelerator operation are minimal. By having a defining collimator whose size can be changed we can accommodate a large range of proton intensities, and it should be possible to operate at levels down to  $10^{11}$  protons/pulse. We would need as long a spill as possible, though a short spill can be tolerated at the cost of more running time.

Our magnet requirements are very modest indeed. Several sweeping magnets, which can have a very small bore, are needed. The magnet for the proton spectrometer can be anything from about 18"x36" to about 48"x48". The larger magnets of course would improve our rate of collecting data.

---

Members of our group would work closely with NAL staff in the beam design. The costs of installing the neutron beam should be considerably less than that for any of the charged beams, and operating costs are almost insignificant.

We wish to emphasize that our requirements are quite flexible. The experiments we have in mind are simple in principle and modest in scale and therefore able to accommodate to restrictions on floor space, availability of equipment, and the uncertainties in the operation of a new accelerator.

Facilities and equipment required:

Magnets - Several bending magnets for sweeping magnets. A very small aperture is possible. One magnet for proton spectrometer, minimum size 18"x36"x6" gap.

Beam - Small angle neutral beam preferably  $0^\circ$ .  
Neutron flux  $\sim 10^6$ /pulse.

Proton beam target - A light nucleus such as beryllium is preferred.

Neutron beam targets - Hydrogen target  $\approx 12$ " long for elastic scattering experiment. Hydrogen target  $\approx 4'$  long for total cross sections.

Other equipment to be supplied by NAL - Collimators for neutral beam, some fast electronics would be desirable but not essential. On-line computer, spark chambers, and counters would be supplied by us.

Running time requested:\*

Elastic scattering - 200 hours tuneup and 200 hours run.

Total cross sections - 100 hours tuneup and 200 hours run; most of this could be concurrent with elastic scattering. Some running at machine energies below 150 GeV is desirable.

---

\* Due to the many uncertainties in accelerator operation and the many options available as far as emphasis and accuracy of the measurements, the estimate should only be considered indicative. We have in mind a fairly modest experiment. The scope and emphasis of the measurements will be decided in consultation with the NAL Program Committee.

---

## References

- 1a) B. E. Gibbard, L. W. Jones, M. J. Longo, J. R. O'Fallon, J. Cox, M. L. Perl, W. L. Toner, M. N. Kreisler, Phys. Rev. Letters 24, 22 (1970).
  - b) M. N. Kreisler, F. Martin, M. L. Perl, M. J. Longo, S. T. Powell, Phys. Rev. Letters 16, 1217 (1966).
  2. J. V. Allaby et al., (data presented and discussed by G. Belletini) p. 329 Proceedings of the 14th International Conference on High Energy Physics, Vienna 1968, edited by J. Prentice and J. Steinberger, CERN, Geneva (1968).
  3. J. Pumplin and M. Ross, Phys. Rev. Letters 21, 1788 (1968).
  4. M. J. Longo "Neutral Beam Experiments at the 200 GeV Accelerator," NAL unpublished report (1968).
  5. L. W. Jones, "A Neutron Beam for NAL," SS-78, 2256 p. 195, National Accelerator Laboratory 1969 Summer Study, Vol. 1.
  6. M. N. Kreisler, L. W. Jones, M. J. Longo, and J. R. O'Fallon, Phys. Rev. Letters 20, 468 (1968).
  7. L. W. Jones, M. J. Longo, J. R. O'Fallon, and M. N. Kreisler, Phys. Letters 27B, 328 (1968).
  7. E. F. Parker, H. R. Gustafson, L. W. Jones, M. J. Longo, P. V. Ramana Murthy, F. E. Ringia, and Bruce Cork, Phys. Letters 31B, 246 (1970).
  8. L. W. Jones, D. E. Lyon, P. V. Ramana Murthy, G. D. DeMeester, R. W. Hartung, S. Mikamo, D. D. Reeder, A. Subramanian, B. Cork, B. Dayton, A. Benvenuti, E. Marquit, P. D. Kearney, A. E. Bussian, F. E. Mills, C. Radmer, and
-

W. R. Winter, Phys. Rev. 164, 1584 (1967).

L. W. Jones, A. E. Bussian, G. D. DeMeester, B. Loo,  
D. E. Lyon, P. V. Ramana Murthy, R. Roth, J. Learned,  
F. E. Mills, D. D. Reeder, Bruce Cork, K. N. Erickson,  
P. D. Kearney, and S. Lal, University of Michigan

Technical Report 03028-3-T (1969)(to be published in the  
Proceedings of the XI International Conference on Cosmic  
Rays, Budapest, 1969).

See Also, L. W. Jones, "The Use of Ionization Calorimeters  
in High Energy Neutron Experiments at Particle Accelerators," 33-1, Proceedings of the International Conference  
on Nuclear Electronics, Versailles, September 1968.

9. L. W. Jones, "Neutral Hadron Detectors for NAL," SS-88  
2259, p. 57, National Accelerator Laboratory 1969  
Summer Study, Vol. 3.





Fig. 1. The neutron spectrum (taken from the inelastic proton spectrum of Amschalom and White) at 0 and 3 mrad production, for 200-GeV protons on a Be target.

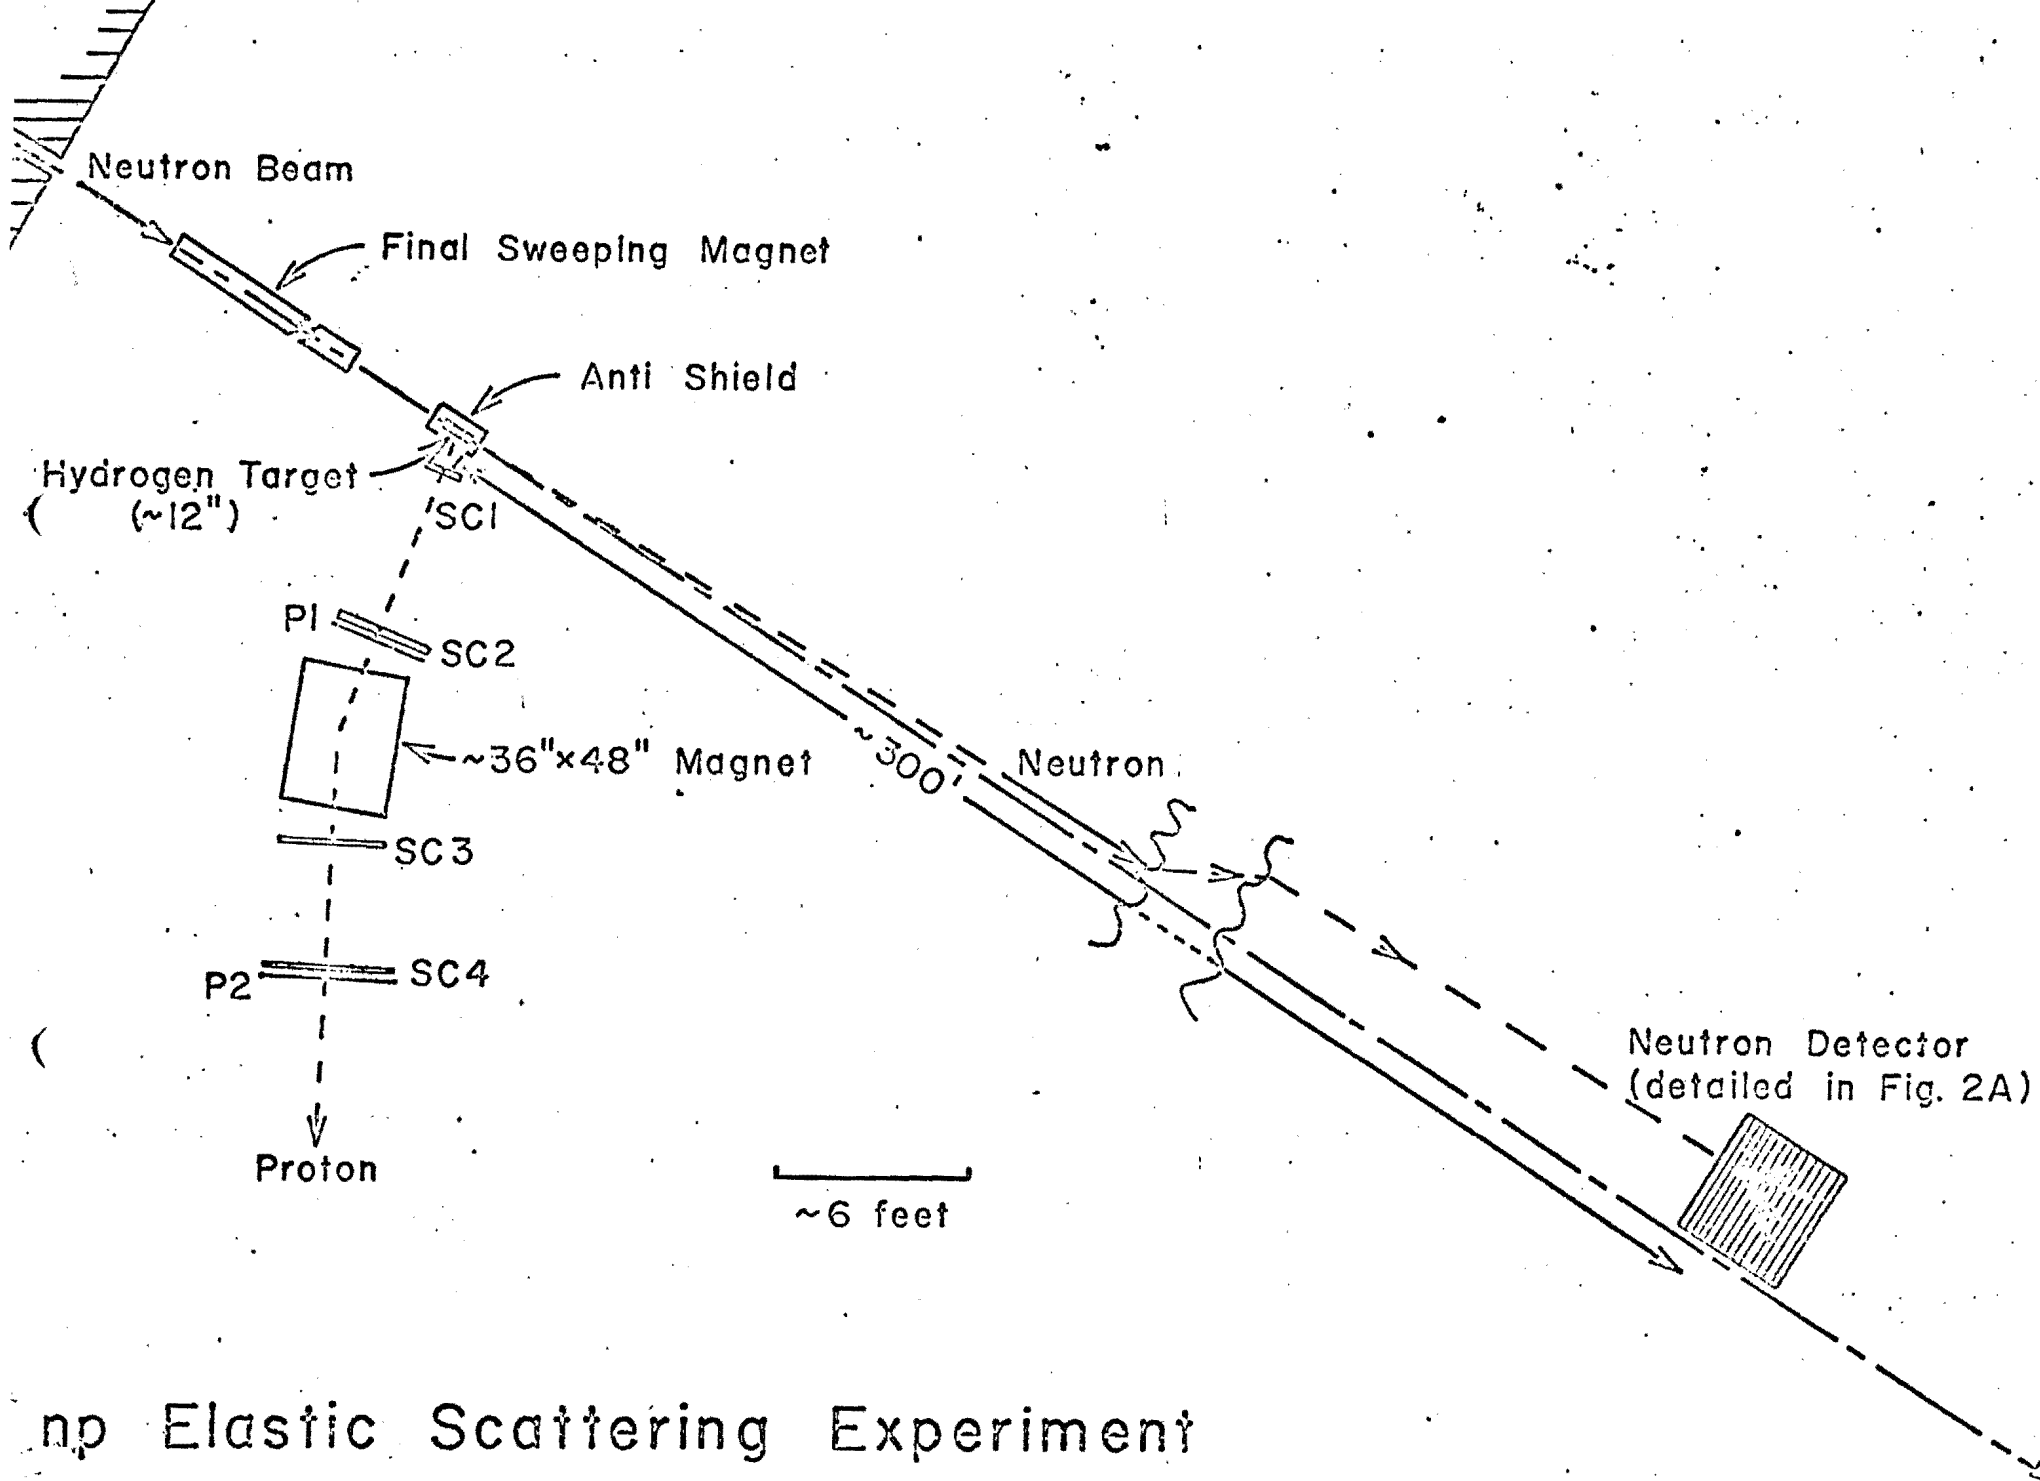

np Elastic Scattering Experiment

Figure 2