

Fermilab

TS-SSC 92-044  
3/23/92

### DCA320 Turn-to-turn Short Located

DCA320 was disassembled following the determination that it had a turn-to-turn short. By electrical measurements the short had been localized to uninstrumented portion of the lower inner coil (15M-50-1022) [1]. The coil resistance was monitored and the short was observed to clear when the the keyss were removed from the last collar pack at the return end. The coils were separated and then the offending coil was compressed in the sizing fixture over the last 6 inches from the return end until the short reappeared. By resistance measurements made by piercing the insulation with a sharp probe, the short was found to be between turns 3 and 4, counting from the mid-plane, in quadrant I/III, 9.25" from the return end of the saddle, or 0.5" into the collared region. The conductors were carefully pried apart, but no obvious cause for the short could be observed. A 3 mil piece of Kapton was slipped between the turns and the offending spot was compressed by the sizing fixture. The short did not return. I measured the coil resistance, using an HP3457 DMM, to be 1.142 Ohms, and the resistance of the upper inner coil (15M-50-1021) to be 1.151 Ohms. This is approximately the original difference between the two coil resistance.

While it is disconcerting to have a short with no known cause, I believe that we should reassemble the magnet and re-key it. However, to limit the peak stress in the collaring press, I propose that the press be shimmed to limit the closure of the tooling. I will recommend a shim thickness shortly.

### ACKNOWLEDGEMENTS

Essentially all the information noted above was given me by Denny Gaw and Dan Smith. Denny made the electrical measurements and Imre Gonczy made the coil repairs.

### REFERENCE

- [1] J. Strait, DCA320 Turn-to-turn Short, TS-SSC 92-039, 3/18/92.

### Distribution:

R. Bossert, J. Carson, S. Delchamps, W. Koska, E.G. Pewitt, M. Wake,  
DCA320 Traveler, Discrepancy Report#480

## FNAL/SSC DISCREPANCY REPORT

1) Traveler Title: <i>Keying Procedure</i>		2) Traveler No.: <i>ES-298280</i>	3) Rev. No.: <i>H</i>	4) DR No.: <i>480</i>
5) Step No.: <i>3.9</i>	6) Drawing/Revision No.:	7) Magnet/Coil Serial No.: <i>DCA-320</i>	QA Assigned: Class ① or II	
8) Nonconformance Description by First Hand Observer: <i>The lower inner coil resistance (measured) was 1129 AT Post keyed. The coil resistance at Post collared was measured at 1142 And the resistance data taken during keying shows a coil to coil short at 7044 psi (see attached sheets).</i>				
9) Name <i>Al Jorgensen</i>		Title: <i>OIT</i>		Date: <i>3-18-92</i>
10) Cause of Nonconformance:				
11) Responsible Authority/Physicist				
12) Disposition:				
11) Responsible Authority/Physicist				
13) Corrective Action to Prevent Recurrence:				
14) Responsible Authority/ Physicist				
15) Corrective Action/Disposition Verified By:				
16) Approved By:				
QA/QC Project Manager				
17) Reviewed By:				
SSCL Q.A. Engineer				
11) Responsible Authority/Physicist				
Class: I or II				
Will Corriguration be effected? [ ] Yes [ ] No				

# RESISTANCE DATA TAKEN DURING KEYING

Magnet number: DCA320

Date: 17 Mar 1992

Time: 09:01:02


Operator's name: D.GAW

Comment: FIRST ATTEMPT THIS MAGNET HAS THE NEW CABLE INSULATION KAPTON WITHOUT FIBERGLASSTAPE

100-JACK	SIDE-JACK	UPPER COIL	LOWER COIL	% Difference	Coil-to-coil
-1 psi	-1 psi	2.974 ohms	2.960 ohms	.470%	OPEN
357 psi	8 psi	2.972 ohms	2.961 ohms	.370%	OPEN
2514 psi	7 psi	2.973 ohms	2.960 ohms	.440%	OPEN
4522 psi	7 psi	2.972 ohms	2.957 ohms	.500%	OPEN
6545 psi	7 psi	2.971 ohms	2.959 ohms	.400%	OPEN
7048 psi	7 psi	2.970 ohms	2.950 ohms	.670%	OPEN
7049 psi	6 psi	2.969 ohms	2.950 ohms	.640%	SHORT
7027 psi	506 psi	2.969 ohms	2.950 ohms	.640%	OPEN
7030 psi	1016 psi	2.969 ohms	2.950 ohms	.640%	OPEN
7042 psi	1524 psi	2.969 ohms	2.950 ohms	.640%	OPEN
7035 psi	2032 psi	2.968 ohms	2.952 ohms	.540%	OPEN
4078 psi	1976 psi	2.970 ohms	2.956 ohms	.470%	OPEN
14 psi	6 psi	2.969 ohms	2.955 ohms	.470%	OPEN

# LINEAR POT DISPLAY DCA320 Mar 17

506 psi 1016 psi 1524 psi 2032 psi

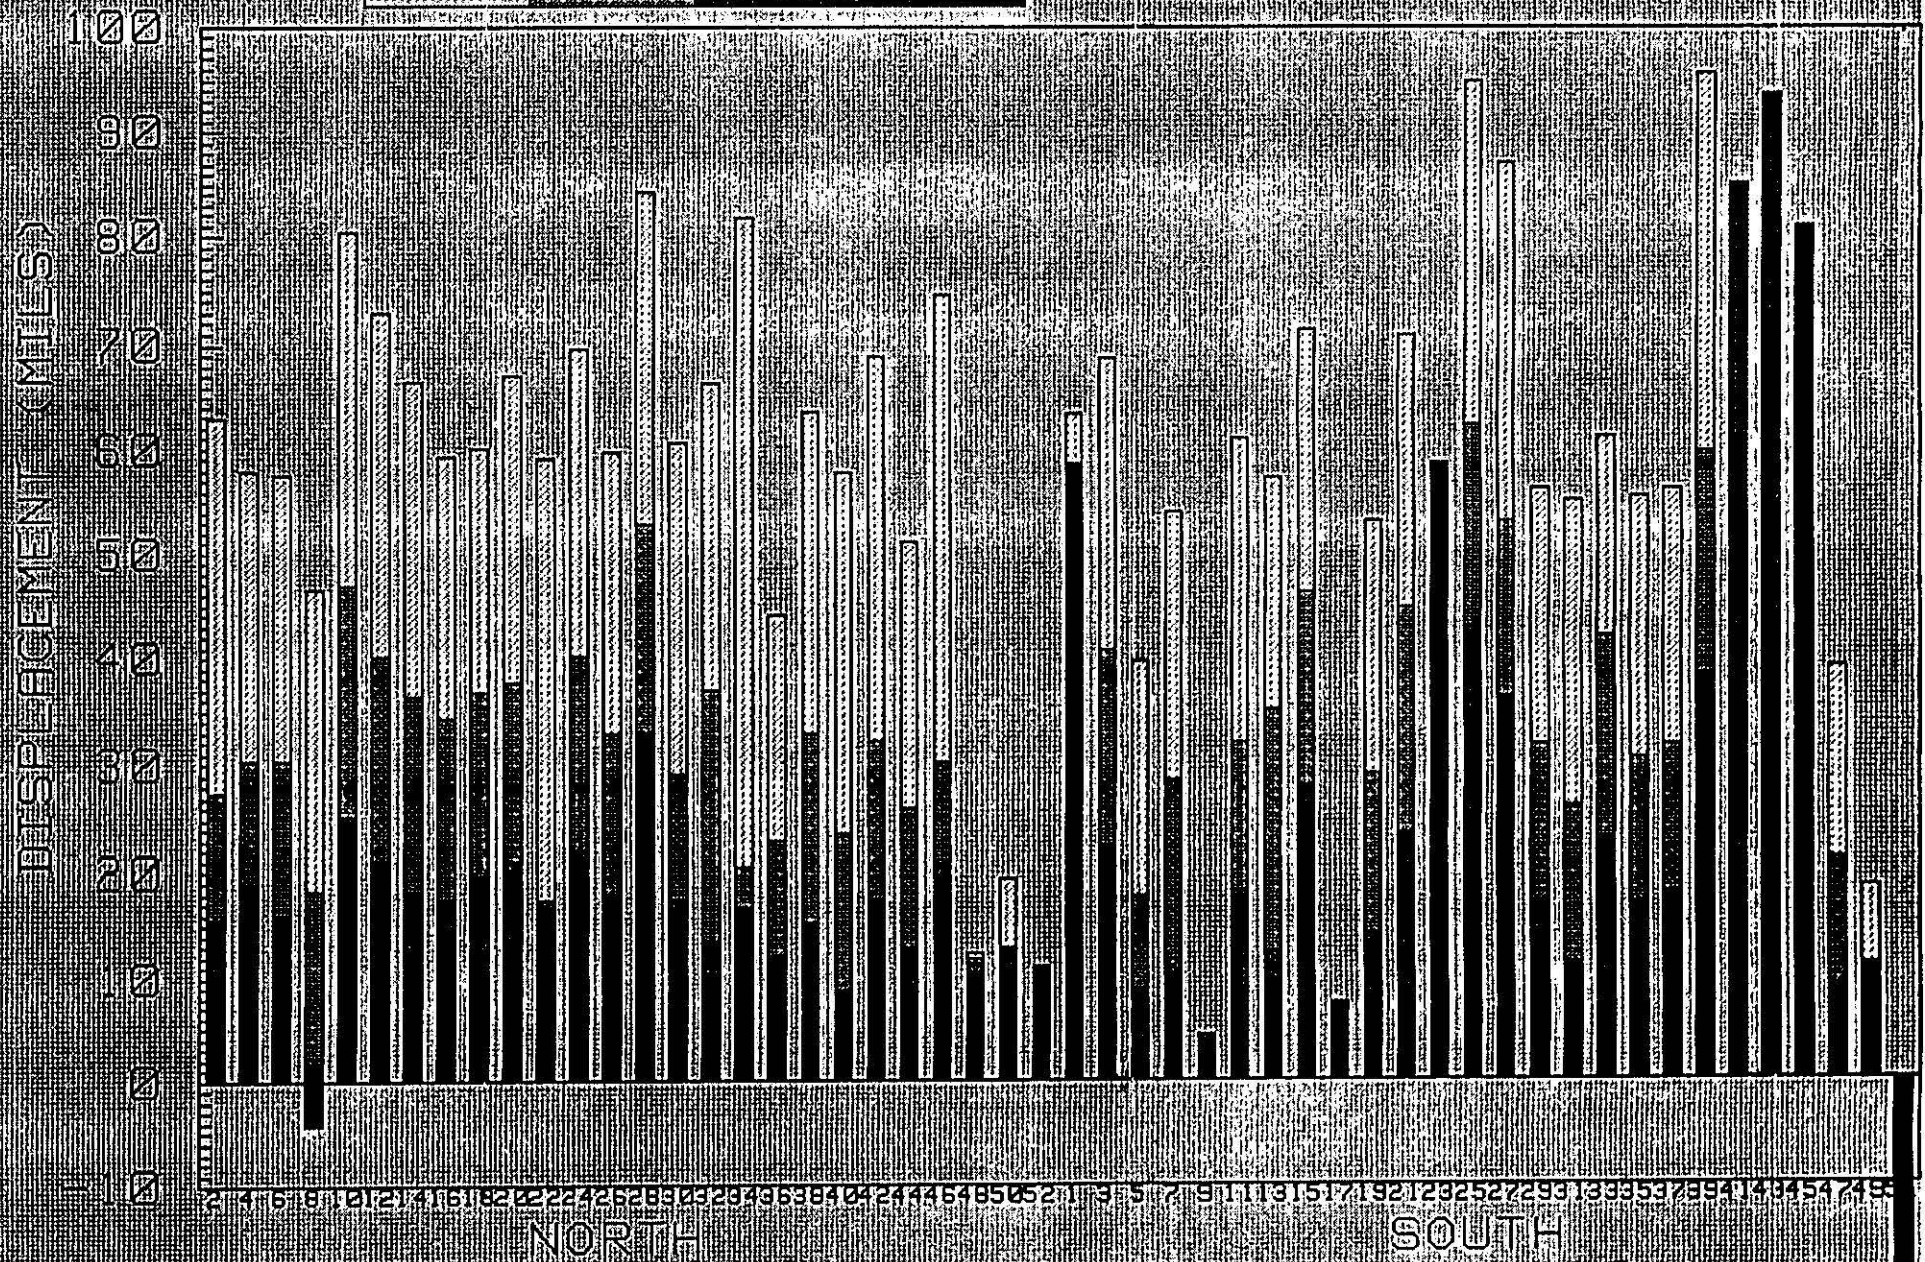

Zero displacement based on average of pot positions of DCA312, DCA313, and DCA314.


Displacement not plotted if > 100 mils



**LVDI DISPLAY DOCS20**

2  
 3  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11  
 12  
 13  
 14  
 15  
 16  
 17  
 18  
 19  
 20  
 21  
 22  
 23  
 24  
 25  
 26  
 27  
 28  
 29  
 30  
 31  
 32  
 33  
 34  
 35  
 36  
 37  
 38  
 39  
 40  
 41  
 42  
 43  
 44  
 45  
 46  
 47  
 48  
 49  
 50  
 51  
 52  
 53  
 54  
 55  
 56  
 57  
 58  
 59  
 60  
 61  
 62  
 63  
 64  
 65  
 66  
 67  
 68  
 69  
 70  
 71  
 72  
 73  
 74  
 75  
 76  
 77  
 78  
 79  
 80  
 81  
 82  
 83  
 84  
 85  
 86  
 87  
 88  
 89  
 90  
 91  
 92  
 93  
 94  
 95  
 96  
 97  
 98  
 99  
 100  
 101  
 102  
 103  
 104  
 105  
 106  
 107  
 108  
 109  
 110  
 111  
 112  
 113  
 114  
 115  
 116  
 117  
 118  
 119  
 120  
 121  
 122  
 123  
 124  
 125  
 126  
 127  
 128  
 129  
 130  
 131  
 132  
 133  
 134  
 135  
 136  
 137  
 138  
 139  
 140  
 141  
 142  
 143  
 144  
 145  
 146  
 147  
 148  
 149  
 150  
 151  
 152  
 153  
 154  
 155  
 156  
 157  
 158  
 159  
 160  
 161  
 162  
 163  
 164  
 165  
 166  
 167  
 168  
 169  
 170  
 171  
 172  
 173  
 174  
 175  
 176  
 177  
 178  
 179  
 180  
 181  
 182  
 183  
 184  
 185  
 186  
 187  
 188  
 189  
 190  
 191  
 192  
 193  
 194  
 195  
 196  
 197  
 198  
 199  
 200  
 201  
 202  
 203  
 204  
 205  
 206  
 207  
 208  
 209  
 210  
 211  
 212  
 213  
 214  
 215  
 216  
 217  
 218  
 219  
 220  
 221  
 222  
 223  
 224  
 225  
 226  
 227  
 228  
 229  
 230  
 231  
 232  
 233  
 234  
 235  
 236  
 237  
 238  
 239  
 240  
 241  
 242  
 243  
 244  
 245  
 246  
 247  
 248  
 249  
 250  
 251  
 252  
 253  
 254  
 255  
 256  
 257  
 258  
 259  
 260  
 261  
 262  
 263  
 264  
 265  
 266  
 267  
 268  
 269  
 270  
 271  
 272  
 273  
 274  
 275  
 276  
 277  
 278  
 279  
 280  
 281  
 282  
 283  
 284  
 285  
 286  
 287  
 288  
 289  
 290  
 291  
 292  
 293  
 294  
 295  
 296  
 297  
 298  
 299  
 300  
 301  
 302  
 303  
 304  
 305  
 306  
 307  
 308  
 309  
 310  
 311  
 312  
 313  
 314  
 315  
 316  
 317  
 318  
 319  
 320  
 321  
 322  
 323  
 324  
 325  
 326  
 327  
 328  
 329  
 330  
 331  
 332  
 333  
 334  
 335  
 336  
 337  
 338  
 339  
 340  
 341  
 342  
 343  
 344  
 345  
 346  
 347  
 348  
 349  
 350  
 351  
 352  
 353  
 354  
 355  
 356  
 357  
 358  
 359  
 360  
 361  
 362  
 363  
 364  
 365  
 366  
 367  
 368  
 369  
 370  
 371  
 372  
 373  
 374  
 375  
 376  
 377  
 378  
 379  
 380  
 381  
 382  
 383  
 384  
 385  
 386  
 387  
 388  
 389  
 390  
 391  
 392  
 393  
 394  
 395  
 396  
 397  
 398  
 399  
 400  
 401  
 402  
 403  
 404  
 405  
 406  
 407  
 408  
 409  
 410  
 411  
 412  
 413  
 414  
 415  
 416  
 417  
 418  
 419  
 420  
 421  
 422  
 423  
 424  
 425  
 426  
 427  
 428  
 429  
 430  
 431  
 432  
 433  
 434  
 435  
 436  
 437  
 438  
 439  
 440  
 441  
 442  
 443  
 444  
 445  
 446  
 447  
 448  
 449  
 450  
 451  
 452  
 453  
 454  
 455  
 456  
 457  
 458  
 459  
 460  
 461  
 462  
 463  
 464  
 465  
 466  
 467  
 468  
 469  
 470  
 471  
 472  
 473  
 474  
 475  
 476  
 477  
 478  
 479  
 480  
 481  
 482  
 483  
 484  
 485  
 486  
 487  
 488  
 489  
 490  
 491  
 492  
 493  
 494  
 495  
 496  
 497  
 498  
 499  
 500  
 501  
 502  
 503  
 504  
 505  
 506  
 507  
 508  
 509  
 510  
 511  
 512  
 513  
 514  
 515  
 516  
 517  
 518  
 519  
 520  
 521  
 522  
 523  
 524  
 525  
 526

-1	ps
357	ps
2514	ps
4522	ps
6545	ps
7048	ps

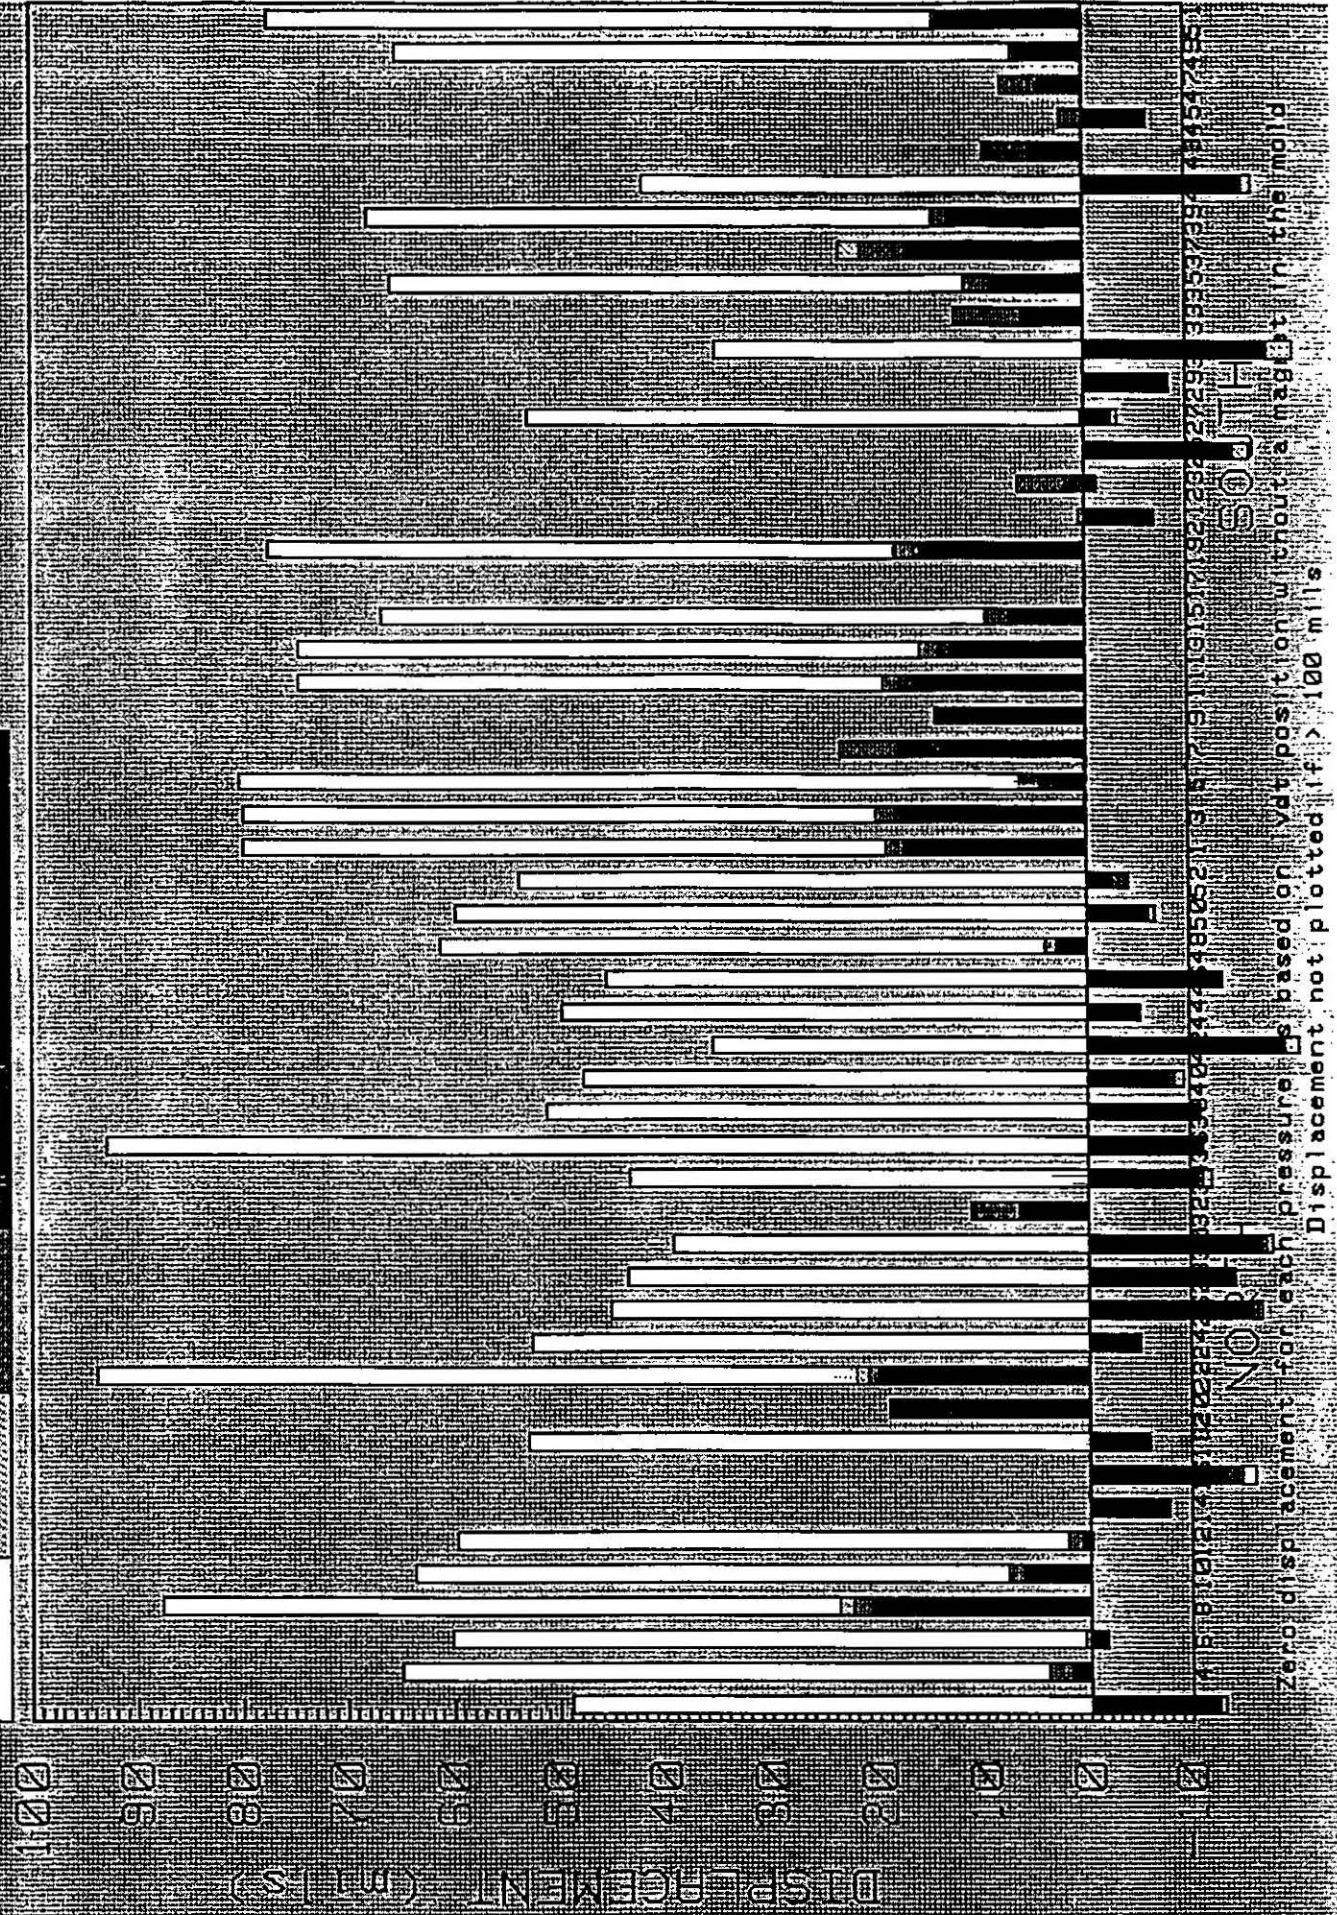

**DCA320 Turn-to-turn Short**

DCA320 has developed a turn-to-turn short either during or immediately after the coller keying operation. The short is in the uninstrumented portion of the lower inner coil. Table I summarizes the inner coil resistance measurements recorded in the Traveler. From before to immediately after keying the lower inner coil resistance decreased 8 milliohms relative to the upper inner coil. This, however, is within the range of variation observed among earlier measurements and did not cause immediate alarm. By the next day, however, it had lost another 13 milliohms, and it became evident that there is a problem.

Table II and Figure 1 show the upper and lower half coil resistances during the keying operation. It is evident that the lower coil resistance dropped about 5 milliohms when the vertical press hydraulic pressure was brought from 6500 to 7000 psi. (No increase in coil stress was observed by the strain gauges at this step, however.) This represents only a 0.2% change in the lower-upper coil difference which is below the alarm threshold of 0.5%. As the press was opened, the lower-upper coil difference returned to its original value. In retrospect, of course, this change indicated the presence of a short; unfortunately no one was looking closely enough.

Table III gives the voltage tap series check data from the Traveler. Also indicated are 1)  $s$ , the estimated cable length, in inches, from tap 19B to each tap, 2)  $ds$ , the distance from the indicated tap to the previous one, and 3)  $\langle s \rangle$ , the average  $s$  of the cable segment defined by the indicated tap and the previous one.  $V_{raw}$  is the measured voltage from the Traveler.  $V_{norm}$  is that voltage normalized to make the voltage at 13A match the "standard" voltage listed in the Traveler of 313.5 mV.  $dV_{norm}$  is the normalized voltage difference between the one tap and the previous tap. The data in the collared (pre-keyed) and keyed states are compared at the right. Within the instrumented portion, the normalized voltage at each tap differs between the two sets by at most 0.1 mV, which corresponds to the least significant digit recorded in the Traveler. However, the the normalized voltage across the uninstrumented portion is 17 mV lower after keying. This corresponds to a 19 milliohm decrease in resistance.

There is no further information about the location of the short that can be obtained without disassembling the magnet. Therefore we should begin disassembly as soon as the standard post-keying inspection has been completed. To aid in the location of the short, all 4 keys should be pryed out together down the length of the magnet and the upper inner and lower inner coil resistances should be monitored as the keys are pryed out. The resistances should be recorded after every 2 feet of the keys has been removed from the key slots.

**Distribution:**

R. Bossert, J. Carson, S. Delchamps, W. Koska, E.G. Pewitt, M. Wake,  
DCA320 Traveler, Discrepancy Report, D. Smith

# 1022 Vtaps Keyed-Collared

## Inner Colls

Rupper Rlower RI-Ru  $\Delta(RI-Ru)$

*Table I*

1/31/92	Post Cure	1148	1137	-11	0
2/7/92	Pre-Assembly	1147	1142	-5	6
2/18/92	Post-Assembly	1148	1139	-9	2
3/10/92	Pre-Collared	1148	1137	-11	0
3/12/92	Post-Collared	1153	1142	-11	0
3/17/92	Post Keyed	1146	1129	-17	-6
3/18/92	Post Keyed	1149	1119	-30	-19

*Table I* Keying Sequence

Vert	Horiz	Rupper	Rlower	RI-Ru	$\Delta(RI-Ru)$	$\Delta/R$
-1.0	-1.0	2974	2960	-14	0	0.00%
357.0	8.0	2972	2961	-11	3	0.10%
2514.0	7.0	2973	2960	-13	1	0.03%
4522.0	7.0	2972	2957	-15	-1	-0.03%
6545.0	7.0	2971	2959	-12	2	0.07%
7048.0	7.0	2970	2950	-20	-6	-0.20%
7049.0	6.0	2969	2950	-19	-5	-0.17%
7027.0	506.0	2969	2950	-19	-5	-0.17%
7030.0	1016.0	2969	2950	-19	-5	-0.17%
7042.0	1524.0	2969	2950	-19	-5	-0.17%
7035.0	2032.0	2968	2952	-16	-2	-0.07%
4078.0	1976.0	2970	2956	-14	0	0.00%
14.0	6.0	2969	2955	-14	0	0.00%

Table III

1022 Vtaps Keyed-Collared

Coil 15M-50-1002 (DCA320 Lower Inner)

Cable				Collared (3/12/92)				Keyed (3/18/92)				Keyed - Collared.			
Vtap	z (in)	dz	<z>(in)	Vraw (mV)	Vnorm (mV)	dVnorm (mV)	dV/dz (μV/in)	Vtap	Vraw (mV)	Vnorm (mV)	dVnorm (mV)	dV/dz (μV/in)	Vtap	Vnorm (mV)	dVnorm (mV)
19 B	0.0			0.0	0.0			19 B	0.0	0.0			19 B	0.0	
19 A	11.5	11.5	5.8	0.5	0.5	0.5	44.9	19 A	0.5	0.5	0.5	45.1	19 A	0.0	0.0
19 C	585.3	573.8	298.4	26.1	26.1	25.6	44.6	19 C	26.6	26.1	25.6	44.6	19 C	0.0	0.0
19 D	596.6	11.3	590.9	26.5	26.5	0.4	35.4	19 D	27.0	26.5	0.4	39.1	19 D	0.0	0.0
18 B	1171.1	574.5	883.8	52.1	52.1	25.6	44.6	18 B	53.0	52.1	25.6	44.5	18 B	0.0	-0.1
18 A	1182.4	11.3	1176.7	52.6	52.7	0.5	44.3	18 A	53.6	52.7	0.6	52.2	18 A	0.0	0.1
18 C	1757.6	575.3	1470.0	78.2	78.3	25.6	44.5	18 C	79.7	78.4	25.7	44.6	18 C	0.1	0.0
18 D	1767.4	9.8	1762.5	78.6	78.7	0.4	40.9	18 D	80.1	78.8	0.4	42.1	18 D	0.1	0.0
17 B	2343.4	576.0	2055.4	104.3	104.4	25.7	44.7	17 B	106.2	104.4	25.6	44.5	17 B	0.0	-0.1
17 A	2353.2	9.8	2348.3	104.7	104.8	0.4	40.9	17 A	106.7	104.9	0.5	50.2	17 A	0.1	0.1
17 C	2930.0	576.8	2641.6	130.4	130.5	25.7	44.6	17 C	132.7	130.5	25.6	44.3	17 C	-0.1	-0.2
17 D	2938.3	8.3	2934.1	130.7	130.8	0.3	36.2	17 D	133.1	130.9	0.4	52.1	17 D	0.1	0.1
16 B	3515.8	577.5	3227.0	156.3	156.4	25.6	44.4	16 B	159.2	156.5	25.6	44.4	16 B	0.1	0.0
16 A	3525.0	9.2	3520.4	156.8	157.0	0.5	54.4	16 A	159.7	157.0	0.5	53.4	16 A	0.0	0.0
16 C	4103.2	578.3	3814.1	182.5	182.7	25.7	44.5	16 C	185.8	182.6	25.6	44.3	16 C	0.0	-0.1
16 D	4111.8	8.6	4107.5	182.8	183.0	0.3	34.9	16 D	186.2	183.0	0.4	43.4	16 D	0.0	0.1
15 B	4690.8	579.0	4401.3	208.5	208.7	25.7	44.4	15 B	212.3	208.7	25.7	44.4	15 B	0.0	0.0
15 A	4699.4	8.6	4695.1	208.9	209.1	0.4	46.6	15 A	212.7	209.1	0.4	45.7	15 A	0.0	0.0
15 C	5276.2	576.8	4987.8	234.6	234.8	25.7	44.6	15 C	238.8	234.8	25.7	44.5	15 C	-0.1	-0.1
15 D	5289.3	13.1	5282.7	235.2	235.4	0.6	45.8	15 D	239.4	235.4	0.6	45.8	15 D	-0.1	0.0
14 B	5863.8	574.5	5576.5	260.7	260.9	25.5	44.4	14 B	265.4	260.9	25.6	44.5	14 B	0.0	0.0
14 A	5876.9	13.1	5870.3	261.3	261.6	0.6	45.8	14 A	266.0	261.5	0.6	46.5	14 A	0.0	0.0
14 C	6452.1	575.3	6164.5	286.9	287.2	25.6	44.5	14 C	292.1	287.1	25.6	44.5	14 C	-0.1	0.0
14 D	6463.7	11.6	6457.9	287.4	287.7	0.5	43.1	14 D	292.6	287.6	0.5	44.1	14 D	-0.1	0.0
13 B	7039.7	576.0	6751.7	313.0	313.3	25.6	44.5	13 B	318.6	313.2	25.6	44.4	13 B	-0.1	0.0
13 A	7051.3	11.6	7045.5	313.5	313.8	0.5	43.1	13 A	319.2	313.8	0.6	50.8	13 A	0.0	0.1
0 A	22476	15425	14764	999.7	1000.7	686.9	44.5	0 A	1000.2	983.3	669.5	43.4	0 A	-17.4	-17.4

584 Straight sect lgth  
 1.8 End lgth (turn 18)  
 3.6 End lgth (turn 15)

$$V_{\text{norm}} = V_{\text{raw}} * 313.8 \text{ mV/V} (13A)$$

# DCA320 Keying

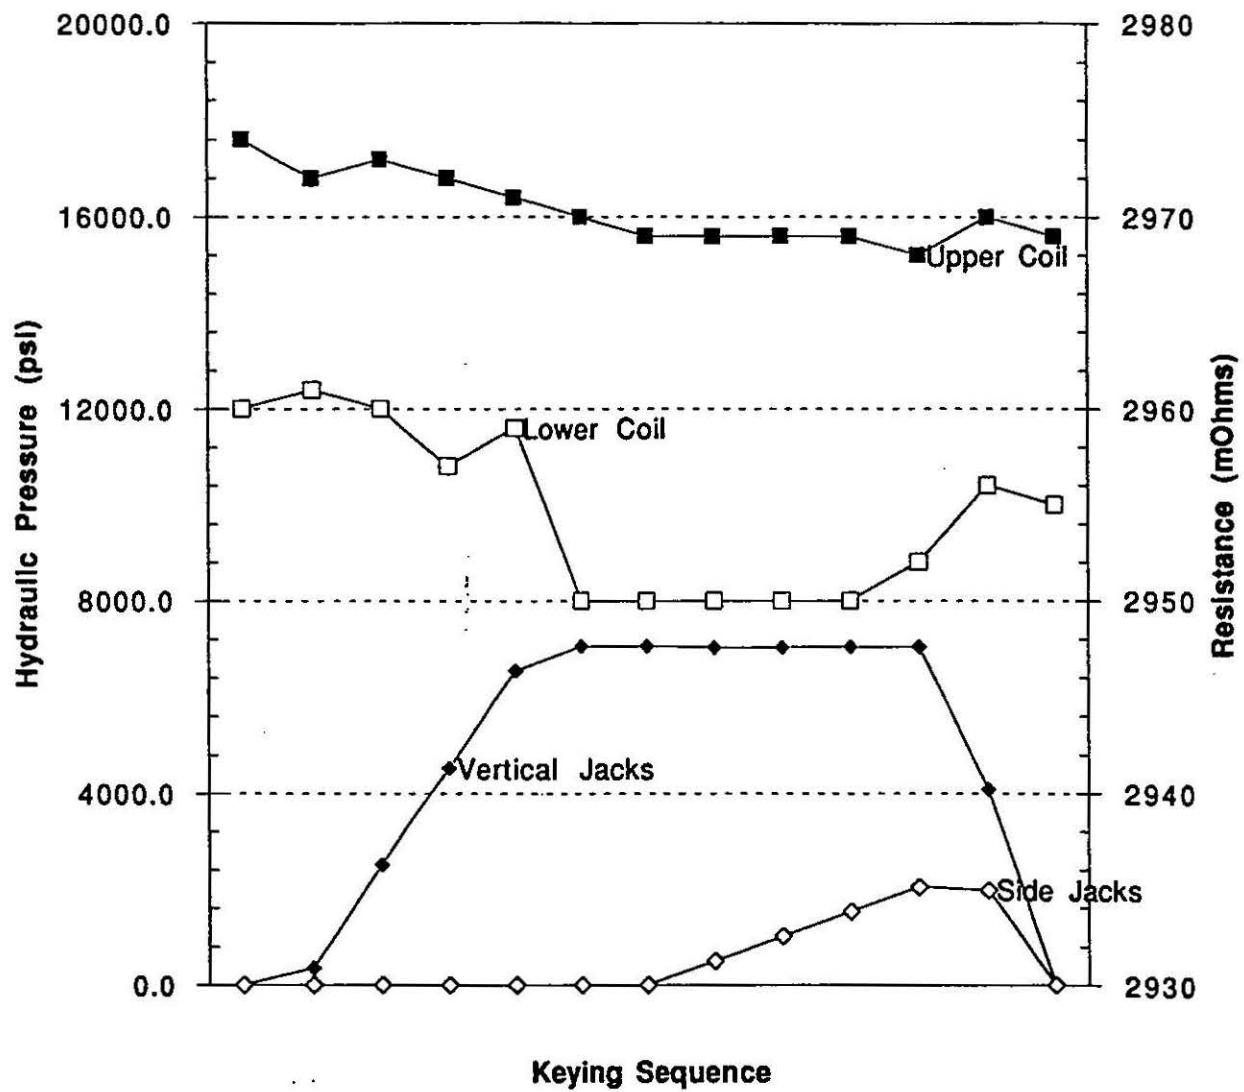


Figure 1