

# Charge response and energy calibration of ProtoDUNE-SP

Graham Chambers-Wall, William Jewell College, for the DUNE Collaboration  
Supervisors: Wanwei Wu and Tingjun Yang, Neutrino Division, Fermilab

FERMILAB-POSTER-20-078-ND

## Introduction

ProtoDUNE-SP is a test bed liquid argon time projection chamber (LArTPC) for the far detector of the Deep Underground Neutrino Experiment (DUNE). This LArTPC was calibrated using cosmic-ray cathode-crossing muons, electric field maps, and purity-monitor data to correct for nonuniformities in the detector response and cosmic-ray stopping muons to perform the absolute energy scale calibration for further physics analysis.



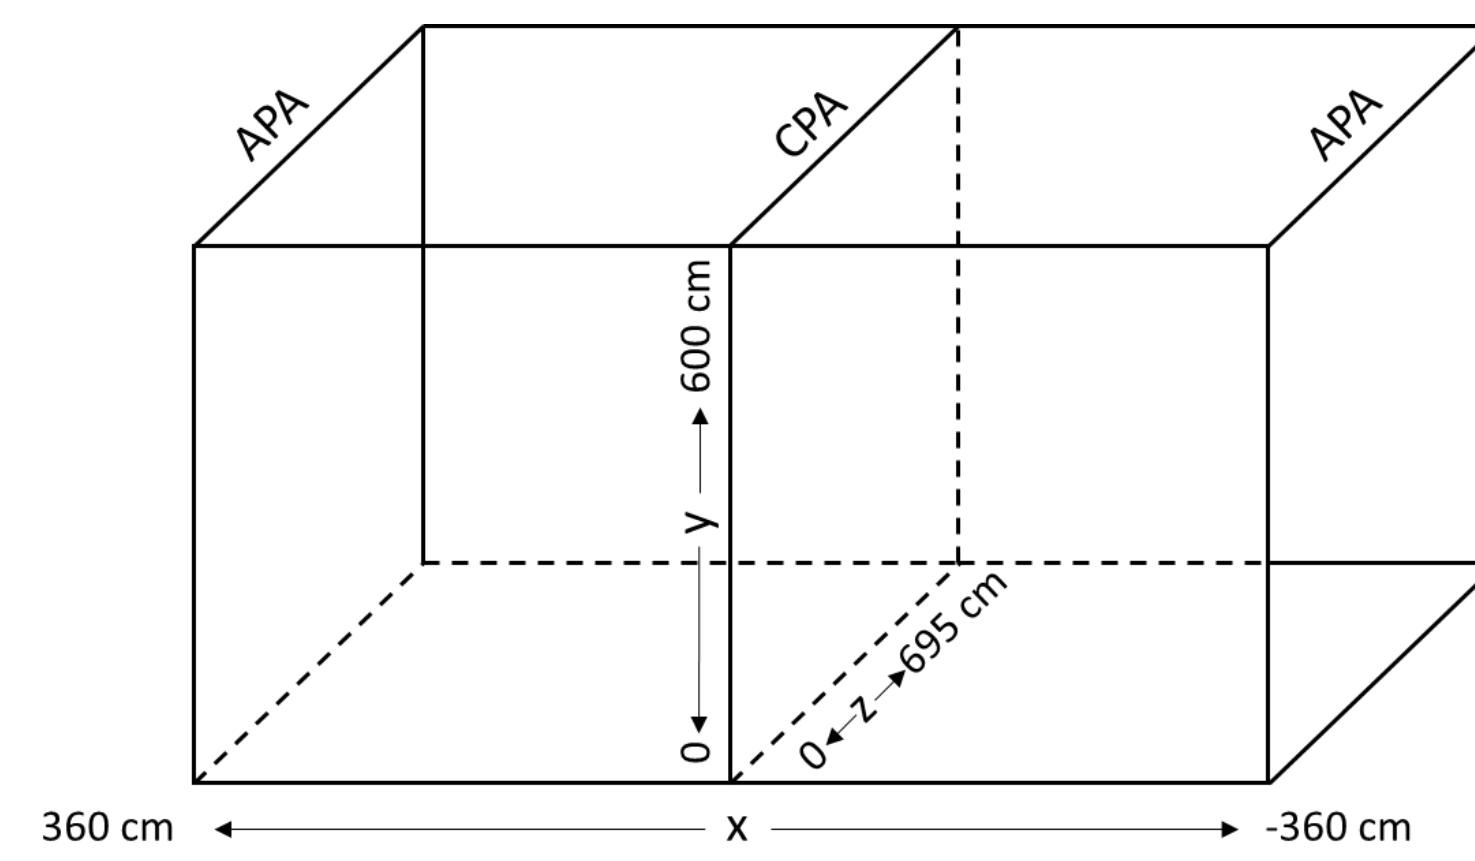


Fig 1: Schematic of ProtoDUNE-SP (left) [1] and dimensions of the detector (right)

## Space Charge Effects

Fig 2: Charge deposition per unit length ( $dQ/dx$ ) vs  $x$  coordinate with and without space charge effect (SCE) corrections applied in plane 2. Cosmic rays passing through the detector cause the accumulation of positive ions, leading to distortions in the electric field in the LArTPC. SCE are corrected for using measured electric field maps.

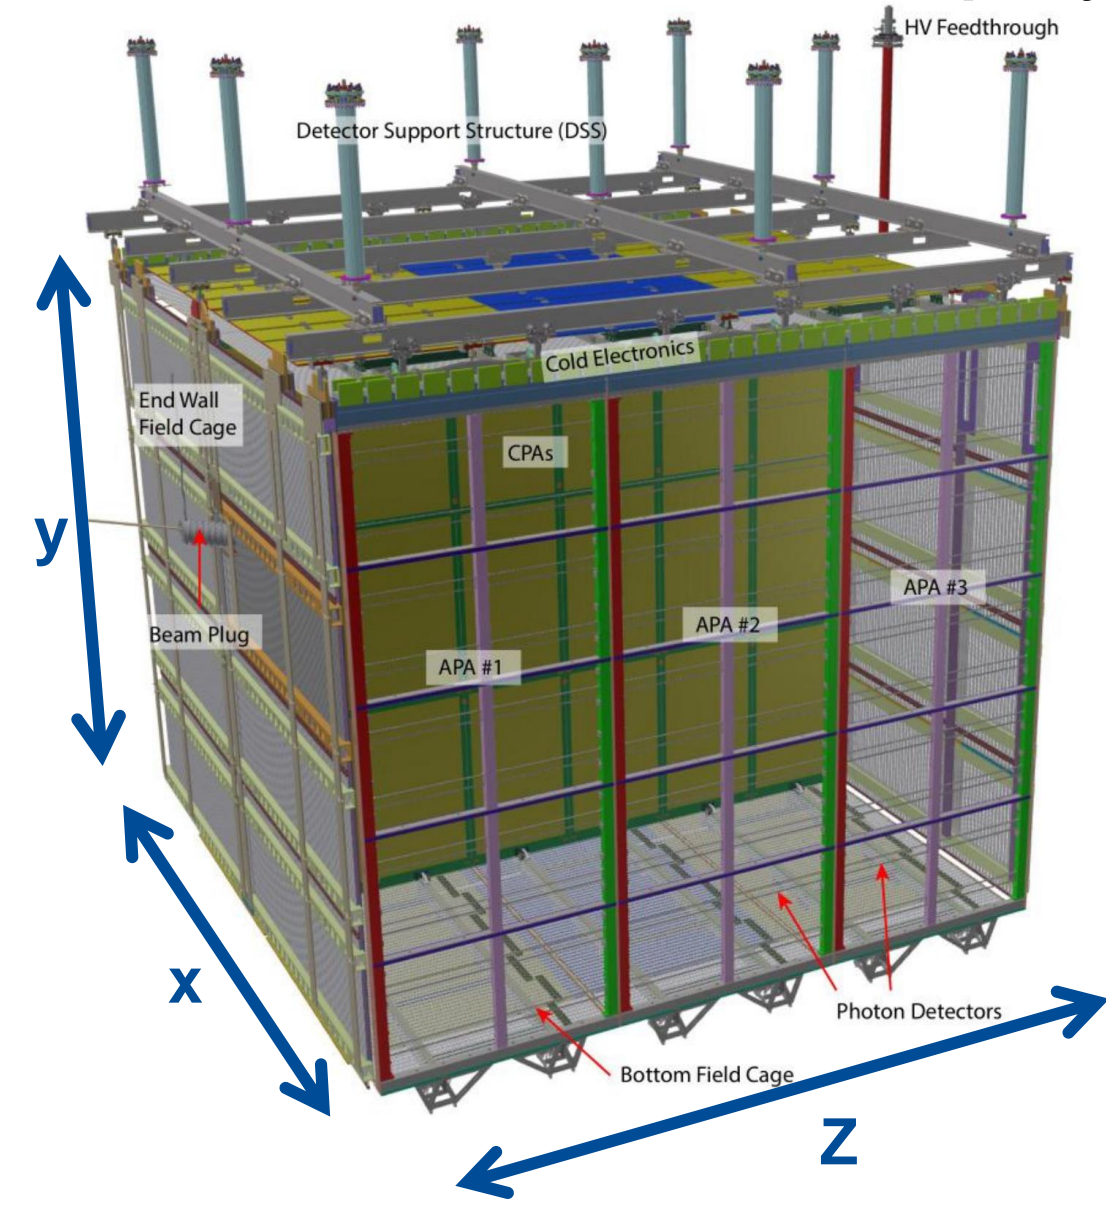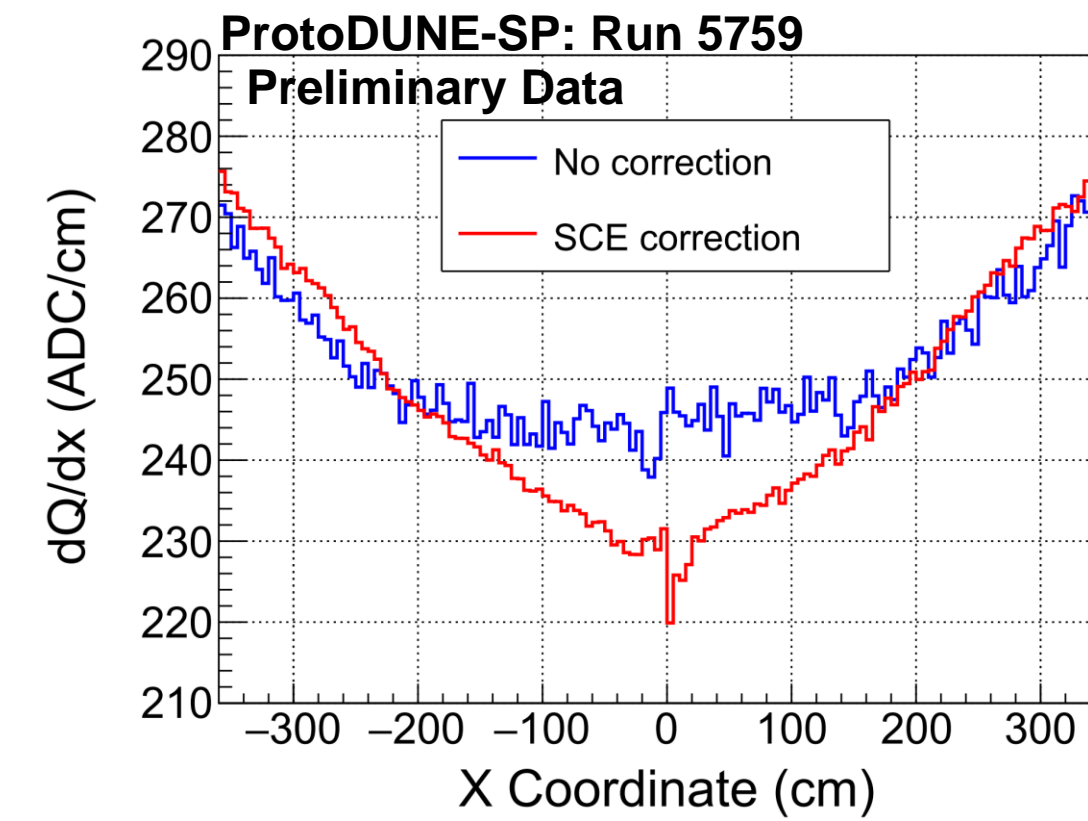

## Electron Lifetime Correction

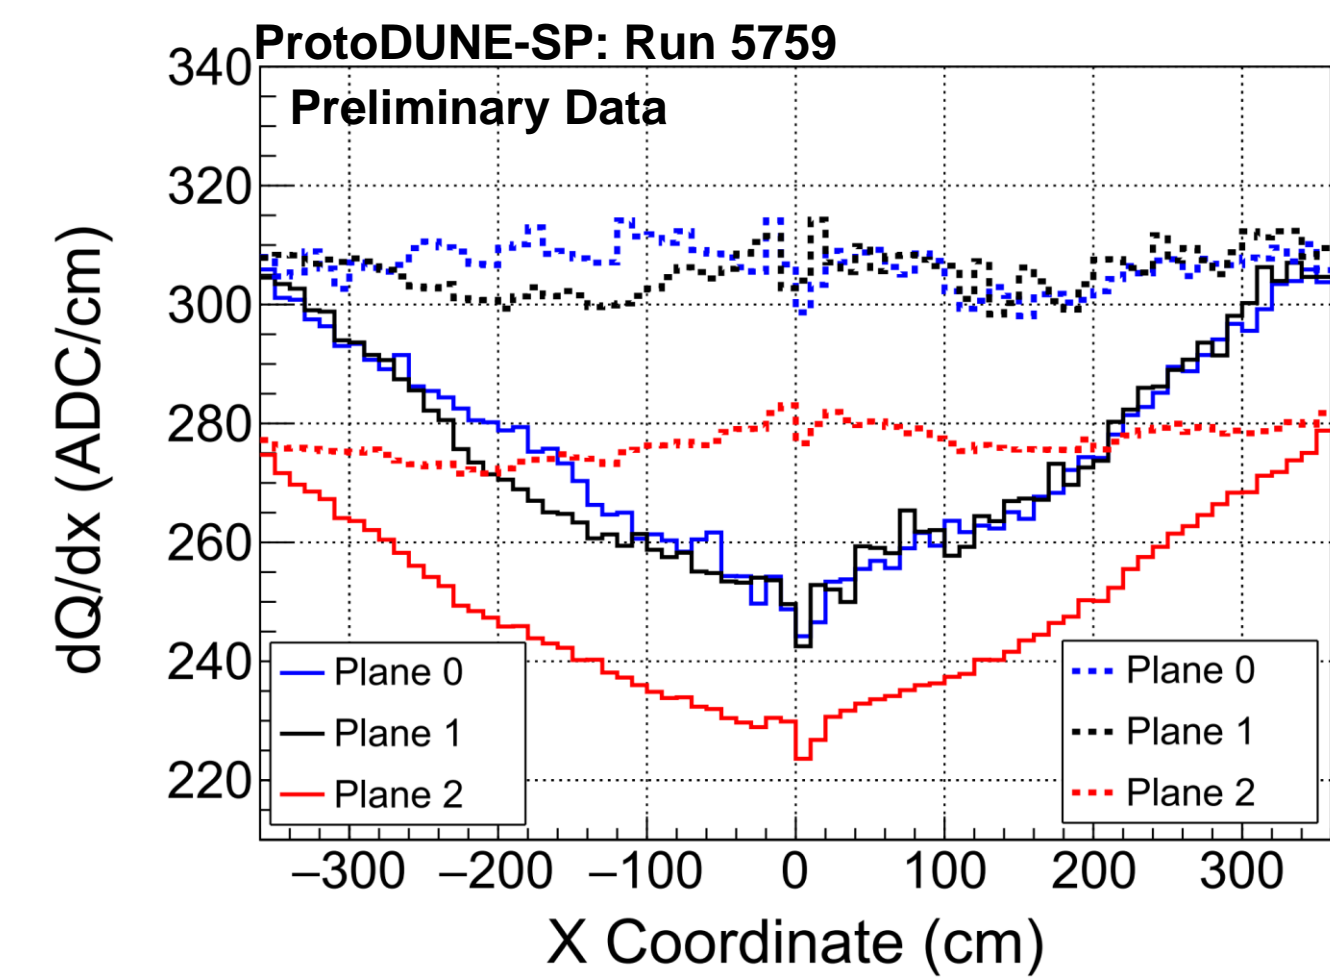


Fig 3:  $dQ/dx$  vs  $x$  coordinate without (solid) and with (dashed) an electron lifetime correction of 10.9747 ms. Electron lifetime measurements are based on purity-monitor data.

Reduced charge model:  
 $Q(t) = Q_0 \exp(-(t_{\text{hit}} - t_0)/\tau)$

$Q(t)$  is charge measured on wire,  $Q_0$  is initial charge from ionization of argon,  $t_{\text{hit}}$  is time charge arrived at the APA,  $t_0$  is time ionization occurred, and  $\tau$  is drift electron lifetime.

## YZ, X, and Normalization Corrections

- Divide two volumes into  $5 \times 5 \text{ cm}^2$  bins for  $yz$  plane and 5 cm bins for  $x$  coordinate
- Correction factors calculated using global  $dQ/dx$  (median value across  $x$  coordinate or  $yz$  plane) and local  $dQ/dx$  (median value in bin)
- Normalization using median  $dQ/dx$  at anode and global  $dQ/dx$

YZ correction factor:

$$C(y, z) = \frac{(dQ/dx)_{YZ}^{\text{global}}}{(dQ/dx)_{YZ}^{\text{local}}}$$

X correction factor:

$$C(x) = \frac{(dQ/dx)_x^{\text{global}}}{(dQ/dx)_x^{\text{local}}}$$

Normalization factor:

$$N_Q = \frac{(dQ/dx)^{\text{anode}}}{(dQ/dx)^{\text{global}}}$$

$$(dQ/dx)_{\text{calibrated}} = N_Q C(y, z) C(x) (dQ/dx)_{\text{reconstructed}}$$

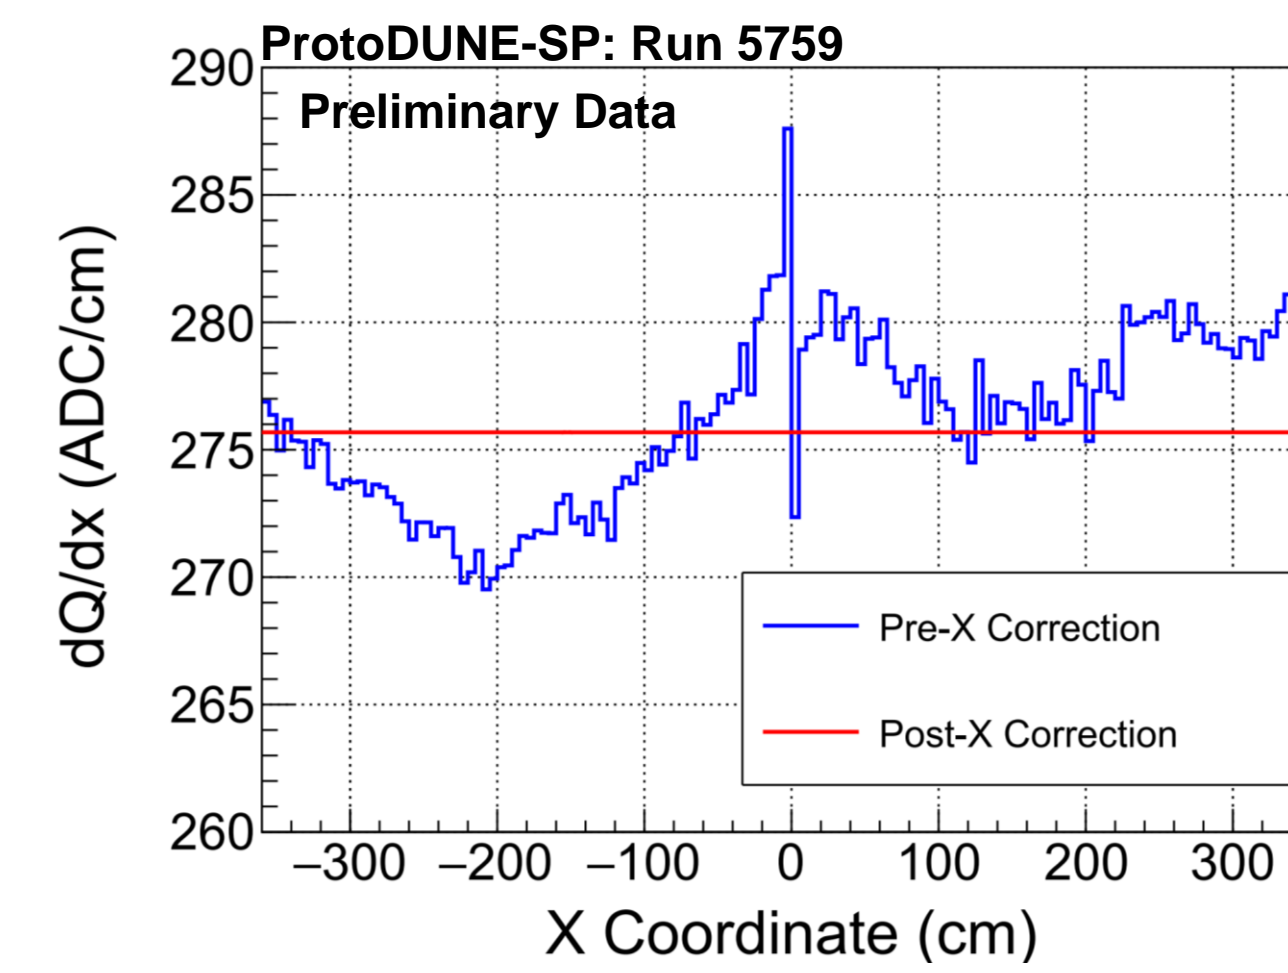
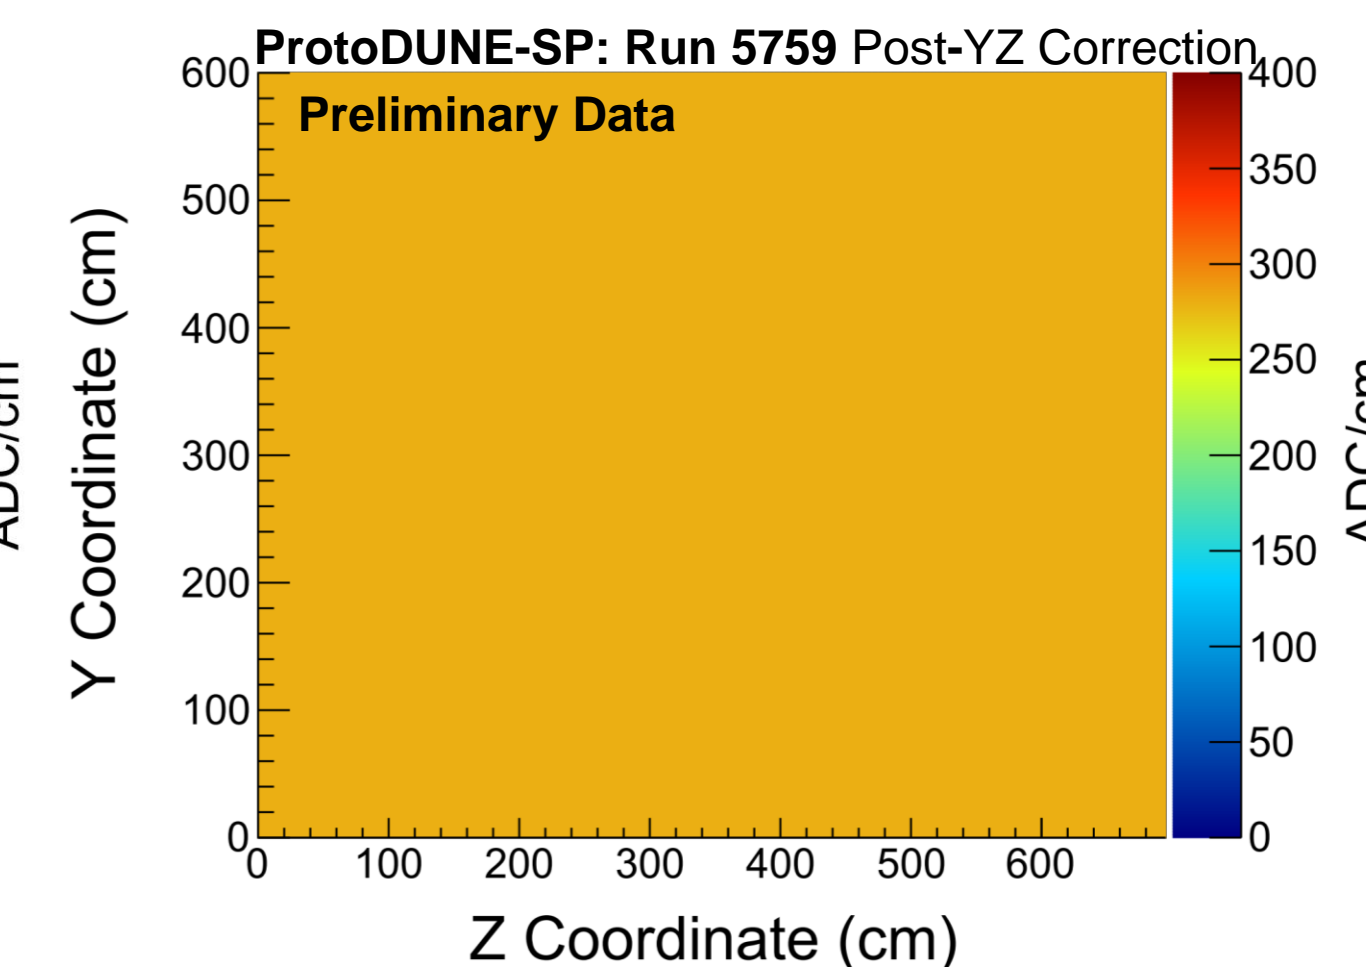
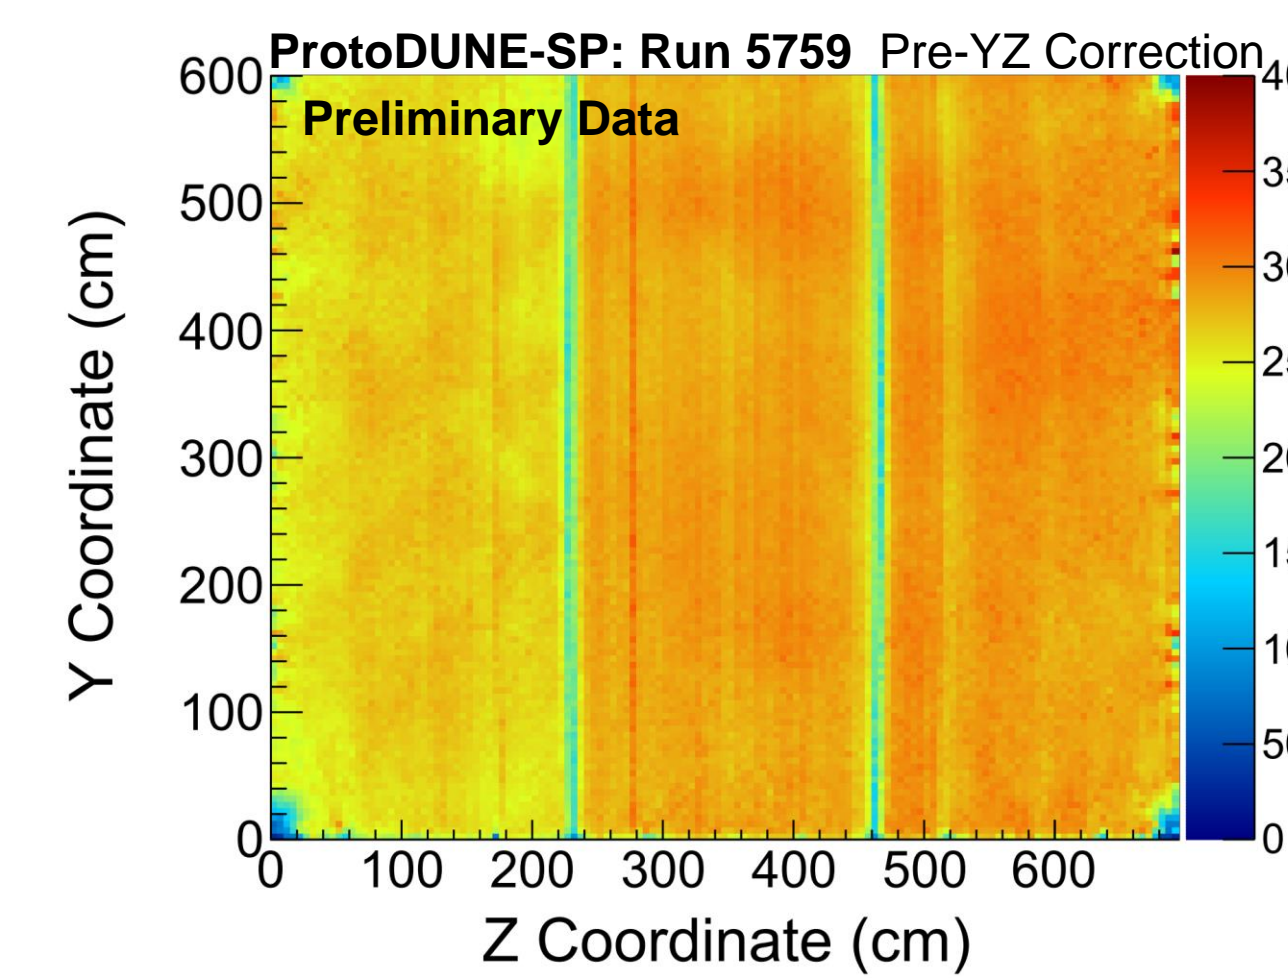


Fig 4:  $dQ/dx$  distribution in plane 2 for  $x < 0$  before  $yz$  correction (top left) and after  $yz$  correction (top right). Corrections were performed in both drift volumes ( $x < 0$  and  $x > 0$ ).

Fig 5:  $dQ/dx$  vs  $x$  coordinate (left) after  $yz$  corrections for plane 2 comparing before and after  $x$  correction.

## Charge Distributions

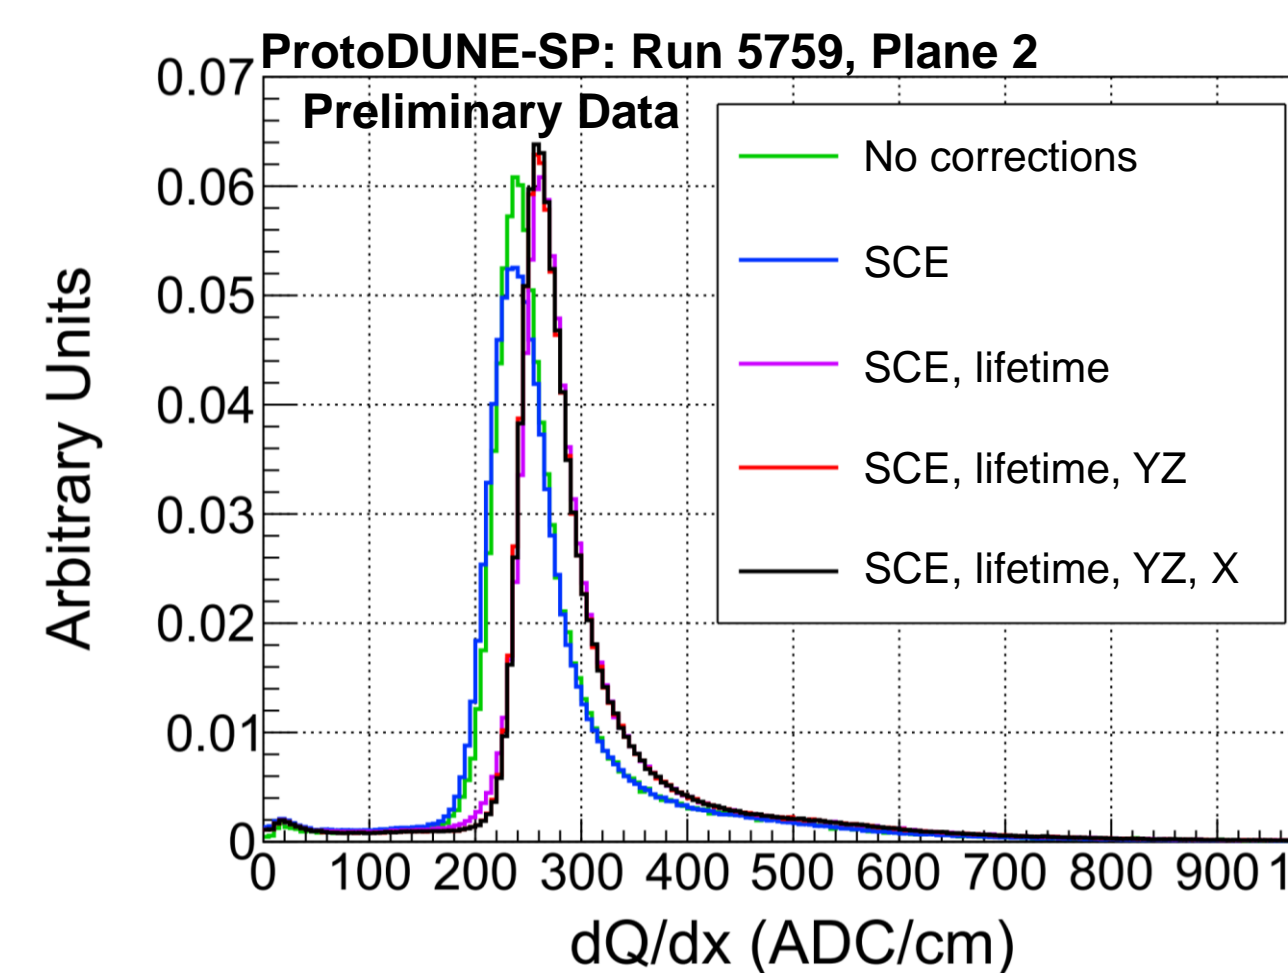


Fig 6:  $dQ/dx$  vs  $x$  (right) and  $dQ/dx$  distribution (left) of cathode-crossing muons comparing no corrections, SCE correction, SCE/lifetime corrections, SCE/lifetime/YZ corrections, and SCE/lifetime/YZ/X corrections.

## Absolute Energy Calibration

Modified Box Model:

$$\left(\frac{dE}{dx}\right)_{\text{calibrated}} = \left( \exp \left[ \frac{\left(\frac{dQ}{dx}\right)_{\text{calibrated}}}{C_{\text{cal}}} \frac{\beta' W_{\text{ion}}}{\rho \varepsilon} \right] - \alpha \right) \left( \frac{\rho \varepsilon}{\beta'} \right)$$

$C_{\text{cal}}$  = Constant used to convert ADC values to number of electrons,  
 $W_{\text{ion}}$  =  $23.6 \times 10^{-6} \text{ MeV/electron}$  (work function of argon),  
 $\varepsilon$  = ProtoDUNE-SP  $E$  field based on the space charge maps,  
 $\rho$  =  $1.38 \text{ g/cm}^3$  (liquid argon density at a pressure of 124.106 kPa)  
 $\beta'$  =  $0.212 \text{ (kV/cm)(g/cm}^2\text{)/MeV}$ , and  
 $\alpha$  = 0.93.

The calibrated  $dQ/dx$  values of stopping muons are used in the Modified Box Model [2] to fit the  $dE/dx$  values.

Calibration Constants ( $10^{-3} \text{ ADC/electron}$ )			
Plane	Run 5759	Run 5770	Run 5841
0	$5.353 \pm 0.0065$	$5.325 \pm 0.0063$	$5.411 \pm 0.0062$
1	$5.328 \pm 0.0062$	$5.261 \pm 0.0057$	$5.403 \pm 0.0061$
2	$4.891 \pm 0.0063$	$4.828 \pm 0.0054$	$4.855 \pm 0.0071$

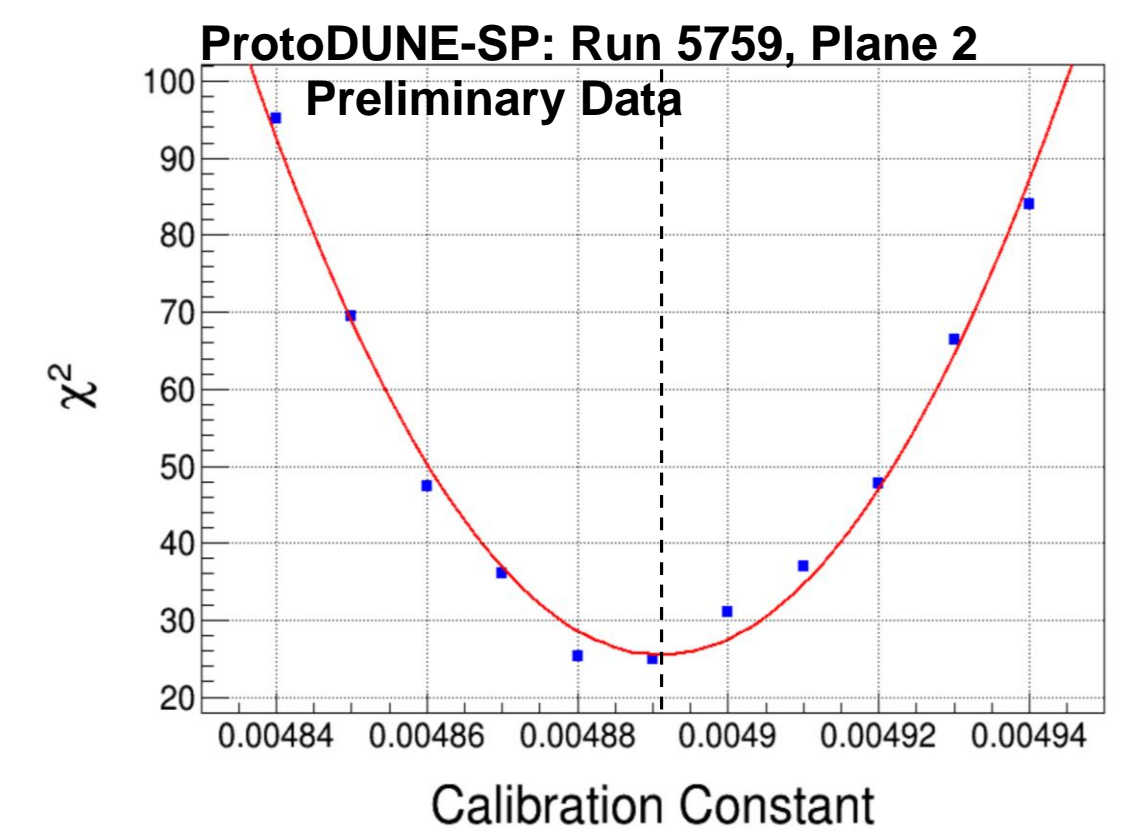


Fig 7:  $\chi^2$  vs calibration constant (above).

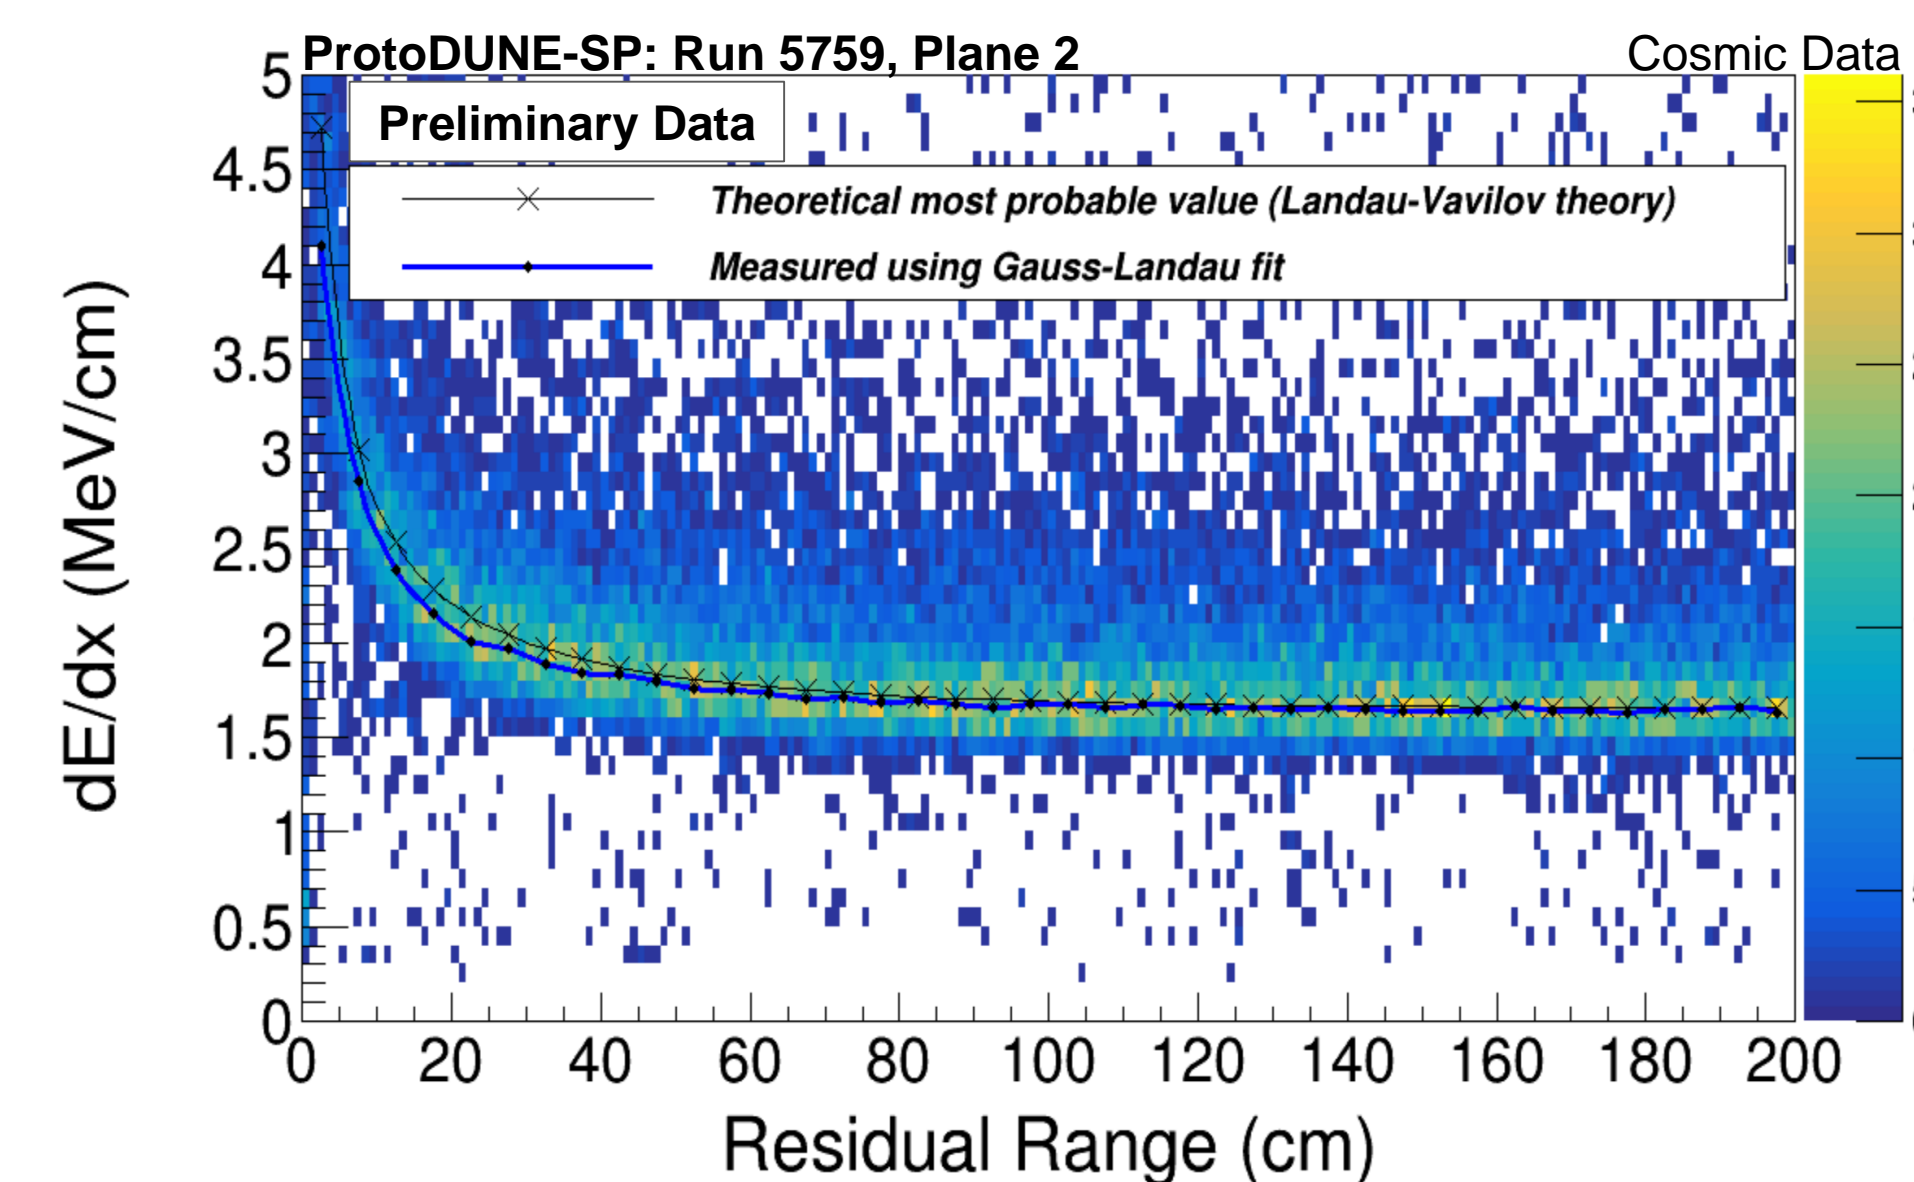


Fig 8:  $dE/dx$  vs residual range of stopping muons (left).

## Conclusions

SCE, lifetime corrections, YZ corrections, X corrections, and normalization factors were applied to runs 5759, 5770, and 5841. Calibration constants were determined to convert  $dQ/dx$  to  $dE/dx$  for the absolute energy scale. These calibration factors were upload to a database for use in further physics analysis.

## References

- [1] B. Abi, et al., "The Single-Phase ProtoDUNE Technical Design Report" arXiv:1706.07081, 2020.
- [2] R. Acciarri et al., "A Study of Electron Recombination Using Highly Ionizing Particles in the ArgoNeuT Liquid Argon TPC" arXiv:1306.1712, 2013.
- [3] A. Paudel, "Charge and energy calibration of the ProtoDUNE-SP detector using cosmic muons" APS April Meeting 2020.
- [4] A. Paudel, "dQdx and dEdx Calibration Instructions" DUNE Wiki Page, 2020.

## Acknowledgements

This work was supported in part by the U.S. Department of Energy, Office of Science, Office of Workforce Development for Teachers and Scientists (WDTS) under the Science Undergraduate Laboratory Internship (SULI) program. I would like to thank my mentors, Wanwei Wu and Tingjun Yang, for their guidance throughout this project. This calibration technique [3] was developed by Ajib Paudel and Tingjun Yang, and this work used calibration code written by Ajib [4].

