FERMILAB-SLIDES-20-077-V

Energy calibration of the ProtoDUNE-SP TPC

Richie Diurba (University of Minnesota) for the DUNE Collaboration ICHEP 2020

This document was prepared by DUNE collaboration using the resources of the Fermi National Accelerator Laboratory (Fermilab), a U.S. Department of Energy, Office of Science, HEP User Facility. Fermilab is managed by Fermi Research Alliance, LLC (FRA), acting under Contract No. DE-AC02-07CH11359.



dE/dx in ProtoDUNE-SP

- Precise dE/dx measurements needed to make cross-section and Bragg peak measurements for pions, protons, muons, and kaons in ProtoDUNE.
- Use Modified Box Model
 - Formula pioneered by ICARUS that is a modification of Birks' Law

$$\left(\frac{dE}{dx}\right)_{\text{calibrated}} = \left(\exp\left(\frac{\left(\frac{dQ}{dx}\right)_{\text{calibrated}}}{C_{\text{cal}}}\frac{\beta'W_{\text{ion}}}{\rho\mathscr{E}}\right) - \alpha\right)\left(\frac{\rho\mathscr{E}}{\beta'}\right)$$

dQ/dx: Charge per step as reconstructed on the wires. C_{cal} : Gain to convert from wire response (ADC*tick) to electrons. ξ : Local electric field W_{ion} , ρ , α , β ' are constants measured previously [1].


Measurements are needed for C_{cal} , ξ , and dQ/dx to calibrate dE/dx.

[1] R. Acciarri *et al.*, "A study of electron recombination using highly ionizing particles in the ArgoNeuT Liquid Argon TPC," *JINST* 8 (2013) P08005, arXiv:1306.1712 [physics.ins-det].




dE/dx and Calibration

• Calibration is done to go from ionized electrons to a quantifiable dE/dx.

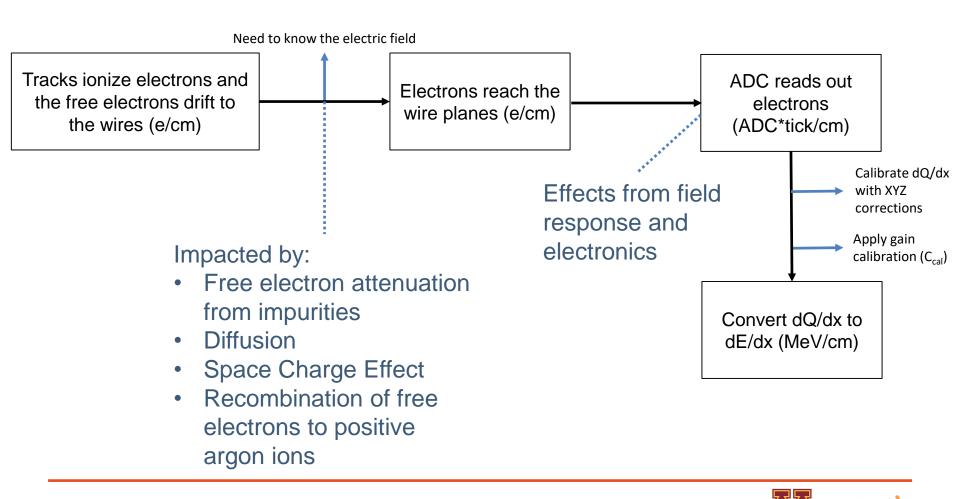

Electric Field Calibration

- Measure space charge effect field distortions using positional distortions on the edges of the detector.
- Interpolate the electric field at a specific hit measured using the map of the electric field generated by the space charge effect calibration.
- The dE/dx measurement also corrects for the squeezing and stretching of the step length (dx) using the space charge effect distortion measurements.
- The nominal electric field was measured at 0.487 kV/cm

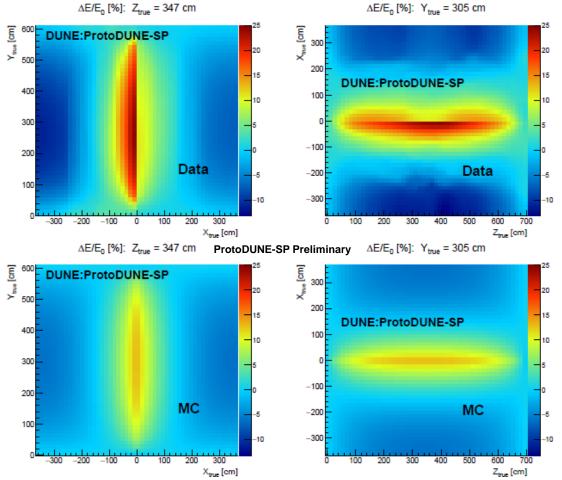

See previous talk by M. Mooney

Electric field deviations measured using the end points of cathode-crossing tracks.




dQ/dx Calibration

• Use cosmic muons at high residual range as they have well-defined dE/dx that is known theoretically by less than 1% uncertainty using the Landau-Vavilov theory [2].

Calibrating dQ/dx:

- 1. Select cathode-crossing cosmic tracks enter and exit detector.
- 2. Cut out cosmic muons that have certain track angles to avoid geometrical effects. (Cut if $65^{0} < \theta xz < 110^{0}$ or $70^{0} < \theta yz < 110^{0}$)
- Measure fluctuations in dQ/dx as a function of YZ. Then Measure dQ/dx as a function of drift distance (X).
- 4. Normalize dQ/dx between drift volumes.

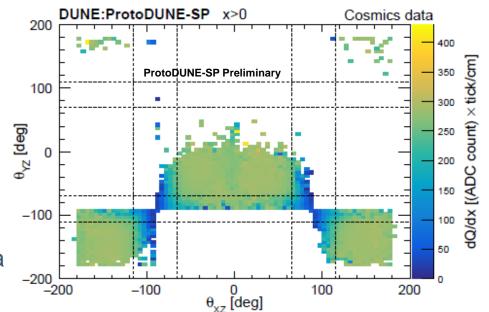


Track angles of cosmic muons for the non-beam side drift volume. The cathode plane of the detector sits at X=0.

[2] Particle Data Group collaboration, M. Tanabashi, K. Hagiwara, K. Hikasa, K. Nakamura, Y. Sumino, F. Takahashi et al., *Review of particle physics, Phys. Rev. D* **98** (Aug, 2018) 030001



XYZ Calibration of dQ/dx

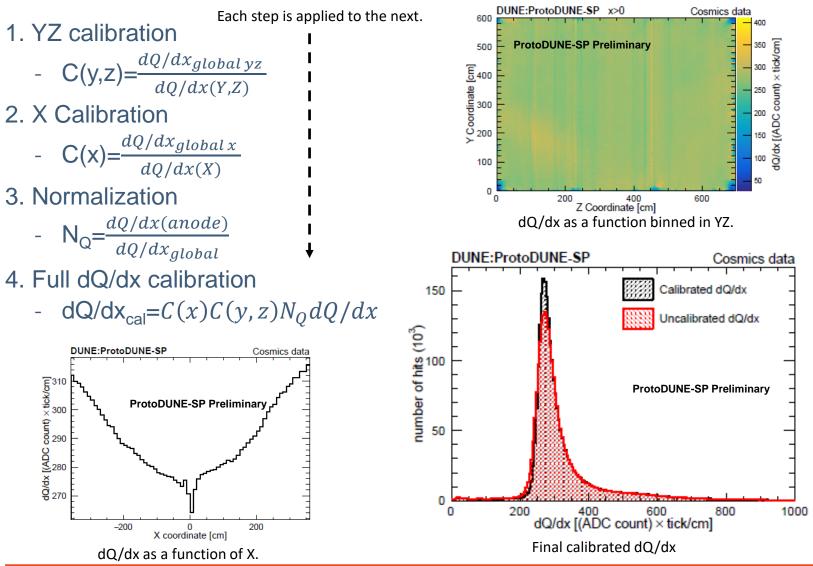




Energy Calibration (C_{cal})


Cathode-crossing tracks are again selected but with the following cuts:

- 1. Cut tracks that stop too close from the edges and with angles parallel to the wire plane.
- 2. Remove tracks that have reconstruction errors, such as broken tracks.
- 3. Use a χ^2 optimization to measure C_{cal} using hits at high residual range (120-200 cm). Optimization is set that in a perfect detector C_{cal} would be set to 5*10⁻³ ADCxtick/e.

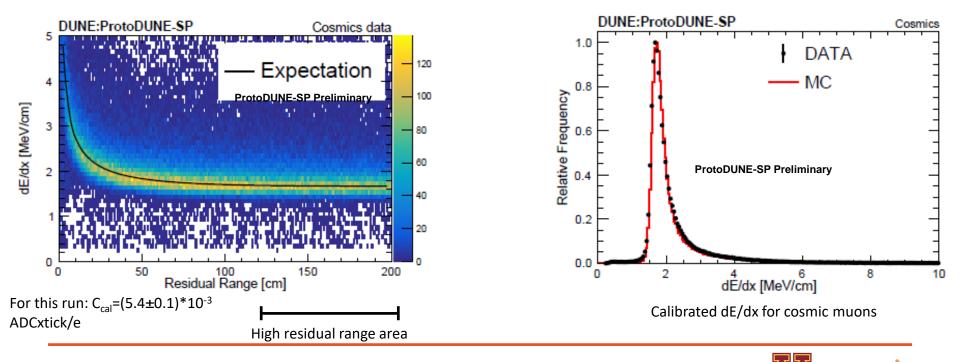

Conclusion

- Calibrations of dE/dx were made by calibrating dQ/dx across the detector and then scaling dE/dx using the Landau-Vavilov theoretical dE/dx.
- Results included in ProtoDUNE-SP paper currently on the arXiv (arXiv:2007.06722).

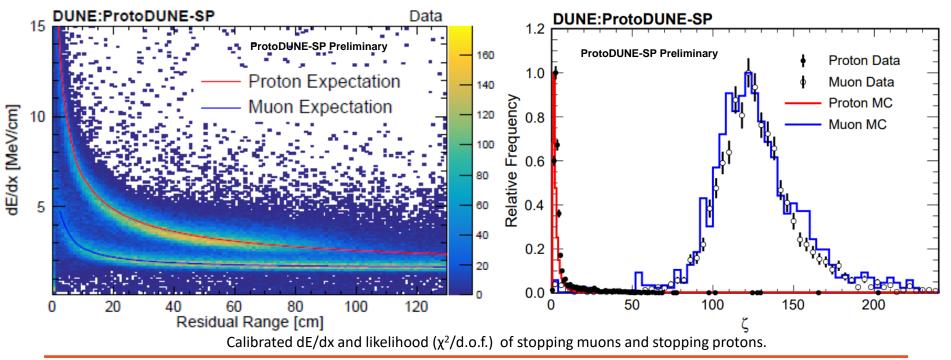




Backup Slides



9 ICHEP 2020 Richie Diurba | Energy calibration of the ProtoDUNE-SP TPC

Detector Basics

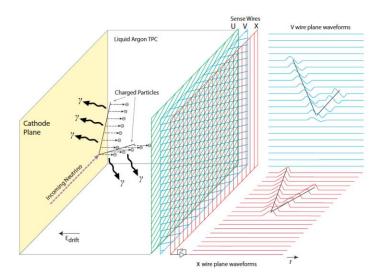

Demonstration of a LAr TPC reading the drift ionized electrons of a neutrino interaction [3].

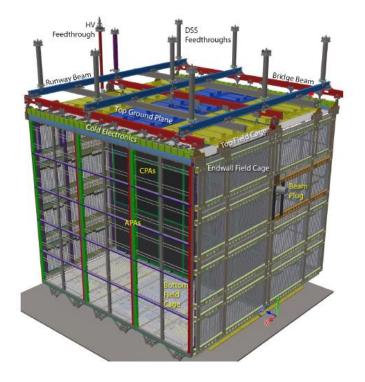



Diagram of the ProtoDUNE-SP detector. The 2nd set of APAs is on the other wall of the detector.

[3] B. Abi, et. al., "Deep Underground Neutrino Experiment (DUNE) Far Detector Technical Detector Report Volume 1" *arXiv:2002.02967*, 2020.



dE/dx in Monte Carlo

Purity of Hits in MC using Cuts Outlined: 99.74% C_{cal} =(5.03±0.01)*10⁻³ ADCxtick/e

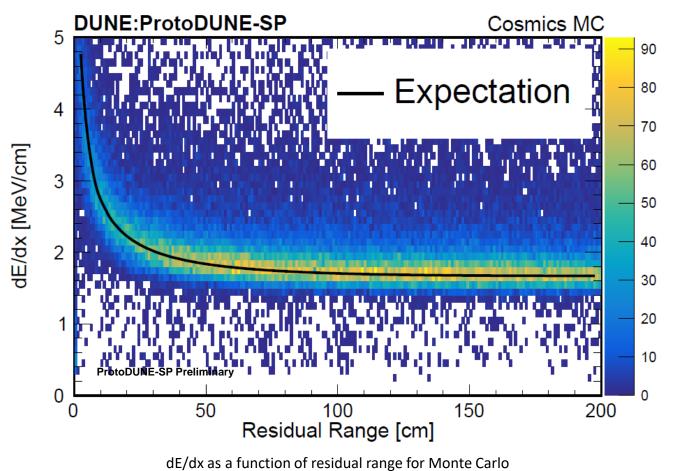






ADC Calibration

- Measures the gain of the ADC to calibrate wire-to-wire differences in the readout.
- Uncertainty in the ADC calibration was considered to be at the few percent level.

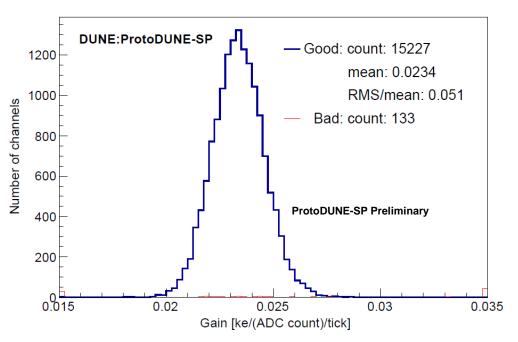

Measurements of the ADC gain using the pulser on the front end electronics.

