
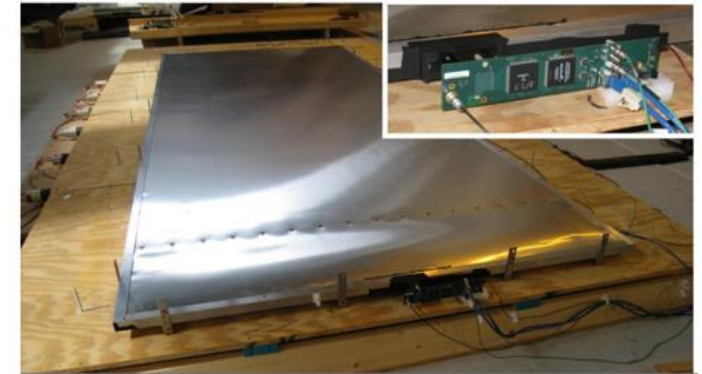


Techniques Developed Calibrating ProtoDUNE-SP Using a Cosmic Ray Tagger (CRT)

Richie Diurba (University of Minnesota) for the DUNE Collaboration
XIX International Workshop on Neutrino Telescopes

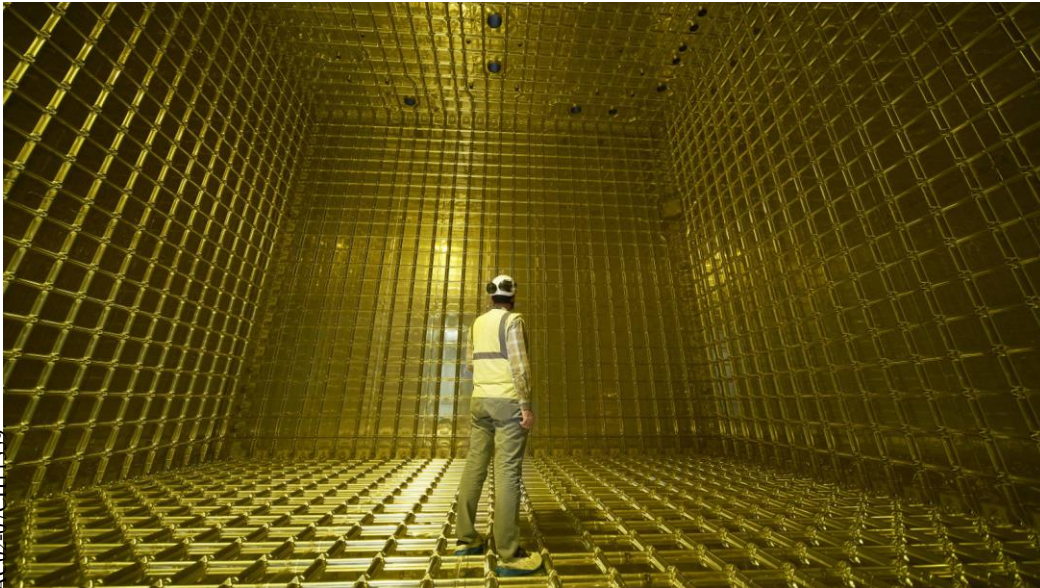

ProtoDUNE-SP

- 770-ton LAr prototype for the DUNE Far Detector single-phase module under a charged particle test beam from CERN SPS.
- The front and back cryostat faces of the TPC covered by the CRT, an array of scintillator strips.
- CRT enables external reconstruction of cosmic muons to calibrate and evaluate the TPC.
- 16 CRT modules cover the front face and 16 modules cover the back face.




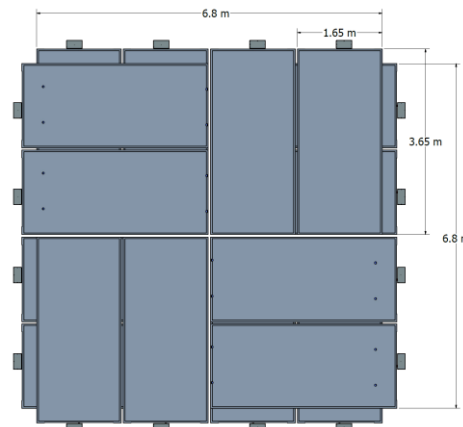



Diagram of the downstream CRTs.

- Overlapping CRT modules enable three-dimensional hit reconstruction.
- Timing resolution of a CRT module is 20 ns.
- 64 strips of 5-cm width overlaid to give an effective width of 2.5 cm in each direction.




CRT-TPC Matched Tracks

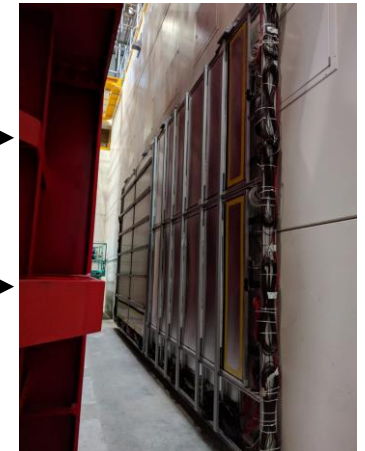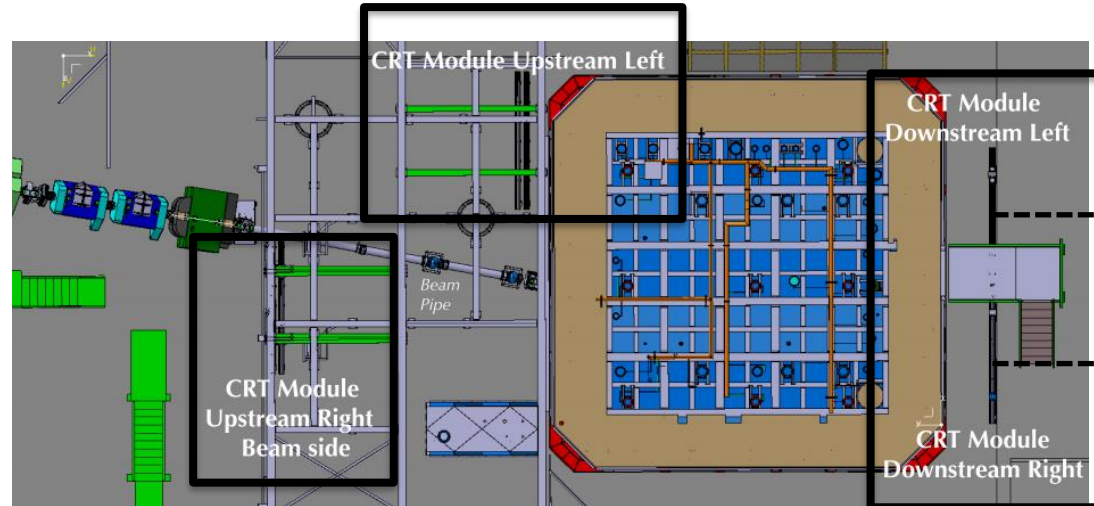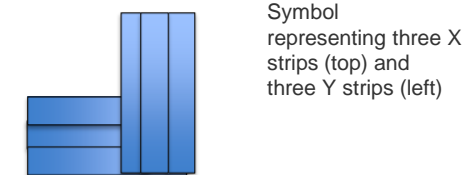

- Search for CRT three-dimensional hits to draw CRT candidate tracks and match by extrapolating the TPC track onto the CRT.
- Purity in simulation found to be above 99.9%.
- Can use CRT-TPC matched tracks for:
 - Positional distortion measurements
 - Drift electron lifetime measurements
 - Photon detector performance
 - TPC reconstruction evaluation and much more.
- We will focus on the first two.

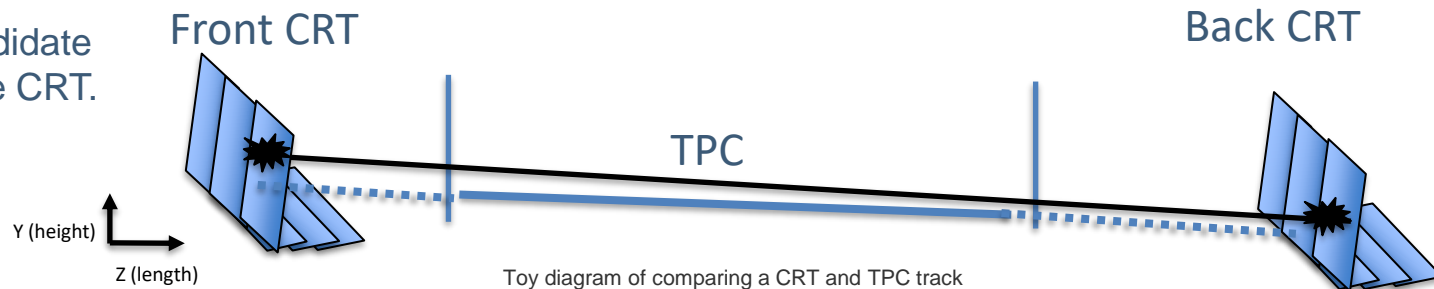


Coverage map on the front and back TPC faces for CRT-TPC matched tracks with a cosmic trigger.

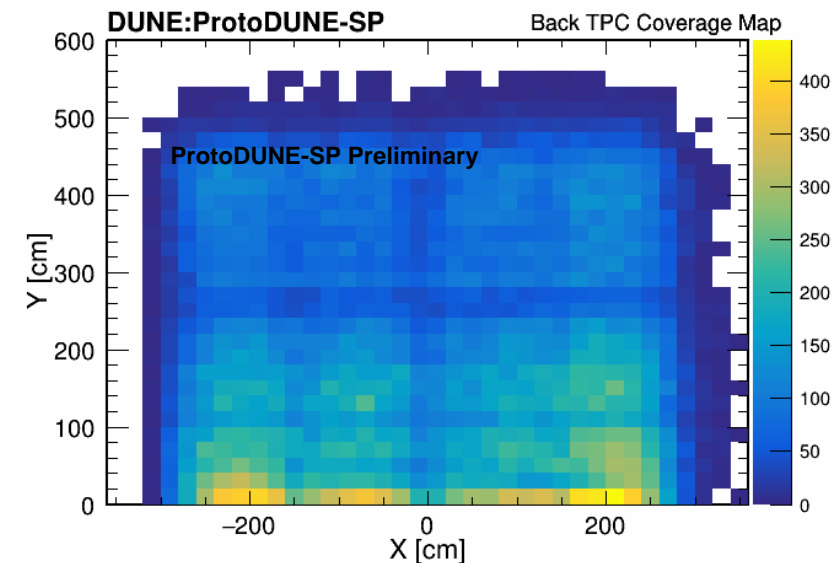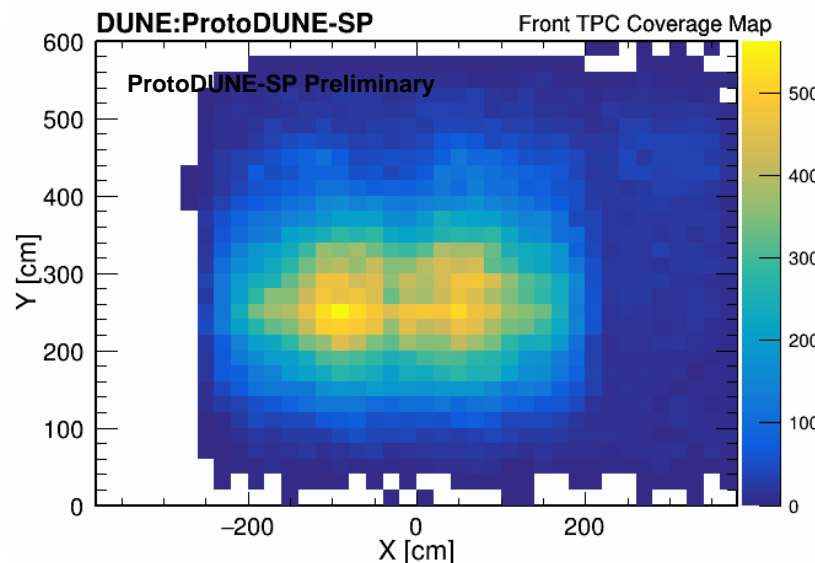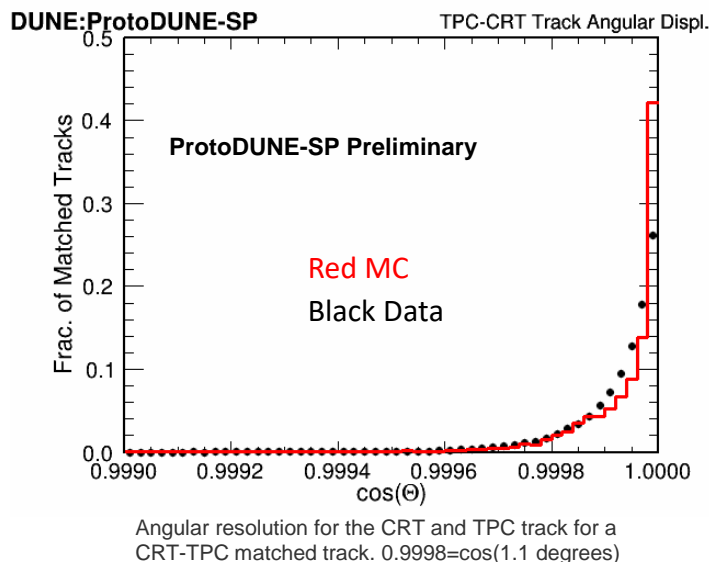

Distortion Measurements with the CRT

- Measure distortions due to the space charge effect, an effect caused by a high cosmic muon flux.
- Distortions on the TPC face measured by interpolating the distance from the TPC face to the endpoint of the track.
- Distortions inside the detector measured using track pairs that intersect and comparing the intersection point between the CRT and TPC.
- Useful for evaluating distortions across the drift distance.


Interpolated distortions measured on the front (left) and back (right) TPC faces in the length of the detector. Distortions in units of centimeters.

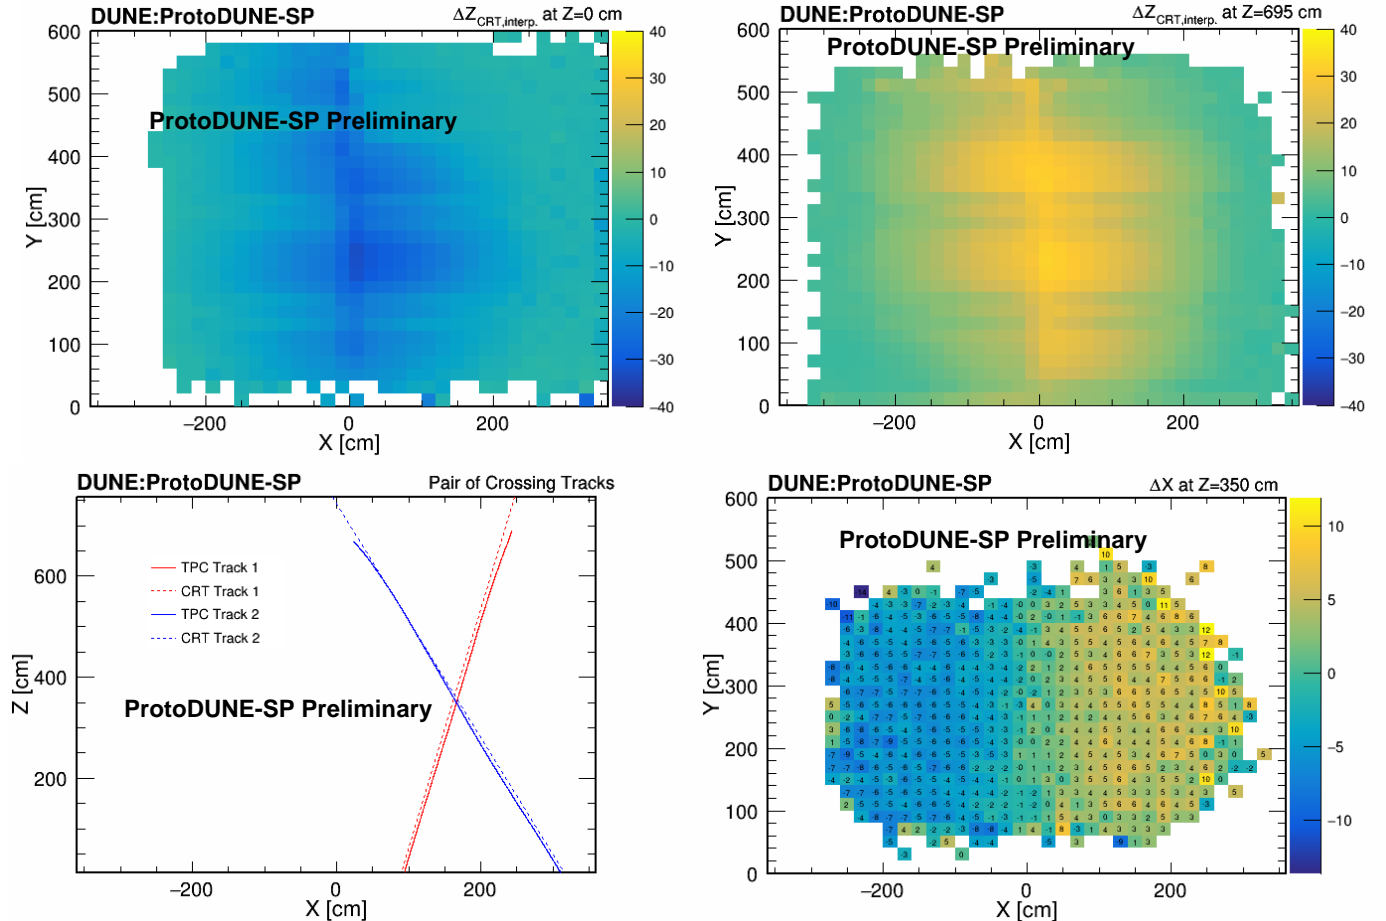


Example of a crossing-track pair (left) and measurements of distortions across the drift volume in the center of the detector using crossing tracks (right). Distortions are in units of centimeters.

Drift Electron Lifetime Measurements with the CRT

- As ionized electrons drift, electronegative impurities may capture them and lead to a loss of measured charge on the wires.
- The effect is measured as a drift electron lifetime whereby surviving charge is: $Q(t)=Q_0\exp(-t_{\text{drift}}/\tau)$
- CRT provides an external timestamp to calibrate t_{drift} and the track position.

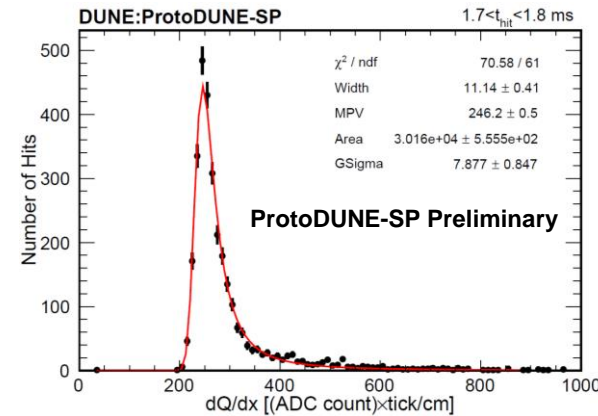


Measurement of MPV for a slice of drift distance in Nov. 2018

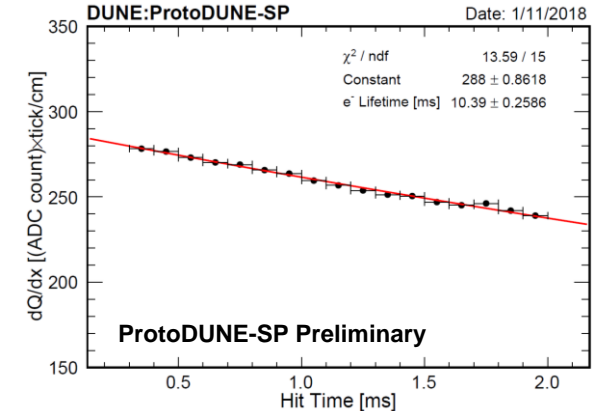


Fit of MPV to a drift electron lifetime for November 1st, 2018.

Charge lost traveling full drift distance measured from drift electron lifetime measurements.

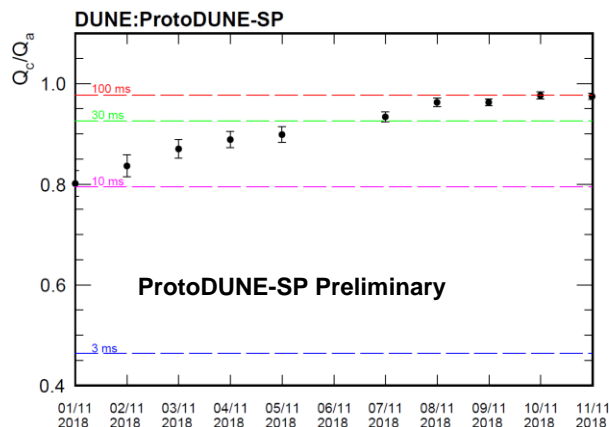


Ratio of drift electron lifetime compared to ProtoDUNE-SP's purity monitors

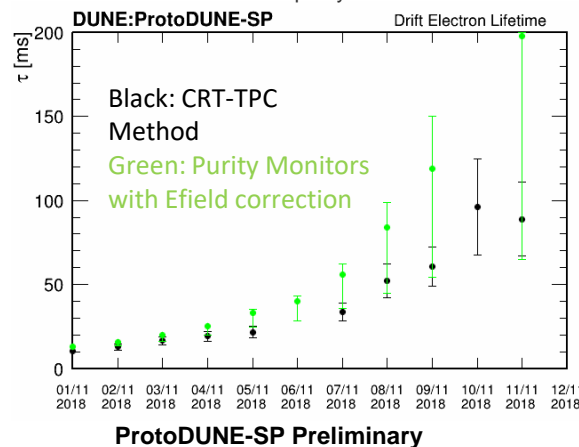

- Measure charge per unit length (dQ/dx) and then fit the Most Probable Value (MPV) across the drift volume. Fit these values to find τ .
- ProtoDUNE-SP saw lifetime consistently above the 10 ms DUNE technical specification.
- Results consistent with measurements from the purity monitors.

Conclusion

- External tracking, like that from a CRT, provides a reference timestamp and tracking information for TPC reconstruction.
- In addition, it enables numerous detector physics analyses ranging from calibration to evaluating liquid argon purity.
- The DUNE Far Detector will require less than percent level performance across multiple detector parameters.
 - Providing the DUNE Far Detector with preliminary evaluations using the CRT of these parameters will expedite DUNE's science program.

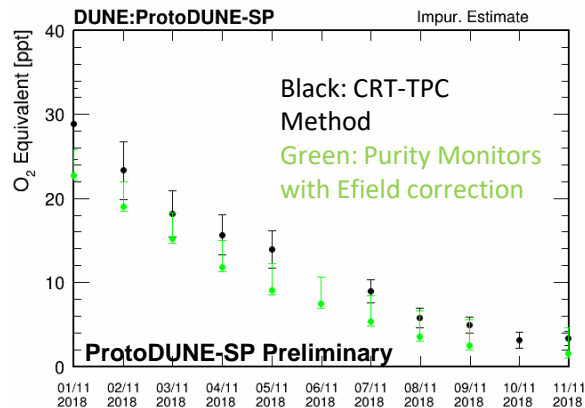

Estimated oxygen contamination in ProtoDUNE-SP from the drift electron lifetime measurements.

