



Fermi National Accelerator Laboratory

FERMILAB-Conf-96/269-E

CDF

Fully Reconstructed B-Meson Decays Using J/ψ and ψ (2S)

Ting Miao

Representing the CDF Collaboration

*Fermi National Accelerator Laboratory
P.O. Box 500, Batavia, Illinois 60510*

September 1996

Published Proceedings of the *1996 Annual Divisional Meeting (DPF 96) of the Division of Particles and Fields of the American Physical Society*, Minneapolis, Minnesota, August 10-15, 1996

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Distribution

Approved for public release; further dissemination unlimited.

Fully Reconstructed B-meson Decays Using J/ψ and $\psi(2S)$

TING MIAO

Fermi National Accelerator Laboratory

Batavia, Illinois 60510, USA

(Representing the CDF collaboration)

In this paper we present CDF B-meson branching ratio results involving color-suppressed $B \rightarrow \Psi\mathbf{K}$ decays, where $\Psi = J/\psi, \psi(2S)$ and $\mathbf{K} = K, K^*$. Fully reconstructed decays of $B \rightarrow J/\psi\mathbf{K}$, $B \rightarrow \psi(2S)\mathbf{K}$, $B^+ \rightarrow J/\psi\pi^+$ and $B_s \rightarrow J/\psi\phi$ are used to extract branching ratios, vector-pseudoscalar ratios and polarization parameters.

1 Introduction

The decay of $B \rightarrow \Psi\mathbf{K}$ is expected to proceed primarily through the ‘color-suppressed’ $b \rightarrow c\bar{c}s$ diagram. The determination of its magnitude and decay mechanism provide insight into the hadronic B decays. Under the factorization assumption¹, the branching ratios of $B \rightarrow \Psi\mathbf{K}$ decay modes depend only on a_2 , where a_2 is the amplitude of internal W -decay in B hadrons. Precise measurements of exclusive $B \rightarrow \Psi\mathbf{K}$ will be useful to determine a_2 and ultimately test the factorization assumption.

The large b production cross section at the Tevatron and the successful implementation of lepton triggers have enabled CDF to join this area of highly competitive b physics. We report here new results³ from CDF on the branching ratio measurements of $B \rightarrow \Psi\mathbf{K}$ decays. The data were taken during the 1992-1995 runs with the CDF detector (RUN-I) and the integrated luminosity is 110 pb^{-1} .

2 J/ψ and $\psi(2S)$ reconstruction

The data sample used for the inclusive Ψ reconstruction was selected by a three-level trigger system in which two opposite-charged muons with an invariant mass between 2.7 and 4.1 GeV/c^2 were required. A least-squares fit was performed on the two muon candidate tracks constraining the two tracks to originate from a common vertex. Muon candidates were required to possess $P_t > 2\text{GeV}/c$ before any vertex constraints were imposed on the track parameters. In the case of $\psi(2S) \rightarrow J/\psi\pi^+\pi^-$ reconstruction, all four legs were required to originate from a common vertex. The pre-constrained dipion invariant mass was required to lie in the range $0.31 < M_{\pi\pi} < 0.61 \text{ GeV}/c$ to reduce combinatorial background.

The excellent triggering, tracking and vertexing at CDF can be demonstrated by the inclusive $J/\psi \rightarrow \mu^+\mu^-$, $\psi(2S) \rightarrow \mu^+\mu^-$ and $\psi(2S) \rightarrow J/\psi\pi^+\pi^-$ mass distributions shown in Fig. 1 and Fig. 2.

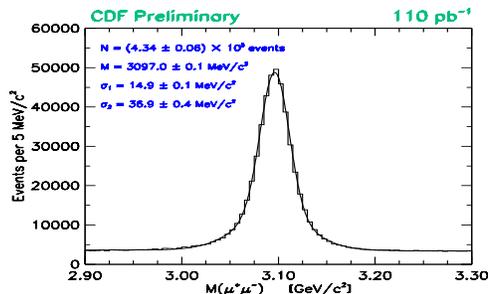


Figure 1: The J/ψ dimuon invariant mass distribution after a vertex constraint.

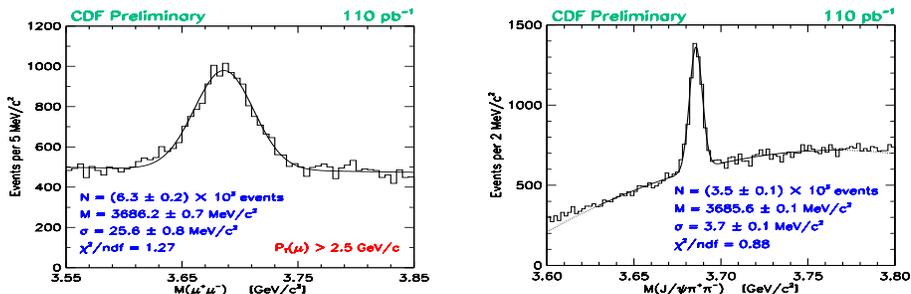


Figure 2: The $\psi(2S)$ dimuon (left) and $J/\psi\pi\pi$ (right) invariant mass distributions after a vertex constraint.

3 $B \rightarrow J/\psi K$

After mass constraining its mass to the world average value², the J/ψ is combined with a K to look for B -mesons where $K = K^+, K^0, K^*(892)^0$, or $K^*(892)^+$. We reconstruct K^0 through K_s^0 . The K_s^0 selection requires two oppositely charged tracks with $p_t > 0.35 \text{ GeV}/c$ and the pairs are vertex constrained. The $K^*(892)^+$ is formed with a K_s^0 candidate plus a track, assumed to be a π^+ ; the $K^*(892)^0$ is formed from two charged tracks assumed to be a K^+ and π^- . The $K^*(892)^+$ and $K^*(892)^0$ candidates are required to have an invariant mass within $75 \text{ MeV}/c^2$ of the PDG value.

The invariant mass spectra of B^+ and B^0 using 19.6 pb^{-1} data (RUN-1A) are shown in Fig 3 and Fig 4. The number of events from fitting and the relative reconstruction efficiency from Monte Carlo study are listed in Table 1.

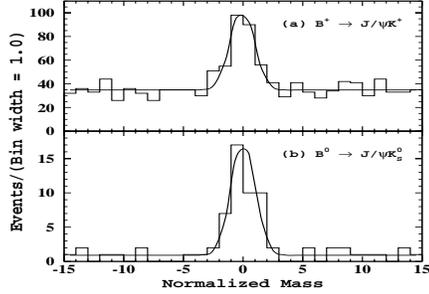


Figure 3: The normalized mass distribution for (a) $B^+ \rightarrow J/\psi K^+$ and (b) $B^0 \rightarrow J/\psi K_s^0$

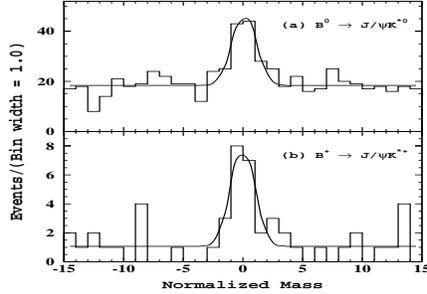


Figure 4: The normalized mass distribution for (a) $B^0 \rightarrow J/\psi K^*(892)^0$ and (b) $B^+ \rightarrow J/\psi K^*(892)^+$

Table 1. $B \rightarrow J/\psi K$ result

	$B^+ \rightarrow J/\psi K^+$	$B^0 \rightarrow J/\psi K_s^0$	$B^0 \rightarrow J/\psi K^*(892)^0$	$B^+ \rightarrow J/\psi K^*(892)^+$
N_s	169 ± 18	41.8 ± 6.9	71 ± 12	17.0 ± 4.7
ϵ	1.0	1.57 ± 0.08	2.11 ± 0.18	2.53 ± 0.37

The ratios of branching ratios are: $\frac{Br(B^0 \rightarrow J/\psi K^0)}{Br(B^+ \rightarrow J/\psi K^+)} = 1.13 \pm 0.22 \pm 0.06$, $\frac{Br(B^0 \rightarrow J/\psi K^{*0})}{Br(B^+ \rightarrow J/\psi K^+)} = 1.33 \pm 0.27 \pm 0.11$ and $\frac{Br(B^+ \rightarrow J/\psi K^{*+})}{Br(B^+ \rightarrow J/\psi K^+)} = 1.55 \pm 0.46 \pm 0.16$

Using the world average $Br(B^+ \rightarrow J/\psi K^+) = (0.102 \pm 0.014)\%$ ², we find

$$Br(B^0 \rightarrow J/\psi K^0) = (0.115 \pm 0.023 \pm 0.017)\%$$

$$Br(B^0 \rightarrow J/\psi K^{*0}) = (0.136 \pm 0.027 \pm 0.022)\%$$

$$Br(B^+ \rightarrow J/\psi K^{*+}) = (0.158 \pm 0.047 \pm 0.027)\%$$

Assuming isospin symmetry, we combine the above results to extract the vector-pseudoscalar ratio

$$R = \frac{Br(B \rightarrow J/\psi K^*)}{Br(B \rightarrow J/\psi K)} = 1.32 \pm 0.23 \pm 0.16.$$

CDF has published a measurement of J/ψ polarization⁴ in $B^0 \rightarrow J/\psi K^*(892)^0$,

$$, L/, = 0.65 \pm 0.10 \pm 0.04.$$

It will be interesting to see whether theory models based on the factorization hypothesis and the $B \rightarrow K(K^*)$ form factors can reproduce the above results.

4 $B^+ \rightarrow J/\psi\pi^+$

The difficult task here is to distinguish the small $B^+ \rightarrow J/\psi\pi^+$ signal from large backgrounds. We estimate the signal mass spectrum and background spectra from $B^+ \rightarrow J/\psi K^+$, misidentifying the K^+ as a π^+ , and combinatorial background using Monte Carlo. From a fit to the $J/\psi\pi^+$ mass spectra, shown in Fig. 5, we find 28_{-9}^{+10} events with a 3.0σ significance. The branching ratio relative to $B^+ \rightarrow J/\psi K^+$ is extracted to be

$$\frac{Br(B^+ \rightarrow J/\psi\pi^+)}{Br(B^+ \rightarrow J/\psi K^+)} = (6.0_{-2.0}^{+2.2} \pm 0.1)\%$$

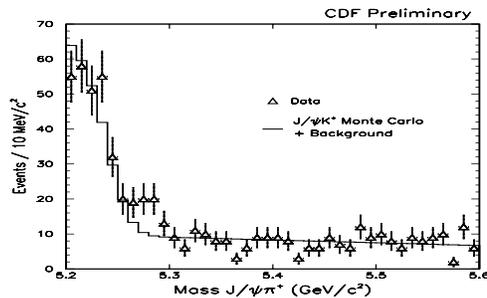


Figure 5: The $M_{J/\psi\pi^+}$ mass distribution. The superimposed curves show the $M_{J/\psi\pi^+}$ distribution for Monte Carlo $B^+ \rightarrow J/\psi K^+$ and combinatorial events. There is clearly an excess around the B mass region which is due to the contribution of $B^+ \rightarrow J/\psi\pi^+$ decay.

5 $B \rightarrow \psi(2S)K$

Using the full available dataset and similar techniques for $B \rightarrow J/\psi K$ decay, we reconstructed decays of $B^+ \rightarrow \psi(2S)K^+$ and $B^0 \rightarrow \psi(2S)K^*(892)^0$ as shown in Fig. 6 and Fig. 7. We use the $B^+ \rightarrow J/\psi K^+$ and $B^0 \rightarrow J/\psi K^*(892)^0$ as normalization modes. We find:

$$\frac{Br(B^+ \rightarrow \psi(2S)K^+)}{Br(B^+ \rightarrow J/\psi K^+)} = 0.666 \pm 0.093 \pm 0.101$$

$$\frac{Br(B^0 \rightarrow \psi(2S)K^{*0})}{Br(B^0 \rightarrow J/\psi K^{*0})} = 0.569 \pm 0.131 \pm 0.074$$

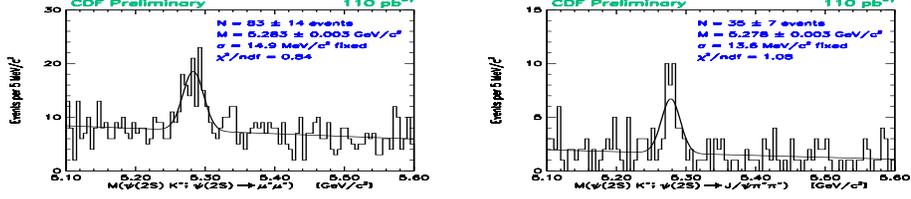


Figure 6: The $\psi(2S)K^+$ invariant mass distribution with $\psi(2S) \rightarrow \mu^+\mu^-$ (left) and $\psi(2S) \rightarrow J/\psi\pi^+\pi^-$ (right). The numbers of events are 83 ± 14 and 35 ± 7 respectively for the two decay channels.

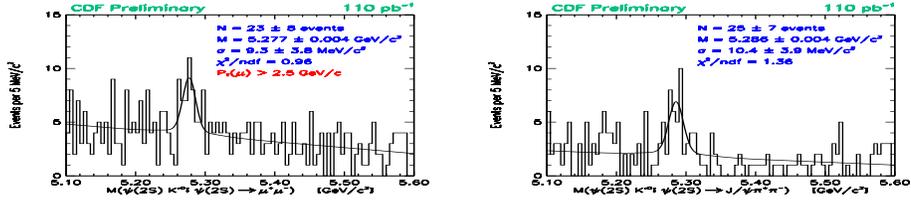


Figure 7: The $\psi(2S)K^*(892)^0$ invariant mass distribution with $\psi(2S) \rightarrow \mu^+\mu^-$ (left) and $\psi(2S) \rightarrow J/\psi\pi^+\pi^-$ (right). The numbers of events are 23 ± 5 and 25 ± 7 respectively for the two decay channels.

Using $Br(B^+ \rightarrow J/\psi K^+) = (0.102 \pm 0.014)\%$ and $Br(B^+ \rightarrow J/\psi K^{*0}) = (0.158 \pm 0.28)\%$, we find $Br(B^+ \rightarrow \psi(2S)K^+) = (6.8 \pm 1.0 \pm 1.4) \times 10^{-4}$ and $Br(B^0 \rightarrow \psi(2S)K^{*0}) = (9.0 \pm 2.1 \pm 2.0) \times 10^{-4}$. From isospin symmetry and $\tau^+/\tau^0 = 1.02 \pm 0.05$, we calculate the vector-pseudoscalar ratio

$$R = \frac{Br(B \rightarrow \psi(2S)K^*)}{Br(B \rightarrow \psi(2S)K)} = 1.35 \pm 0.55$$

which is consistent with R calculated with $B \rightarrow J/\psi$ decays.

6 $B_s \rightarrow J/\psi\phi$

The decay of $B_s \rightarrow J/\psi\phi$ is expected to be dominated by CP-even state and the decay is of special interest to extract CP violation in the B_s system. From a data sample of 19.6 pb^{-1} , we find 29.4 ± 6.2 events of $B_s \rightarrow J/\psi\phi$ with $\phi \rightarrow K^+K^-$, as show in Fig. 8. Using the well measured $B \rightarrow J/\psi K$ as the normalization mode and their world averaged branching ratio, we find

$$Br(B_s \rightarrow J/\psi\phi) = \frac{f_s}{f_u + f_d} (0.037 \pm 0.011 \pm 0.004)\%$$

where f_u, f_d and f_s are fragmentation fraction of b quarks to B_u, B_d and B_s mesons. Using $f_s/(f_u + f_d) = (0.20 \pm 0.03)^5$, we have

$$Br(B_s \rightarrow J/\psi\phi) = (0.093 \pm 0.028 \pm 0.017)\%.$$

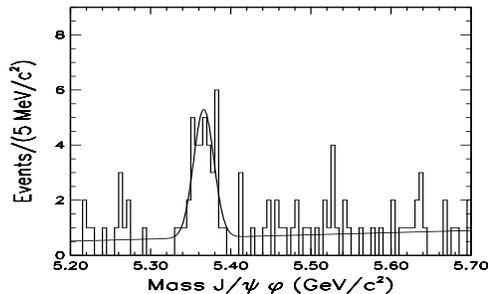


Figure 8: The $J/\psi\phi$ invariant mass distribution.

7 Summary

Using CDF dimuon sample, we measured B-meson branching ratios involving color-suppressed $B \rightarrow \Psi\mathbf{K}$ decays, $B \rightarrow J/\psi\pi$ and $B_s \rightarrow J/\psi\phi$. The vector-pseudoscalar ratios for $B \rightarrow J/\psi$ and $B \rightarrow \psi(2S)$ are extracted to be $1.32 \pm 0.23 \pm 0.16$ and 1.35 ± 0.55 respectively. Much effort is still being put into updating the above results using the full RUN-I data sample. We can expect excellent new results in the near future.

References

1. M. Wirbel, B. Stech, and M. Bauer, Z. Phys. C **29**, 637 (1985);
M. Bauer, B. Stech, and M. Wirbel, Z. Phys. C **34**, 103 (1987).
M. Neubert, V. Rieckert, Q. P. Xu and B. Stech in “Heavy Flavors”,
edited by A. J. Buras and H. Lindner (World Scientific, Singapore, 1992).
2. Particle Data Group, Phys. Rev. D **50** 1 (1994).
3. F. Abe *et al.* (CDF Collaboration), Phys. Rev. Lett. **76**, 2015 (1996);
F. Abe *et al.* (CDF Collaboration), FERMILAB-Conf-96/160-E;
F. Abe *et al.* (CDF Collaboration), FERMILAB-PUB-96/119-E;
<http://www-cdf.fnal.gov/physics/new/bottom/bottom.html>.
4. F. Abe *et al.* (CDF Collaboration), Phys. Rev. Lett. **75**, 3068 (1995).
5. See references 11 and 12 in FERMILAB-PUB-96/119-E.