



Search for neutral MSSM Higgs bosons decaying to τ pairs in $p\bar{p}$ collisions at
 $\sqrt{s} = 1.96$ TeV

A. Abulencia,²³ D. Acosta,¹⁷ J. Adelman,¹³ T. Affolder,¹⁰ T. Akimoto,⁵³ M.G. Albrow,¹⁶ D. Ambrose,¹⁶ S. Amerio,⁴² D. Amidei,³³ A. Anastassov,⁵⁰ K. Anikeev,¹⁶ A. Annovi,⁴⁴ J. Antos,¹ M. Aoki,⁵³ G. Apollinari,¹⁶ J.-F. Arguin,³² T. Arisawa,⁵⁵ A. Artikov,¹⁴ W. Ashmanskas,¹⁶ A. Attal,⁸ F. Azfar,⁴¹ P. Azzi-Bacchetta,⁴² P. Azzurri,⁴⁴ N. Bacchetta,⁴² H. Bachacou,²⁸ W. Badgett,¹⁶ A. Barbaro-Galtieri,²⁸ V.E. Barnes,⁴⁶ B.A. Barnett,²⁴ S. Baroiant,⁷ V. Bartsch,³⁰ G. Bauer,³¹ F. Bedeschi,⁴⁴ S. Behari,²⁴ S. Belforte,⁵² G. Bellettini,⁴⁴ J. Bellinger,⁵⁷ A. Belloni,³¹ E. Ben-Haim,¹⁶ D. Benjamin,¹⁵ A. Beretvas,¹⁶ J. Beringer,²⁸ T. Berry,²⁹ A. Bhatti,⁴⁸ M. Binkley,¹⁶ D. Bisello,⁴² M. Bishai,¹⁶ R. E. Blair,² C. Blocker,⁶ K. Bloom,³³ B. Blumenfeld,²⁴ A. Bocci,⁴⁸ A. Bodek,⁴⁷ V. Boisvert,⁴⁷ G. Bolla,⁴⁶ A. Bolshov,³¹ D. Bortoletto,⁴⁶ J. Boudreau,⁴⁵ S. Bourov,¹⁶ A. Boveia,¹⁰ B. Brau,¹⁰ C. Bromberg,³⁴ E. Brubaker,¹³ J. Budagov,¹⁴ H.S. Budd,⁴⁷ S. Budd,²³ K. Burkett,¹⁶ G. Busetto,⁴² P. Bussey,²⁰ K. L. Byrum,² S. Cabrera,¹⁵ M. Campanelli,¹⁹ M. Campbell,³³ F. Canelli,⁸ A. Canepa,⁴⁶ D. Carlsmith,⁵⁷ R. Carosi,⁴⁴ S. Carron,¹⁵ M. Casarsa,⁵² A. Castro,⁵ P. Catastini,⁴⁴ D. Cauz,⁵² M. Cavalli-Sforza,³ A. Cerri,²⁸ L. Cerrito,⁴¹ S.H. Chang,²⁷ J. Chapman,³³ Y.C. Chen,¹ M. Chertok,⁷ G. Chiarelli,⁴⁴ G. Chlachidze,¹⁴ F. Chlebana,¹⁶ I. Cho,²⁷ K. Cho,²⁷ D. Chokheli,¹⁴ J.P. Chou,²¹ P.H. Chu,²³ S.H. Chuang,⁵⁷ K. Chung,¹² W.H. Chung,⁵⁷ Y.S. Chung,⁴⁷ M. Ciljak,⁴⁴ C.I. Ciobanu,²³ M.A. Ciocci,⁴⁴ A. Clark,¹⁹ D. Clark,⁶ M. Coca,¹⁵ A. Connolly,²⁸ M.E. Convery,⁴⁸ J. Conway,⁷ B. Cooper,³⁰ K. Copic,³³ M. Cordelli,¹⁸ G. Cortiana,⁴² A. Cruz,¹⁷ J. Cuevas,¹¹ R. Culbertson,¹⁶ D. Cyr,⁵⁷ S. DaRonco,⁴² S. D'Auria,²⁰ M. D'onofrio,¹⁹ D. Dagenhart,⁶ P. de Barbaro,⁴⁷ S. De Cecco,⁴⁹ A. Deisher,²⁸ G. De Lentdecker,⁴⁷ M. Dell'Orso,⁴⁴ S. Demers,⁴⁷ L. Demortier,⁴⁸ J. Deng,¹⁵ M. Deninno,⁵ D. De Pedis,⁴⁹ P.F. Derwent,¹⁶ C. Dionisi,⁴⁹ J. Dittmann,⁴ P. DiTuro,⁵⁰ C. Dörr,²⁵ A. Dominguez,²⁸ S. Donati,⁴⁴ M. Donega,¹⁹ P. Dong,⁸ J. Donini,⁴² T. Dorigo,⁴² S. Dube,⁵⁰ K. Ebina,⁵⁵ J. Efron,³⁸ J. Ehlers,¹⁹ R. Erbacher,⁷ D. Errede,²³ S. Errede,²³ R. Eusebi,⁴⁷ H.C. Fang,²⁸ S. Farrington,²⁹ I. Fedorko,⁴⁴ W.T. Fedorko,¹³ R.G. Feild,⁵⁸ M. Feindt,²⁵ J.P. Fernandez,⁴⁶ R. Field,¹⁷ G. Flanagan,³⁴ L.R. Flores-Castillo,⁴⁵ A. Foland,²¹ S. Forrester,⁷ G.W. Foster,¹⁶ M. Franklin,²¹ J.C. Freeman,²⁸ Y. Fujii,²⁶ I. Furic,¹³ A. Gajjar,²⁹ M. Gallinaro,⁴⁸ J. Galyardt,¹² J.E. Garcia,⁴⁴ M. Garcia Sciveres,²⁸ A.F. Garfinkel,⁴⁶ C. Gay,⁵⁸ H. Gerberich,²³ E. Gerchtein,¹² D. Gerdes,³³ S. Giagu,⁴⁹ P. Giannetti,⁴⁴ A. Gibson,²⁸ K. Gibson,¹² C. Ginsburg,¹⁶ K. Giolo,⁴⁶ M. Giordani,⁵² M. Giunta,⁴⁴ G. Giurciu,¹² V. Glagolev,¹⁴ D. Glenzinski,¹⁶ M. Gold,³⁶ N. Goldschmidt,³³ J. Goldstein,⁴¹ G. Gomez,¹¹ G. Gomez-Ceballos,¹¹ M. Goncharov,⁵¹ O. González,⁴⁶ I. Gorelov,³⁶ A.T. Goshaw,¹⁵ Y. Gotra,⁴⁵ K. Goulianos,⁴⁸ A. Gresele,⁴² M. Griffiths,²⁹ S. Grinstein,²¹ C. Grosso-Pilcher,¹³ U. Grundler,²³ J. Guimaraes da Costa,²¹ C. Haber,²⁸ S.R. Hahn,¹⁶ K. Hahn,⁴³ E. Halkiadakis,⁴⁷ A. Hamilton,³² B.-Y. Han,⁴⁷ R. Handler,⁵⁷ F. Happacher,¹⁸ K. Hara,⁵³ M. Hare,⁵⁴ S. Harper,⁴¹ R.F. Harr,⁵⁶ R.M. Harris,¹⁶ K. Hatakeyama,⁴⁸ J. Hauser,⁸ C. Hays,¹⁵ H. Hayward,²⁹ A. Heijboer,⁴³ B. Heinemann,²⁹ J. Heinrich,⁴³ M. Hennecke,²⁵ M. Herndon,⁵⁷ J. Heuser,²⁵ D. Hidas,¹⁵ C.S. Hill,¹⁰ D. Hirschbuehl,²⁵ A. Hocker,¹⁶ A. Holloway,²¹ S. Hou,¹ M. Houlden,²⁹ S.-C. Hsu,⁹ B.T. Huffman,⁴¹ R.E. Hughes,³⁸ J. Huston,³⁴ K. Ikado,⁵⁵ J. Incandela,¹⁰ G. Introzzi,⁴⁴ M. Iori,⁴⁹ Y. Ishizawa,⁵³ A. Ivanov,⁷ B. Iyutin,³¹ E. James,¹⁶ D. Jang,⁵⁰ B. Jayatilaka,³³ D. Jeans,⁴⁹ H. Jensen,¹⁶ E.J. Jeon,²⁷ M. Jones,⁴⁶ K.K. Joo,²⁷ S.Y. Jun,¹² T.R. Junk,²³ T. Kamon,⁵¹ J. Kang,³³ M. Karagoz-Unel,³⁷ P.E. Karchin,⁵⁶ Y. Kato,⁴⁰ Y. Kemp,²⁵ R. Kephart,¹⁶ U. Kerzel,²⁵ V. Khotilovich,⁵¹ B. Kilminster,³⁸ D.H. Kim,²⁷ H.S. Kim,²⁷ J.E. Kim,²⁷ M.J. Kim,¹² M.S. Kim,²⁷ S.B. Kim,²⁷ S.H. Kim,⁵³ Y.K. Kim,¹³ M. Kirby,¹⁵ L. Kirsch,⁶ S. Klimenko,¹⁷ M. Klute,³¹ B. Knuteson,³¹ B.R. Ko,¹⁵ H. Kobayashi,⁵³ K. Kondo,⁵⁵ D.J. Kong,²⁷ J. Konigsberg,¹⁷ K. Kordas,¹⁸ A. Korytov,¹⁷ A.V. Kotwal,¹⁵ A. Kovalev,⁴³ J. Kraus,²³ I. Kravchenko,³¹ M. Kreps,²⁵ A. Kreymer,¹⁶ J. Kroll,⁴³ N. Krumnack,⁴ M. Kruse,¹⁵ V. Krutelyov,⁵¹ S. E. Kuhlmann,² Y. Kusakabe,⁵⁵ S. Kwang,¹³ A.T. Laasanen,⁴⁶ S. Lai,³² S. Lami,⁴⁴ S. Lammel,¹⁶ M. Lancaster,³⁰ R.L. Lander,⁷ K. Lannon,³⁸ A. Lath,⁵⁰ G. Latino,⁴⁴ I. Lazzizzera,⁴² C. Lecci,²⁵ T. LeCompte,² J. Lee,⁴⁷ J. Lee,²⁷ S.W. Lee,⁵¹ R. Lefèvre,³ N. Leonardo,³¹ S. Leone,⁴⁴ S. Levy,¹³ J.D. Lewis,¹⁶ K. Li,⁵⁸ C. Lin,⁵⁸ C.S. Lin,¹⁶ M. Lindgren,¹⁶ E. Lipeles,⁹ T.M. Liss,²³ A. Lister,¹⁹ D.O. Litvintsev,¹⁶ T. Liu,¹⁶ Y. Liu,¹⁹ N.S. Lockyer,⁴³ A. Loginov,³⁵ M. Loreti,⁴² P. Loverre,⁴⁹ R.-S. Lu,¹ D. Lucchesi,⁴² P. Lujan,²⁸ P. Lukens,¹⁶ G. Lungu,¹⁷ L. Lyons,⁴¹ J. Lys,²⁸ R. Lysak,¹ E. Lytken,⁴⁶ P. Mack,²⁵ D. MacQueen,³² R. Madrak,¹⁶ K. Maeshima,¹⁶ P. Maksimovic,²⁴ G. Manca,²⁹ F. Margaroli,⁵ R. Marginean,¹⁶ C. Marino,²³ A. Martin,⁵⁸ M. Martin,²⁴ V. Martin,³⁷ M. Martínez,³ T. Maruyama,⁵³ H. Matsunaga,⁵³ M.E. Mattson,⁵⁶ R. Mazini,³² P. Mazzanti,⁵ K.S. McFarland,⁴⁷ D. McGivern,³⁰ P. McIntyre,⁵¹ P. McNamara,⁵⁰ R. McNulty,²⁹ A. Mehta,²⁹ S. Menzemer,³¹ A. Menzione,⁴⁴ P. Merkel,⁴⁶ C. Mesropian,⁴⁸

A. Messina,⁴⁹ M. von der Mey,⁸ T. Miao,¹⁶ N. Miladinovic,⁶ J. Miles,³¹ R. Miller,³⁴ J.S. Miller,³³ C. Mills,¹⁰ M. Milnik,²⁵ R. Miquel,²⁸ S. Miscetti,¹⁸ G. Mitselmakher,¹⁷ A. Miyamoto,²⁶ N. Moggi,⁵ B. Mohr,⁸ R. Moore,¹⁶ M. Morello,⁴⁴ P. Movilla Fernandez,²⁸ J. Mülmenstädt,²⁸ A. Mukherjee,¹⁶ M. Mulhearn,³¹ Th. Muller,²⁵ R. Mumford,²⁴ P. Murat,¹⁶ J. Nachtman,¹⁶ S. Nahn,⁵⁸ I. Nakano,³⁹ A. Napier,⁵⁴ D. Naumov,³⁶ V. Necula,¹⁷ C. Neu,⁴³ M.S. Neubauer,⁹ J. Nielsen,²⁸ T. Nigmanov,⁴⁵ L. Nodulman,² O. Norniella,³ T. Ogawa,⁵⁵ S.H. Oh,¹⁵ Y.D. Oh,²⁷ T. Okusawa,⁴⁰ R. Oldeman,²⁹ R. Orava,²² K. Osterberg,²² C. Pagliarone,⁴⁴ E. Palencia,¹¹ R. Paoletti,⁴⁴ V. Papadimitriou,¹⁶ A. Papikononou,²⁵ A.A. Paramonov,¹³ B. Parks,³⁸ S. Pashapour,³² J. Patrick,¹⁶ G. Pauletta,⁵² M. Paulini,¹² C. Paus,³¹ D.E. Pellett,⁷ A. Penzo,⁵² T.J. Phillips,¹⁵ G. Piacentino,⁴⁴ J. Piedra,¹¹ K. Pitts,²³ C. Plager,⁸ L. Pondrom,⁵⁷ G. Pope,⁴⁵ X. Portell,³ O. Poukhov,¹⁴ N. Pounder,⁴¹ F. Prakoshyn,¹⁴ A. Pronko,¹⁶ J. Proudfoot,² F. Ptohos,¹⁸ G. Punzi,⁴⁴ J. Pursley,²⁴ J. Rademacker,⁴¹ A. Rahaman,⁴⁵ A. Rakitin,³¹ S. Rappoccio,²¹ F. Ratnikov,⁵⁰ B. Reisert,¹⁶ V. Rekovic,³⁶ N. van Remortel,²² P. Renton,⁴¹ M. Rescigno,⁴⁹ S. Richter,²⁵ F. Rimondi,⁵ K. Rinnert,²⁵ L. Ristori,⁴⁴ W.J. Robertson,¹⁵ A. Robson,²⁰ T. Rodrigo,¹¹ E. Rogers,²³ S. Rolli,⁵⁴ R. Roser,¹⁶ M. Rossi,⁵² R. Rossin,¹⁷ C. Rott,⁴⁶ A. Ruiz,¹¹ J. Russ,¹² V. Rusu,¹³ D. Ryan,⁵⁴ H. Saarikko,²² S. Sabik,³² A. Safonov,⁷ W.K. Sakumoto,⁴⁷ G. Salamanna,⁴⁹ O. Salto,³ D. Saltzberg,⁸ C. Sanchez,³ L. Santi,⁵² S. Sarkar,⁴⁹ K. Sato,⁵³ P. Savard,³² A. Savoy-Navarro,¹⁶ T. Scheidle,²⁵ P. Schlabach,¹⁶ E.E. Schmidt,¹⁶ M.P. Schmidt,⁵⁸ M. Schmitt,³⁷ T. Schwarz,³³ L. Scodellaro,¹¹ A.L. Scott,¹⁰ A. Scribano,⁴⁴ F. Scuri,⁴⁴ A. Sedov,⁴⁶ S. Seidel,³⁶ Y. Seiya,⁴⁰ A. Semenov,¹⁴ F. Semeria,⁵ L. Sexton-Kennedy,¹⁶ I. Sfiligoi,¹⁸ M.D. Shapiro,²⁸ T. Shears,²⁹ P.F. Shepard,⁴⁵ D. Sherman,²¹ M. Shimojima,⁵³ M. Shochet,¹³ Y. Shon,⁵⁷ I. Shreyber,³⁵ A. Sidoti,⁴⁴ A. Sill,¹⁶ P. Sinervo,³² A. Sisakyan,¹⁴ J. Sjolin,⁴¹ A. Skiba,²⁵ A.J. Slaughter,¹⁶ K. Sliwa,⁵⁴ D. Smirnov,³⁶ J. R. Smith,⁷ F.D. Snider,¹⁶ R. Snihur,³² M. Soderberg,³³ A. Soha,⁷ S. Somalwar,⁵⁰ V. Sorin,³⁴ J. Spalding,¹⁶ F. Spinella,⁴⁴ P. Squillacioti,⁴⁴ M. Stanitzki,⁵⁸ A. Staveris-Polykalas,⁴⁴ R. St. Denis,²⁰ B. Stelzer,⁸ O. Stelzer-Chilton,³² D. Stentz,³⁷ J. Strologas,³⁶ D. Stuart,¹⁰ J.S. Suh,²⁷ A. Sukhanov,¹⁷ K. Sumorok,³¹ H. Sun,⁵⁴ T. Suzuki,⁵³ A. Taffard,²³ R. Tafirout,³² R. Takashima,³⁹ Y. Takeuchi,⁵³ K. Takikawa,⁵³ M. Tanaka,² R. Tanaka,³⁹ M. Tecchio,³³ P.K. Teng,¹ K. Terashi,⁴⁸ S. Tether,³¹ J. Thom,¹⁶ A.S. Thompson,²⁰ E. Thomson,⁴³ P. Tipton,⁴⁷ V. Tiwari,¹² S. Tkaczyk,¹⁶ D. Toback,⁵¹ K. Tollefson,³⁴ T. Tomura,⁵³ D. Tonelli,⁴⁴ M. Tönnemann,³⁴ S. Torre,⁴⁴ D. Torretta,¹⁶ S. Tourneur,¹⁶ W. Trischuk,³² R. Tsuchiya,⁵⁵ S. Tsuno,³⁹ N. Turini,⁴⁴ F. Ukegawa,⁵³ T. Unverhau,²⁰ S. Uozumi,⁵³ D. Usynin,⁴³ L. Vacavant,²⁸ A. Vaiciulis,⁴⁷ S. Vallecorsa,¹⁹ A. Varganov,³³ E. Vataha,³⁶ G. Velev,¹⁶ G. Veramendi,²³ V. Veszpremi,⁴⁶ T. Vickey,²³ R. Vidal,¹⁶ I. Vila,¹¹ R. Vilar,¹¹ I. Vollrath,³² I. Volobouev,²⁸ F. Würthwein,⁹ P. Wagner,⁵¹ R. G. Wagner,² R.L. Wagner,¹⁶ W. Wagner,²⁵ R. Wallny,⁸ T. Walter,²⁵ Z. Wan,⁵⁰ M.J. Wang,¹ S.M. Wang,¹⁷ A. Warburton,³² B. Ward,²⁰ S. Waschke,²⁰ D. Waters,³⁰ T. Watts,⁵⁰ M. Weber,²⁸ W.C. Wester III,¹⁶ B. Whitehouse,⁵⁴ D. Whiteson,⁴³ A.B. Wicklund,² E. Wicklund,¹⁶ H.H. Williams,⁴³ P. Wilson,¹⁶ B.L. Winer,³⁸ P. Wittich,⁴³ S. Wolbers,¹⁶ C. Wolfe,¹³ S. Worm,⁵⁰ T. Wright,³³ X. Wu,¹⁹ S.M. Wynne,²⁹ A. Yagil,¹⁶ K. Yamamoto,⁴⁰ J. Yamaoka,⁵⁰ Y. Yamashita,³⁹ C. Yang,⁵⁸ U.K. Yang,¹³ W.M. Yao,²⁸ G.P. Yeh,¹⁶ J. Yoh,¹⁶ K. Yorita,¹³ T. Yoshida,⁴⁰ I. Yu,²⁷ S.S. Yu,⁴³ J.C. Yun,¹⁶ L. Zanello,⁴⁹ A. Zanetti,⁵² I. Zaw,²¹ F. Zetti,⁴⁴ X. Zhang,²³ J. Zhou,⁵⁰ and S. Zucchelli⁵

(CDF Collaboration)

¹*Institute of Physics, Academia Sinica, Taipei, Taiwan 11529, Republic of China*

²*Argonne National Laboratory, Argonne, Illinois 60439*

³*Institut de Fisica d'Altes Energies, Universitat Autònoma de Barcelona, E-08193, Bellaterra (Barcelona), Spain*

⁴*Baylor University, Waco, Texas 76798*

⁵*Istituto Nazionale di Fisica Nucleare, University of Bologna, I-40127 Bologna, Italy*

⁶*Brandeis University, Waltham, Massachusetts 02254*

⁷*University of California, Davis, Davis, California 95616*

⁸*University of California, Los Angeles, Los Angeles, California 90024*

⁹*University of California, San Diego, La Jolla, California 92093*

¹⁰*University of California, Santa Barbara, Santa Barbara, California 93106*

¹¹*Instituto de Fisica de Cantabria, CSIC-University of Cantabria, 39005 Santander, Spain*

¹²*Carnegie Mellon University, Pittsburgh, PA 15213*

¹³*Enrico Fermi Institute, University of Chicago, Chicago, Illinois 60637*

¹⁴*Joint Institute for Nuclear Research, RU-141980 Dubna, Russia*

¹⁵*Duke University, Durham, North Carolina 27708*

¹⁶*Fermi National Accelerator Laboratory, Batavia, Illinois 60510*

¹⁷*University of Florida, Gainesville, Florida 32611*

¹⁸*Laboratori Nazionali di Frascati, Istituto Nazionale di Fisica Nucleare, I-00044 Frascati, Italy*

¹⁹*University of Geneva, CH-1211 Geneva 4, Switzerland*

- ²⁰*Glasgow University, Glasgow G12 8QQ, United Kingdom*
²¹*Harvard University, Cambridge, Massachusetts 02138*
²²*Division of High Energy Physics, Department of Physics, University of Helsinki and Helsinki Institute of Physics, FIN-00014, Helsinki, Finland*
²³*University of Illinois, Urbana, Illinois 61801*
²⁴*The Johns Hopkins University, Baltimore, Maryland 21218*
²⁵*Institut für Experimentelle Kernphysik, Universität Karlsruhe, 76128 Karlsruhe, Germany*
²⁶*High Energy Accelerator Research Organization (KEK), Tsukuba, Ibaraki 305, Japan*
²⁷*Center for High Energy Physics: Kyungpook National University, Taegu 702-701; Seoul National University, Seoul 151-742; and SungKyunKwan University, Suwon 440-746; Korea*
²⁸*Ernest Orlando Lawrence Berkeley National Laboratory, Berkeley, California 94720*
²⁹*University of Liverpool, Liverpool L69 7ZE, United Kingdom*
³⁰*University College London, London WC1E 6BT, United Kingdom*
³¹*Massachusetts Institute of Technology, Cambridge, Massachusetts 02139*
³²*Institute of Particle Physics: McGill University, Montréal, Canada H3A 2T8; and University of Toronto, Toronto, Canada M5S 1A7*
³³*University of Michigan, Ann Arbor, Michigan 48109*
³⁴*Michigan State University, East Lansing, Michigan 48824*
³⁵*Institution for Theoretical and Experimental Physics, ITEP, Moscow 117259, Russia*
³⁶*University of New Mexico, Albuquerque, New Mexico 87131*
³⁷*Northwestern University, Evanston, Illinois 60208*
³⁸*The Ohio State University, Columbus, Ohio 43210*
³⁹*Okayama University, Okayama 700-8530, Japan*
⁴⁰*Osaka City University, Osaka 588, Japan*
⁴¹*University of Oxford, Oxford OX1 3RH, United Kingdom*
⁴²*University of Padova, Istituto Nazionale di Fisica Nucleare, Sezione di Padova-Trento, I-35131 Padova, Italy*
⁴³*University of Pennsylvania, Philadelphia, Pennsylvania 19104*
⁴⁴*Istituto Nazionale di Fisica Nucleare Pisa, Universities of Pisa, Siena and Scuola Normale Superiore, I-56127 Pisa, Italy*
⁴⁵*University of Pittsburgh, Pittsburgh, Pennsylvania 15260*
⁴⁶*Purdue University, West Lafayette, Indiana 47907*
⁴⁷*University of Rochester, Rochester, New York 14627*
⁴⁸*The Rockefeller University, New York, New York 10021*
⁴⁹*Istituto Nazionale di Fisica Nucleare, Sezione di Roma 1, University of Rome “La Sapienza,” I-00185 Roma, Italy*
⁵⁰*Rutgers University, Piscataway, New Jersey 08855*
⁵¹*Texas A&M University, College Station, Texas 77843*
⁵²*Istituto Nazionale di Fisica Nucleare, University of Trieste/ Udine, Italy*
⁵³*University of Tsukuba, Tsukuba, Ibaraki 305, Japan*
⁵⁴*Tufts University, Medford, Massachusetts 02155*
⁵⁵*Waseda University, Tokyo 169, Japan*
⁵⁶*Wayne State University, Detroit, Michigan 48201*
⁵⁷*University of Wisconsin, Madison, Wisconsin 53706*
⁵⁸*Yale University, New Haven, Connecticut 06520*

(Dated: August 24, 2005)

We present a search for neutral supersymmetric Higgs bosons decaying to τ pairs produced in $p\bar{p}$ collisions at $\sqrt{s} = 1.96$ TeV. The data, corresponding to 310 pb^{-1} integrated luminosity, were collected with the CDF II detector at the Tevatron collider at Fermilab. No significant excess above the standard model backgrounds is observed. We set exclusion limits on the production cross section times branching fraction to τ pairs for Higgs masses in the range from 90 to 250 GeV/ c^2 .

PACS numbers: 14.80.Cp, 13.85.Rm, 12.60.Fr, 12.60.Jv

One of the outstanding questions in particle physics is the dynamics of electroweak (EW) symmetry breaking and the origin of particle masses. In the standard model (SM), EW symmetry is spontaneously broken through the Higgs mechanism [1], which predicts the existence of a massive scalar Higgs boson h_{SM} . Theoretical difficulties related to divergent radiative corrections to the h_{SM}

mass have natural solutions in supersymmetric (SUSY) models [2].

The minimal supersymmetric extension of the standard model (MSSM) [3] is the simplest realistic SUSY theory. The Higgs sector in the MSSM consists of two charged and three neutral scalar bosons. Assuming CP -invariance, one of the neutral bosons (A) is CP -odd, and

the other two (h, H) are CP -even. Throughout this Letter, we use h (H) for the lighter (heavier) CP -even neutral Higgs boson, and ϕ to denote any of h, H, A . At tree level, the MSSM Higgs bosons are described by the mass of A (m_A), and $\tan\beta = v_u/v_d$, where v_u, v_d are the vacuum expectation values of the neutral Higgs fields that couple to up-type and down-type fermions, respectively. The Yukawa couplings of A to down-type fermions (such as the b quark and τ) are enhanced by a factor of $\tan\beta$ relative to the SM. For large $\tan\beta$ one of the CP -even bosons is nearly mass-degenerate with A and has similar couplings. The dominant production mechanisms of neutral MSSM Higgs bosons at hadron colliders are gluon fusion [4] and $b\bar{b}$ fusion [5, 6]. The leading decay modes of A and the corresponding mass-degenerate CP -even Higgs boson are $\phi \rightarrow b\bar{b}$ ($\sim 90\%$) and $\phi \rightarrow \tau\tau$ ($\sim 10\%$).

In this Letter we present the results of a search for neutral MSSM Higgs bosons produced in $p\bar{p}$ collisions at $\sqrt{s}=1.96$ TeV. The data sample was collected with the CDF II detector at the Fermilab Tevatron between 2002 and 2004 and has an integrated luminosity of 310 pb^{-1} . The search is performed in the $\phi \rightarrow \tau\tau$ decay channel for $90 < m_A < 250 \text{ GeV}/c^2$. One τ is detected in the decay to an e or μ and neutrinos, and the other in the decay to hadrons and a neutrino. In the following, we use τ_e, τ_μ , and τ_{had} as shorthand notations for the decay modes $\tau \rightarrow e\nu_e\nu_\tau$, $\tau \rightarrow \mu\nu_\mu\nu_\tau$, and $\tau \rightarrow \text{hadrons } \nu_\tau$, respectively. Previous and related searches in the di- τ channel are presented in [7, 8].

CDF II [9] is a general purpose detector with tracking and calorimetry. The tracking system consists of silicon micro-strip detectors and a cylindrical wire drift chamber. It is immersed in a 1.4 T magnetic field produced by a superconducting solenoid. Electromagnetic (EM) and hadronic (HAD) sampling calorimeters are located outside the solenoid and cover detector pseudorapidity $|\eta| < 3.6$, where $\eta = -\ln(\tan(\theta/2))$ and θ is the polar angle with respect to the proton beam. The calorimeters are divided into towers with projective geometry. A central electromagnetic shower maximum detector (CES) consisting of proportional chambers with anode wires parallel to the beam axis and orthogonal cathode strips is embedded in the EM calorimeter at a depth of six radiation lengths. The CES is used to determine the position of EM showers with spatial resolution of ~ 0.5 cm. Muons are identified by a system of drift chambers located outside the calorimeter volume with combined coverage extending to $|\eta| < 1.5$. The luminosity is measured by gas Cherenkov counters located in the detector forward and backward regions ($3.7 < |\eta| < 4.7$) with 6% precision [10].

The search for $\phi \rightarrow \tau\tau$ requires detection of an e or μ (from τ_e, τ_μ) and the reconstruction of the τ_{had} decay products. Events are pre-selected with ‘‘lepton plus track’’ triggers [11]. The triggers require a lepton (e, μ) candidate and another track, both pointing to the central calorimeter ($|\eta| \lesssim 1.0$) and having azimuthal separa-

tion $\Delta\varphi > 10^\circ$. The overall trigger efficiency for signal events passing the selection criteria described below is greater than 90%. The algorithms for e and μ identification are described in detail in [9]. The vector sum of the transverse momenta [12] of the neutrinos from τ decays appears as missing transverse energy (\cancel{E}_T), determined from the imbalance of energy deposition in the calorimeter [13]. The decay products in τ_{had} form narrow jets with low multiplicity of neutral and charged particles. The positions and energies of π^0 's and photons are reconstructed with the CES detector and EM calorimeter, respectively. In this search we do not distinguish reconstructed photons and π^0 's, and all neutrals are assumed to be π^0 's. We use a variable-size signal cone and an isolation annulus [8] to identify τ_{had} candidates. The four-momentum of τ_{had} is calculated from tracks and π^0 's contained in the signal cone. Particles in the isolation annulus are used to impose requirements that discriminate against quark and gluon jets: the scalar sum of the p_T of tracks (sum of E_T of π^0 's) in the isolation annulus is required to be less than 1 GeV/ c (1 GeV). We select τ_{had} candidates with one or three tracks in the signal cone ($N_{sig}^{trk} = 1, 3$) with $p_T > 1 \text{ GeV}/c$, consistent with the dominant τ decay modes. In the $N_{sig}^{trk} = 3$ case the sum of the electric charges must be equal to ± 1 . The invariant mass of the hadronic system is required to be less than $1.8 \text{ GeV}/c^2$. Electrons are rejected by imposing the condition $(E^{cl}/P_{sig}^{trk})(0.95-f) > 0.1$, where E^{cl} is the energy in the calorimeter cluster produced by the τ_{had} candidate, f is the ratio of electromagnetic to hadronic energy in the cluster, and P_{sig}^{trk} is the scalar sum of track momenta in the signal cone. Muons are suppressed by requiring $E_T^{cl} > 15 \text{ GeV}$. The τ_{had} identification efficiency increases from 38% at transverse momentum of the hadronic system $p_T^{had} = 15 \text{ GeV}/c$ to $\sim 46\%$ for $p_T^{had} \gtrsim 25 \text{ GeV}/c$. The probability for misidentifying a quark or gluon jet as τ_{had} is measured using jet data samples. It is $\sim 1.5\%$ for jet transverse energy $E_T^{jet} = 20 \text{ GeV}$, dropping to $\sim 0.1\%$ for $E_T^{jet} = 100 \text{ GeV}$.

The acceptances for signal and most of the backgrounds are determined from samples of Monte Carlo (MC) simulated events produced by the PYTHIA event generator [14] with CTEQ5L [15] parton distribution functions (PDF's). Tau decays are simulated by the TAUOLA package [16]. Detector response is simulated with a GEANT-based [17] model of the detector.

The dominant (and irreducible) background in the final sample of selected events is from inclusive Z/γ^* production with subsequent decays to τ pairs. It is estimated using MC simulated events with normalization corresponding to $\sigma(p\bar{p} \rightarrow Z/\gamma^*) \times BR(Z/\gamma^* \rightarrow ll) = 254.9 \text{ pb}$ in the di-lepton mass region $66 < m_{ll} < 116 \text{ GeV}/c^2$ [18]. The second largest background contribution comes from processes with quark or gluon jets misidentified as τ_{had} , such as di-jet and multi-jet, W +jets and γ +jets produc-

tion. These backgrounds are estimated from the data by applying $\text{jet} \rightarrow \tau_{had}$ misidentification rates to jets in events that pass all selection criteria except for τ_{had} identification. The validity of the predictions is verified using independent data samples representing the background processes. The third group of backgrounds includes $Z/\gamma^* \rightarrow ll$ ($l = e, \mu$), WW , WZ , ZZ , and $t\bar{t}$ production. Their contributions are determined from MC samples normalized to the theoretical cross sections.

The events in the $\tau_e\tau_{had}$ ($\tau_\mu\tau_{had}$) channel are selected by requiring one e (μ) candidate with $p_T^{e(\mu)} > 10$ GeV/ c , and one τ_{had} candidate with $p_T^{had} > 15$ GeV/ c and opposite electric charge. Low-energy multi-jet backgrounds are suppressed by rejecting events with $|p_T^{e(\mu)}| + |p_T^{had}| + |\cancel{E}_T| < 50$ GeV. Backgrounds from $W + \text{jet}$ events are suppressed by imposing a requirement on the relative directions of the visible τ decay products and \cancel{E}_T . We define a unit vector $\hat{\zeta}$ along the bisector of the angle between the directions of e (μ) and τ_{had} in the transverse plane. The projections $p_\zeta^{vis} = (\vec{p}_{e(\mu)} + \vec{p}_{had}) \cdot \hat{\zeta}$ and $p_\zeta^{\cancel{E}_T} = \vec{\cancel{E}}_T \cdot \hat{\zeta}$ are required to satisfy $p_\zeta^{\cancel{E}_T} > 0.6p_\zeta^{vis} - 10$ GeV/ c . This condition removes $\sim 85\%$ of the $W + \text{jet}$ events passing the other selection criteria, while retaining $\sim 95\%$ of the signal. To suppress backgrounds from $Z \rightarrow ll$ decays with a misidentified lepton, we do not accept events with invariant mass of an e (μ) and a single-track τ_{had} candidate within 10 GeV/ c^2 of the Z mass. The combined signal acceptance for a Higgs boson of mass 90 GeV/ c^2 (250 GeV/ c^2) in the $\tau_e\tau_{had}$ and $\tau_\mu\tau_{had}$ channels is 0.8% (2.0%).

The systematic uncertainties for particle identification efficiency are 3.5% (τ_{had}), 1.3% (e), and 4.6% (μ). The uncertainties in trigger efficiency for the $\tau_e\tau_{had}$ and $\tau_\mu\tau_{had}$ channels are 2.1% and 1.4%, respectively. The uncertainty in the determination of backgrounds due to $\text{jet} \rightarrow \tau$ misidentification is 20%, resulting in 3% effect on the total background estimate. The systematic uncertainty in signal acceptance from event-level cuts is less than 2%. The imprecise knowledge of the PDF's introduces an additional 5.7% uncertainty on signal acceptance [19].

Figure 1 shows the track multiplicity distribution for τ_{had} candidates in the data, along with the background predictions. The characteristic enhancement in the one- and three-track bins clearly shows the contribution from events with τ_{had} in the final state. The total number of expected events from SM processes after applying all selection criteria is $N_{SM} = 496 \pm 5(stat) \pm 28(sys) \pm 25(lumi)$. The contributions from $Z/\gamma^* \rightarrow \tau\tau$, backgrounds with $\text{jet} \rightarrow \tau$ misidentification, and all remaining background sources are 405, 75, and 16, respectively.

We observe 487 events, in agreement with N_{SM} . To probe for possible Higgs signal we perform binned likelihood fits of the partially reconstructed mass of the di- τ system (m_{vis}) defined as the invariant mass of the vis-

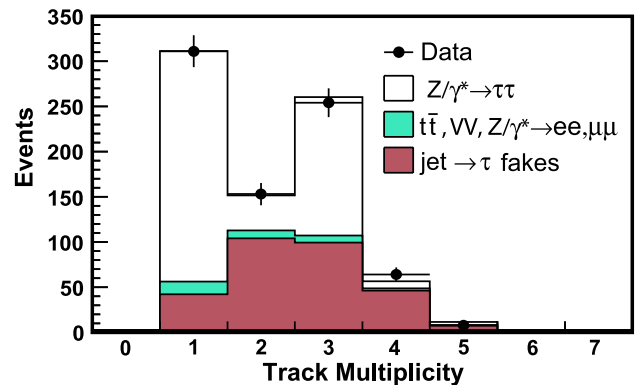


FIG. 1: Track multiplicity for hadronically decaying tau candidates before applying the opposite charge and N_{trk}^{sig} requirements.

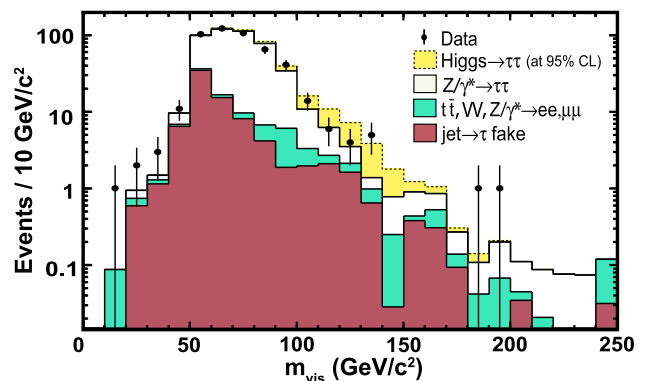


FIG. 2: Example fit of the m_{vis} distribution for signal with $m_A = 140$ GeV/ c^2 . Signal and background normalizations correspond to the fit results for signal exclusion at 95% CL.

ible tau decay products and \cancel{E}_T . The backgrounds are allowed to float within limits set by Gaussian constraints corresponding to the systematic uncertainties in trigger efficiencies, particle identification, production cross sections, PDF's, event cuts, and luminosity measurement. Potential differences in m_{vis} shapes between data and the MC simulation in different channels are treated as systematic uncertainties. We create signal and background m_{vis} templates with the MC energy scales shifted from the nominal values according to the uncertainties, and study the effect on hypothetical cross section measurements. The deviations from the results obtained with the nominal templates are parameterized in terms of Higgs mass and input cross section. An example fit for $m_A = 140$ GeV/ c^2 is shown in Figure 2. We observe no signal evidence for $m_A = 90 - 250$ GeV/ c^2 , and set exclusion limits at 95% CL on $\sigma(p\bar{p} \rightarrow \phi + X) \times BR(\phi \rightarrow \tau\tau)$ as shown in Figure 3. The sensitivity of the limit-setting procedure is determined from MC simulations assuming no signal. The m_{vis} shape uncertainty leads to 15% (5%) deterioration of the limits for the low (high) end of the considered m_A region. The observed limits

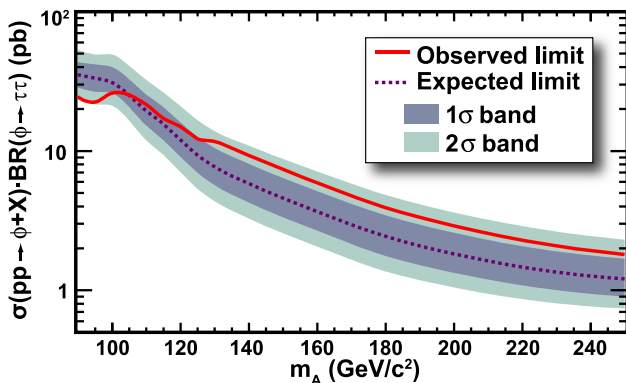


FIG. 3: Upper limits at 95% CL on Higgs production cross section times branching fraction to τ pairs. The expected limits from the pseudo-experiments are also shown.

range from 24.4 pb for $m_A = 90 \text{ GeV}/c^2$, to 9.3 pb for $m_A = 140 \text{ GeV}/c^2$, to 1.8 pb for $m_A = 250 \text{ GeV}/c^2$.

Using the theoretical predictions for the MSSM Higgs production and decay to τ pairs we interpret the limits on $\sigma(p\bar{p} \rightarrow \phi + X) \times BR(\phi \rightarrow \tau\tau)$ as exclusions of parameter regions in the $\tan\beta$ vs m_A plane. The cross sections are obtained from SM calculations and scaling factors $\sigma_{MSSM}/\sigma_{SM}$ accounting for the modified Higgs couplings [20]. The cross sections for gluon fusion mediated by a b -quark loop are calculated with the HIGLU program [21]. The corresponding values for $b\bar{b} \rightarrow \phi + X$ are taken from [6]. The scaling factors and $BR(\phi \rightarrow \tau\tau)$ are calculated with the FeynHiggs program [22]. They depend on m_A , $\tan\beta$, the $SU(2)$ gaugino mass parameter M_2 , the SUSY mass scale M_{SUSY} , the squark mixing parameter X_t , the gluino mass $m_{\tilde{g}}$, and the Higgs mixing parameter μ . We consider four benchmarks [23]: the m_h^{max} and no-mixing scenarios, with $\mu > 0$ and $\mu < 0$. The excluded $\tan\beta$ vs m_A regions are shown in Figure 4.

The LEP experiments have excluded $m_A \lesssim 93 \text{ GeV}/c^2$, and higher-mass A for small $\tan\beta$ [24]. Our search is complementary, providing sensitivity in the large $\tan\beta$ region. The excluded parameter space in the $\tan\beta$ vs m_A plane for $\mu < 0$ is similar to the $D\bar{O}$ results obtained in the $\phi \rightarrow b\bar{b}$ decay mode [25], and extends to higher m_A . Moreover, our results in the $\phi \rightarrow \tau\tau$ channel allow us to set comparable exclusions for scenarios with $\mu > 0$, as the lower production cross sections are compensated by an increase in $BR(\phi \rightarrow \tau\tau)$.

We thank A. Belyaev, M. Carena, J. Gunion, S. Heinemeyer, W. Kilgore, S. Mrenna, M. Spira, C. Wagner, G. Weiglein, and S. Willenbrock for illuminating discussions on the theory of MSSM Higgs production and decays.

We thank the Fermilab staff and the technical staffs of the participating institutions for their vital contributions. This work was supported by the U.S. Department of Energy and National Science Foundation; the Italian

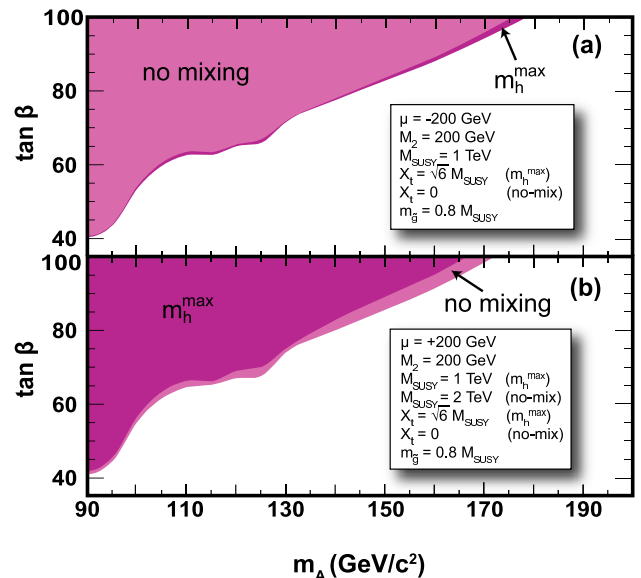


FIG. 4: Excluded regions in the $\tan\beta$ vs m_A plane for the m_h^{max} and no-mixing scenarios with (a) $\mu < 0$ and (b) $\mu > 0$.

Istituto Nazionale di Fisica Nucleare; the Ministry of Education, Culture, Sports, Science and Technology of Japan; the Natural Sciences and Engineering Research Council of Canada; the National Science Council of the Republic of China; the Swiss National Science Foundation; the A.P. Sloan Foundation; the Bundesministerium für Bildung und Forschung, Germany; the Korean Science and Engineering Foundation and the Korean Research Foundation; the Particle Physics and Astronomy Research Council and the Royal Society, UK; the Russian Foundation for Basic Research; the Comisión Interministerial de Ciencia y Tecnología, Spain; in part by the European Community's Human Potential Programme under contract HPRN-CT-2002-00292; and the Academy of Finland.

-
- [1] P.W. Higgs, Phys. Lett. **12**, 132 (1964); Phys. Rev. Lett. **13** 508 (1964); Phys. Rev. **145**, 1156 (1966).
 - [2] S.P. Martin, hep-ph/9709356 (1997), and references therein.
 - [3] D.J.H. Chung *et al.*, Phys.Rept. **407**, 1 (2005), and references therein.
 - [4] S. Dawson, A. Djouadi, and M. Spira, Phys. Rev. Lett. **77**, 16 (1996).
 - [5] F. Maltoni, Z.Sullivan, and S. Willenbrock, Phys. Rev. D **67**, 093005 (2003).
 - [6] R.V. Harlander and W.B. Kilgore, Phys. Rev. D **68**, 013001 (2003).
 - [7] D. Acosta *et al.* (CDF Collaboration), hep-ex/0506042 (2005).
 - [8] D. Acosta *et al.* (CDF Collaboration), Phys. Rev. Lett. (to be published); hep-ex/0506034 (2005).

- [9] D. Acosta *et al.* (CDF Collaboration), Phys. Rev. D **71**, 032001 (2005).
- [10] S. Klimenko, J. Konigsberg, and T.M. Liss, FERMILAB-FN-0741 (2003).
- [11] A. Anastassov *et al.*, Nucl. Instrum. Methods A **518**, 609 (2004).
- [12] We define transverse momentum (p_T) and transverse energy (E_T) as $p_T = p \sin \theta$ and $E_T = E \sin \theta$.
- [13] D. Acosta *et al.* (CDF Collaboration), hep-ex/0504053 (2005).
- [14] T. Sjöstrand *et al.*, Comput. Phys. Commun. **135**, 238 (2001). We use PYTHIA v. 6.215.
- [15] H.L. Lai *et al.* (CTEQ Collaboration), Eur. Phys. J. C **12**, 375 (2000).
- [16] Z. Was *et al.*, Nucl. Phys. Proc. Suppl. **98**, 96 (2001).
- [17] R. Brun and F. Carminati, CERN Programming Library Long Writeup **W5013** (1993).
- [18] D. Acosta *et al.* (CDF Collaboration), Phys. Rev. Lett. **94**, 091803 (2005).
- [19] We compare the acceptances obtained with the CTEQ5 and CTEQ6 PDF sets. In the latter case we also include the effect of the eigen-vector variations.
- [20] M. Carena, S. Heinemeyer, G. Weiglein, and C.E.M. Wagner, FERMILAB-PUB-05-370-T (2005).
- [21] M. Spira, Nucl. Instrum. Methods A **389**, 357 (1997).
- [22] S. Heinemeyer, W. Hollik, and G. Weiglein, Eur. Phys. J. C **9**, 343 (1999); Comput. Phys. Commun. **124**, 76 (2000).
- [23] M. Carena, S. Heinemeyer, C.E.M. Wagner, and G. Weiglein, hep-ph/9912223 (1999); Eur. Phys. J. C **26**, 601 (2003).
- [24] ALEPH, DELPHI, L3, and OPAL Collaborations, LHWG-Note 2004-01 (2004).
- [25] V. Abazov *et al.* (DØ Collaboration), hep-ex/0504018 (2005).