

## Measurement of the $WW$ production cross section with dilepton final states in $p\bar{p}$ collisions at $\sqrt{s} = 1.96$ TeV and limits on anomalous trilinear gauge couplings

V.M. Abazov<sup>37</sup>, B. Abbott<sup>75</sup>, M. Abolins<sup>65</sup>, B.S. Acharya<sup>30</sup>, M. Adams<sup>51</sup>, T. Adams<sup>49</sup>, E. Aguilo<sup>6</sup>, M. Ahsan<sup>59</sup>, G.D. Alexeev<sup>37</sup>, G. Alkhalaf<sup>41</sup>, A. Alton<sup>64,a</sup>, G. Alverson<sup>63</sup>, G.A. Alves<sup>2</sup>, L.S. Ancu<sup>36</sup>, T. Andeen<sup>53</sup>, M.S. Anzelc<sup>53</sup>, M. Aoki<sup>50</sup>, Y. Arnoud<sup>14</sup>, M. Arov<sup>60</sup>, M. Arthaud<sup>18</sup>, A. Askew<sup>49,b</sup>, B. Åsman<sup>42</sup>, O. Atramentov<sup>49,b</sup>, C. Avila<sup>8</sup>, J. BackusMayes<sup>82</sup>, F. Badaud<sup>13</sup>, L. Bagby<sup>50</sup>, B. Baldin<sup>50</sup>, D.V. Bandurin<sup>59</sup>, S. Banerjee<sup>30</sup>, E. Barberis<sup>63</sup>, A.-F. Barfuss<sup>15</sup>, P. Bargassa<sup>80</sup>, P. Baringer<sup>58</sup>, J. Barreto<sup>2</sup>, J.F. Bartlett<sup>50</sup>, U. Bassler<sup>18</sup>, D. Bauer<sup>44</sup>, S. Beale<sup>6</sup>, A. Bean<sup>58</sup>, M. Begalli<sup>3</sup>, M. Biegel<sup>73</sup>, C. Belanger-Champagne<sup>42</sup>, L. Bellantoni<sup>50</sup>, A. Bellavance<sup>50</sup>, J.A. Benitez<sup>65</sup>, S.B. Beri<sup>28</sup>, G. Bernardi<sup>17</sup>, R. Bernhard<sup>23</sup>, I. Bertram<sup>43</sup>, M. Besançon<sup>18</sup>, R. Beuselinck<sup>44</sup>, V.A. Bezzubov<sup>40</sup>, P.C. Bhat<sup>50</sup>, V. Bhatnagar<sup>28</sup>, G. Blazey<sup>52</sup>, S. Blessing<sup>49</sup>, K. Bloom<sup>67</sup>, A. Boehnlein<sup>50</sup>, D. Boline<sup>62</sup>, T.A. Bolton<sup>59</sup>, E.E. Boos<sup>39</sup>, G. Borissov<sup>43</sup>, T. Bose<sup>62</sup>, A. Brandt<sup>78</sup>, R. Brock<sup>65</sup>, G. Brooijmans<sup>70</sup>, A. Bross<sup>50</sup>, D. Brown<sup>19</sup>, X.B. Bu<sup>7</sup>, D. Buchholz<sup>53</sup>, M. Buehler<sup>81</sup>, V. Buescher<sup>22</sup>, V. Bunichev<sup>39</sup>, S. Burdin<sup>43,c</sup>, T.H. Burnett<sup>82</sup>, C.P. Buszello<sup>44</sup>, P. Calfayan<sup>26</sup>, B. Calpas<sup>15</sup>, S. Calvet<sup>16</sup>, J. Cammin<sup>71</sup>, M.A. Carrasco-Lizarraga<sup>34</sup>, E. Carrera<sup>49</sup>, W. Carvalho<sup>3</sup>, B.C.K. Casey<sup>50</sup>, H. Castilla-Valdez<sup>34</sup>, S. Chakrabarti<sup>72</sup>, D. Chakraborty<sup>52</sup>, K.M. Chan<sup>55</sup>, A. Chandra<sup>48</sup>, E. Cheu<sup>46</sup>, D.K. Cho<sup>62</sup>, S. Choi<sup>33</sup>, B. Choudhary<sup>29</sup>, T. Christoudias<sup>44</sup>, S. Cihangir<sup>50</sup>, D. Claes<sup>67</sup>, J. Clutter<sup>58</sup>, M. Cooke<sup>50</sup>, W.E. Cooper<sup>50</sup>, M. Corcoran<sup>80</sup>, F. Couderc<sup>18</sup>, M.-C. Cousinou<sup>15</sup>, S. Crépe-Renaudin<sup>14</sup>, V. Cuplov<sup>59</sup>, D. Cutts<sup>77</sup>, M. Źwiok<sup>31</sup>, A. Das<sup>46</sup>, G. Davies<sup>44</sup>, K. De<sup>78</sup>, S.J. de Jong<sup>36</sup>, E. De La Cruz-Burelo<sup>34</sup>, K. DeVaughan<sup>67</sup>, F. Déliot<sup>18</sup>, M. Demarteau<sup>50</sup>, R. Demina<sup>71</sup>, D. Denisov<sup>50</sup>, S.P. Denisov<sup>40</sup>, S. Desai<sup>50</sup>, H.T. Diehl<sup>50</sup>, M. Diesburg<sup>50</sup>, A. Dominguez<sup>67</sup>, T. Dorland<sup>82</sup>, A. Dubey<sup>29</sup>, L.V. Dudko<sup>39</sup>, L. Duflot<sup>16</sup>, D. Duggan<sup>49</sup>, A. Duperrin<sup>15</sup>, S. Dutt<sup>28</sup>, A. Dyshkant<sup>52</sup>, M. Eads<sup>67</sup>, D. Edmunds<sup>65</sup>, J. Ellison<sup>48</sup>, V.D. Elvira<sup>50</sup>, Y. Enari<sup>77</sup>, S. Eno<sup>61</sup>, P. Ermolov<sup>39,‡</sup>, M. Escalier<sup>15</sup>, H. Evans<sup>54</sup>, A. Evdokimov<sup>73</sup>, V.N. Evdokimov<sup>40</sup>, G. Facini<sup>63</sup>, A.V. Ferapontov<sup>59</sup>, T. Ferbel<sup>61,71</sup>, F. Fiedler<sup>25</sup>, F. Filthaut<sup>36</sup>, W. Fisher<sup>50</sup>, H.E. Fisk<sup>50</sup>, M. Fortner<sup>52</sup>, H. Fox<sup>43</sup>, S. Fu<sup>50</sup>, S. Fuess<sup>50</sup>, T. Gadfort<sup>70</sup>, C.F. Galea<sup>36</sup>, A. Garcia-Bellido<sup>71</sup>, V. Gavrilov<sup>38</sup>, P. Gay<sup>13</sup>, W. Geist<sup>19</sup>, W. Geng<sup>15,65</sup>, C.E. Gerber<sup>51</sup>, Y. Gershtein<sup>49,b</sup>, D. Gillberg<sup>6</sup>, G. Ginther<sup>50,71</sup>, B. Gómez<sup>8</sup>, A. Goussiou<sup>82</sup>, P.D. Grannis<sup>72</sup>, S. Greder<sup>19</sup>, H. Greenlee<sup>50</sup>, Z.D. Greenwood<sup>60</sup>, E.M. Gregores<sup>4</sup>, G. Grenier<sup>20</sup>, Ph. Gris<sup>13</sup>, J.-F. Grivaz<sup>16</sup>, A. Grohsjean<sup>26</sup>, S. Grünendahl<sup>50</sup>, M.W. Grünewald<sup>31</sup>, F. Guo<sup>72</sup>, J. Guo<sup>72</sup>, G. Gutierrez<sup>50</sup>, P. Gutierrez<sup>75</sup>, A. Haas<sup>70</sup>, N.J. Hadley<sup>61</sup>, P. Haefner<sup>26</sup>, S. Hagopian<sup>49</sup>, J. Haley<sup>68</sup>, I. Hall<sup>65</sup>, R.E. Hall<sup>47</sup>, L. Han<sup>7</sup>, K. Harder<sup>45</sup>, A. Harel<sup>71</sup>, J.M. Hauptman<sup>57</sup>, J. Hays<sup>44</sup>, T. Hebbeker<sup>21</sup>, D. Hedin<sup>52</sup>, J.G. Hegeman<sup>35</sup>, A.P. Heinson<sup>48</sup>, U. Heintz<sup>62</sup>, C. Hensel<sup>24</sup>, I. Heredia-De La Cruz<sup>34</sup>, K. Herner<sup>64</sup>, G. Hesketh<sup>63</sup>, M.D. Hildreth<sup>55</sup>, R. Hirosky<sup>81</sup>, T. Hoang<sup>49</sup>, J.D. Hobbs<sup>72</sup>, B. Hoeneisen<sup>12</sup>, M. Hohlfeld<sup>22</sup>, S. Hossain<sup>75</sup>, P. Houben<sup>35</sup>, Y. Hu<sup>72</sup>, Z. Hubacek<sup>10</sup>, N. Huske<sup>17</sup>, V. Hynek<sup>10</sup>, I. Iashvili<sup>69</sup>, R. Illingworth<sup>50</sup>, A.S. Ito<sup>50</sup>, S. Jabeen<sup>62</sup>, M. Jaffré<sup>16</sup>, S. Jain<sup>75</sup>, K. Jakobs<sup>23</sup>, D. Jamin<sup>15</sup>, C. Jarvis<sup>61</sup>, R. Jesik<sup>44</sup>, K. Johns<sup>46</sup>, C. Johnson<sup>70</sup>, M. Johnson<sup>50</sup>, D. Johnston<sup>67</sup>, A. Jonckheere<sup>50</sup>, P. Jonsson<sup>44</sup>, A. Juste<sup>50</sup>, E. Kajfasz<sup>15</sup>, D. Karmanov<sup>39</sup>, P.A. Kasper<sup>50</sup>, I. Katsanos<sup>67</sup>, V. Kaushik<sup>78</sup>, R. Kehoe<sup>79</sup>, S. Kermiche<sup>15</sup>, N. Khalatyan<sup>50</sup>, A. Khanov<sup>76</sup>, A. Kharchilava<sup>69</sup>, Y.N. Kharzhev<sup>37</sup>, D. Khatidze<sup>70</sup>, T.J. Kim<sup>32</sup>, M.H. Kirby<sup>53</sup>, M. Kirsch<sup>21</sup>, B. Klima<sup>50</sup>, J.M. Kohli<sup>28</sup>, J.-P. Konrath<sup>23</sup>, A.V. Kozelov<sup>40</sup>, J. Kraus<sup>65</sup>, T. Kuhl<sup>25</sup>, A. Kumar<sup>69</sup>, A. Kupco<sup>11</sup>, T. Kurča<sup>20</sup>, V.A. Kuzmin<sup>39</sup>, J. Kvita<sup>9</sup>, F. Lacroix<sup>13</sup>, D. Lam<sup>55</sup>, S. Lammers<sup>54</sup>, G. Landsberg<sup>77</sup>, P. Lebrun<sup>20</sup>, W.M. Lee<sup>50</sup>, A. Leflat<sup>39</sup>, J. Lellouch<sup>17</sup>, J. Li<sup>78,‡</sup>, L. Li<sup>48</sup>, Q.Z. Li<sup>50</sup>, S.M. Lietti<sup>5</sup>, J.K. Lim<sup>32</sup>, D. Lincoln<sup>50</sup>, J. Linnemann<sup>65</sup>, V.V. Lipaev<sup>40</sup>, R. Lipton<sup>50</sup>, Y. Liu<sup>7</sup>, Z. Liu<sup>6</sup>, A. Lobodenko<sup>41</sup>, M. Lokačicek<sup>11</sup>, P. Love<sup>43</sup>, H.J. Lubatti<sup>82</sup>, R. Luna-Garcia<sup>34,d</sup>, A.L. Lyon<sup>50</sup>, A.K.A. Maciel<sup>2</sup>, D. Mackin<sup>80</sup>, P. Mättig<sup>27</sup>, A. Magerkurth<sup>64</sup>, P.K. Mal<sup>82</sup>, H.B. Malbouisson<sup>3</sup>, S. Malik<sup>67</sup>, V.L. Malyshev<sup>37</sup>, Y. Maravin<sup>59</sup>, B. Martin<sup>14</sup>, R. McCarthy<sup>72</sup>, C.L. McGivern<sup>58</sup>, M.M. Meijer<sup>36</sup>, A. Melnitchouk<sup>66</sup>, L. Mendoza<sup>8</sup>, D. Menezes<sup>52</sup>, P.G. Mercadante<sup>5</sup>, M. Merkin<sup>39</sup>, K.W. Merritt<sup>50</sup>, A. Meyer<sup>21</sup>, J. Meyer<sup>24</sup>, J. Mitrevski<sup>70</sup>, R.K. Mommsen<sup>45</sup>, N.K. Mondal<sup>30</sup>, R.W. Moore<sup>6</sup>, T. Moulik<sup>58</sup>, G.S. Muanza<sup>15</sup>, M. Mulhearn<sup>70</sup>, O. Mundal<sup>22</sup>, L. Mundim<sup>3</sup>, E. Nagy<sup>15</sup>, M. Naimuddin<sup>50</sup>, M. Narain<sup>77</sup>, H.A. Neal<sup>64</sup>, J.P. Negret<sup>8</sup>, P. Neustroev<sup>41</sup>, H. Nilsen<sup>23</sup>, H. Nogima<sup>3</sup>, S.F. Novaes<sup>5</sup>, T. Nunnemann<sup>26</sup>, G. Obrant<sup>41</sup>, C. Ochando<sup>16</sup>, D. Onoprienko<sup>59</sup>, J. Orduna<sup>34</sup>, N. Oshima<sup>50</sup>, N. Osman<sup>44</sup>, J. Osta<sup>55</sup>, R. Otec<sup>10</sup>, G.J. Otero y Garzón<sup>1</sup>, M. Owen<sup>45</sup>, M. Padilla<sup>48</sup>, P. Padley<sup>80</sup>, M. Pangilinan<sup>77</sup>, N. Parashar<sup>56</sup>, S.-J. Park<sup>24</sup>, S.K. Park<sup>32</sup>, J. Parsons<sup>70</sup>, R. Partridge<sup>77</sup>, N. Parua<sup>54</sup>, A. Patwa<sup>73</sup>, G. Pawloski<sup>80</sup>, B. Penning<sup>23</sup>, M. Perfilov<sup>39</sup>, K. Peters<sup>45</sup>, Y. Peters<sup>45</sup>, P. Pétrouff<sup>16</sup>, R. Piegai<sup>1</sup>, J. Piper<sup>65</sup>, M.-A. Pleier<sup>22</sup>, P.L.M. Podesta-Lerma<sup>34,e</sup>, V.M. Podstavkov<sup>50</sup>, Y. Pogorelov<sup>55</sup>, M.-E. Pol<sup>2</sup>, P. Polozov<sup>38</sup>, A.V. Popov<sup>40</sup>,

C. Potter<sup>6</sup>, W.L. Prado da Silva<sup>3</sup>, S. Protopopescu<sup>73</sup>, J. Qian<sup>64</sup>, A. Quadt<sup>24</sup>, B. Quinn<sup>66</sup>, A. Rakitine<sup>43</sup>, M.S. Rangel<sup>16</sup>, K. Ranjan<sup>29</sup>, P.N. Ratoff<sup>43</sup>, P. Renkel<sup>79</sup>, P. Rich<sup>45</sup>, M. Rijssenbeek<sup>72</sup>, I. Ripp-Baudot<sup>19</sup>, F. Rizatdinova<sup>76</sup>, S. Robinson<sup>44</sup>, R.F. Rodrigues<sup>3</sup>, M. Rominsky<sup>75</sup>, C. Royon<sup>18</sup>, P. Rubinov<sup>50</sup>, R. Ruchti<sup>55</sup>, G. Safronov<sup>38</sup>, G. Sajot<sup>14</sup>, A. Sánchez-Hernández<sup>34</sup>, M.P. Sanders<sup>17</sup>, B. Sanghi<sup>50</sup>, G. Savage<sup>50</sup>, L. Sawyer<sup>60</sup>, T. Scanlon<sup>44</sup>, D. Schaile<sup>26</sup>, R.D. Schamberger<sup>72</sup>, Y. Scheglov<sup>41</sup>, H. Schellman<sup>53</sup>, T. Schliephake<sup>27</sup>, S. Schlobohm<sup>82</sup>, C. Schwanenberger<sup>45</sup>, R. Schwienhorst<sup>65</sup>, J. Sekaric<sup>49</sup>, H. Severini<sup>75</sup>, E. Shabalina<sup>24</sup>, M. Shamim<sup>59</sup>, V. Shary<sup>18</sup>, A.A. Shchukin<sup>40</sup>, R.K. Shivpuri<sup>29</sup>, V. Siccaldi<sup>19</sup>, V. Simak<sup>10</sup>, V. Sirotenko<sup>50</sup>, P. Skubic<sup>75</sup>, P. Slattey<sup>71</sup>, D. Smirnov<sup>55</sup>, G.R. Snow<sup>67</sup>, J. Snow<sup>74</sup>, S. Snyder<sup>73</sup>, S. Söldner-Rembold<sup>45</sup>, L. Sonnenschein<sup>21</sup>, A. Sopczak<sup>43</sup>, M. Sosebee<sup>78</sup>, K. Soustruznik<sup>9</sup>, B. Spurlock<sup>78</sup>, J. Stark<sup>14</sup>, V. Stolin<sup>38</sup>, D.A. Stoyanova<sup>40</sup>, J. Strandberg<sup>64</sup>, S. Strandberg<sup>42</sup>, M.A. Strang<sup>69</sup>, E. Strauss<sup>72</sup>, M. Strauss<sup>75</sup>, R. Ströhmer<sup>26</sup>, D. Strom<sup>53</sup>, L. Stutte<sup>50</sup>, S. Sumowidagdo<sup>49</sup>, P. Svoisky<sup>36</sup>, M. Takahashi<sup>45</sup>, A. Tanasijczuk<sup>1</sup>, W. Taylor<sup>6</sup>, B. Tiller<sup>26</sup>, F. Tissandier<sup>13</sup>, M. Titov<sup>18</sup>, V.V. Tokmenin<sup>37</sup>, I. Torchiani<sup>23</sup>, D. Tsybychev<sup>72</sup>, B. Tuchming<sup>18</sup>, C. Tully<sup>68</sup>, P.M. Tuts<sup>70</sup>, R. Unalan<sup>65</sup>, L. Uvarov<sup>41</sup>, S. Uvarov<sup>41</sup>, S. Uzunyan<sup>52</sup>, B. Vachon<sup>6</sup>, P.J. van den Berg<sup>35</sup>, R. Van Kooten<sup>54</sup>, W.M. van Leeuwen<sup>35</sup>, N. Varelas<sup>51</sup>, E.W. Varnes<sup>46</sup>, I.A. Vasilyev<sup>40</sup>, P. Verdier<sup>20</sup>, L.S. Vertogradov<sup>37</sup>, M. Verzocchi<sup>50</sup>, D. Vilanova<sup>18</sup>, P. Vint<sup>44</sup>, P. Vokac<sup>10</sup>, M. Voutilainen<sup>67,f</sup>, R. Wagner<sup>68</sup>, H.D. Wahl<sup>49</sup>, M.H.L.S. Wang<sup>71</sup>, J. Warchol<sup>55</sup>, G. Watts<sup>82</sup>, M. Wayne<sup>55</sup>, G. Weber<sup>25</sup>, M. Weber<sup>50,g</sup>, L. Welty-Rieger<sup>54</sup>, A. Wenger<sup>23,h</sup>, M. Wetstein<sup>61</sup>, A. White<sup>78</sup>, D. Wicke<sup>25</sup>, M.R.J. Williams<sup>43</sup>, G.W. Wilson<sup>58</sup>, S.J. Wimpenny<sup>48</sup>, M. Wobisch<sup>60</sup>, D.R. Wood<sup>63</sup>, T.R. Wyatt<sup>45</sup>, Y. Xie<sup>77</sup>, C. Xu<sup>64</sup>, S. Yacoub<sup>53</sup>, R. Yamada<sup>50</sup>, W.-C. Yang<sup>45</sup>, T. Yasuda<sup>50</sup>, Y.A. Yatsunenko<sup>37</sup>, Z. Ye<sup>50</sup>, H. Yin<sup>7</sup>, K. Yip<sup>73</sup>, H.D. Yoo<sup>77</sup>, S.W. Youn<sup>53</sup>, J. Yu<sup>78</sup>, C. Zeitnitz<sup>27</sup>, S. Zelitch<sup>81</sup>, T. Zhao<sup>82</sup>, B. Zhou<sup>64</sup>, J. Zhu<sup>72</sup>, M. Zielinski<sup>71</sup>, D. Zieminska<sup>54</sup>, L. Zivkovic<sup>70</sup>, V. Zutshi<sup>52</sup>, and E.G. Zverev<sup>39</sup>

(The DØ Collaboration)

<sup>1</sup>Universidad de Buenos Aires, Buenos Aires, Argentina

<sup>2</sup>LAFEX, Centro Brasileiro de Pesquisas Físicas, Rio de Janeiro, Brazil

<sup>3</sup>Universidade do Estado do Rio de Janeiro, Rio de Janeiro, Brazil

<sup>4</sup>Universidade Federal do ABC, Santo André, Brazil

<sup>5</sup>Instituto de Física Teórica, Universidade Estadual Paulista, São Paulo, Brazil

<sup>6</sup>University of Alberta, Edmonton, Alberta, Canada; Simon Fraser University, Burnaby, British Columbia, Canada; York University, Toronto, Ontario, Canada and McGill University, Montreal, Quebec, Canada

<sup>7</sup>University of Science and Technology of China, Hefei, People's Republic of China

<sup>8</sup>Universidad de los Andes, Bogotá, Colombia

<sup>9</sup>Center for Particle Physics, Charles University,

Faculty of Mathematics and Physics, Prague, Czech Republic

<sup>10</sup>Czech Technical University in Prague, Prague, Czech Republic

<sup>11</sup>Center for Particle Physics, Institute of Physics, Academy of Sciences of the Czech Republic, Prague, Czech Republic

<sup>12</sup>Universidad San Francisco de Quito, Quito, Ecuador

<sup>13</sup>LPC, Université Blaise Pascal, CNRS/IN2P3, Clermont, France

<sup>14</sup>LPSC, Université Joseph Fourier Grenoble 1, CNRS/IN2P3,

Institut National Polytechnique de Grenoble, Grenoble, France

<sup>15</sup>CPPM, Aix-Marseille Université, CNRS/IN2P3, Marseille, France

<sup>16</sup>LAL, Université Paris-Sud, IN2P3/CNRS, Orsay, France

<sup>17</sup>LPNHE, IN2P3/CNRS, Universités Paris VI and VII, Paris, France

<sup>18</sup>CEA, Irfu, SPP, Saclay, France

<sup>19</sup>IPHC, Université de Strasbourg, CNRS/IN2P3, Strasbourg, France

<sup>20</sup>IPNL, Université Lyon 1, CNRS/IN2P3, Villeurbanne, France and Université de Lyon, Lyon, France

<sup>21</sup>III. Physikalisches Institut A, RWTH Aachen University, Aachen, Germany

<sup>22</sup>Physikalisches Institut, Universität Bonn, Bonn, Germany

<sup>23</sup>Physikalisches Institut, Universität Freiburg, Freiburg, Germany

<sup>24</sup>II. Physikalisches Institut, Georg-August-Universität Göttingen, Germany

<sup>25</sup>Institut für Physik, Universität Mainz, Mainz, Germany

<sup>26</sup>Ludwig-Maximilians-Universität München, München, Germany

<sup>27</sup>Fachbereich Physik, University of Wuppertal, Wuppertal, Germany

<sup>28</sup>Panjab University, Chandigarh, India

<sup>29</sup>Delhi University, Delhi, India

<sup>30</sup>Tata Institute of Fundamental Research, Mumbai, India

<sup>31</sup>University College Dublin, Dublin, Ireland

<sup>32</sup>Korea Detector Laboratory, Korea University, Seoul, Korea

- <sup>33</sup>*SungKyunKwan University, Suwon, Korea*  
<sup>34</sup>*CINVESTAV, Mexico City, Mexico*  
<sup>35</sup>*FOM-Institute NIKHEF and University of Amsterdam/NIKHEF, Amsterdam, The Netherlands*  
<sup>36</sup>*Radboud University Nijmegen/NIKHEF, Nijmegen, The Netherlands*  
<sup>37</sup>*Joint Institute for Nuclear Research, Dubna, Russia*  
<sup>38</sup>*Institute for Theoretical and Experimental Physics, Moscow, Russia*  
<sup>39</sup>*Moscow State University, Moscow, Russia*  
<sup>40</sup>*Institute for High Energy Physics, Protvino, Russia*  
<sup>41</sup>*Petersburg Nuclear Physics Institute, St. Petersburg, Russia*  
<sup>42</sup>*Stockholm University, Stockholm, Sweden, and Uppsala University, Uppsala, Sweden*  
<sup>43</sup>*Lancaster University, Lancaster, United Kingdom*  
<sup>44</sup>*Imperial College, London, United Kingdom*  
<sup>45</sup>*University of Manchester, Manchester, United Kingdom*  
<sup>46</sup>*University of Arizona, Tucson, Arizona 85721, USA*  
<sup>47</sup>*California State University, Fresno, California 93740, USA*  
<sup>48</sup>*University of California, Riverside, California 92521, USA*  
<sup>49</sup>*Florida State University, Tallahassee, Florida 32306, USA*  
<sup>50</sup>*Fermi National Accelerator Laboratory, Batavia, Illinois 60510, USA*  
<sup>51</sup>*University of Illinois at Chicago, Chicago, Illinois 60607, USA*  
<sup>52</sup>*Northern Illinois University, DeKalb, Illinois 60115, USA*  
<sup>53</sup>*Northwestern University, Evanston, Illinois 60208, USA*  
<sup>54</sup>*Indiana University, Bloomington, Indiana 47405, USA*  
<sup>55</sup>*University of Notre Dame, Notre Dame, Indiana 46556, USA*  
<sup>56</sup>*Purdue University Calumet, Hammond, Indiana 46323, USA*  
<sup>57</sup>*Iowa State University, Ames, Iowa 50011, USA*  
<sup>58</sup>*University of Kansas, Lawrence, Kansas 66045, USA*  
<sup>59</sup>*Kansas State University, Manhattan, Kansas 66506, USA*  
<sup>60</sup>*Louisiana Tech University, Ruston, Louisiana 71272, USA*  
<sup>61</sup>*University of Maryland, College Park, Maryland 20742, USA*  
<sup>62</sup>*Boston University, Boston, Massachusetts 02215, USA*  
<sup>63</sup>*Northeastern University, Boston, Massachusetts 02115, USA*  
<sup>64</sup>*University of Michigan, Ann Arbor, Michigan 48109, USA*  
<sup>65</sup>*Michigan State University, East Lansing, Michigan 48824, USA*  
<sup>66</sup>*University of Mississippi, University, Mississippi 38677, USA*  
<sup>67</sup>*University of Nebraska, Lincoln, Nebraska 68588, USA*  
<sup>68</sup>*Princeton University, Princeton, New Jersey 08544, USA*  
<sup>69</sup>*State University of New York, Buffalo, New York 14260, USA*  
<sup>70</sup>*Columbia University, New York, New York 10027, USA*  
<sup>71</sup>*University of Rochester, Rochester, New York 14627, USA*  
<sup>72</sup>*State University of New York, Stony Brook, New York 11794, USA*  
<sup>73</sup>*Brookhaven National Laboratory, Upton, New York 11973, USA*  
<sup>74</sup>*Langston University, Langston, Oklahoma 73050, USA*  
<sup>75</sup>*University of Oklahoma, Norman, Oklahoma 73019, USA*  
<sup>76</sup>*Oklahoma State University, Stillwater, Oklahoma 74078, USA*  
<sup>77</sup>*Brown University, Providence, Rhode Island 02912, USA*  
<sup>78</sup>*University of Texas, Arlington, Texas 76019, USA*  
<sup>79</sup>*Southern Methodist University, Dallas, Texas 75275, USA*  
<sup>80</sup>*Rice University, Houston, Texas 77005, USA*  
<sup>81</sup>*University of Virginia, Charlottesville, Virginia 22901, USA and*  
<sup>82</sup>*University of Washington, Seattle, Washington 98195, USA*

(Dated: April 3, 2009)

We provide the most precise measurement of the  $WW$  production cross section in  $p\bar{p}$  collisions to date at a center of mass energy of 1.96 TeV, and set limits on the associated trilinear gauge couplings. The  $WW \rightarrow \ell\nu\ell'\nu$  ( $\ell, \ell' = e, \mu$ ) decay channels are analyzed in  $1 \text{ fb}^{-1}$  of data collected by the D0 detector at the Fermilab Tevatron Collider. The measured cross section is  $\sigma(p\bar{p} \rightarrow WW) = 11.5 \pm 2.1$  (stat + syst)  $\pm 0.7$  (lumi) pb. One- and two-dimensional 95% C.L. limits on trilinear gauge couplings are provided.

The non-Abelian gauge group structure of the electroweak sector of the standard model (SM) predicts specific interactions between the  $\gamma$ ,  $W$ , and  $Z$  bosons. Two vertices,  $WW\gamma$  and  $WWZ$ , provide important contributions

to the  $p\bar{p} \rightarrow WW$  production cross section. A detailed study of  $WW$  production probes the triple gauge-boson coupling (TGCs), which are sensitive to low-energy manifestations of new physics from a higher mass scale, and

is sensitive to the production and decay of new particles, such as the Higgs boson [1]. Studying  $WW$  production at the Fermilab Tevatron Collider provides an opportunity to explore constituent center of mass energies higher than that available at the CERN  $e^+e^-$  Collider (LEP) [2]. The Tevatron experiments have been active in studying the  $WW$  cross section and TGCs in the past [3–5]. In this Letter we present the most precise measurement of the  $WW$  production cross section in  $p\bar{p}$  collisions to date and updated limits on anomalous  $WW\gamma$  and  $WWZ$  couplings.

We examine  $WW$  production via the process  $p\bar{p} \rightarrow W^+W^- \rightarrow \ell^+\nu\ell'^-\bar{\nu}$  ( $\ell, \ell' = e, \mu$ ; allowing for  $W \rightarrow \tau\nu \rightarrow \ell + n\nu$  decays) and use charged lepton transverse momentum ( $p_T$ ) distributions to study the TGCs. The decay of two  $W$  bosons into electrons or muons results in a pair of isolated, high- $p_T$ , oppositely charged leptons and a large amount of missing transverse energy ( $\cancel{E}_T$ ) due to the escaping neutrinos. This analysis uses  $p\bar{p}$  collisions at a center of mass energy of 1.96 TeV, as recorded by the D0 detector [6] at the Tevatron. A combination of single-electron ( $ee$  and  $e\mu$  channels) or single-muon ( $\mu\mu$  channel) triggers were used to collect the data, which correspond to integrated luminosities of 1104 ( $ee$ ), 1072 ( $e\mu$ ), and 1002 ( $\mu\mu$ )  $\text{pb}^{-1}$  [7].

Electrons are identified in the calorimeter by their electromagnetic showers, which must occur within  $|\eta| < 1.1$  or  $1.5 < |\eta| < 3.0$  [8]. In the  $ee$  channel, at least one electron must satisfy  $|\eta| < 1.1$ . Electron candidates must be spatially matched to a track from the central tracking system, isolated from other energetic particles, and have a shape consistent with that of an electromagnetic shower. Electron candidates must also satisfy a tight requirement on a multivariate electron discriminator which takes into account track quality, shower shape, calorimeter and track isolation, and  $E/p$ , where  $E$  is the calorimeter cluster energy and  $p$  is the track momentum. The  $p_T$  measurement of an electron is based on calorimeter energy information and track position.

Muons are reconstructed within  $|\eta| < 2.0$ , must be spatially matched to a track from the central tracking system, and are required to have matched sets of wire and scintillator hits before and after the muon toroid. Detector support structure limits the muon system coverage in the region  $|\eta| < 1.1$  and  $4.25 < \phi < 5.15$  [8]; in this region a single set of matched wire and scintillator hits is required. Additionally, muons must be isolated such that the  $p_T$  sum of other tracks in a cone  $\mathcal{R} = \sqrt{(\Delta\eta)^2 + (\Delta\phi)^2} > 0.5$  is  $< 2.5$  GeV and calorimeter energy within  $0.1 < \mathcal{R} < 0.4$  is  $< 2.5$  GeV.

The  $\cancel{E}_T$  is determined based on the calorimeter energy deposition distribution with respect to the interaction vertex. It is corrected for the electromagnetic or jet energy scale, as appropriate, and the  $p_T$  of muons.

Signal acceptances and background processes are studied with a detailed Monte Carlo (MC) simulation based

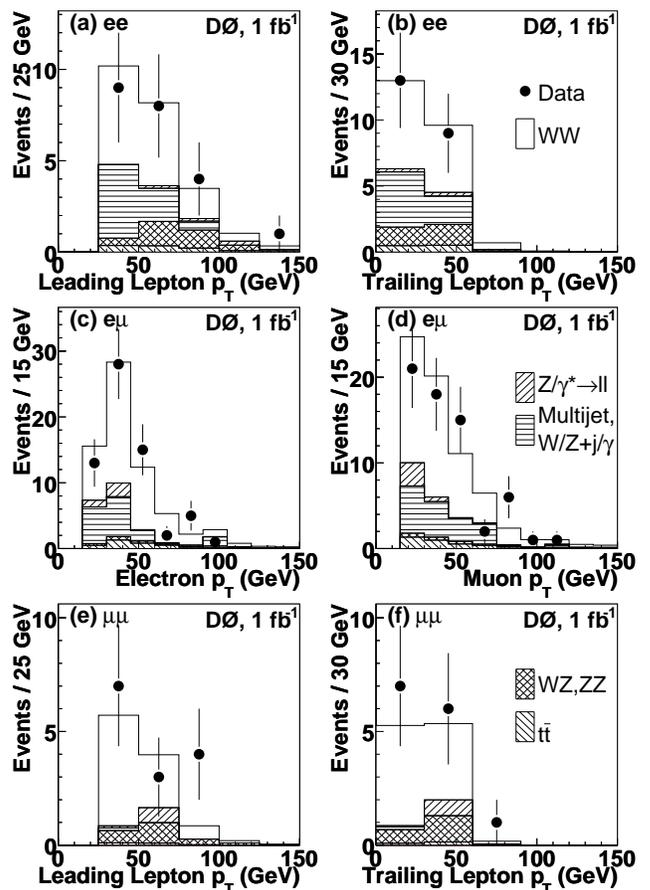


FIG. 1: Distributions of the (a) leading and (b) trailing electron  $p_T$  in the  $ee$  channel, (c) electron and (d) muon  $p_T$  in the  $e\mu$  channel, and (e) leading and (f) trailing muon  $p_T$  in the  $\mu\mu$  channel after final selection. Data are compared to estimated signal,  $\sigma(WW) = 12$  pb, and background sum.

on PYTHIA [9] in conjunction with the CTEQ6L1 [10] parton distribution functions, with detector simulation carried out by GEANT [11]. The  $Z$  boson  $p_T$  spectrum in  $Z/\gamma^* \rightarrow \ell\ell$  MC events is adjusted to match data [12].

For each final state, we require the highest  $p_T$  (leading) lepton to have  $p_T > 25$  GeV, the trailing lepton to have  $p_T > 15$  GeV, and the leptons to be of opposite charge. Both charged leptons are required to originate from the same vertex. The leptons must also have a minimum separation of  $\mathcal{R}_{ee} > 0.8$  in the  $ee$  channel or  $\mathcal{R}_{e\mu/\mu\mu} > 0.5$  in the  $e\mu$  and  $\mu\mu$  channels, in order to prevent overlap of the lepton isolation cones.

Background contributions to  $WW$  production from  $W$ +jets and multijet production are estimated from the data. Those from  $Z/\gamma^* \rightarrow \ell\ell$ ,  $t\bar{t}$ ,  $WZ$ ,  $W\gamma$ , and  $ZZ$  are estimated from the MC simulation.

After the initial event selection, the dominant background in each channel is  $Z/\gamma^* \rightarrow \ell\ell$  ( $\ell = e, \mu, \tau$ ). Much of this background is removed by requiring  $\cancel{E}_T > 45$  ( $ee$ ), 20 ( $e\mu$ ), or 35 ( $\mu\mu$ ) GeV. For the  $ee$  channel, we require

$\cancel{E}_T > 50$  GeV if  $|M_Z - m_{ee}| < 6$  GeV to further reduce the  $Z/\gamma^* \rightarrow \ell\ell$  background. In events containing muons, a requirement on the azimuthal separation ( $\Delta\phi$ ) between the leptons is more effective at reducing the  $Z/\gamma^* \rightarrow \ell\ell$  background than an invariant mass requirement, since the momentum resolution for high  $p_T$  muons is poorer than for electrons. The  $e\mu$  channel additionally requires  $\cancel{E}_T > 40$  (instead of 20) GeV if  $\Delta\phi_{e\mu} > 2.8$ , and the  $\mu\mu$  channel requires  $\Delta\phi_{\mu\mu} < 2.45$ .

Mismeasurement of the muon momentum can lead to spurious  $\cancel{E}_T$  which is collinear with the muon direction. Especially in the  $\mu\mu$  channel, mismeasurement of the muon momentum can allow  $Z$  boson events to satisfy the  $\cancel{E}_T$  requirement. To suppress these events in the  $\mu\mu$  channel, we require that the track for each muon candidate include at least one silicon microstrip tracker hit, for better momentum resolution, and that the azimuthal angle between each muon and the direction of the  $\cancel{E}_T$  satisfies  $|\cos(\Delta\phi_{\cancel{E}_T,\mu})| < 0.98$ .

A second background is  $t\bar{t}$  production followed by the leptonic decay of  $W$  bosons. This background can be suppressed by requiring  $q_T = |\vec{p}_{T\ell} + \vec{p}_{T\ell'} + \vec{\cancel{E}}_T| < 20$  ( $ee$ ), 25 ( $e\mu$ ), or 16 ( $\mu\mu$ ) GeV. This quantity is the  $p_T$  of the  $WW$  system and is expected to be small for signal events. However, for  $t\bar{t}$  production and other background processes,  $q_T$  can be large, so this variable is a powerful discriminant against these backgrounds.

The  $W\gamma$  process is a background for only the  $ee$  and  $e\mu$  channels, since the probability for a photon to misidentify a muon is negligible. We determine the probability that a photon is misidentified as an electron with photons from  $Z/\gamma^* \rightarrow ee\gamma$  decays and use it to correct the MC-based prediction of the  $W\gamma$  background. The  $W$ +jets background, in which a jet is misidentified as an electron or muon is determined from the data by selecting dilepton samples with loose and tight lepton requirements and setting up a system of linear equations to solve for the  $W$ +jet backgrounds after all event selection cuts. The background due to multijet production, in which both lepton candidates are due to a jet which is misidentified as a lepton, is determined from the data using a sample of like-charged reconstructed objects that satisfy inverted lepton quality cuts.

The leptonic decay of  $WZ$  and  $ZZ$  events can mimic the  $WW$  signal when one or more of the charged leptons are not reconstructed and instead contribute to  $\cancel{E}_T$ . The  $ZZ \rightarrow \ell\nu\nu$  process is suppressed by the  $|M_Z - m_{ee}|$  or  $\Delta\phi_{\ell\ell'}$  cut.

For each channel, the exact selection requirements on  $\cancel{E}_T$ ,  $q_T$ , and  $|M_Z - m_{ee}|$  or  $\Delta\phi_{\ell\ell'}$  are chosen by performing a grid search on signal MC and expected background, minimizing the combined statistical and systematic uncertainty on the expected cross section measurement. The final lepton  $p_T$  distributions are shown in Fig. 1.

TABLE I: Numbers of signal and background events expected and number of events observed after the final event selection in each channel. Negligible contributions are not shown. Uncertainties include contributions from statistics and object selection efficiency.

Process	$ee$	$e\mu$	$\mu\mu$
$Z/\gamma^* \rightarrow ee/\mu\mu$	$0.27 \pm 0.20$	$2.52 \pm 0.56$	$0.76 \pm 0.36$
$Z/\gamma^* \rightarrow \tau\tau$	$0.26 \pm 0.05$	$3.67 \pm 0.46$	—
$t\bar{t}$	$1.10 \pm 0.10$	$3.79 \pm 0.17$	$0.22 \pm 0.04$
$WZ$	$1.42 \pm 0.14$	$1.29 \pm 0.14$	$0.97 \pm 0.11$
$ZZ$	$1.70 \pm 0.04$	$0.09 \pm 0.01$	$0.84 \pm 0.03$
$W\gamma$	$0.23 \pm 0.16$	$5.21 \pm 2.97$	—
$W$ + jet	$6.09 \pm 1.72$	$7.50 \pm 1.83$	$0.12 \pm 0.24$
Multijet	$0.01 \pm 0.01$	$0.14 \pm 0.13$	—
$WW \rightarrow \ell\ell'$	$10.98 \pm 0.59$	$39.25 \pm 0.81$	$7.18 \pm 0.34$
$WW \rightarrow \ell\tau/\tau\tau \rightarrow \ell\ell'$	$1.40 \pm 0.20$	$5.18 \pm 0.29$	$0.71 \pm 0.10$
Total expected	$23.46 \pm 1.90$	$68.64 \pm 3.88$	$10.79 \pm 0.58$
Data	22	64	14

The overall detection efficiency for signal events is determined using MC with full detector, trigger, and reconstruction simulation and is 7.18% ( $ee$ ), 13.43% ( $e\mu$ ), and 5.34% ( $\mu\mu$ ) for  $WW \rightarrow \ell\nu\ell'\nu$  ( $\ell, \ell' = e, \mu$ ) decays and 2.24% ( $ee$ ), 4.36% ( $e\mu$ ), and 1.30% ( $\mu\mu$ ) for  $WW \rightarrow \tau\nu\ell\nu/\tau\nu\tau\nu \rightarrow \ell\ell' + n\nu$  decays. The numbers of estimated signal and background events and the number of observed events for each channel after the final event selection are summarized in Table I. Assuming the  $W$  boson and  $\tau$  branching ratios from [13], the observations in data correspond to  $\sigma(pp\bar{p} \rightarrow WW) = 10.6 \pm 4.6$  (stat)  $\pm 1.9$  (syst)  $\pm 0.7$  (lumi) pb in the  $ee$  channel,  $10.8 \pm 2.2 \pm 1.1 \pm 0.7$  pb in the  $e\mu$  channel, and  $16.9 \pm 5.7 \pm 1.0 \pm 1.0$  pb in the  $\mu\mu$  channel. The most significant sources of systematic uncertainty for each channel are the statistics associated with the estimation of the  $W$ +jet contribution in the  $ee$  channel, the photon misidentification probability used to estimate the  $W\gamma$  contribution in the  $e\mu$  channel, and the MC statistics for backgrounds in the  $\mu\mu$  channel.

The cross section measurements in the individual channels are combined using the best linear unbiased estimator (BLUE) method [14] yielding:  $\sigma(pp\bar{p} \rightarrow WW) = 11.5 \pm 2.1$  (stat + syst)  $\pm 0.7$  (lumi) pb. The standard model calculation of the  $WW$  production cross section at the Tevatron center of mass energy is  $12.0 \pm 0.7$  pb [15].

The TGCs that govern  $WW$  production can be parameterized by a general Lorentz-invariant Lagrangian with fourteen independent complex coupling parameters, seven each for the  $WW\gamma$  and  $WWZ$  vertices [1]. Limits on the anomalous couplings are often obtained by taking the parameters to be real, enforcing electroweak gauge invariance, and assuming charge conjugation and parity invariance, reducing the number of independent couplings

to five:  $g_1^Z$ ,  $\kappa_Z$ ,  $\kappa_\gamma$ ,  $\lambda_Z$ , and  $\lambda_\gamma$  (using notation from [1]). In the SM,  $g_1^Z = \kappa_Z = \kappa_\gamma = 1$  and  $\lambda_Z = \lambda_\gamma = 0$ . The couplings that are non-zero in the SM are often expressed in terms of their deviation from the SM values, e.g.  $\Delta g_1^Z \equiv g_1^Z - 1$ . Enforcing  $SU(2)_L \otimes U(1)_Y$  symmetry introduces two relationships between the remaining parameters:  $\kappa_Z = g_1^Z - (\kappa_\gamma - 1)\tan^2\theta_W$  and  $\lambda_Z = \lambda_\gamma$ , reducing the number of free parameters to three [16]. Alternatively, enforcing equality between the  $WW\gamma$  and  $WWZ$  vertices ( $WW\gamma=WWZ$ ) such that  $\kappa_\gamma = \kappa_Z$ ,  $\lambda_\gamma = \lambda_Z$ , and  $g_1^Z = 1$  reduces the number of free parameters to two.

One effect of introducing anomalous coupling parameters into the SM Lagrangian is an enhancement of the cross section for the  $q\bar{q} \rightarrow Z/\gamma^* \rightarrow W^+W^-$  process, which leads to unphysically large cross sections at high energy. Therefore, the anomalous couplings must vanish as the partonic center of mass energy  $\sqrt{\hat{s}} \rightarrow \infty$ . This is achieved by introducing a dipole form factor for an arbitrary coupling  $\alpha$  ( $g_1^Z$ ,  $\kappa_V$ , or  $\lambda_V$ ):  $\alpha(\hat{s}) = \alpha_0/(1+\hat{s}/\Lambda^2)^2$ , where the form factor scale  $\Lambda$  is set by new physics, and limits are set in terms of  $\alpha_0$ . Unitarity constraints provide an upper limit for each coupling that is dependent on the choice of  $\Lambda$ . For this analysis we use  $\Lambda = 2$  TeV, the approximate center of mass energy of the Tevatron.

The leading order MC event generator by Hagiwara, Woodside, and Zeppenfeld [1] is used to predict the changes in  $WW$  production cross section and kinematics as coupling parameters are varied about their SM values. At each point on a grid in TGC parameter space, events are generated and passed through a parameterized simulation of the D0 detector that is tuned to data. To enhance the sensitivity to anomalous couplings, events are sorted by lepton  $p_T$  into a two-dimensional histogram, using leading and trailing lepton  $p_T$  values in the  $ee$  and  $\mu\mu$  channels, and  $e$  and  $\mu$   $p_T$  values in the  $e\mu$  channel. For each bin in lepton  $p_T$  space, the expected number of  $WW$  events produced is parameterized by a quadratic function in three-dimensional  $(\Delta\kappa_\gamma, \lambda_\gamma, \Delta g_1^Z)$  space or two-dimensional  $(\Delta\kappa, \lambda)$  space, as appropriate for the TGC relationship scenario under study. In the three-dimensional case, coupling parameters are investigated in pairs, with the third parameter fixed to the SM value. A likelihood surface is generated by considering all channels simultaneously, integrating over the signal, background, and luminosity uncertainties with Gaussian distributions using a similar method to that used in previous studies [5].

The one-dimensional 95% C.L. limits for  $\Lambda = 2$  TeV are determined to be  $-0.54 < \Delta\kappa_\gamma < 0.83$ ,  $-0.14 < \lambda_\gamma = \lambda_Z < 0.18$ , and  $-0.14 < \Delta g_1^Z < 0.30$  under the  $SU(2)_L \otimes U(1)_Y$ -conserving constraints, and  $-0.12 < \Delta\kappa_\gamma = \Delta\kappa_Z < 0.35$ , with the same  $\lambda$  limits as above, under the  $WW\gamma=WWZ$  constraints. One- and two-dimensional 95% C.L. limits are shown in Fig. 2.

In summary, we have made the most precise measurement of  $WW$  production at a hadronic collider to date,

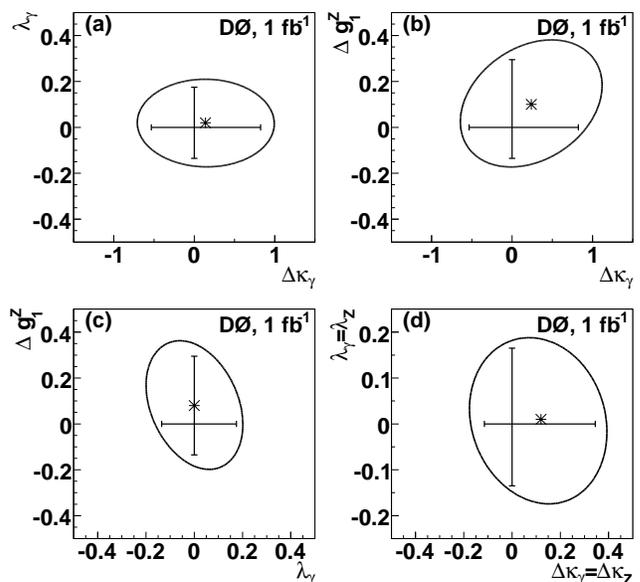


FIG. 2: One and two-dimensional 95% C.L. limits when enforcing  $SU(2)_L \otimes U(1)_Y$  symmetry at  $\Lambda = 2$  TeV, for (a)  $\Delta\kappa_\gamma$  vs.  $\lambda_\gamma$ , (b)  $\Delta\kappa_\gamma$  vs.  $\Delta g_1^Z$ , and (c)  $\lambda_\gamma$  vs.  $\Delta g_1^Z$ , each when the third free coupling is set to its SM value; limits when enforcing the  $WW\gamma=WWZ$  constraints are shown in (d). The curve represents the two-dimensional 95% C.L. contour and the ticks along the axes represent the one-dimensional 95% C.L. limits. An asterisk (\*) marks the point with the highest likelihood in the two-dimensional plane.

$\sigma(p\bar{p} \rightarrow WW) = 11.5 \pm 2.1$  (stat + syst)  $\pm 0.7$  (lumi) pb, using  $1 \text{ fb}^{-1}$  of data at the D0 experiment. The selected event kinematics are used to significantly improve previous limits on anomalous TGCs from  $WW$  production at the Tevatron.

We thank the staffs at Fermilab and collaborating institutions, and acknowledge support from the DOE and NSF (USA); CEA and CNRS/IN2P3 (France); FASI, Rosatom and RFBR (Russia); CNPq, FAPERJ, FAPESP and FUNDUNESP (Brazil); DAE and DST (India); Colciencias (Colombia); CONACyT (Mexico); KRF and KOSEF (Korea); CONICET and UBACyT (Argentina); FOM (The Netherlands); STFC and the Royal Society (United Kingdom); MSMT and GACR (Czech Republic); CRC Program, CFI, NSERC and WestGrid Project (Canada); BMBF and DFG (Germany); SFI (Ireland); The Swedish Research Council (Sweden); CAS and CNSF (China); and the Alexander von Humboldt Foundation (Germany).

- [a] Visitor from Augustana College, Sioux Falls, SD, USA.  
 [b] Visitor from Rutgers University, Piscataway, NJ, USA.  
 [c] Visitor from The University of Liverpool, Liverpool, UK.

- [d] Visitor from Centro de Investigacion en Computacion - IPN, Mexico City, Mexico.
- [e] Visitor from ECFM, Universidad Autonoma de Sinaloa, Culiacán, Mexico.
- [f] Visitor from Helsinki Institute of Physics, Helsinki, Finland.
- [g] Visitor from Universität Bern, Bern, Switzerland.
- [h] Visitor from Universität Zürich, Zürich, Switzerland.
- [‡] Deceased.
- [1] K. Hagiwara, J. Woodside, and D. Zeppenfeld, Phys. Rev. D **41**, 2113 (1990); K. Hagiwara, R. D. Peccei, D. Zeppenfeld, Nucl. Phys. **B282**, 253 (1987).
- [2] S. Schael *et al.* (ALEPH Collaboration), Phys. Lett. B **614**, 7 (2005); P. Achard *et al.* (L3 Collaboration), Phys. Lett. B **586**, 151 (2004); G. Abbiendi *et al.* (OPAL Collaboration), Eur. Phys. J. C **33**, 463 (2004).
- [3] V. M. Abazov *et al.* (D0 Collaboration), Phys. Rev. Lett. **94**, 151801 (2005); V. M. Abazov *et al.* (D0 Collaboration), Phys. Rev. Lett. **100**, 139901(E) (2008).
- [4] D. Acosta *et al.* (CDF Collaboration), Phys. Rev. Lett., **94**, 211801 (2005).
- [5] V. M. Abazov *et al.* (D0 Collaboration), Phys. Rev. D **74**, 057101 (2006).
- [6] V. M. Abazov *et al.* (D0 Collaboration), Nucl. Instrum. Methods Phys. Res. A **565**, 463 (2006).
- [7] T. Andeen *et al.*, FERMILAB-TM-2365 (2007). A 6.1% uncertainty is assigned to the integrated luminosity measurement.
- [8] Pseudorapidity  $\eta = -\ln[\tan(\frac{\theta}{2})]$ , where  $\theta$  is the polar angle as measured from the beam axis;  $\phi$  is the azimuthal angle.
- [9] H. U. Bengtsson and T. Sjöstrand, Comput. Phys. Commun. **46**, 43 (1987); T. Sjöstrand *et al.*, Comp. Phys. Comm., **135**, 283 (2001). We use PYTHIA v6.319.
- [10] J. Pumplin *et al.*, J. High Energy Phys. **07**, 012 (2002).
- [11] R. Brun and F. Carminati, CERN Program Library Long Writeup W5013, 1993 (unpublished).
- [12] V. M. Abazov *et al.* (D0 Collaboration), Phys. Rev. Lett. **100**, 102002 (2008).
- [13] C. Amsler *et al.*, Phys. Lett. B **667**, 1 (2008).
- [14] P. Clifford, D. Gibaut, and L. Lyons, Nucl. Instrum. Methods Phys. Res. A **270**, 110 (1998).
- [15] J. M. Campbell and R. K. Ellis, Phys. Rev. D **60**, 113006 (1999). Cross section calculated with the same parameters given in the paper, except with  $\sqrt{s} = 1.96$  TeV.
- [16] A. De Rújula, M. B. Gavela, P. Hernandez and E. Masso, Nucl. Phys. **B384**, 3 (1992).