

Search for $B_s^0 \rightarrow \mu^+ \mu^-$ and $B^0 \rightarrow \mu^+ \mu^-$ Decays with CDF II

T. Aaltonen,²¹ B. Álvarez González^{w,9}, S. Amerio,⁴¹ D. Amidei,³² A. Anastassov,³⁶ A. Annovi,¹⁷ J. Antos,¹²
 G. Apollinari,¹⁵ J.A. Appel,¹⁵ A. Apresyan,⁴⁶ T. Arisawa,⁵⁶ A. Artikov,¹³ J. Asaadi,⁵¹ W. Ashmanskas,¹⁵
 B. Auerbach,⁵⁹ A. Aurisano,⁵¹ F. Azfar,⁴⁰ W. Badgett,¹⁵ A. Barbaro-Galtieri,²⁶ V.E. Barnes,⁴⁶ B.A. Barnett,²³
 P. Barria^{dd,44} P. Bartos,¹² M. Bauce^{bb,41} G. Bauer,³⁰ F. Bedeschi,⁴⁴ D. Beecher,²⁸ S. Behari,²³ G. Bellettini^{cc,44}
 J. Bellinger,⁵⁸ D. Benjamin,¹⁴ A. Beretvas,¹⁵ A. Bhatti,⁴⁸ M. Binkley*,¹⁵ D. Bisello^{bb,41} I. Bizjak^{hh,28} K.R. Bland,⁵
 B. Blumenfeld,²³ A. Bocci,¹⁴ A. Bodek,⁴⁷ D. Bortoletto,⁴⁶ J. Boudreau,⁴⁵ A. Boveia,¹¹ L. Brigliadori^{aa,6}
 A. Brisuda,¹² C. Bromberg,³³ E. Brucken,²¹ M. Bucciantonio^{cc,44} J. Budagov,¹³ H.S. Budd,⁴⁷ S. Budd,²²
 K. Burkett,¹⁵ G. Busetto^{bb,41} P. Bussey,¹⁹ A. Buzatu,³¹ C. Calancha,²⁹ S. Camarda,⁴ M. Campanelli,²⁸
 M. Campbell,³² F. Canelli^{11,15} B. Carls,²² D. Carlsmith,⁵⁸ R. Carosi,⁴⁴ S. Carrillo^{k,16} S. Carron,¹⁵ B. Casal,⁹
 M. Casarsa,¹⁵ A. Castro^{aa,6} P. Catastini,²⁰ D. Cauz,⁵² V. Cavaliere,²² M. Cavalli-Sforza,⁴ A. Cerri^{e,26}
 L. Cerrito^{q,28} Y.C. Chen,¹ M. Chertok,⁷ G. Chiarelli,⁴⁴ G. Chlachidze,¹⁵ F. Chlebana,¹⁵ K. Cho,²⁵
 D. Chokheli,¹³ J.P. Chou,²⁰ W.H. Chung,⁵⁸ Y.S. Chung,⁴⁷ C.I. Ciobanu,⁴² M.A. Ciocci^{dd,44} A. Clark,¹⁸
 C. Clarke,⁵⁷ G. Compostella^{bb,41} M.E. Convery,¹⁵ J. Conway,⁷ M. Corbo,⁴² M. Cordelli,¹⁷ C.A. Cox,⁷ D.J. Cox,⁷
 F. Crescioli^{cc,44} C. Cuenca Almenar,⁵⁹ J. Cuevas^{w,9} R. Culbertson,¹⁵ D. Dagenhart,¹⁵ N. d'Ascenzo^{u,42}
 M. Datta,¹⁵ P. de Barbaro,⁴⁷ S. De Cecco,⁴⁹ G. De Lorenzo,⁴ M. Dell'Orso^{cc,44} C. Deluca,⁴ L. Demortier,⁴⁸
 J. Deng^{b,14} M. Deninno,⁶ F. Devoto,²¹ M. d'Errico^{bb,41} A. Di Canto^{cc,44} B. Di Ruzza,⁴⁴ J.R. Dittmann,⁵
 M. D'Onofrio,²⁷ S. Donati^{cc,44} P. Dong,¹⁵ M. Dorigo,⁵² T. Dorigo,⁴¹ K. Ebina,⁵⁶ A. Elagin,⁵¹ A. Eppig,³²
 R. Erbacher,⁷ D. Errede,²² S. Errede,²² N. Ershaidat^{z,42} R. Eusebi,⁵¹ H.C. Fang,²⁶ S. Farrington,⁴⁰ M. Feindt,²⁴
 J.P. Fernandez,²⁹ C. Ferrazza^{ee,44} R. Field,¹⁶ G. Flanagan^{s,46} R. Forrest,⁷ M.J. Frank,⁵ M. Franklin,²⁰
 J.C. Freeman,¹⁵ Y. Funakoshi,⁵⁶ I. Furic,¹⁶ M. Gallinaro,⁴⁸ J. Galyardt,¹⁰ J.E. Garcia,¹⁸ A.F. Garfinkel,⁴⁶
 P. Garosi^{dd,44} H. Gerberich,²² E. Gerchtein,¹⁵ S. Giagu^{ff,49} V. Giakoumopoulou,³ P. Giannetti,⁴⁴ K. Gibson,⁴⁵
 C.M. Ginsburg,¹⁵ N. Giokaris,³ P. Giromini,¹⁷ M. Giunta,⁴⁴ G. Giurgiu,²³ V. Glagolev,¹³ D. Glenzinski,¹⁵
 M. Gold,³⁵ D. Goldin,⁵¹ N. Goldschmidt,¹⁶ A. Golossanov,¹⁵ G. Gomez,⁹ G. Gomez-Ceballos,³⁰ M. Goncharov,³⁰
 O. González,²⁹ I. Gorelov,³⁵ A.T. Goshaw,¹⁴ K. Goulianos,⁴⁸ S. Grinstein,⁴ C. Grosso-Pilcher,¹¹ R.C. Group^{55,15}

* Deceased

J. Guimaraes da Costa,²⁰ Z. Gunay-Unalan,³³ C. Haber,²⁶ S.R. Hahn,¹⁵ E. Halkiadakis,⁵⁰ A. Hamaguchi,³⁹
 J.Y. Han,⁴⁷ F. Happacher,¹⁷ K. Hara,⁵³ D. Hare,⁵⁰ M. Hare,⁵⁴ R.F. Harr,⁵⁷ K. Hatakeyama,⁵ C. Hays,⁴⁰ M. Heck,²⁴
 J. Heinrich,⁴³ M. Herndon,⁵⁸ S. Hewamanage,⁵ D. Hidas,⁵⁰ A. Hocker,¹⁵ W. Hopkins^f,¹⁵ D. Horn,²⁴ S. Hou,¹
 R.E. Hughes,³⁷ M. Hurwitz,¹¹ U. Husemann,⁵⁹ N. Hussain,³¹ M. Hussein,³³ J. Huston,³³ G. Introzzi,⁴⁴ M. Iori^{ff},⁴⁹
 A. Ivanov^o,⁷ E. James,¹⁵ D. Jang,¹⁰ B. Jayatilaka,¹⁴ E.J. Jeon,²⁵ M.K. Jha,⁶ S. Jindariani,¹⁵ W. Johnson,⁷
 M. Jones,⁴⁶ K.K. Joo,²⁵ S.Y. Jun,¹⁰ T.R. Junk,¹⁵ T. Kamon,⁵¹ P.E. Karchin,⁵⁷ A. Kasmi,⁵ Y. Katoⁿ,³⁹
 W. Ketchum,¹¹ J. Keung,⁴³ V. Khotilovich,⁵¹ B. Kilminster,¹⁵ D.H. Kim,²⁵ H.S. Kim,²⁵ H.W. Kim,²⁵ J.E. Kim,²⁵
 M.J. Kim,¹⁷ S.B. Kim,²⁵ S.H. Kim,⁵³ Y.K. Kim,¹¹ N. Kimura,⁵⁶ M. Kirby,¹⁵ S. Klimentenko,¹⁶ K. Kondo*,⁵⁶
 D.J. Kong,²⁵ J. Konigsberg,¹⁶ A.V. Kotwal,¹⁴ M. Kreps,²⁴ J. Kroll,⁴³ D. Krop,¹¹ N. Krumnack^l,⁵ M. Kruse,¹⁴
 V. Krutelyov^c,⁵¹ T. Kuhr,²⁴ M. Kurata,⁵³ S. Kwang,¹¹ A.T. Laasanen,⁴⁶ S. Lami,⁴⁴ S. Lammel,¹⁵ M. Lancaster,²⁸
 R.L. Lander,⁷ K. Lannon^v,³⁷ A. Lath,⁵⁰ G. Latino^{cc},⁴⁴ T. LeCompte,² E. Lee,⁵¹ H.S. Lee,¹¹ J.S. Lee,²⁵ S.W. Lee^x,⁵¹
 S. Leo^{cc},⁴⁴ S. Leone,⁴⁴ J.D. Lewis,¹⁵ A. Limosani^r,¹⁴ C.-J. Lin,²⁶ J. Linacre,⁴⁰ M. Lindgren,¹⁵ E. Lipeles,⁴³
 A. Lister,¹⁸ D.O. Litvintsev,¹⁵ C. Liu,⁴⁵ Q. Liu,⁴⁶ T. Liu,¹⁵ S. Lockwitz,⁵⁹ A. Loginov,⁵⁹ D. Lucchesi^{bb},⁴¹
 J. Lueck,²⁴ P. Lujan,²⁶ P. Lukens,¹⁵ G. Lungu,⁴⁸ J. Lys,²⁶ R. Lysak,¹² R. Madrak,¹⁵ K. Maeshima,¹⁵
 K. Makhoul,³⁰ S. Malik,⁴⁸ G. Manca^a,²⁷ A. Manousakis-Katsikakis,³ F. Margaroli,⁴⁶ C. Marino,²⁴ M. Martínez,⁴
 R. Martínez-Ballarín,²⁹ P. Mastrandrea,⁴⁹ M.E. Mattson,⁵⁷ P. Mazzanti,⁶ K.S. McFarland,⁴⁷ P. McIntyre,⁵¹
 R. McNultyⁱ,²⁷ A. Mehta,²⁷ P. Mehtala,²¹ A. Menzione,⁴⁴ C. Mesropian,⁴⁸ T. Miao,¹⁵ D. Mietlicki,³² A. Mitra,¹
 H. Miyake,⁵³ S. Moed,²⁰ N. Moggi,⁶ M.N. Mondragon^k,¹⁵ C.S. Moon,²⁵ R. Moore,¹⁵ M.J. Morello,¹⁵ J. Morlock,²⁴
 P. Movilla Fernandez,¹⁵ A. Mukherjee,¹⁵ Th. Muller,²⁴ P. Murat,¹⁵ M. Mussini^{aa},⁶ J. Nachtman^m,¹⁵ Y. Nagai,⁵³
 J. Naganoma,⁵⁶ I. Nakano,³⁸ A. Napier,⁵⁴ J. Nett,⁵¹ C. Neu,⁵⁵ M.S. Neubauer,²² J. Nielsen^d,²⁶ L. Nodulman,²
 O. Norriella,²² E. Nurse,²⁸ L. Oakes,⁴⁰ S.H. Oh,¹⁴ Y.D. Oh,²⁵ I. Oksuzian,⁵⁵ T. Okusawa,³⁹ R. Orava,²¹
 L. Ortolan,⁴ S. Pagan Griso^{bb},⁴¹ C. Pagliarone,⁵² E. Palencia^e,⁹ V. Papadimitriou,¹⁵ A.A. Paramonov,²
 J. Patrick,¹⁵ G. Pauletta^{gg},⁵² M. Paulini,¹⁰ C. Paus,³⁰ D.E. Pellett,⁷ A. Penzo,⁵² T.J. Phillips,¹⁴ G. Piacentino,⁴⁴
 E. Pianori,⁴³ J. Pilot,³⁷ K. Pitts,²² C. Plager,⁸ L. Pondrom,⁵⁸ K. Potamianos,⁴⁶ O. Poukhov*,¹³ F. Prokoshin^y,¹³
 A. Pronko,¹⁵ F. Ptohos^g,¹⁷ E. Pueschel,¹⁰ G. Punzi^{cc},⁴⁴ J. Pursley,⁵⁸ A. Rahaman,⁴⁵ V. Ramakrishnan,⁵⁸
 N. Ranjan,⁴⁶ I. Redondo,²⁹ P. Renton,⁴⁰ M. Rescigno,⁴⁹ T. Riddick,²⁸ F. Rimondi^{aa},⁶ L. Ristori⁴⁴,¹⁵ A. Robson,¹⁹
 T. Rodrigo,⁹ T. Rodriguez,⁴³ E. Rogers,²² S. Rolli^h,⁵⁴ R. Roser,¹⁵ M. Rossi,⁵² F. Rubbo,¹⁵ F. Ruffini^{dd},⁴⁴
 A. Ruiz,⁹ J. Russ,¹⁰ V. Rusu,¹⁵ A. Safonov,⁵¹ W.K. Sakumoto,⁴⁷ Y. Sakurai,⁵⁶ L. Santi^{gg},⁵² L. Sartori,⁴⁴
 K. Sato,⁵³ V. Saveliev^u,⁴² A. Savoy-Navarro,⁴² P. Schlabach,¹⁵ A. Schmidt,²⁴ E.E. Schmidt,¹⁵ M.P. Schmidt*,⁵⁹

M. Schmitt,³⁶ T. Schwarz,⁷ L. Scodellaro,⁹ A. Scribano^{dd,44} F. Scuri,⁴⁴ A. Sedov,⁴⁶ S. Seidel,³⁵ Y. Seiya,³⁹
 A. Semenov,¹³ F. Sforza^{cc,44} A. Sfyrta,²² S.Z. Shalhout,⁷ T. Shears,²⁷ P.F. Shepard,⁴⁵ M. Shimojima^{t,53}
 S. Shiraishi,¹¹ M. Shochet,¹¹ I. Shreyber,³⁴ A. Simonenko,¹³ P. Sinervo,³¹ A. Sissakian*,¹³ K. Sliwa,⁵⁴ J.R. Smith,⁷
 F.D. Snider,¹⁵ A. Soha,¹⁵ S. Somalwar,⁵⁰ V. Sorin,⁴ D. Sperka,⁵⁸ P. Squillacioti,⁴⁴ M. Stancari,¹⁵ M. Stanitzki,⁵⁹
 R. St. Denis,¹⁹ B. Stelzer,³¹ O. Stelzer-Chilton,³¹ D. Stentz,³⁶ J. Strologas,³⁵ G.L. Strycker,³² Y. Sudo,⁵³
 A. Sukhanov,¹⁶ I. Suslov,¹³ K. Takemasa,⁵³ Y. Takeuchi,⁵³ J. Tang,¹¹ M. Tecchio,³² P.K. Teng,¹ J. Thom^{f,15}
 J. Thome,¹⁰ G.A. Thompson,²² E. Thomson,⁴³ P. Ttito-Guzmán,²⁹ S. Tkaczyk,¹⁵ D. Toback,⁵¹ S. Tokar,¹²
 K. Tollefson,³³ T. Tomura,⁵³ D. Tonelli,¹⁵ S. Torre,¹⁷ D. Torretta,¹⁵ P. Totaro,⁴¹ M. Trovato^{ee,44} Y. Tu,⁴³
 F. Ukegawa,⁵³ S. Uozumi,²⁵ A. Varganov,³² F. Vázquez^{k,16} G. Velev,¹⁵ C. Vellidis,³ M. Vidal,²⁹ I. Vila,⁹
 R. Vilar,⁹ J. Vizán,⁹ M. Vogel,³⁵ G. Volpi^{cc,44} P. Wagner,⁴³ R.L. Wagner,¹⁵ T. Wakisaka,³⁹ R. Wallny,⁸
 S.M. Wang,¹ A. Warburton,³¹ D. Waters,²⁸ M. Weinberger,⁵¹ W.C. Wester III,¹⁵ B. Whitehouse,⁵⁴ D. Whiteson^{b,43}
 A.B. Wicklund,² E. Wicklund,¹⁵ S. Wilbur,¹¹ F. Wick,²⁴ H.H. Williams,⁴³ J.S. Wilson,³⁷ P. Wilson,¹⁵ B.L. Winer,³⁷
 P. Wittich^{g,15} S. Wolbers,¹⁵ H. Wolfe,³⁷ T. Wright,³² X. Wu,¹⁸ Z. Wu,⁵ K. Yamamoto,³⁹ J. Yamaoka,¹⁴
 T. Yang,¹⁵ U.K. Yang^{p,11} Y.C. Yang,²⁵ W.-M. Yao,²⁶ G.P. Yeh,¹⁵ K. Yi^{m,15} J. Yoh,¹⁵ K. Yorita,⁵⁶
 T. Yoshida^{j,39} G.B. Yu,¹⁴ I. Yu,²⁵ S.S. Yu,¹⁵ J.C. Yun,¹⁵ A. Zanetti,⁵² Y. Zeng,¹⁴ and S. Zucchelli^{aa6}

(CDF Collaboration[†])

¹*Institute of Physics, Academia Sinica, Taipei, Taiwan 11529, Republic of China*

²*Argonne National Laboratory, Argonne, Illinois 60439, USA*

³*University of Athens, 157 71 Athens, Greece*

⁴*Institut de Física d'Altes Energies, ICREA, Universitat Autònoma de Barcelona, E-08193, Bellaterra (Barcelona), Spain*

⁵*Baylor University, Waco, Texas 76798, USA*

⁶*Istituto Nazionale di Fisica Nucleare Bologna, ^{aa}University of Bologna, I-40127 Bologna, Italy*

⁷*University of California, Davis, Davis, California 95616, USA*

[†] With visitors from ^aIstituto Nazionale di Fisica Nucleare, Sezione di Cagliari, 09042 Monserrato (Cagliari), Italy, ^bUniversity of CA Irvine, Irvine, CA 92697, USA, ^cUniversity of CA Santa Barbara, Santa Barbara, CA 93106, USA, ^dUniversity of CA Santa Cruz, Santa Cruz, CA 95064, USA, ^eCERN, CH-1211 Geneva, Switzerland, ^fCornell University, Ithaca, NY 14853, USA, ^gUniversity of Cyprus, Nicosia CY-1678, Cyprus, ^hOffice of Science, U.S. Department of Energy, Washington, DC 20585, USA, ⁱUniversity College Dublin, Dublin 4, Ireland, ^jUniversity of Fukui, Fukui City, Fukui Prefecture, Japan 910-0017, ^kUniversidad Iberoamericana, Mexico D.F., Mexico, ^lIowa State University, Ames, IA 50011, USA, ^mUniversity of Iowa, Iowa City, IA 52242, USA, ⁿKinki University, Higashi-Osaka City, Japan 577-8502, ^oKansas State University, Manhattan, KS 66506, USA, ^pUniversity of Manchester, Manchester M13 9PL, United Kingdom, ^qQueen Mary, University of London, London, E1 4NS, United Kingdom, ^rUniversity of Melbourne, Victoria 3010, Australia, ^sMuons, Inc., Batavia, IL 60510, USA, ^tNagasaki Institute of Applied Science, Nagasaki, Japan, ^uNational Research Nuclear University, Moscow, Russia, ^vUniversity of Notre Dame, Notre Dame, IN 46556, USA, ^wUniversidad de Oviedo, E-33007 Oviedo, Spain, ^xTexas Tech University, Lubbock, TX 79609, USA, ^yUniversidad Tecnica Federico Santa Maria, 110v Valparaiso, Chile, ^zYarmouk University, Irbid 211-63, Jordan, ^{hh}On leave from J. Stefan Institute, Ljubljana, Slovenia,

- ⁸University of California, Los Angeles, Los Angeles, California 90024, USA
- ⁹Instituto de Fisica de Cantabria, CSIC-University of Cantabria, 39005 Santander, Spain
- ¹⁰Carnegie Mellon University, Pittsburgh, Pennsylvania 15213, USA
- ¹¹Enrico Fermi Institute, University of Chicago, Chicago, Illinois 60637, USA
- ¹²Comenius University, 842 48 Bratislava, Slovakia; Institute of Experimental Physics, 040 01 Kosice, Slovakia
- ¹³Joint Institute for Nuclear Research, RU-141980 Dubna, Russia
- ¹⁴Duke University, Durham, North Carolina 27708, USA
- ¹⁵Fermi National Accelerator Laboratory, Batavia, Illinois 60510, USA
- ¹⁶University of Florida, Gainesville, Florida 32611, USA
- ¹⁷Laboratori Nazionali di Frascati, Istituto Nazionale di Fisica Nucleare, I-00044 Frascati, Italy
- ¹⁸University of Geneva, CH-1211 Geneva 4, Switzerland
- ¹⁹Glasgow University, Glasgow G12 8QQ, United Kingdom
- ²⁰Harvard University, Cambridge, Massachusetts 02138, USA
- ²¹Division of High Energy Physics, Department of Physics,
University of Helsinki and Helsinki Institute of Physics, FIN-00014, Helsinki, Finland
- ²²University of Illinois, Urbana, Illinois 61801, USA
- ²³The Johns Hopkins University, Baltimore, Maryland 21218, USA
- ²⁴Institut für Experimentelle Kernphysik, Karlsruhe Institute of Technology, D-76131 Karlsruhe, Germany
- ²⁵Center for High Energy Physics: Kyungpook National University,
Daegu 702-701, Korea; Seoul National University, Seoul 151-742,
Korea; Sungkyunkwan University, Suwon 440-746,
Korea; Korea Institute of Science and Technology Information,
Daejeon 305-806, Korea; Chonnam National University, Gwangju 500-757,
Korea; Chonbuk National University, Jeonju 561-756, Korea
- ²⁶Ernest Orlando Lawrence Berkeley National Laboratory, Berkeley, California 94720, USA
- ²⁷University of Liverpool, Liverpool L69 7ZE, United Kingdom
- ²⁸University College London, London WC1E 6BT, United Kingdom
- ²⁹Centro de Investigaciones Energeticas Medioambientales y Tecnologicas, E-28040 Madrid, Spain
- ³⁰Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, USA
- ³¹Institute of Particle Physics: McGill University, Montréal, Québec,
Canada H3A 2T8; Simon Fraser University, Burnaby, British Columbia,
Canada V5A 1S6; University of Toronto, Toronto, Ontario,
Canada M5S 1A7; and TRIUMF, Vancouver, British Columbia, Canada V6T 2A3

- ³²University of Michigan, Ann Arbor, Michigan 48109, USA
- ³³Michigan State University, East Lansing, Michigan 48824, USA
- ³⁴Institution for Theoretical and Experimental Physics, ITEP, Moscow 117259, Russia
- ³⁵University of New Mexico, Albuquerque, New Mexico 87131, USA
- ³⁶Northwestern University, Evanston, Illinois 60208, USA
- ³⁷The Ohio State University, Columbus, Ohio 43210, USA
- ³⁸Okayama University, Okayama 700-8530, Japan
- ³⁹Osaka City University, Osaka 588, Japan
- ⁴⁰University of Oxford, Oxford OX1 3RH, United Kingdom
- ⁴¹Istituto Nazionale di Fisica Nucleare, Sezione di Padova-Trento, ^{bb}University of Padova, I-35131 Padova, Italy
- ⁴²LPNHE, Universite Pierre et Marie Curie/IN2P3-CNRS, UMR7585, Paris, F-75252 France
- ⁴³University of Pennsylvania, Philadelphia, Pennsylvania 19104, USA
- ⁴⁴Istituto Nazionale di Fisica Nucleare Pisa, ^{cc}University of Pisa,
- ^{dd}University of Siena and ^{ee}Scuola Normale Superiore, I-56127 Pisa, Italy
- ⁴⁵University of Pittsburgh, Pittsburgh, Pennsylvania 15260, USA
- ⁴⁶Purdue University, West Lafayette, Indiana 47907, USA
- ⁴⁷University of Rochester, Rochester, New York 14627, USA
- ⁴⁸The Rockefeller University, New York, New York 10065, USA
- ⁴⁹Istituto Nazionale di Fisica Nucleare, Sezione di Roma 1,
- ^{ff}Sapienza Università di Roma, I-00185 Roma, Italy
- ⁵⁰Rutgers University, Piscataway, New Jersey 08855, USA
- ⁵¹Texas A&M University, College Station, Texas 77843, USA
- ⁵²Istituto Nazionale di Fisica Nucleare Trieste/Udine,
- I-34100 Trieste, ^{gg}University of Udine, I-33100 Udine, Italy
- ⁵³University of Tsukuba, Tsukuba, Ibaraki 305, Japan
- ⁵⁴Tufts University, Medford, Massachusetts 02155, USA
- ⁵⁵University of Virginia, Charlottesville, Virginia 22906, USA
- ⁵⁶Waseda University, Tokyo 169, Japan
- ⁵⁷Wayne State University, Detroit, Michigan 48201, USA
- ⁵⁸University of Wisconsin, Madison, Wisconsin 53706, USA
- ⁵⁹Yale University, New Haven, Connecticut 06520, USA

A search has been performed for $B_s^0 \rightarrow \mu^+ \mu^-$ and $B^0 \rightarrow \mu^+ \mu^-$ decays using 7 fb^{-1} of integrated

luminosity collected by the CDF II detector at the Fermilab Tevatron collider. The observed number of B^0 candidates is consistent with background-only expectations and yields an upper limit on the branching fraction of $\mathcal{B}(B^0 \rightarrow \mu^+\mu^-) < 6.0 \times 10^{-9}$ at 95% confidence level. We observe an excess of B_s^0 candidates. The probability that the background processes alone could produce such an excess or larger is 0.27%. The probability that the combination of background and the expected standard model rate of $B_s^0 \rightarrow \mu^+\mu^-$ could produce such an excess or larger is 1.9%. These data are used to determine $\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) = (1.8_{-0.9}^{+1.1}) \times 10^{-8}$ and provide an upper limit of $\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) < 4.0 \times 10^{-8}$ at 95% confidence level.

PACS numbers: 13.20.He 13.30.Ce 12.15.Mm 12.60.Jv

Studies of flavor-changing neutral current (FCNC) decays have played an important role in formulating the theoretical description of particle physics known as the standard model (SM). In the SM all neutral currents conserve flavor so that FCNC decays do not occur at lowest order. The decays of B_s^0 mesons (with a quark content of $\bar{b}s$) and B^0 mesons ($\bar{b}d$) into a dimuon pair ($\mu^+\mu^-$) [1] are examples of FCNC processes that can occur in the SM through higher order loop diagrams. Their branching fractions are predicted in the SM to be $(3.2 \pm 0.2) \times 10^{-9}$ and $(1.0 \pm 0.1) \times 10^{-10}$, respectively [2]. A wide variety of beyond-SM theories predict significant increases over the SM branching fraction [3], making the study of $B_s^0 \rightarrow \mu^+\mu^-$ and $B^0 \rightarrow \mu^+\mu^-$ decays one of the most sensitive indirect searches for new physics. Published upper limits [4–6] contribute significantly to our knowledge of the available new physics parameter space [7–11].

We report a search for $B_s^0 \rightarrow \mu^+\mu^-$ and $B^0 \rightarrow \mu^+\mu^-$ decays using $p\bar{p}$ data corresponding to an integrated luminosity of 7 fb^{-1} collected with the Collider Detector at Fermilab (CDF II). The sensitivity of this analysis is significantly improved with respect to the previous analysis [4] due to the higher integrated luminosity of the event sample, a 30% increase in the signal acceptance, and the use of an improved neural-network (NN) discriminant that provides approximately twice the background rejection for the same signal efficiency.

A detailed description of the CDF II detector can be found in Ref. [12]. A charged particle tracking system provides precise vertex determination and momentum measurements in a pseudorapidity range $|\eta| < 1.0$. Additionally, the system measures the ionization per unit path length dE/dx for particle identification. Beyond the tracking detectors are electromagnetic and hadronic calorimeters, which are surrounded by drift chambers used to detect muons in the central region (C) $|\eta| < 0.6$ and the forward region (F) $0.6 < |\eta| < 1.0$.

The online (trigger) requirements used to collect the data sample and the initial set of baseline requirements used

in the analysis are the same as those described in [13]. The events are collected using a set of dimuon triggers [12] and must satisfy either of two sets of requirements corresponding to different topologies: CC events have both muon candidates detected in the central region, while CF events have one central muon and another muon detected in the forward region. Since the expected signal-to-background ratios are different, the two topologies are treated separately. The acceptance of the analysis is improved by 30% by using additional forward muon candidates and by using muon candidates that traverse detector regions previously excluded due to their rapidly changing trigger efficiency. The larger data sample has allowed us to obtain a detailed understanding of the trigger performance in these regions so that we can confidently include these muon candidates in the current analysis. The baseline selection requires high quality muon candidates with transverse momentum relative to the beam direction of $p_T > 2.0$ (2.2) GeV/ c in the central (forward) region. The muon pairs are required to have an invariant mass in the range $4.669 < m_{\mu\mu} < 5.969$ GeV/ c^2 and are constrained to originate from a common well measured three-dimensional (3D) vertex. A likelihood method [14] together with a dE/dx based selection [15] are used to further suppress contributions from hadrons misidentified as muons. The baseline requirements also demand that the measured proper decay length of the B candidate λ with its uncertainty σ_λ satisfy $\lambda/\sigma_\lambda > 2$; the 3D opening angle between the momentum of the dimuon pair and the displacement vector between the primary $p\bar{p}$ collision vertex and the dimuon vertex $\Delta\Omega < 0.7$ rad; and the B -candidate track isolation [16] $I > 0.50$. There are 46 907 CC and 51 425 CF muon pairs that fulfill the trigger and baseline selection requirements.

A sample of $B^+ \rightarrow J/\psi K^+$ events serves as a normalization mode. The $B^+ \rightarrow J/\psi K^+$ sample is collected using the same dimuon triggers and selection requirements so that common systematic uncertainties are suppressed. An additional requirement on the kaon candidate $p_T > 1$ GeV/ c is made to limit the p_T range to a region where the tracking efficiency is well understood.

For the final selection, we define search regions around the known B_s^0 and B^0 masses [17]. These regions correspond to approximately $\pm 2.5\sigma_m$, where $\sigma_m \approx 24$ MeV/ c^2 is the estimated two-track mass resolution. The sideband regions $4.669 < m_{\mu\mu} < 5.0$ GeV/ c^2 and $5.469 < m_{\mu\mu} < 5.969$ GeV/ c^2 are used to estimate combinatorial backgrounds. Backgrounds from $B \rightarrow h^+h'^-$ decays, which peak in the signal mass region, are estimated separately.

Fourteen variables are used to construct a NN discriminant ν_N that ranges from 0 to 1 and enhances the signal-to-background ratio [18]. The variables include dimuon vertex related information (*e.g.* λ/σ_λ), the impact parameters with respect to the primary vertex and transverse momenta of the muons, the isolation of the B candidate, and the opening angle $\Delta\Omega$. The NN is trained with background events sampled from the sideband regions and signal events generated with a simulation described below. Only a fraction of the total number of background and simulated signal

events are used to train the NN. The remainder are used to test for NN overtraining and to determine the signal and background efficiencies. Several tests are done to ensure ν_N is independent of $m_{\mu\mu}$.

All selection criteria were finalized before revealing the content of the signal regions. The optimization used the expected upper limit on the $B_s^0 \rightarrow \mu^+\mu^-$ branching fraction as a figure of merit. To exploit the difference in the $m_{\mu\mu}$ distributions between signal and background and the improved suppression of combinatorial background at large ν_N , the data is divided into sub-samples in the $(\nu_N, m_{\mu\mu})$ plane. The CC and CF samples are each divided into 40 sub-samples. There are eight bins in ν_N with bin boundaries 0.70, 0.76, 0.85, 0.90, 0.94, 0.97, 0.987, 0.995 and 1. Within each ν_N bin we employ five $m_{\mu\mu}$ bins, each 24 MeV/ c^2 wide, centered on the world average $B_s^0(B^0)$ mass. The expected backgrounds and efficiencies are calculated in each bin separately.

For measuring efficiencies, estimating backgrounds, and optimizing the analysis, samples of $B_s^0(B^0) \rightarrow \mu^+\mu^-$, $B^+ \rightarrow J/\psi K^+$, and $B \rightarrow h^+h'^-$ are generated with the PYTHIA program [19] and a CDF II detector simulation. The p_T spectrum and the I distribution of the B -mesons are weighted to match distributions measured in samples of $B^+ \rightarrow J/\psi K^+$ and $B_s^0 \rightarrow J/\psi \phi$ events [12].

We use a relative normalization to determine the $B_s^0 \rightarrow \mu^+\mu^-$ branching fraction:

$$\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) = \frac{N_s}{N_+} \frac{\alpha_+}{\alpha_s} \frac{\epsilon_+}{\epsilon_s} \frac{1}{\epsilon_N} \frac{f_+}{f_s} \mathcal{B}(B^+),$$

where N_s is the number of $B_s^0 \rightarrow \mu^+\mu^-$ candidate events. The observed number of $B^+ \rightarrow J/\psi K^+$ candidates is $N_+ = 21\,471 \pm 191$ and $9\,814 \pm 137$ in the CC and CF channels, respectively. The contribution of $B^+ \rightarrow J/\psi \pi^+$ events is negligible. We use $\mathcal{B}(B^+) = \mathcal{B}(B^+ \rightarrow J/\psi K^+ \rightarrow \mu^+\mu^- K^+) = (6.01 \pm 0.21) \times 10^{-5}$ [17] and the ratio of B -meson production fractions $f_+/f_s = 3.55 \pm 0.47$ [17]. The parameter α_s (α_+) is the acceptance of the trigger and ϵ_s (ϵ_+) is the efficiency of the reconstruction requirements for the signal (normalization) mode. The reconstruction efficiency includes trigger, track, muon, and baseline requirement efficiencies. The NN efficiency ϵ_N only applies to the signal mode since it is not used to select the $B^+ \rightarrow J/\psi K^+$ sample. The expression for $\mathcal{B}(B^0 \rightarrow \mu^+\mu^-)$ is derived by replacing B_s^0 with B^0 and f_+/f_s with $f_+/f_d = 1$. The ratios of acceptances α_+/α_s are 0.300 ± 0.018 and 0.196 ± 0.014 for the CC and CF topologies, respectively. These ratios are measured using simulated events. The uncertainties include contributions from systematic variations of the modeling of the B -meson p_T distributions and the longitudinal beam profile. The ratio of reconstruction efficiencies is $\epsilon_+/\epsilon_s = 0.81 \pm 0.03$ as determined from studies using samples of $J/\psi \rightarrow \mu^+\mu^-$ and $B^+ \rightarrow J/\psi K^+$ events collected with the same triggers. The uncertainty in ϵ_+/ϵ_s is dominated by kinematic differences between $J/\psi \rightarrow \mu^+\mu^-$ and $B_s^0(B^0) \rightarrow \mu^+\mu^-$ decays. The ϵ_N is

estimated from the simulation. We assign a relative systematic uncertainty on ϵ_N of 7% using comparisons of the NN performance in simulated and observed $B^+ \rightarrow J/\psi K^+$ event samples, and the statistical uncertainty on studies of the p_T and I distributions from observed $B_s^0 \rightarrow J/\psi \phi$ event samples. The $B^0 \rightarrow \mu^+\mu^-$ decay is determined to have the same acceptances and efficiencies. Treating CC and CF together, about 90% of simulated $B_s^0 \rightarrow \mu^+\mu^-$ events surviving the initial requirements have $\nu_N > 0.70$, with about 45% having $\nu_N > 0.995$. The expected SM yield of $B_s^0 \rightarrow \mu^+\mu^-$ events ranges from 0.05 in the lowest ν_N bin to 1.0 events in the highest ν_N bin summing the CC and CF contributions. The expected SM yield of $B^0 \rightarrow \mu^+\mu^-$ events is about thirty times smaller.

The expected background is obtained by summing contributions from the combinatorial background and from $B \rightarrow h^+h'^-$ decays. To estimate the combinatorial background, we fit the $m_{\mu\mu}$ distribution of sideband events with $\nu_N > 0.70$ to a linear function. We only use events with $m_{\mu\mu} > 5 \text{ GeV}/c^2$ in order to suppress contributions from $b \rightarrow \mu^+\mu^- X$ decays. The slopes are then fixed, and the normalization is determined for each ν_N bin separately using the relevant sideband events. In addition to the statistical uncertainties of the slope and normalization parameters, systematic uncertainties are assigned by comparing results derived using alternative fit functions and ranges. The uncertainties vary from about 10% for the lower ν_N bins to 65% for the highest ν_N bins. The $B \rightarrow h^+h'^-$ contributions are estimated using efficiencies determined from the simulation, probabilities of misidentifying hadrons as muons measured in a $D^0 \rightarrow K^-\pi^+$ data sample obtained from $D^{*+} \rightarrow D^0\pi^+$ decays, and normalizations derived from their branching fractions [15, 17]. In addition to the statistical uncertainties from the D^0 sample, systematic uncertainties are assigned to account for variations in time of the misidentification probability due to changing detector conditions and for branching fraction uncertainties. For the B_s^0 modes there is an additional uncertainty from f_+/f_s . The estimated $B \rightarrow h^+h'^-$ background is approximately one quarter of the total background in the $B^0 \rightarrow \mu^+\mu^-$ search while in the $B_s^0 \rightarrow \mu^+\mu^-$ search it is a factor of ten smaller than both the combinatorial background and the SM signal. The expected background is shown in Fig. 1 for the $B_s^0 \rightarrow \mu^+\mu^-$ and $B^0 \rightarrow \mu^+\mu^-$ searches. The background estimates are cross-checked using two sets of independent control samples: $\mu^+\mu^-$ events with $\lambda < 0$ and $\mu^\pm\mu^\pm$ events, both of which are dominated by combinatorial backgrounds, and a misidentified-muon enhanced $\mu^+\mu^-$ sample with at least one muon candidate failing the muon quality requirements. The latter sample has a significant contribution from $B \rightarrow h^+h'^-$ backgrounds. We compare the predicted and observed number of events in each of these control samples for all 80 sub-samples and observe no significant discrepancies.

Two fits are performed on the data, a background-only fit (b) and a signal-plus-background fit ($s + b$) for which the branching fraction of the signal is left floating. A log-likelihood ratio is formed, $-2 \ln Q$, where $Q = \mathcal{L}(s + b|\text{data})/\mathcal{L}(b|\text{data})$ and $\mathcal{L}(h|x)$ is the likelihood of hypothesis h given observation x ; this likelihood is obtained by

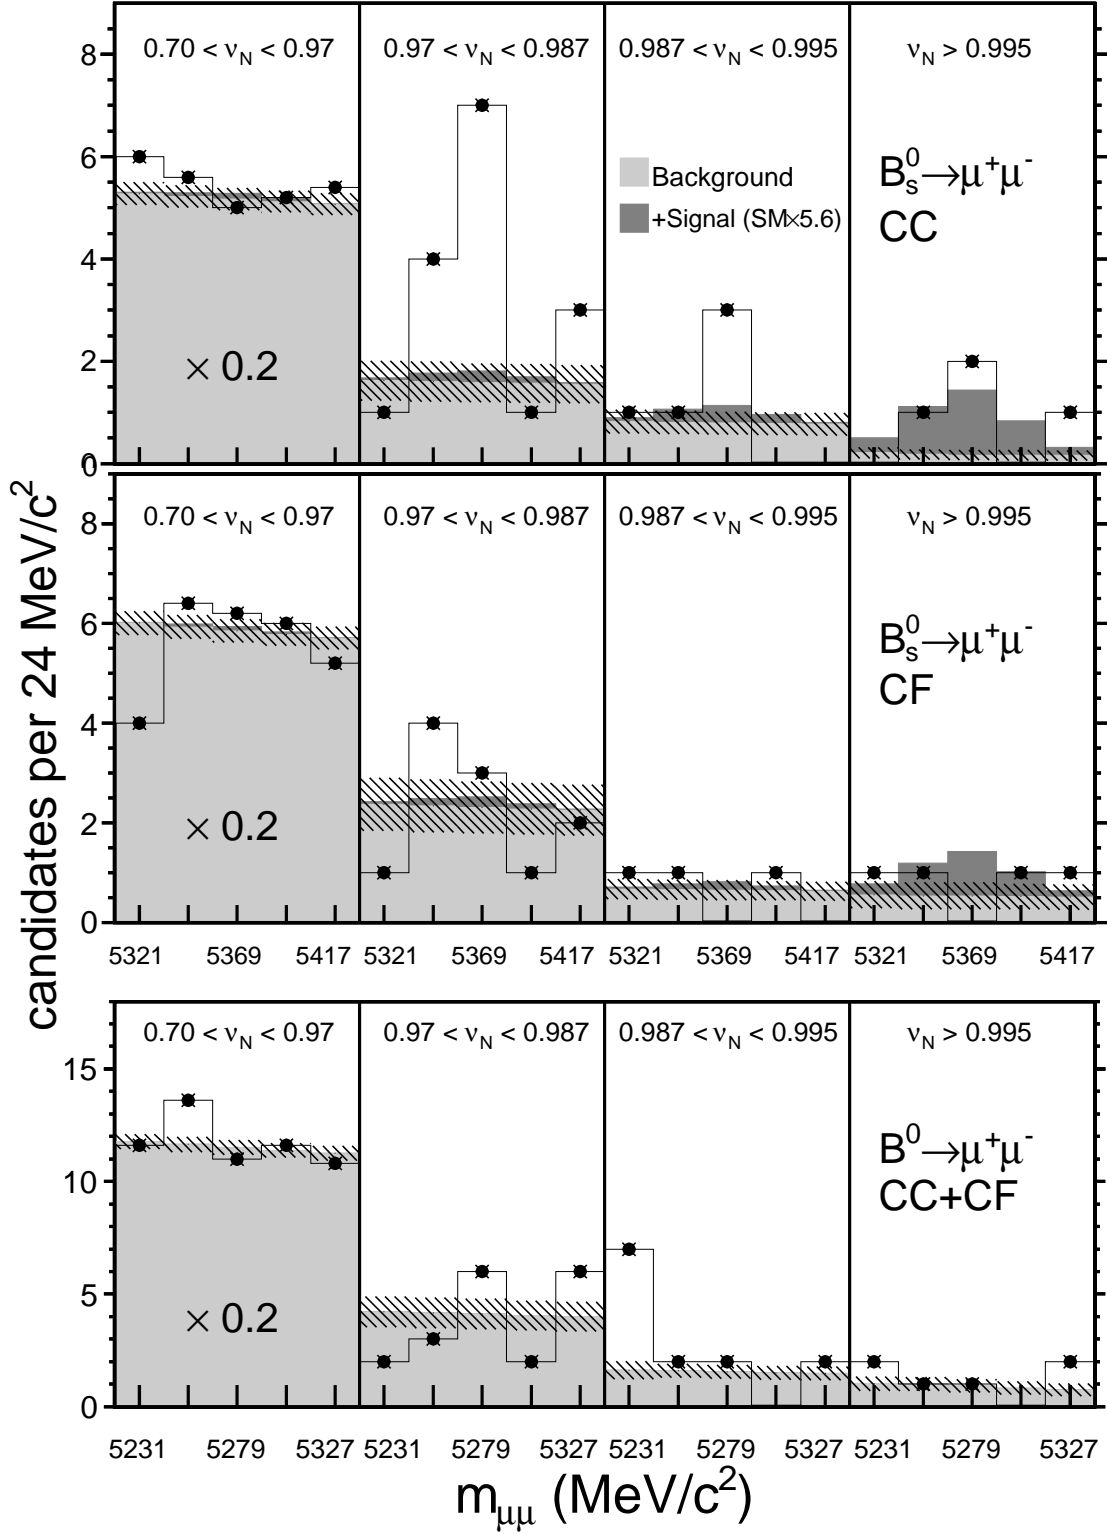


FIG. 1: The observed number of events (points) is compared to the total expected background (light grey) and its uncertainty (hatched) in bins of dimuon invariant mass. The top and middle rows show the results in the B_s^0 mass signal region for the CC and CF channels, respectively. The bottom row shows the results in the B^0 mass signal region for the CC and CF channels combined. The results for the first 5 ν_N bins are combined while the results for the last three bins are each shown separately. Also shown is the expected contribution from $B_s^0 \rightarrow \mu^+ \mu^-$ events (dark gray) using the fitted branching fraction, which is 5.6 times the expected SM value.

multiplying Poisson probabilities over all 80 sub-samples and is minimized with respect to the nuisance parameters that model our systematic uncertainties. To evaluate the consistency of the data in the signal region with our background model, we compare the observed value of $-2\ln Q$ with the distribution of $-2\ln Q$ obtained from an ensemble of background-only simulated experiments. The effects of systematic uncertainties are included in the simulated experiments by randomly choosing the nuisance parameters from Gaussian distributions. The fraction of simulated experiments with a value of $-2\ln Q$ less than that observed in the data is used to determine the p -value for the background-only hypothesis. The data are shown in Fig. 1. In the B^0 search region the data are consistent with the background prediction and have a p -value of 23%. In the B_s^0 search region the data exceed the background prediction and have a p -value of 0.27%. The excess is concentrated in bins with $\nu_N > 0.97$. If we restrict ourselves to only the two highest ν_N bins ($\nu_N > 0.987$), which together account for 85% of the signal acceptance, we find a p -value of 0.66%. For the $B_s^0 \rightarrow \mu^+\mu^-$ analysis we also produce an ensemble of simulated experiments that includes a $B_s^0 \rightarrow \mu^+\mu^-$ contribution at the expected SM branching fraction [2] and yields a p -value of 1.9%. The corresponding p -value for the two highest ν_N bins alone is 4.3%.

We use a modified frequentist approach [20, 21] that includes the effects of systematic uncertainties to calculate expected and observed limits. We calculate expected limits of $\mathcal{B}(B^0 \rightarrow \mu^+\mu^-) < 4.6 \times 10^{-9}$ and $\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) < 1.5 \times 10^{-8}$ at the 95% confidence level (C.L.), a factor 3.3 improvement relative to our previous analysis [4]. We calculate observed limits of $\mathcal{B}(B^0 \rightarrow \mu^+\mu^-) < 6.0(5.0) \times 10^{-9}$ and $\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) < 4.0(3.5) \times 10^{-8}$ at 95% (90%) C.L. If we assume the observed excess in the B_s^0 region is due to signal, we determine $\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) = (1.8_{-0.9}^{+1.1}) \times 10^{-8}$ using the data $-2\ln Q$ distribution and taking the central value from the minimum and the associated uncertainty as the interval corresponding to a change of one unit. By examining the interval corresponding to a change of 2.71 units we set bounds of $4.6 \times 10^{-9} < \mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) < 3.9 \times 10^{-8}$ at the 90% C.L. As a cross check we use a Bayesian technique to make a point estimate and to derive bounds at 90% C.L. and obtain results very similar to those reported here.

In summary, we have performed a search for $B^0 \rightarrow \mu^+\mu^-$ and $B_s^0 \rightarrow \mu^+\mu^-$ decays using 7 fb^{-1} of integrated luminosity collected by the CDF II detector at the Fermilab Tevatron. The data in the B^0 search region are consistent with background expectations and the world's most stringent upper limit on $\mathcal{B}(B^0 \rightarrow \mu^+\mu^-)$ is established. The data in the B_s^0 search region are in excess of the background predictions. A fit to the data determines $\mathcal{B}(B_s^0 \rightarrow \mu^+\mu^-) = (1.8_{-0.9}^{+1.1}) \times 10^{-8}$ including all uncertainties. Although of moderate statistical significance, this is the first indication of a $B_s^0 \rightarrow \mu^+\mu^-$ signal.

I. ACKNOWLEDGMENTS

We thank the Fermilab staff and the technical staffs of the participating institutions for their vital contributions. This work was supported by the U.S. Department of Energy and National Science Foundation; the Italian Istituto Nazionale di Fisica Nucleare; the Ministry of Education, Culture, Sports, Science and Technology of Japan; the Natural Sciences and Engineering Research Council of Canada; the National Science Council of the Republic of China; the Swiss National Science Foundation; the A.P. Sloan Foundation; the Bundesministerium für Bildung und Forschung, Germany; the Korean World Class University Program, the National Research Foundation of Korea; the Science and Technology Facilities Council and the Royal Society, UK; the Institut National de Physique Nucleaire et Physique des Particules/CNRS; the Russian Foundation for Basic Research; the Ministerio de Ciencia e Innovación, and Programa Consolider-Ingenio 2010, Spain; the Slovak R&D Agency; the Academy of Finland; and the Australian Research Council (ARC).

-
- [1] Throughout this paper inclusion of charge conjugate modes is implied.
- [2] A. J. Buras, M. V. Carlucci, S. Gori, and G. Isidori, *J. High Energy Phys.* **10**, 009 (2010).
- [3] S. R. Choudhury and N. Gaur, *Phys. Lett. B* **451**, 86 (1999); K.S. Babu and C. Kolda, *Phys. Rev. Lett.* **84**, 228 (2000).
- [4] T. Aaltonen *et al.* (CDF Collaboration), *Phys. Rev. Lett.* **100**, 101802 (2008).
- [5] V. Abazov *et al.* (D0 Collaboration), *Phys. Lett. B* **693**, 539 (2010).
- [6] R. Aaij *et al.* (LHCb Collaboration), *Phys. Lett. B* **699**, 330 (2011).
- [7] A. Dedes, H. K. Dreiner, and U. Nierste, *Phys. Rev. Lett.* **87**, 251804 (2001); R. Arnowitt *et al.*, *Phys. Lett. B* **538**, 121 (2002).
- [8] S. Baek *et al.*, *J. High Energy Phys.* **06**, 017 (2005).
- [9] R. Ruiz de Austri, R. Trotta and L. Roszkowski, *J. High Energy Phys.* **0605**, 002 (2006); J. Ellis *et al.*, *J. High Energy Phys.* **0605**, 063 (2006).
- [10] S. Baek, P. Ko and W.Y. Song, *Phys. Rev. Lett.* **89**, 271801 (2002).
- [11] A. Buras *et al.*, *J. Phys. Conf. Ser.* **171**, 012004 (2009).
- [12] D. Acosta *et al.* (CDF Collaboration), *Phys. Rev. D* **71**, 032001 (2005).
- [13] D. Acosta *et al.* (CDF Collaboration), *Phys. Rev. Lett.* **93**, 032001 (2004).
- [14] A. Abulencia *et al.* (CDF Collaboration), *Phys. Rev. Lett.* **97**, 242003 (2006).
- [15] T. Aaltonen *et al.* (CDF Collaboration), *Phys. Rev. Lett.* **106**, 181802 (2011).
- [16] $I = |\vec{p}_T^{\mu\mu}|/(\sum_i p_T^i + |\vec{p}_T^{\mu\mu}|)$, where $\vec{p}^{\mu\mu}$ is the momentum of the dimuon pair; the sum is over all tracks with

$\sqrt{(\Delta\eta)^2 + (\Delta\phi)^2} \leq 1$; $\Delta\phi$ and $\Delta\eta$ are the relative azimuthal angle and pseudorapidity of track i with respect to $\vec{p}^{\mu\mu}$.

- [17] K. Nakamura *et al.* (Particle Data Group), J. Phys. G **37**, 075021 (2010).
- [18] M. Feindt and U. Kerzel, Nucl. Instrum. Methods A **559**, 190 (2006).
- [19] T. Sjöstrand *et al.*, Comp. Phys. Comm. **135**, 238 (2001).
- [20] T. Junk, Nucl. Instrum. Methods A **434**, 435 (1999).
- [21] A.L. Read, “Modified frequentist analysis of search results (the CL_s method)”, in F. James, L. Lyons and Y. Perrin (eds.), *Workshop on Confidence Limits*, CERN Yellow Report 2000-005 (2000).