

Dual baseline search for muon antineutrino disappearance at $0.1 \text{ eV}^2 < \Delta m^2 < 100 \text{ eV}^2$

G. Cheng,^{6, a} W. Huelsnitz,^{15, b} A. A. Aguilar-Arevalo,¹⁸ J. L. Alcaraz-Aunión,³ S. J. Brice,⁷ B. C. Brown,⁷ L. Bugel,¹⁷ J. Catala-Perez,²⁴ E. D. Church,²⁵ J. M. Conrad,¹⁷ R. Dharmapalan,¹ Z. Djuric,² U. Dore,²¹ D. A. Finley,⁷ R. Ford,⁷ A. J. Franke,⁶ F. G. Garcia,⁷ G. T. Garvey,¹⁵ C. Giganti,^{21, c} J. J. Gomez-Cadenas,²⁴ J. Grange,⁸ P. Guzowski,^{10, d} A. Hanson,¹¹ Y. Hayato,¹² K. Hiraide,^{14, e} C. Ignarra,¹⁷ R. Imlay,¹⁶ R. A. Johnson,⁴ B. J. P. Jones,¹⁷ G. Jover-Manas,³ G. Karagiorgi,^{6, 17} T. Katori,^{11, 17} Y. K. Kobayashi,²³ T. Kobilarcik,⁷ H. Kubo,¹⁴ Y. Kurimoto,^{14, f} W. C. Louis,¹⁵ P. F. Loverre,²¹ L. Ludovici,²¹ K. B. M. Mahn,^{6, g} C. Mariani,^{6, h} W. Marsh,⁷ S. Masuike,²³ K. Matsuoka,¹⁴ V. T. McGary,¹⁷ W. Metcalf,¹⁶ G. B. Mills,¹⁵ J. Mirabal,¹⁵ G. Mitsuka,^{13, i} Y. Miyachi,^{23, j} S. Mizugashira,²³ C. D. Moore,⁷ J. Mousseau,⁸ Y. Nakajima,^{14, k} T. Nakaya,¹⁴ R. Napora,^{20, l} P. Nienaber,²² D. Orme,¹⁴ B. Osmanov,⁸ M. Otani,¹⁴ Z. Pavlovic,¹⁵ D. Perevalov,⁷ C. C. Polly,⁷ H. Ray,⁸ B. P. Roe,¹⁹ A. D. Russell,⁷ F. Sanchez,³ M. H. Shaevitz,⁶ T.-A. Shibata,²³ M. Sorel,²⁴ J. Spitz,¹⁷ I. Stancu,¹ R. J. Stefanski,⁷ H. Takei,^{23, m} H.-K. Tanaka,¹⁷ M. Tanaka,⁹ R. Tayloe,¹¹ I. J. Taylor,^{10, n} R. J. Tesarek,⁷ Y. Uchida,¹⁰ R. G. Van de Water,¹⁵ J. J. Walding,^{10, o} M. O. Wascko,¹⁰ D. H. White,¹⁵ H. B. White,⁷ D. A. Wickremasinghe,⁴ M. Yokoyama,^{14, p} G. P. Zeller,⁷ and E. D. Zimmerman⁵

(MiniBooNE and SciBooNE Collaborations)

¹University of Alabama, Tuscaloosa, Alabama 35487, USA

²Argonne National Laboratory, Argonne, Illinois 60439, USA

³Institut de Fisica d'Altes Energies, Universitat Autònoma de Barcelona, E-08193 Bellaterra (Barcelona), Spain

⁴University of Cincinnati, Cincinnati, Ohio 45221, USA

⁵University of Colorado, Boulder, Colorado 80309, USA

⁶Columbia University, New York, New York 10027, USA

⁷Fermi National Accelerator Laboratory, Batavia, Illinois 60510, USA

⁸University of Florida, Gainesville, Florida 32611, USA

⁹High Energy Accelerator Research Organization (KEK), Tsukuba, Ibaraki 305-0801, Japan

¹⁰Imperial College London, London SW7 2AZ, United Kingdom

¹¹Indiana University, Bloomington, Indiana 47405, USA

¹²Kamioka Observatory, Institute for Cosmic Ray Research, University of Tokyo, Gifu 506-1205, Japan

¹³Research Center for Cosmic Neutrinos, Institute for Cosmic Ray Research,

University of Tokyo, Kashiwa, Chiba 277-8582, Japan

¹⁴Kyoto University, Kyoto 606-8502, Japan

¹⁵Los Alamos National Laboratory, Los Alamos, New Mexico 87545, USA

¹⁶Louisiana State University, Baton Rouge, Louisiana 70803, USA

¹⁷Massachusetts Institute of Technology, Cambridge, Massachusetts 02139, USA

¹⁸Instituto de Ciencias Nucleares, Universidad Nacional Autónoma de México, D.F. 04510, México

¹⁹University of Michigan, Ann Arbor, Michigan 48109, USA

²⁰Purdue University Calumet, Hammond, Indiana 46323, USA

²¹Università di Roma Sapienza, Dipartimento di Fisica and INFN, I-00185 Rome, Italy

²²Saint Mary's University of Minnesota, Winona, Minnesota 55987, USA

²³Tokyo Institute of Technology, Tokyo 152-8551, Japan

²⁴Instituto de Fisica Corpuscular, Universidad de Valencia and CSIC, E-46071 Valencia, Spain

²⁵Yale University, New Haven, Connecticut 06520, USA

(Dated: August 1, 2012)

The MiniBooNE and SciBooNE collaborations report the results of a joint search for short baseline disappearance of $\bar{\nu}_\mu$ at Fermilab's Booster Neutrino Beamline. The MiniBooNE Cherenkov detector and the SciBooNE tracking detector observe antineutrinos from the same beam, therefore the combined analysis of their datasets serves to partially constrain some of the flux and cross section uncertainties. Uncertainties in the ν_μ background were constrained by neutrino flux and cross section measurements performed in both detectors. A likelihood ratio method was used to set a 90% confidence level upper limit on $\bar{\nu}_\mu$ disappearance that dramatically improves upon prior limits in the $\Delta m^2=0.1\text{--}100 \text{ eV}^2$ region.

PACS numbers: 14.60.Lm, 14.60.Pq, 14.60.St

^a Corresponding author: gcc2113@columbia.edu

^b Corresponding author: whuelsn@fnal.gov

^c Present address: DSM/Irfu/SPP, CEA Saclay, F-91191 Gif-sur-

I. INTRODUCTION

Recently there has been increasing evidence for neutrino oscillations in the $\Delta m^2 \approx 1 \text{ eV}^2$ region. Such oscillations could imply the existence of new sterile neutrino species that do not participate in standard weak interactions but mix with the known neutrino flavors through additional mass eigenstates. The LSND [1] experiment observed an excess of $\bar{\nu}_e$ -like events in a $\bar{\nu}_\mu$ beam. MiniBooNE [2–4] has observed an excess of ν_e -like and $\bar{\nu}_e$ -like events, in a ν_μ beam and $\bar{\nu}_\mu$ beam, respectively. Additional evidence for short-baseline anomalies with $L/E \approx 1$, where L is the neutrino path length in km and E the neutrino energy in GeV, includes the deficit of events observed in reactor antineutrino [5] and radioactive source neutrino [6] experiments. If these anomalies are due to neutrino oscillations in the $\Delta m^2 \approx 1 \text{ eV}^2$ range, then sterile neutrinos may provide the additional mass eigenstate(s). Observation of ν_μ ($\bar{\nu}_\mu$) disappearance in conjunction with ν_e ($\bar{\nu}_e$) appearance in this Δm^2 range would be a smoking-gun for the presence of these sterile neutrinos. Alternatively, constraining ν_μ ($\bar{\nu}_\mu$) disappearance can, along with global ν_e ($\bar{\nu}_e$) disappearance data, constrain the oscillation interpretation of the ν_e ($\bar{\nu}_e$) appearance signals in LSND and MiniBooNE [7].

Searches for ν_μ and $\bar{\nu}_\mu$ disappearance in MiniBooNE were performed in 2009 [8]. No evidence for disappearance was found. The search for ν_μ disappearance was recently repeated in MiniBooNE with the inclusion of data from the SciBooNE detector in a joint analysis [9]. Once again, the results were consistent with no ν_μ disappearance. The analysis presented here is an improved search for $\bar{\nu}_\mu$ disappearance using data from MiniBooNE

and SciBooNE taken while the Booster Neutrino Beamline (BNB) operated in antineutrino mode.

The Monte Carlo (MC) predictions for both MiniBooNE and SciBooNE were updated to account for recent neutrino flux and cross section measurements made with both experiments. The data from both detectors were then simultaneously fit to a simple two-antineutrino oscillation model. Improved constraints on MC predictions, the inclusion of SciBooNE data, and a MiniBooNE antineutrino data set nearly three times larger than what was available for the original $\bar{\nu}_\mu$ disappearance analysis, have allowed a 90% confidence level upper limit to be set that dramatically improves upon prior limits in the $\Delta m^2 = 0.1\text{--}100 \text{ eV}^2$ region, pushing down into the region of parameter space of interest to sterile neutrino models.

This paper is organized as follows. Section II describes the BNB and the MiniBooNE and SciBooNE detectors. Then, the simulation of neutrino interactions with nuclei and subsequent detector responses are described in Section III. The event selection and reconstruction for both detectors are described in Section IV. The parameters for the MC tuning and its systematic uncertainties are given in Section V. Section VI describes the analysis methodology. The results of the analysis are presented in Section VII, and the final conclusions are given in Section VIII.

II. BEAMLINE AND EXPERIMENTAL APPARATUS

MiniBooNE and SciBooNE both use the BNB at Fermilab in Batavia, Illinois. The 8 GeV kinetic energy protons from the booster accelerator strike a 1.7 interaction length beryllium target, which is located inside a focusing horn. The horn is pulsed in time with the beam to produce a toroidal magnetic field that, depending on the polarity setting, will either focus π^-/K^- and defocus π^+/K^+ or vice-versa. These mesons then pass through a 60 cm long collimator and decay in flight along a 50 m long tunnel. A schematic view of the BNB from the beryllium target to both detectors is shown in Figure 1.

The resulting neutrino beam will have an enhanced flux of either muon neutrinos (*neutrino mode*) or muon antineutrinos (*antineutrino mode*). In antineutrino mode beam running, the flux of antineutrinos in the beam will be referred to as the right-sign (RS) flux and the flux of neutrinos in the beam will be referred to as the wrong-sign (WS) flux. These two designations are used because antineutrinos are the signal in this analysis and neutrinos are an intrinsic background. Figure 2 shows the neutrino and antineutrino flux prediction in antineutrino mode at both the MiniBooNE and SciBooNE detectors. Details on the beamline and flux predictions are given in Ref. [10].

The MiniBooNE detector [11] is located 541 m downstream of the antineutrino production target and consists of a spherical 12.2 m diameter tank containing 800 tons of

Yvette, France

^d Present address: The School of Physics and Astronomy, The University of Manchester, Manchester, M13 9PL, United Kingdom

^e Present address: Kamioka Observatory, Institute for Cosmic Ray Research, University of Tokyo, Gifu 506-1205, Japan

^f Present address: Present address: High Energy Accelerator Research Organization (KEK), Tsukuba, Ibaraki 305-0801, Japan

^g Present address: TRIUMF, Vancouver, British Columbia, V6T 2A3, Canada

^h Present address: Center for Neutrino Physics, Virginia Tech, Blacksburg, VA, USA

ⁱ Present address: Solar-Terrestrial Environment Laboratory, Nagoya University, Furo-cho, Chikusa-ku, Nagoya, Japan

^j Present address: Yamagata University, Yamagata, 990-8560 Japan

^k Present address: Lawrence Berkeley National Laboratory, Berkeley, CA 94720, USA

^l Present address: Epic Systems, Inc.

^m Present address: Kitasato University, Tokyo, 108-8641 Japan

ⁿ Present address: Department of Physics and Astronomy, State University of New York, Stony Brook, New York 11794-3800, USA

^o Present address: Department of Physics, Royal Holloway, University of London, Egham, TW20 0EX, United Kingdom

^p Present address: Department of Physics, University of Tokyo, Tokyo 113-0033, Japan



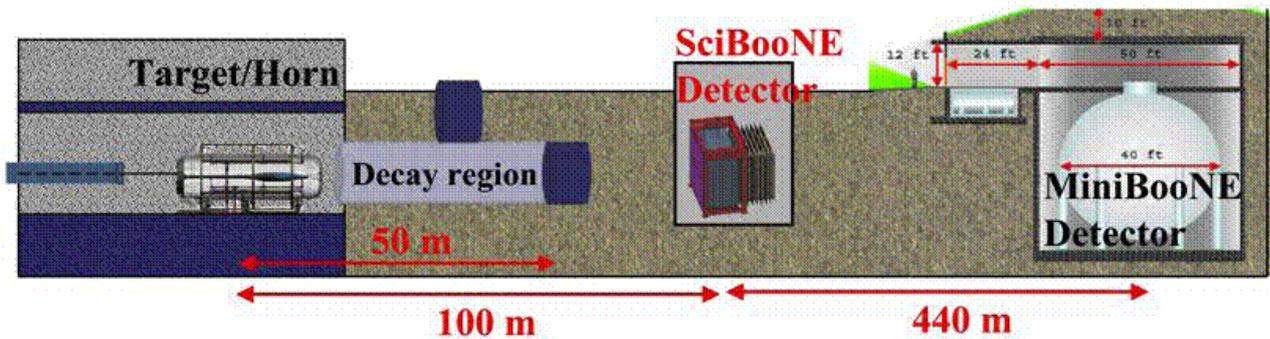


FIG. 1. Schematic view of the BNB from the beryllium target and magnetic horn to the SciBooNE and MiniBooNE detectors.

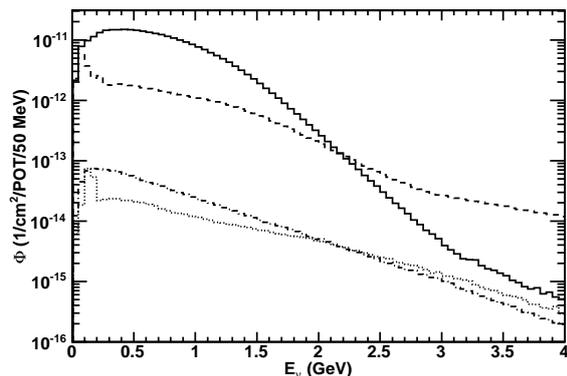

(a) MiniBooNE antineutrino mode flux

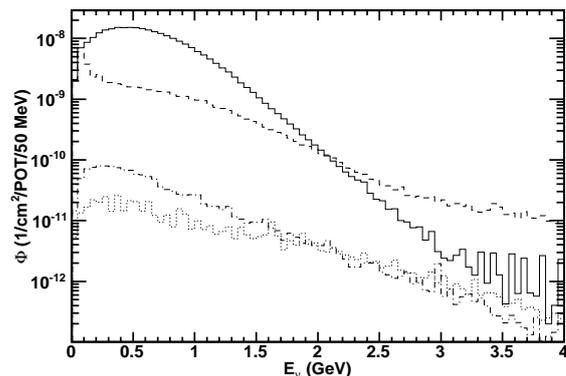

(b) SciBooNE antineutrino mode flux

FIG. 2. The neutrino and antineutrino flux prediction as a function of true neutrino(antineutrino) energy, in antineutrino mode at the MiniBooNE and SciBooNE detectors. The $\bar{\nu}_\mu$ flux is represented by the solid line, the ν_μ flux is represented by the dashed line, the $\bar{\nu}_e$ flux is represented by the dot-dashed line, and the ν_e flux is represented by the dotted line.

1 mineral oil (CH_2), beneath at least 3 m of earth overburden.
 2 The fiducial volume is a sphere 10 m in diameter,
 3 with a fiducial mass of 450 tons. The detector is instru-
 4 mented with 1280 8 inch photomultiplier tubes (PMTs)
 5 in the active region, and 240 8 inch PMTs in an outer,
 6 veto region. Events are reconstructed based on timing
 7 and charge information mostly from Cherenkov radia-
 8 tion. A schematic of the MiniBooNE detector is shown
 9 in Figure 3.

10 The SciBooNE detector [12] is located 100 m down-
 11 stream of the target. SciBooNE is a discrete tracking
 12 detector comprised of three sub-detectors (in order from
 13 upstream to downstream): a fully active and finely seg-
 14 mented scintillator tracker (SciBar), an electromagnetic
 15 calorimeter (EC), and a muon range detector (MRD).
 16 The SciBar sub-detector [13] consists of 14336 extruded
 17 polystyrene (C_8H_8) strips arranged vertically and hori-
 18 zontally to construct a $3 \times 3 \times 1.7 \text{ m}^3$ volume. Each scin-
 19 tillator strip is read out by a wavelength shifting fiber
 20 (WLS) attached to a 64-channel multi-anode PMT (MA-

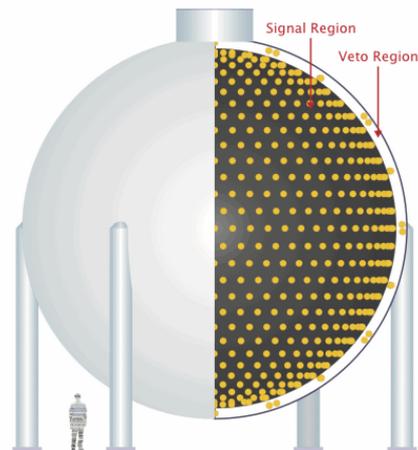


FIG. 3. Schematic view of the MiniBooNE detector.

1 PMT). The 15 ton SciBar sub-detector (10.6 ton fiducial 36
 2 volume) provides the primary interaction target. The
 3 EC sub-detector is a two plane (vertical and horizon-
 4 tal) “spaghetti”-type calorimeter; 64 modules made of 37
 5 1 mm scintillating fibers embedded in lead foil are bun-
 6 dled and read out at both ends by PMTs. The MRD
 7 sub-detector, designed to measure muon momentum, is
 8 made from 12 iron plates, each 5 cm thick, sandwiched 39
 9 between 13 alternating horizontal and vertical scintilla-
 10 tor planes of thickness 6 mm that are read out via 362
 11 individual 2 inch PMTs. A schematic of the SciBooNE
 12 detector is shown in Figure 4.

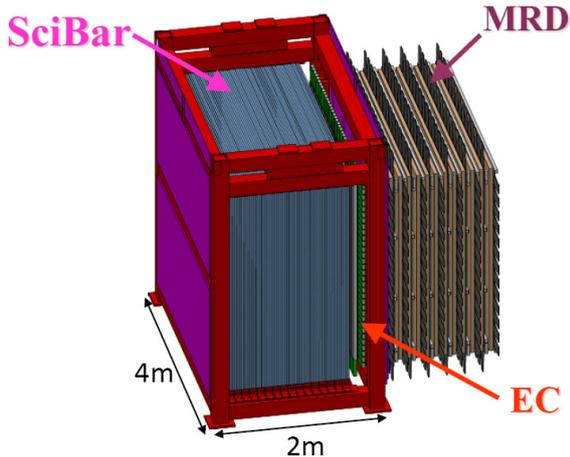


FIG. 4. Schematic view of the SciBooNE detector.

13 III. MONTE CARLO SIMULATION

14 Simulation of the neutrino and antineutrino flux, neu- 69
 15 trino and antineutrino interactions in the detector, and 70
 16 detector response has been discussed in detail in previous 71
 17 publications for MiniBooNE [14, 15] and SciBooNE [16]. 72
 18 Calculation of the neutrino and antineutrino flux at the 73
 19 detector is done with a GEANT4-based model [17] that 74
 20 is constrained by external measurements [10, 18] and ac- 75
 21 counts for proton transport to the target, p-Be interac- 76
 22 tions in the target, meson production, focusing by the 77
 23 magnetic horn, meson propagation and decay, and neu- 78
 24 trino and antineutrino propagation to the detectors. 79

25 Neutrino and antineutrino interactions in both detec- 80
 26 tors are simulated using the NUANCE [19] event gener- 81
 27 ator. Bound nucleons are described by the Relativistic 82
 28 Fermi Gas (RFG) model [20]. The MiniBooNE detector 83
 29 response is simulated using GEANT3 [21], which takes 84
 30 the final-state particles emerging from a nucleus and 85
 31 propagates them through the detector. The GEANT3 86
 32 code was modified to include a custom model for light 87
 33 propagation in the detector [22] and to use GCALOR [23] 88
 34 for pion absorption and charge exchange in the detector 89
 35 medium. SciBooNE uses GEANT4 [24] to simulate the 90

interactions of hadronic particles with detector materials.

IV. EVENT SELECTION AND RECONSTRUCTION

41 MiniBooNE data from a total of 1.01×10^{21} protons on
 42 target (POT) operation in antineutrino mode, from July
 43 2006 up through April 2012, are included in the analysis.
 44 Data from SciBooNE antineutrino mode operation from
 45 June 2007 through August 2008 are included, comprising
 46 a total of 1.53×10^{20} POT for the SciBooNE contribution.

47 MiniBooNE event selection and reconstruction is es-
 48 sentially identical to that used for a previous neutrino
 49 mode ν_μ cross section measurement [14]. Events with
 50 only a single μ^+ in the detector are selected. Event se-
 51 lection cuts are based on the beam timing, fiducial vol-
 52 ume, observation of two correlated events (the muon and
 53 its decay electron), and the likelihood of the fit to the
 54 muon hypothesis. These cuts are designed to reject in-
 55 coming particles (i.e. muons from cosmic rays or from
 56 neutrino and antineutrino interactions in the surround-
 57 ing material), ensure that the event is contained within
 58 the detector, and ensure correct event classification as
 59 well as accurate muon energy estimation. The capture
 60 of μ^- resulting from initial ν_μ CCQE interaction events
 61 is simulated in the MC and these specific events are not
 62 selected. In antineutrino mode, a sizeable fraction of the
 63 events (roughly 20%) are due to ν_μ interactions. Mini-
 64 BooNE cannot distinguish between ν_μ and $\bar{\nu}_\mu$ events on
 an event-by-event basis, so μ^- s from ν_μ interactions are
 an irreducible background.

65 For SciBooNE, the event selection and reconstruction
 66 is nearly identical to the previous inclusive charged
 67 current measurement [16]. Two-dimensional SciBar
 68 tracks are reconstructed using a cellular automaton al-
 gorithm [25] from SciBar hits. Three-dimensional SciBar
 tracks are then reconstructed based on the timing and
 endpoint positions of the two-dimensional SciBar tracks.
 Two-dimensional tracks in the MRD are independently
 reconstructed using hits in the MRD that are clustered
 within a 50 ns timing window. Three-dimensional tracks
 in the MRD are reconstructed by matching the timing of
 the two-dimensional projections. If the downstream edge
 of a SciBar track lies in the last two layers of SciBar,
 a search for a matching track or hits in the MRD is per-
 formed. The upstream edge of the MRD track is required
 to be on either one of the first two layers of the MRD,
 and to be within 30 cm of the projected entry point of the
 SciBar track into the MRD (a more detailed description
 of the track reconstruction can be found in Ref. [12]).

To select μ^+ events, the highest momentum track per
 event in the beam on-time window is required to have
 $p_\mu > 0.25$ GeV/c to reduce the number of neutral current
 (NC) events. The energy loss of the track in SciBar must
 be consistent with a muon hypothesis, and must origi-
 nate within the 10.6 ton SciBar fiducial volume. These
 muon candidate tracks are further categorized as SciBar-

stopped or MRD-stopped. SciBar-stopped events have the downstream endpoint of the muon candidate track contained in the SciBar fiducial volume. MRD-stopped events have the muon candidate track being a SciBar track matched to MRD hits or to an MRD track with a downstream endpoint that does not exit the back or sides of the MRD. Both SciBar-stopped and MRD-stopped events are used in the analysis. SciBooNE has no overburden so cosmic backgrounds must be subtracted. For cosmic background estimation, the same muon selection criteria are applied to a beam-off time window that is five times longer than the beam-on window. This event rate is scaled and subtracted from the beam-on data.

The selected events include $\bar{\nu}_\mu$ and ν_μ interactions on carbon and hydrogen in the detectors. The reconstructed antineutrino energy is based on the assumption that the interaction is always a $\bar{\nu}_\mu$ charged current quasielastic (CCQE) interaction with a proton at rest in carbon: $\bar{\nu}_\mu + p \rightarrow \mu + n$. Hence, it is a function of the measured energy and direction of the outgoing muon. The equation for reconstructed energy is:

$$E_\nu^{QE} = \frac{M_n^2 - (M_p - E_B)^2 - M_\mu^2 + 2(M_p - E_B) E_\mu}{2(M_p - E_B - E_\mu + P_\mu \cos \theta_\mu)}, \quad (1)$$

where M_n and M_p are the mass of the neutron and proton, M_μ , E_μ , P_μ , and θ_μ are the mass, energy, momentum, and direction of the outgoing muon, and E_B is the binding energy (30 MeV for protons in carbon). Equation 1 is applied to all events in data and MC, even though a sizeable fraction of the events are not CCQE (i.e. charged current single π (CC1 π) or multi-nucleon knockout events misidentified as CCQE events). MiniBooNE has an estimated resolution for reconstructed energy of 8.3% for CCQE events and 13.9% for all events. SciBooNE has a reconstructed energy resolution of 9.6% for CCQE events and 24.6% for all events.

MiniBooNE and SciBooNE data and MC are put in 21-bin histograms of E_ν^{QE} . The binning goes from 300 MeV to 1.9 GeV, with individual bin widths as follows: bin 1, 100 MeV; bins 2-19, 66.7 MeV; bin 20, 100 MeV; bin 21, 200 MeV. The first and last two bins are wider to ensure adequate event statistics in data and MC.

Figure 5 shows the predicted event distributions in MiniBooNE for reconstructed antineutrino and neutrino energy, for events on hydrogen and carbon nuclei. Figure 6 shows the predictions for MiniBooNE's reconstructed antineutrino and neutrino energy distributions by interaction type: CCQE, CC1 π , and all other interaction types (CC multi-pion and NC). Table I shows the MC predictions for the selected MiniBooNE events by neutrino and interaction type. ν_e and $\bar{\nu}_e$ contamination is negligible.

The following plots show several properties of the selected SciBooNE events, as predicted by simulation. Figure 7 shows the reconstructed antineutrino and neutrino energy distributions for events on hydrogen and carbon nuclei. Figure 8 shows the reconstructed antineutrino

and neutrino energy distribution by interaction type: CCQE, CC1 π , and other (CC multi-pion and NC). Table I shows the MC predictions for the selected SciBooNE events by neutrino and interaction type. The data set is estimated to contain an additional 811 events from cosmic ray muons.

TABLE I. MC predictions for the number of selected events by neutrino and interaction type in both MiniBooNE and SciBooNE.


interaction type	MiniBooNE		SciBooNE	
	$\bar{\nu}$ events	ν events	$\bar{\nu}$ events	ν events
CCQE	37428	9955	4619	1359
CC1 π	8961	2593	1735	1006
CC multi- π or NC	2364	460	959	610

The difference in shape between the SciBooNE RS (WS) and MiniBooNE RS (WS) energy distributions is mainly due to different event selection criteria between MiniBooNE and SciBooNE. MiniBooNE selects for CCQE interaction events and SciBooNE selects for all CC interaction events so the SciBooNE sample has a larger percentage of non-CCQE interaction events. Since the antineutrino energy reconstruction is based on a CCQE interaction assumption, there are more SciBooNE events with a larger discrepancy between true antineutrino energy and reconstructed antineutrino energy than in MiniBooNE, leading to shape differences. Differences in selection efficiency, antineutrino flux at the detector locations, and background rejection between MiniBooNE and SciBooNE also contribute to the shape differences.


Figure 9 shows the distribution of the combined antineutrino and neutrino propagation distances, from production in the decay tunnel to interaction in SciBooNE or MiniBooNE.

V. SYSTEMATIC UNCERTAINTIES

Beam and cross section uncertainties are calculated for both MiniBooNE and SciBooNE using the multisim method [26]. In this procedure, groups of correlated simulation parameters associated with beam production and cross section modeling uncertainties are sampled according to their covariance matrices. The parameters for each source of uncertainty (π^\pm , K^+ , etc.) are sampled 1000 times to obtain sufficient statistics. Each MC event in MiniBooNE and SciBooNE is reweighted based on these varied parameters forming 1000 new MC predictions of the E_ν^{QE} distribution in both detectors. Covariance matrices, in bins of E_ν^{QE} , are then computed for each source of uncertainty by comparing these 1000 new MC predictions to the default MC prediction. The procedure takes care of the correlation of beam production and cross section uncertainties between MiniBooNE and SciBooNE. Cross section and nuclear model uncertainties for ν and $\bar{\nu}$ events are treated as uncorrelated due to the poor understanding of differences between ν and $\bar{\nu}$ interactions

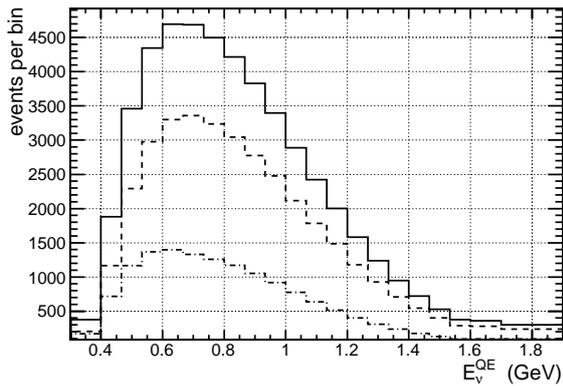


(a) MiniBooNE RS Events

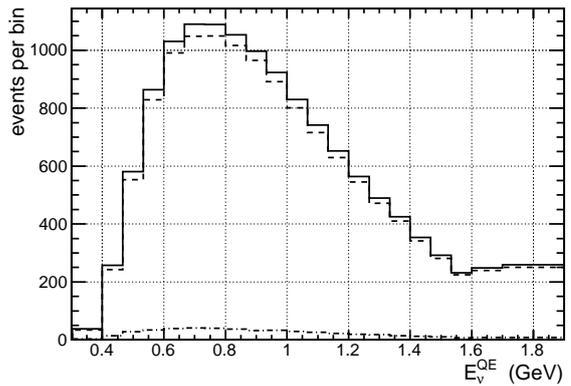


(b) MiniBooNE WS Events

FIG. 5. Reconstructed antineutrino and neutrino energy (E_{ν}^{QE}) distributions for selected RS and WS MiniBooNE events on different target types (hydrogen or carbon) from MiniBooNE MC. Total events are represented by the solid line, events with interaction on carbon are represented by the dashed line, and events with interaction on hydrogen are represented by the dot-dashed line.

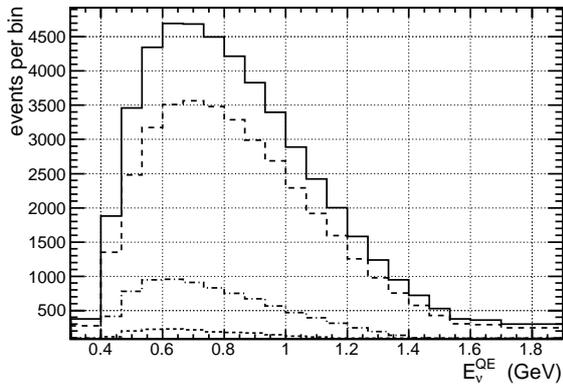

(a) MiniBooNE RS Events

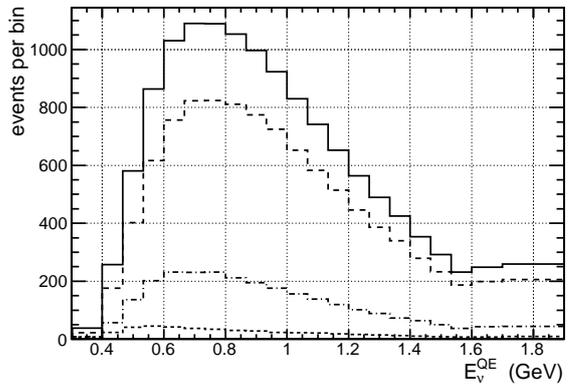

(b) MiniBooNE WS Events

FIG. 6. Reconstructed antineutrino and neutrino energy (E_{ν}^{QE}) distributions for selected RS and WS MiniBooNE events for different interaction types (CCQE, $CC1\pi$, other) from MiniBooNE MC. Total events are represented by the solid line, CCQE interaction events are represented by the dashed line, $CC1\pi$ interaction events are represented by the dot-dashed line, and all other interaction (CC multi- π or NC) events are represented by the short-dashed line.


1 in nuclear modeling. Some detector specific uncertain- 10
 2 ties are calculated using the unisim method [26] where 11
 3 uncorrelated detector specific uncertainties are varied up 12
 4 or down by one standard deviation.

5 A. Beam Uncertainties


6 Uncertainties in the delivery of the primary proton 18
 7 beam to the beryllium target, the primary beam optics, 19
 8 secondary hadron production in proton-beryllium inter- 20
 9 actions, hadronic interactions in the target and horn, and 21

the horn magnetic field, are included in the beam mul-
 tisims. Uncertainties in the magnetic field horn current,
 skin effect of the horn, and secondary nucleon and pion
 interactions in the Be target and Al horn are obtained
 from previous MiniBooNE analyses [10].

15 The normalization of the neutrino component in the
 16 antineutrino beam was adjusted based on direct mea-
 17 surements in MiniBooNE [15, 27]. The beam fraction of
 18 ν_{μ} in the antineutrino beam was determined using three
 19 methods: a pure data sample of ν_{μ} events from $CC1\pi$
 20 interactions, differences in Michel electron rates between
 21 final state μ^{-} and μ^{+} from ν_{μ} and $\bar{\nu}_{\mu}$ interactions, respec-

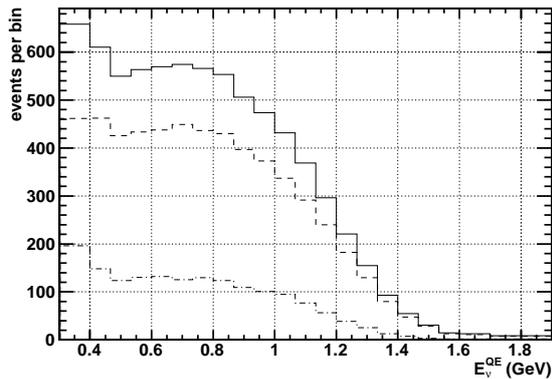


(a) SciBooNE RS Events

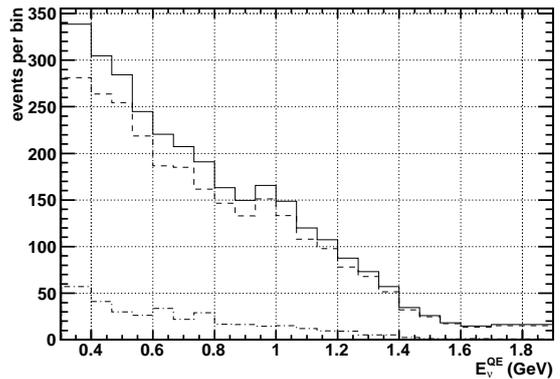


(b) SciBooNE WS Events

FIG. 7. Reconstructed antineutrino and neutrino energy (E_{ν}^{QE}) distributions for selected RS and WS SciBooNE events on different target types (hydrogen or carbon) from SciBooNE MC. Total events are represented by the solid line, events with interaction on carbon are represented by the dashed line, and events with interaction on hydrogen are represented by the dot-dashed line.

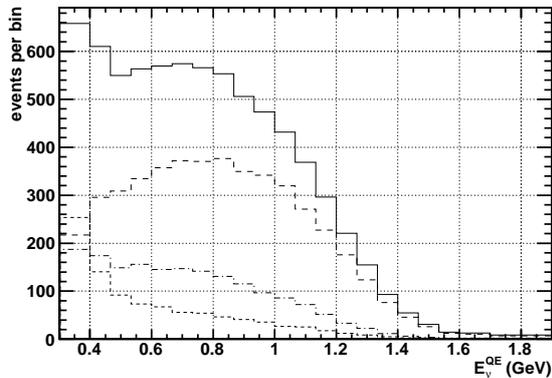

(a) SciBooNE RS Events

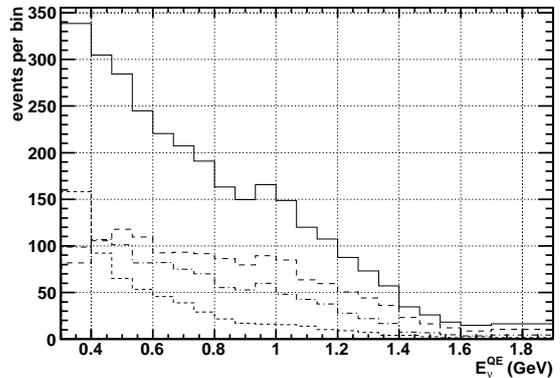


(b) SciBooNE WS Events


FIG. 8. Reconstructed antineutrino and neutrino energy (E_{ν}^{QE}) distributions for selected RS and WS SciBooNE events for different interaction types (CCQE, CC1 π , other) from SciBooNE MC. Total events are represented by the solid line, CCQE interaction events are represented by the dashed line, CC1 π interaction events are represented by the dot-dashed line, and all other interaction (CC multi- π or NC) events are represented by the short-dashed line.

1 tively, due to μ^- capture on carbon, and angular distri- 13
 2 bution differences between final state μ^- and μ^+ from ν_{μ} 14
 3 and $\bar{\nu}_{\mu}$ interactions, respectively. Averaging these three 15
 4 methods, the π^+ production in the beam MC was scaled 16
 5 by a factor of 0.78 and given a 12.8% normalization un- 17
 6 certainty. Uncertainties on the production of π^- from the 18
 7 initial p-Be interaction are calculated using spline fits to 19
 8 data from the HARP experiment [10]. An updated K^+
 9 production simulation with reduced uncertainties for the
 10 initial p-Be interaction is used. This update is based on
 11 a new Feynman scaling fit [28] to recent SciBooNE mea-
 12 surements [29]. The K^0 production uncertainties for the

initial p-Be interaction are from the Sanford-Wang pa-
 parameterization covariance matrix [10]. K^- production
 is estimated using the MARS hadronic interaction pack-
 age [30] due to the scarcity of production measurements
 in the relevant kinematic regions. K^- production cross
 section uncertainties from the initial p-Be interaction are
 given a conservative 100% normalization uncertainty.

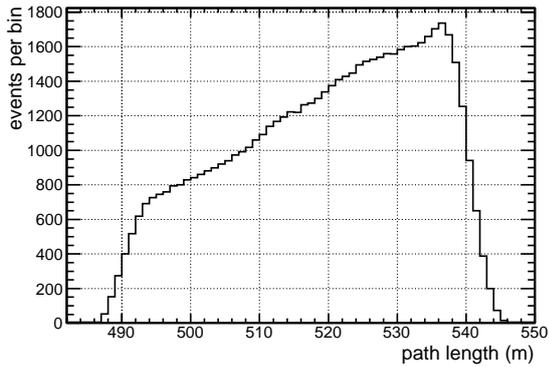

(a) MiniBooNE (anti)neutrino path lengths

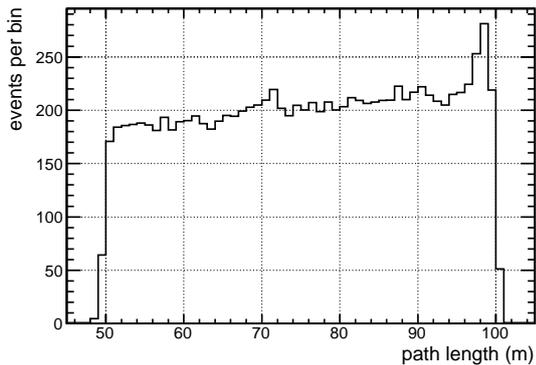

(b) SciBooNE (anti)neutrino path lengths

FIG. 9. Antineutrino and neutrino path lengths for MiniBooNE and SciBooNE events from point of production to interaction in detector, as predicted by the MC simulation.

B. Cross Section Uncertainties

CCQE cross sections on carbon are calculated assuming an RFG model with parameters M_A (axial mass) $= 1.35$ and κ (Pauli blocking factor) $= 1.007$. An additional correction, as a function of Q^2 , is applied to background $CC1\pi$ interaction events in MC [14]. The uncertainties in M_A and κ for CCQE events on carbon are based on the statistical uncertainties of the MiniBooNE neutrino mode measurement [14], to avoid double counting systematic uncertainties accounted for in this analysis as detailed in this section.

Since the purpose of the Q^2 correction in the MiniBooNE neutrino mode measurement [14] is to match the background $CC1\pi$ interaction events in MC to a selected data sample comprising mainly of $CC1\pi$ interaction events, there is no uncertainty placed on M_A for ν_μ $CC1\pi$ interaction events. However, for $\bar{\nu}_\mu$ $CC1\pi$ interaction events, the M_A -resonant and coherent 1π uncertainties are not constrained by the MiniBooNE neutrino mode measurement and are not reduced. The values

and uncertainties of M_A for CC coherent π interactions, M_A for multi π interactions, Fermi surface momentum (p_F), and NC axial vector isoscalar contribution (Δ_s) are identical to previous MiniBooNE and SciBooNE measurements [9, 16]. The uncertainties for pion absorption, pion inelastic scattering, and pionless Δ decay in the target nucleus ($\pm 25\%$, $\pm 30\%$, and $\pm 100\%$, respectively) are treated in the same way as in a previous measurement [9], however they are treated as uncorrelated between MiniBooNE and SciBooNE (unlike all other cross section uncertainties). Both the ν and $\bar{\nu}$ M_A values and their uncertainties for quasielastic interactions on hydrogen are based on the latest deuterium measurements [31].

Additional systematic uncertainties are added to account for limitations of the RFG model. Such limitations include the absence of processes such as meson exchange currents and multi-nucleon knockout events [32–35]. A 10% normalization uncertainty is assigned to both ν and $\bar{\nu}$ CCQE interactions on carbon to cover the difference between data and prediction in the MiniBooNE ν_μ CCQE measurement. An additional 40% normalization uncertainty is placed on $\bar{\nu}$ CCQE interactions on carbon to cover the discrepancy between the RFG model prediction for $\bar{\nu}$ and recent nuclear models [32–35]. An additional 10% normalization uncertainty is added to non-CCQE $\bar{\nu}$ interactions on carbon to account for the limitations of the RFG model for those type of events.

The full list of beam and cross section parameters for MC simulation and its associated systematic uncertainties are shown in Table II.

C. Detector Uncertainties

Uncertainties associated with the MiniBooNE detector include light propagation, attenuation, and scattering in the detector as well as PMT response. The optical model for light propagation in the detector [22] uses 35 parameters for properties such as refractive index, attenuation length, scintillation strength, etc. These parameters are tuned to non-MiniBooNE measurements as well as MiniBooNE internal data. Over 100 separate MC data sets were created based on variations in these parameters. In a manner similar to the multisim method, these results were used to compute the optical model error matrix in bins of reconstructed antineutrino energy. To estimate the impact of uncertainties in PMT response, independent MC data sets based on variations in the discriminator threshold, or the PMT charge-time correlations, were created and compared to default MC. Based on comparisons with external data [36–38] and the output of GCALOR, an uncertainty of 35% is assigned to pion absorption and 50% is assigned to charge exchange in the detector medium. This is distinct from the uncertainty on pion absorption and charge exchange inside the nucleus.

Uncertainties associated with the SciBooNE detector include uncertainties in the muon energy loss in the scin-

tillator and iron, light attenuation in the wavelength shifting fibers, and PMT response; see Ref. [16]. The crosstalk of the MA-PMT was measured to be 3.15% for adjacent channels with an absolute error of 0.4% [12]. The single photoelectron resolution of the MA-PMT is set to 50% in the simulation, and the absolute error is estimated to be $\pm 20\%$. Birk's constant for quenching in the SciBar scintillator was measured to be 0.0208 ± 0.0023 cm/MeV [12]. The conversion factors for ADC counts to photoelectrons were measured for all 14,336 MA-PMT channels in SciBar. The measurement uncertainty was at the 20% level. The threshold for hits to be used in SciBar track reconstruction is 2.5 photoelectrons; this threshold is varied by $\pm 20\%$ to evaluate the systematic error for SciBar track reconstruction. The TDC dead time is set to 55 ns in the MC simulation, with the error estimated to be ± 20 ns [39].

The reconstruction uncertainties consist of antineutrino energy reconstruction uncertainties and muon track misidentification uncertainties. For antineutrino energy reconstruction uncertainties, the densities of SciBar, EC, and MRD are varied independently within their measured uncertainties of $\pm 3\%$, $\pm 10\%$, and $\pm 3\%$, respectively. Misidentified muons stem mainly from proton tracks created through NC interactions, which are given a conservative $\pm 20\%$ normalization uncertainty. A conservative $\pm 20\%$ normalization uncertainty is applied for the MC simulated background of neutrino and antineutrino events initially interacting outside the SciBooNE detector that pass the selection criteria. A conservative $\pm 20\%$ normalization uncertainty is applied for the MC simulated background of neutrino and antineutrino events initially interacting in the EC/MRD detector that pass the selection criteria.

D. Error Matrix

All of the MiniBooNE uncertainties, the SciBooNE uncertainties, and the correlations between them are expressed in the total error matrix, M , a 42×42 covariance matrix in MiniBooNE and SciBooNE reconstructed antineutrino energy bins defined as:

$$M = \begin{pmatrix} M^{\text{MB-SB}} & M^{\text{SB-SB}} \\ M^{\text{MB-MB}} & M^{\text{SB-MB}} \end{pmatrix} \quad (2)$$

where

$$\begin{aligned} M_{i,j}^X &= \hat{M}_{i,j;(RS,RS)}^X N_i^Y{}^{RS} N_j^Z{}^{RS} \\ &+ \hat{M}_{i,j;(WS,WS)}^X N_i^Y{}^{WS} N_j^Z{}^{WS} \\ &+ \hat{M}_{i,j;(RS,WS)}^X N_i^Y{}^{RS} N_j^Z{}^{WS} \\ &+ \hat{M}_{i,j;(WS,RS)}^X N_i^Y{}^{WS} N_j^Z{}^{RS} \\ &+ M_{i,j}^{\text{stat}} \end{aligned} \quad (3)$$

are the bin to bin covariance elements of the full error matrix. X denotes the type of correlation with Y and Z denoting the type of bins (either MiniBooNE or SciBooNE)

associated with X. For MiniBooNE to MiniBooNE correlations, X=MB-MB, Y=MB, Z=MB. For SciBooNE to SciBooNE correlations, X=SB-SB, Y=SB, Z=SB. For MiniBooNE to SciBooNE correlations, X=MB-SB, Y=MB, Z=SB. For SciBooNE to MiniBooNE correlations, X=SB-MB, Y=SB, Z=MB. $N_i^Y{}^{RS}$ ($N_j^Z{}^{RS}$) and $N_i^Y{}^{WS}$ ($N_j^Z{}^{WS}$) are the number of RS and WS events for bin type Y (bin type Z) in reconstructed antineutrino energy bin i (bin j), respectively. $\hat{M}_{i,j;(RS,RS)}^X$ are the elements of the RS to RS correlated fractional error matrix for correlation type X defined as:

$$\hat{M}_{i,j;(RS,RS)}^X = \frac{M_{i,j;(RS,RS)}^X}{N_i^Y{}^{RS} N_j^Z{}^{RS}} \quad (4)$$

where $M_{i,j;(RS,RS)}^X$ is the full RS to RS reconstructed antineutrino energy bin covariance for correlation type X. $\hat{M}_{i,j;(WS,WS)}^X$, $\hat{M}_{i,j;(RS,WS)}^X$, and $\hat{M}_{i,j;(WS,RS)}^X$ are similarly defined fractional error matrices for correlation type X with different RS and WS correlations. M^{stat} is the statistical covariance matrix in reconstructed antineutrino energy bins for correlation type X (only SB-SB and MB-MB have nonzero elements).

The decomposition and reconstruction of the full error matrix M to and from the fractional error matrices allows the error matrix to be updated based on different MC predictions, as a function of the oscillation parameters in the physics parameter space.

For illustrative purposes, Figure 10 shows the square roots of the elements of the total fractional error matrix, $\sqrt{\hat{M}_{ij}} = \sqrt{M_{ij}}/\sqrt{N_i N_j}$, where M_{ij} are the elements of the total error matrix and N_i (N_j) is the MC prediction for reconstructed antineutrino energy bin i (j). Figure 11 shows the correlation coefficients of the total error matrix in reconstructed antineutrino energy bins.

Figure 12 shows the MiniBooNE and SciBooNE default MC E_{ν}^{QE} predictions for RS and WS events with error bars corresponding to the $\sqrt{M_{ii}}$ values of the error matrix diagonal elements.

VI. ANALYSIS METHODOLOGY

Oscillation predictions are based on a two-antineutrino oscillation model, where the oscillation survival probability for a $\bar{\nu}_\mu$ in the beam is given by

$$P(\bar{\nu}_\mu \rightarrow \bar{\nu}_x) = 1 - \sin^2 2\theta \sin^2 \frac{1.27 \Delta m^2 L}{E}. \quad (5)$$

L is the path length in kilometers, E is the antineutrino energy in GeV, θ is the mixing angle, and Δm^2 is the difference in the squares of the masses of two different mass eigenstates.

The χ^2 statistic is formed

$$\chi^2 = \sum_{i,j=1}^{42} (D_i - N_i) (M^{-1})_{ij} (D_j - N_j), \quad (6)$$

TABLE II. Summary of beam and cross section parameters for MC simulation with its associated systematic uncertainties.

Beam	Uncertainty
π^+ production in antineutrino beam (from WS neutrino background)	12.8% normalization uncertainty [15]
π^- production from p-Be interaction	Spline fit to HARP data
K^+ production from p-Be interaction	Table IX in Ref. [28]
K^0 production from p-Be interaction	Table IX in Ref. [10]
K^- production from p-Be interaction	100% normalization uncertainty
Nucleon and pion interaction in Be/Al	Table XIII in Ref. [10]
Horn current	± 1 kA
Horn skin effect	Horn skin depth, ± 1.4 mm
Cross Sections	Uncertainty
CCQE M_A on carbon target	1.35 ± 0.07 GeV
κ	1.007 ± 0.005
CCQE M_A on hydrogen target	1.014 ± 0.014 GeV
CC resonant π M_A	1.1 ± 0.275 GeV ^a
CC coherent π M_A	1.03 ± 0.275 GeV ^a
CC multi π M_A	1.3 ± 0.52 GeV
E_B	± 9 MeV
p_F	220 ± 30 MeV/c
Δs	0.0 ± 0.1
CCQE on carbon	$\pm 10\%$ norm error
CCQE on carbon ($\bar{\nu}_\mu$) only	$\pm 40\%$ norm error
non-CCQE on carbon ($\bar{\nu}_\mu$) only	$\pm 10\%$ norm error
π absorption in nucleus	25%
π inelastic scattering	30%
π -less Δ decay	100%

^a This uncertainty is not applied to ν_μ CC1 π events that are Q^2 corrected.

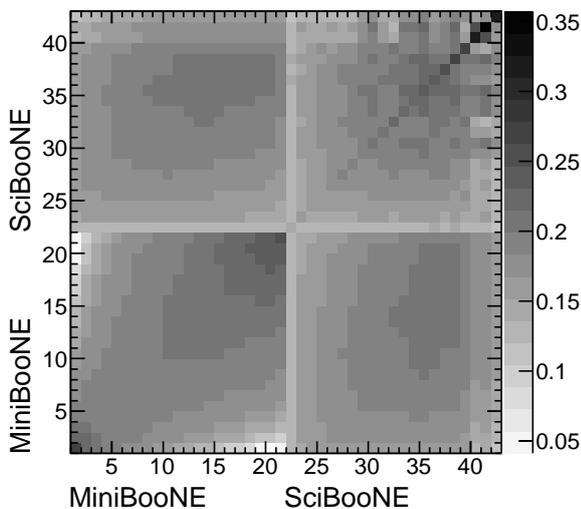


FIG. 10. Bin-wise square root of the total (statistical and systematic errors combined) fractional error matrix $\sqrt{\hat{M}_{ij}} = \sqrt{M_{ij}}/\sqrt{N_i N_j}$, where M_{ij} is the total error matrix and N_i (N_j) is the MC prediction for reconstructed antineutrino energy bin i (j). Bins 1 through 21 are MiniBooNE, bins 22 through 42 are SciBooNE.



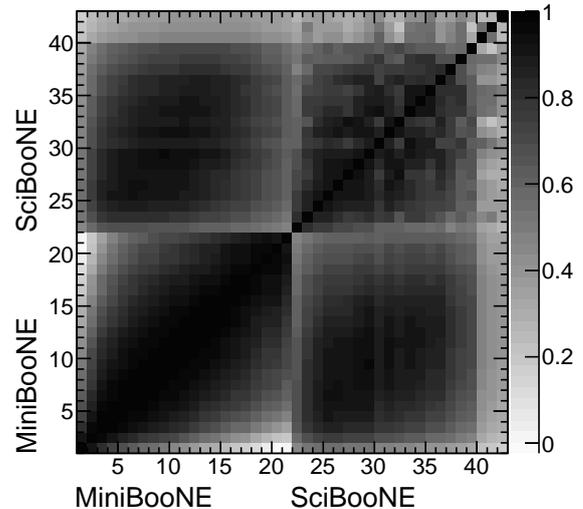


FIG. 11. Correlation coefficients of the total (statistical and systematic errors combined) error matrix ($\rho_{ij} = M_{ij}/(\sigma_{ii}\sigma_{jj})$). Bins 1 through 21 are MiniBooNE, bins 22 through 42 are SciBooNE. No bins are anti-correlated.

- 1 where $(M^{-1})_{ij}$ is the ij -th element of the inverse of the
- 2 error matrix M , the covariance matrix in MiniBooNE
- 3 and SciBooNE E_ν^{QE} bins described in Eq. 2. D_i (D_j) is

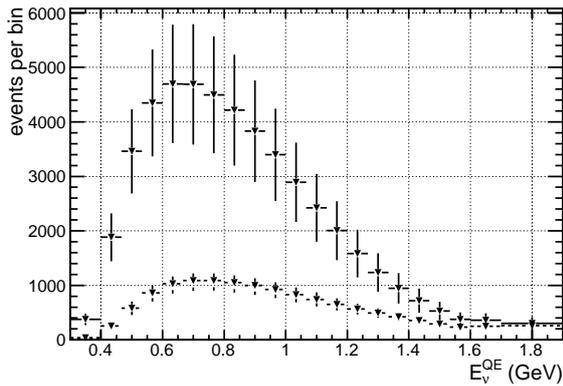

(a) MiniBooNE RS and WS events with systematic

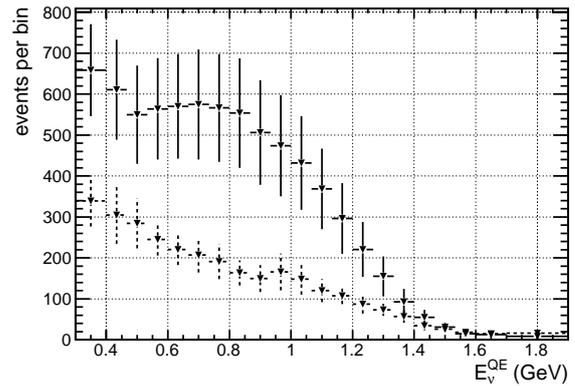

(b) SciBooNE RS and WS events with systematics

FIG. 12. RS (solid line) and WS (dashed line) contributions to the default MC prediction for MiniBooNE and SciBooNE reconstructed antineutrino and neutrino energy (E_ν^{QE}) distributions. Error bars are the systematic uncertainties from the diagonals of the error matrix ($\sigma_{ii} = \sqrt{M_{ii}}$) and do not account for correlations.

1 the data count in bin i (j) and N_i (N_j) is the MC pre- 31
 2 diction for bin i (j), in MiniBooNE and SciBooNE E_ν^{QE}
 3 bins. N_i is the sum of neutrino (WS) and antineutrino
 4 (RS) events in the i -th bin:

$$N_i = N_i^{RS}(\Delta m^2, \sin^2 2\theta) + N_i^{WS}. \quad (7)$$

5 As shown in Eq. 7, only the predicted RS event rate 35
 6 depends on the oscillation parameters, Δm^2 and $\sin^2 2\theta$, 36
 7 for this two-antineutrino oscillation model. The WS flux
 8 is assumed to not oscillate. The index runs from 1 to 42
 9 (21 MiniBooNE E_ν^{QE} bins and 21 SciBooNE E_ν^{QE} bins). 37
 10 For the physics analysis fitting, a $\Delta\chi^2$ test statistic is 38
 11 used as defined by 39

$$\Delta\chi^2 = \chi^2(N(\theta_{\text{phys}}), M(\theta_{\text{phys}})) - \chi^2(N(\theta_{\text{BF}}), M(\theta_{\text{BF}})) \quad (8)$$

12 where θ_{BF} refers to the oscillation parameters at the best
 13 fit point and θ_{phys} refers to the oscillation parameters at 41
 14 a given test point. 42

15 The method of Feldman and Cousins [40] is used to 43
 16 determine the $\Delta\chi^2$ value at each point that corresponds 44
 17 to a certain confidence level of acceptance or rejection. 45
 18 To obtain the 90% confidence level exclusion region for 46
 19 $\bar{\nu}_\mu$ disappearance, a $\Delta\chi^2$ distribution is formed for each 47
 20 point θ_{phys} in parameter space using many iterations of 48
 21 generated fake data at that θ_{phys} . The $\Delta\chi^2$ value from 49
 22 actual data at each θ_{phys} is then compared to the fake 50
 23 data $\Delta\chi^2$ distribution at each θ_{phys} . If the $\Delta\chi^2$ value 51
 24 from actual data is larger than 90% of the all the fake 52
 25 data $\Delta\chi^2$ values at a θ_{phys} point, then the θ_{phys} point in 53
 26 parameter space is excluded at 90% confidence level. The 54
 27 aggregation of all the excluded 90% confidence level θ_{phys} 55
 28 points forms the 90% confidence level exclusion region. 56

29 The full error matrix is used to create the fake data 57
 30 for the Feldman and Cousins tests. First, a Cholesky 58

decomposition is performed on the error matrix M :

$$M = LL^*, \quad (9)$$

where L is a lower triangular matrix and L^* is the conju-
 32 gate transpose of L . Then, a vector u is created, where
 33 each of the n elements, 42 in total, of u are drawn from a
 34 Gaussian distribution with mean 0 and variance 1. A
 fluctuated fake data histogram is given by

$$N_{\text{fake}} = N_{\text{default}}(\theta_{\text{phys}}) + Lu, \quad (10)$$

where N_{default} is the default monte carlo prediction assum-
 37 ing an oscillation signal with oscillation parameters
 38 at point θ_{phys} . 39

VII. RESULTS

Figure 13 shows the observed event distributions, in
 reconstructed antineutrino energy, for MiniBooNE and
 SciBooNE. The systematic uncertainty shown for the MC
 predictions was computed as just the square roots of the
 diagonals of the total error matrix without correlations.

Table III lists the event counts in each bin, for data and
 for MC predictions. The listed uncertainties are based on
 the square roots of the diagonals of the total error matrix
 without correlations. (The reported SciBooNE data has
 fractional counts due to the manner in which the cosmic
 ray background is subtracted.)

A MiniBooNE-only disappearance analysis is included
 to give a sense of what the sensitivity would be with-
 out the inclusion of SciBooNE data. Figure 14 shows
 the 90% CL exclusion region and best fit point for the
 MiniBooNE-only $\bar{\nu}_\mu$ disappearance analysis, completed
 using the same methodology as the joint disappearance
 analysis except with the exclusion of SciBooNE data,

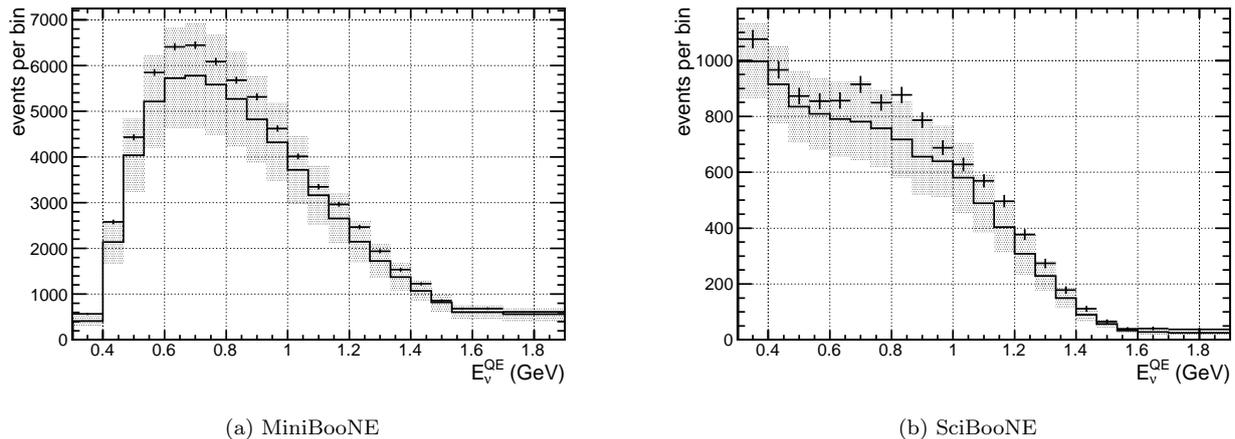


FIG. 13. Reconstructed antineutrino energy (E_ν^{QE}) distribution for data events, compared to Monte Carlo predictions, for MiniBooNE and SciBooNE. Vertical error bars on data are statistical uncertainty. Shaded error band around simulation is the systematic uncertainty computed as the square roots of the diagonals of the total error matrix.

TABLE III. Observed event counts for each MiniBooNE and SciBooNE data bin, MC predictions, and uncertainty.

Bin Range (MeV)	MB Data	MB MC	MB Error \pm	SB Data ^b	SB Cosmic Data	SB MC	SB Error \pm
300-400	565	413.5	111.0	1077.0	21.0	997.3	136.8
400-467	2577	2139.2	464.8	966.8	89.2	915.6	141.9
467-533	4433	4039.9	802.2	872.8	85.2	834.4	132.1
533-600	5849	5211.0	1005.7	854.4	72.6	809.4	132.2
600-667	6411	5725.6	1108.7	856.8	59.2	790.6	137.3
667-733	6445	5778.3	1130.3	915.0	51.0	781.9	144.3
733-800	6090	5586.8	1096.9	849.8	52.2	757.3	139.5
800-867	5678	5268.3	1044.8	876.6	43.4	717.1	138.8
867-933	5314	4826.2	951.8	787.0	39.0	655.8	138.0
933-1000	4624	4319.6	865.1	688.0	35.0	639.7	129.6
1000-1067	4015	3720.3	747.2	628.0	29.0	580.2	125.4
1067-1133	3349	3163.6	642.1	569.6	28.4	488.7	105.8
1133-1200	2965	2655.9	554.3	496.6	21.4	403.9	92.2
1200-1267	2464	2147.2	453.0	377.0	23.0	308.4	74.6
1267-1333	1937	1726.4	367.8	273.6	22.4	228.4	53.6
1333-1400	1534	1372.0	297.9	178.6	18.4	150.0	37.2
1400-1467	1227	1073.3	238.1	111.2	18.8	89.4	23.9
1467-1533	859	820.5	187.7	65.4	17.6	57.1	15.0
1533-1600	679	607.2	145.8	39.0	17.0	33.1	10.4
1600-1700	684	607.2	149.1	40.8	28.2	27.6	9.9
1700-1900	610	560.1	144.5	37.6	39.4	24.8	7.8

^b The SB data has its SB cosmic data background removed.

1 SciBooNE MC prediction, and SciBooNE error matrix
2 uncertainties in the χ^2 statistic. The best fit point is
3 $\Delta m^2 = 5.9 \text{ eV}^2$, $\sin^2 2\theta = 0.076$. At the best fit point,
4 $\chi^2 = 25.7$ (probability 12.4%). For the null oscilla-
5 tion hypothesis, $\chi^2 = 28.3$ (probability 13.7%). With
6 $\Delta\chi^2 = 2.6$, the null oscillation hypothesis is excluded at
7 52.4% CL.

8 Figure 15 shows the $\bar{\nu}_\mu$ disappearance limit for the joint
9 disappearance analysis. For $\Delta m^2 = 1 \text{ eV}^2$ and $\Delta m^2 = 10$
10 eV^2 , the 90% CL limit for $\sin^2 2\theta$ are at 0.12 and 0.03,

respectively. At $\sin^2 2\theta = 1$, the 90% CL limit for Δm^2
is 0.17 eV^2 . The best fit point from the joint analy-
sis is $\Delta m^2 = 5.9 \text{ eV}^2$, $\sin^2 2\theta = 0.086$. At the best fit
point, $\chi^2 = 40.0$ (probability 47.1%). For the null oscil-
lation hypothesis, $\chi^2 = 43.5$ (probability 41.2%). With
 $\Delta\chi^2 = 3.5$, the null oscillation hypothesis is excluded at
81.9% CL. All probabilities in both the MiniBooNE-only
and joint disappearance analyses are based on fake data
studies.

Figure 16 shows the data to MC ratios for MiniBooNE

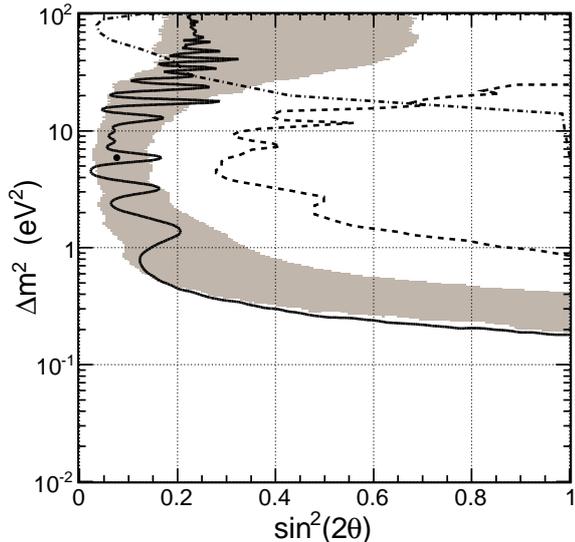


FIG. 14. 90% CL exclusion region (solid line) and best fit point for the MiniBooNE-only $\bar{\nu}_\mu$ disappearance analysis. Also shown is the 90% CL result from the 2009 MiniBooNE disappearance analysis [8] (dashed line) and CCFR [41] (dot-dashed line). The expected 90% CL sensitivity band from fake data studies is also shown (shaded region); 1σ (68%) of fake data tests, where the fake data had statistical and systematic fluctuations but no oscillation signal, had 90% CL limit curves in this shaded region.


1 and SciBooNE, as well as how the best fit signal modifies
 2 the MC predictions. From these ratio plots, it can be
 3 seen how the best fit signal improves the shape agreement
 4 between data and MC. Figure 17 shows the double ratio

$$\frac{\left(\frac{\text{MiniBooNE data}}{\text{MiniBooNE default MC}}\right)}{\left(\frac{\text{SciBooNE data}}{\text{SciBooNE default MC}}\right)}. \quad (11)$$


5 In Figure 17, any common normalization difference is re-
 6 moved and the expected result is a value of one. The
 7 double ratio result agrees well with the expectation ex-
 8 cept where statistics are small.

VIII. CONCLUSIONS

9
 10 An improved search for $\bar{\nu}_\mu$ disappearance using a two-
 11 detector combined MiniBooNE/SciBooNE analysis has
 12 been performed. Previous flux and cross section mea-
 13 surements, as well as an increased data set, have enabled
 14 a substantial improvement in the sensitivity to $\bar{\nu}_\mu$ dis-
 15 appearance. The results are consistent with no short
 16 baseline disappearance of $\bar{\nu}_\mu$ and we have dramatically
 17 improved on the excluded regions of the oscillation pa-
 18 rameter space. MiniBooNE and SciBooNE have pushed
 19 the limit on short baseline disappearance of $\bar{\nu}_\mu$ down to 21

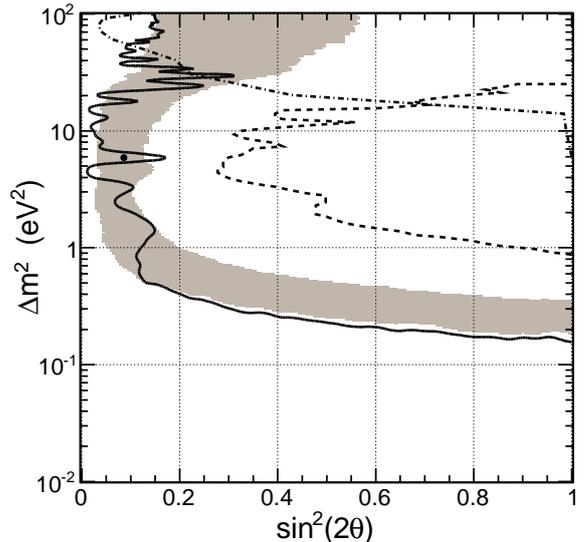

(a) Linear scale on x-axis.

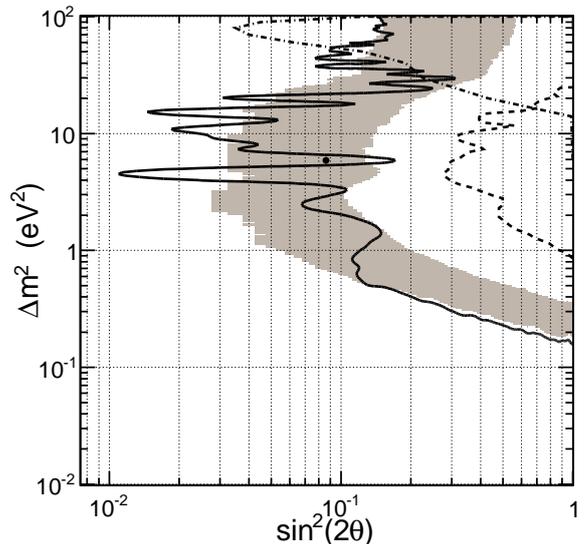

(b) Log scale on x-axis.

FIG. 15. 90% CL exclusion region (solid line) and best fit point for the joint MiniBooNE, SciBooNE $\bar{\nu}_\mu$ disappearance analysis. Also shown is the 90% CL result from the 2009 MiniBooNE disappearance analysis [8] (dashed line) and CCFR [41] (dot-dashed line). The expected 90% CL sensitivity band from fake data studies is also shown (shaded region); 1σ (68%) of fake data tests, where the fake data had statistical and systematic fluctuations but no oscillation signal, had 90% CL limit curves in this shaded region.

roughly 10%, the region of interest for sterile neutrino models.

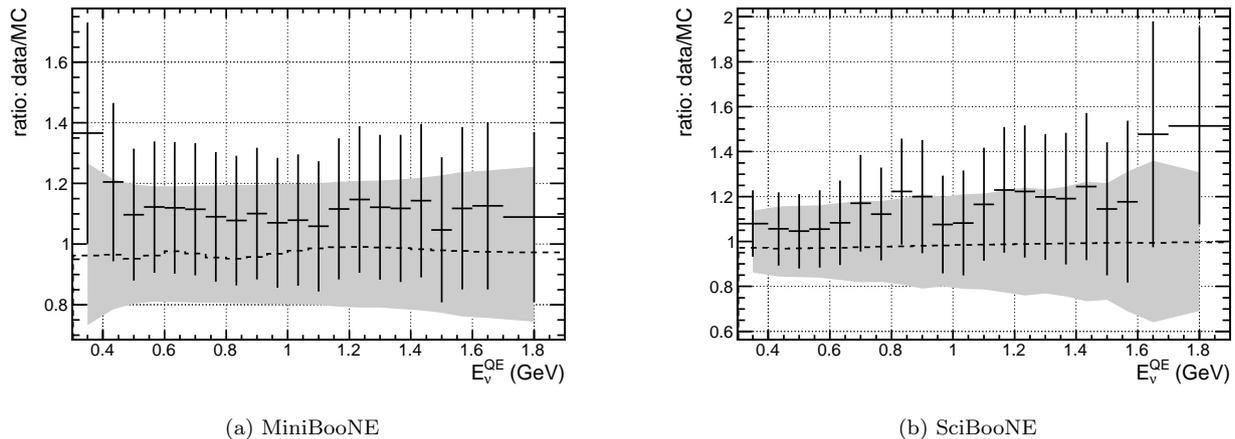


FIG. 16. The ratio, with error bars, between data and default MC as a function of reconstructed antineutrino energy (E_{ν}^{QE}). The ratio of best fit signal MC to default MC is also shown (dashed line). The best fit results from the joint analysis were used to generate the signal MC. The shaded regions are the 1σ band from fake data with statistical and systematic fluctuations but no oscillation signal.

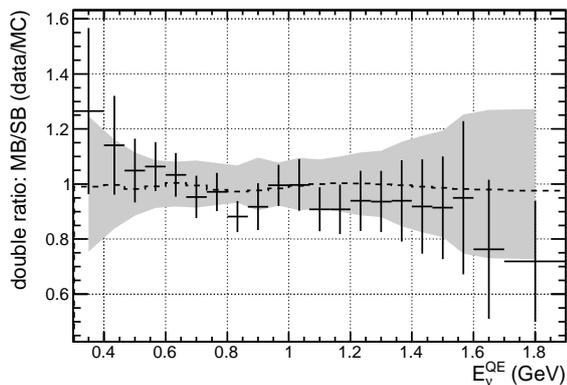


FIG. 17. The double ratio (Eq. 11), with error bars, as a function of reconstructed antineutrino energy (E_{ν}^{QE}). Some of the MiniBooNE and SciBooNE uncertainties cancel in this double ratio. The double ratio where the MiniBooNE and SciBooNE signal MC based on the best fit results from the joint analysis are used in place of data is also shown (dashed line). The shaded region is the 1σ band from fake data with statistical and systematic fluctuations but no oscillation signal.

ACKNOWLEDGMENTS

We wish to acknowledge the support of Fermilab, the U.S. Department of Energy, and the National Science Foundation in the construction, operation, and data analysis for the MiniBooNE and SciBooNE experiments. The SciBooNE detector was mainly constructed and operated by the budget of Japan-U.S. Cooperative Science Program. We acknowledge the support of MEXT and JSPS (Japan) with the Japan/U.S. Cooperation Program. We also acknowledge the Los Alamos National Laboratory for LDRD funding. We acknowledge the Physics Department at Chonnam National University, Dongshin University, and Seoul National University for the loan of parts used in SciBar and the help in the assembly of SciBar. We wish to thank the Physics Departments at the University of Rochester and Kansas State University for the loan of Hamamatsu PMTs used in the MRD. We gratefully acknowledge the support of grants and contracts from the INFN (Italy), the Ministry of Science and Innovation and CSIC (Spain), and the STFC (UK). We acknowledge the support by MEXT and JSPS with the Grant-in-Aid for Scientific Research A 19204026, Young Scientists S 20674004, Young Scientists B 18740145, Scientific Research on Priority Areas “New Developments of Flavor Physics,” the global COE program “The Next Generation of Physics, Spun from Universality and Emergence,” and the Japan-U.S. Cooperative Science Program between JSPS and NSF.

[1] A. Aguilar et al. (LSND Collaboration), Phys. Rev. D **64**, 112007 (2001).

[2] A. A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), Phys. Rev. Lett. **98**, 231801 (2007).

- [3] A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Phys.Rev.Lett.* **102**, 101802 (2009).
- [4] A. A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Phys. Rev. Lett.* **105**, 181801 (2010).
- [5] G. Mention, M. Fechner, T. Lasserre, T. Mueller, D. Lhuillier, et al., *Phys.Rev.* **D83**, 073006 (2011).
- [6] C. Giunti and M. Laveder, *Phys. Rev. C* **83**, 065504 (2011).
- [7] A. A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), arXiv:1207.4809 (2012).
- [8] A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Phys. Rev. Lett.* **103**, 061802 (2009).
- [9] K. Mahn et al. (SciBooNE and MiniBooNE Collaborations), *Phys.Rev.* **D85**, 032007 (2012).
- [10] A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Phys.Rev.* **D79**, 072002 (2009).
- [11] A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Nucl.Instrum.Meth.* **A599**, 28 (2009).
- [12] K. Hiraide et al. (SciBooNE Collaboration), *Phys. Rev.* **D78**, 112004 (2008).
- [13] K. Nitta et al., *Nucl. Instrum. Meth.* **A535**, 147 (2004).
- [14] A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Phys. Rev. D* **81**, 092005 (2010).
- [15] A. Aguilar-Arevalo et al. (MiniBooNE Collaboration), *Phys. Rev. D* **84**, 072005 (2011).
- [16] Y. Nakajima et al. (SciBooNE Collaboration), *Phys. Rev.* **D83**, 012005 (2011).
- [17] S. Agostinelli et al. (GEANT4 Collaboration), *Nucl. Instrum. Meth.* **A506**, 250 (2003).
- [18] M. Catanesi, E. Radicioni, R. Edgecock, M. Ellis, S. Robins, et al., *Eur.Phys.J.* **C52**, 29 (2007).
- [19] D. Casper, *Nucl. Phys. Proc. Suppl.* **112**, 161 (2002).
- [20] R. Smith and E. Moniz, *Nuclear Physics B* **43**, 605 (1972).
- [21] R. Brun, F. Carminati, and S. Giani, *GEANT Detector Description and Simulation Tool* (1994).
- [22] B. Brown et al., *IEEE Nucl.Sci.Symp. Conf.Rec.* **1** **652** (2004).
- [23] C. Zeitnitz and T. Gabriel, *Nucl.Instrum.Meth.* **A349**, 106 (1994).
- [24] A. Heikkinen, N. Stepanov, and J. P. Wellisch, arXiv:nucl-th/0306008 (2003).
- [25] J. L. A. Aunion, Ph.D. thesis, Universitat Autònoma de Barcelona (2010), fermilab-thesis-2010-45.
- [26] K. Mahn, Ph.D. thesis, Columbia University (2009), fermilab-thesis-2009-22.
- [27] J. Grange (MiniBooNE Collaboration), *AIP Conf.Proc.* **1405**, 83 (2011).
- [28] C. Mariani, G. Cheng, J. M. Conrad, and M. H. Shaevitz, *Phys. Rev. D* **84**, 114021 (2011).
- [29] G. Cheng et al. (SciBooNE Collaboration), *Phys. Rev. D* **84**, 012009 (2011).
- [30] N. V. Mokhov et al., arXiv:nucl-th/9812038 (1998).
- [31] A. Bodek, S. Avvakumov, R. Bradford, and H. S. Budd, *J.Phys.Conf.Ser.* **110**, 082004 (2008).
- [32] J. Amaro, M. Barbaro, J. Caballero, and T. Donnelly, *Phys.Rev.Lett.* **108**, 152501 (2012).
- [33] A. Bodek, H. Budd, and M. Christy, *Eur.Phys.J.* **C71**, 1726 (2011).
- [34] J. Nieves, I. Ruiz Simo, and M. Vicente Vacas, *Phys.Lett.* **B707**, 72 (2012).
- [35] M. Martini, M. Ericson, G. Chanfray, and J. Marteau, *Phys.Rev.* **C80**, 065501 (2009).
- [36] D. Ashery et al., *Phys. Rev.* **C23**, 2173 (1981).
- [37] M. K. Jones et al., *Phys. Rev.* **C48**, 2800 (1993).
- [38] R. D. Ransome et al., *Phys. Rev.* **C45**, 509 (1992).
- [39] K. Hiraide, Ph.D. thesis, Kyoto University (2009), fermilab-thesis-2009-02.
- [40] G. J. Feldman and R. D. Cousins, *Phys. Rev. D* **57**, 3873 (1998).
- [41] I. Stockdale, A. Bodek, F. Borcharding, N. Giokaris, K. Lang, et al., *Phys.Rev.Lett.* **52**, 1384 (1984).