

CMS-SUS-12-028

Search for supersymmetry in hadronic final states with missing transverse energy using the variables $\alpha_{\rm T}$ and b-quark multiplicity in pp collisions at $\sqrt{s}=8\,{\rm TeV}$

The CMS Collaboration*

Abstract

An inclusive search for supersymmetric processes that produce final states with jets and missing transverse energy is performed in pp collisions at a centre-of-mass energy of 8 TeV. The data sample corresponds to an integrated luminosity of $11.7\,\mathrm{fb}^{-1}$ collected by the CMS experiment at the LHC. In this search, a dimensionless kinematic variable, α_{T} , is used to discriminate between events with genuine and misreconstructed missing transverse energy. The search is based on an examination of the number of reconstructed jets per event, the scalar sum of transverse energies of these jets, and the number of these jets identified as originating from bottom quarks. No significant excess of events over the standard model expectation is found. Exclusion limits are set in the parameter space of simplified models, with a special emphasis on both compressed-spectrum scenarios and direct or gluino-induced production of third-generation squarks.

Submitted to the European Physical Journal C

1 Introduction

The standard model (SM) of particle physics has been extremely successful in describing phenomena at the highest energies attained thus far. Nevertheless, it is widely believed to be only an effective approximation of a more complete theory that supersedes the SM at a higher energy scale. Supersymmetry (SUSY) [1–8] is generally regarded as one of the likely extensions to the SM. The theory is based on the unique way to extend the space-time symmetry group underpinning the SM, introducing a relationship between fermions and bosons.

A low-energy realisation of SUSY, e.g. at the TeV scale, is motivated by the cancellation of the quadratically divergent loop corrections to the Higgs boson mass in the SM [7, 8]. These corrections are proportional to the masses of the particles that couple to the Higgs boson, where the most relevant terms come from the interplay between the masses of the third-generation squarks and the largest Yukawa couplings, e.g. of the top quark. In order to avoid a large amount of fine-tuning in these loop corrections, the difference in masses between the top quark and the third-generation squarks must not be too large [9]. While the majority of SUSY particles (sparticles) may be beyond the reach of the Large Hadron Collider (LHC) at the present beam energy and luminosity, the recent discovery of a low-mass Higgs boson candidate [10, 11] motivates "natural" SUSY models in which top and bottom squarks (and gluinos) appear at the TeV scale. For R-parity-conserving SUSY [12], sparticles will be produced in pairs and decay to SM particles and the lightest sparticle (LSP), which is generally assumed to be weakly interacting and massive. Therefore, the pair production of massive coloured sparticles is expected to result in a signature that is rich in jets, especially those originating from bottom quarks, and contains a significant amount of missing transverse energy, E_T , due to the undetected LSPs.

This paper summarises an inclusive search for pair production of massive coloured sparticles in final states with jets and \not E_T, performed in pp collisions at a centre-of-mass energy $\sqrt{s} = 8$ TeV. The analysed data sample corresponds to an integrated luminosity of 11.7 ± 0.5 fb⁻¹ [13] collected by the Compact Muon Solenoid (CMS) experiment. Several other searches in this channel have been conducted by both the ATLAS and CMS experiments [14–25]. The strategy of the analysis presented in this paper is based on the kinematic variable α_T , which provides powerful discrimination against multijet production, a manifestation of quantum chromodynamics (QCD), while maintaining sensitivity to a wide range of SUSY models. This analysis extends previous searches based on a similar strategy with samples of pp collisions at $\sqrt{s} = 7$ TeV [23–25].

In order to improve the sensitivity of the analysis to the main production mechanisms of massive coloured sparticles at hadron colliders (squark-squark, squark-gluino, and gluino-gluino), events with significant E_T and two or more energetic jets are categorised according to the jet multiplicity. Events with two or three reconstructed jets are used to search for squark-squark and squark-gluino production, while events with four or more reconstructed jets probe gluino-gluino production. This classification according to the jet multiplicity is a new feature with respect to the previous analysis [23]. Moreover, to enhance the sensitivity to third-generation squark signatures, events are further categorised according to the number of reconstructed jets identified as originating from bottom quarks (b-quark jets). The analysis also considers a large dynamic range in the scalar sum of the transverse energies of reconstructed jets in order to probe signal models over a large range of mass splittings between the parent sparticle and the LSP, including models characterised by a compressed spectrum [26]. This approach provides sensitivity to a wide variety of SUSY event topologies arising from the pair production and decay of massive coloured sparticles while still maintaining the character of an inclusive search.

2 Interpretation with simplified models

To interpret the results of this search, simplified models [27–29] are used. These effective models include only a limited set of sparticles (production and decay) to enable comprehensive studies of individual SUSY event topologies. The result of this search can also be interpreted in a range of other relevant models, such as the constrained minimal supersymmetric extension of the standard model (CMSSM) [30–32] or other effective or complete SUSY models that predict event topologies with two or more energetic jets and significant E_T .

In this paper, we focus on the interpretation in two classes of simplified models, the first of which describes direct pair-production of squarks, including top and bottom squarks, that decay to a quark of the same flavour and the LSP. The second class describes gluino-induced production of (off-shell) squarks, again including top and bottom squarks, in which gluino-gluino pair production is followed by the decay of each gluino to a quark-antiquark pair and the LSP. The simplified models considered in this analysis are summarised in Table 1. For each model, the LSP is assumed to be the lightest neutralino.

Table 1 also defines reference models in terms of the parent (gluino or squark) and LSP sparticle masses, m_{parent} and m_{LSP} , respectively, which are used to illustrate potential yields in the signal region. In the case of the model D3, a massless LSP is considered. The masses are chosen to be reasonably high while still being within the expected sensitivity reach.

Table 1: A summary of the simplified models considered in this analysis, which involve both direct (D) and gluino-induced (G) production of squarks, and their decays. Models D1 and G1 concern the direct or gluino-induced production of first or second-generation squarks only. Reference models are also defined in terms of the parent (gluino or squark) and LSP sparticle masses.

Model	Production/decay mode	Reference model		
		m _{parent} [GeV]	m_{LSP} [GeV]	
D1	$pp o \widetilde{q} \widetilde{q}^* o q \widetilde{\chi}_1^0 \overline{q} \widetilde{\chi}_1^0$	600	250	
D2	$pp o \widetilde{b}\widetilde{b}^* o b\widetilde{\chi}_1^0 \overline{b}\widetilde{\chi}_1^0$	500	150	
D3	$pp o \widetilde{t}\widetilde{t}^* o t\widetilde{\chi}_1^0 \overline{t}\widetilde{\chi}_1^0$	400	0	
G1	$\mathrm{pp} ightarrow \widetilde{\mathrm{g}}\widetilde{\mathrm{g}} ightarrow \mathrm{q}\overline{\mathrm{q}}\widetilde{\chi}_1^0 \mathrm{q} \overline{\mathrm{q}}\widetilde{\chi}_1^0$	700	300	
G2	${\sf pp} o \widetilde{\sf g}\widetilde{\sf g} o {\sf b}\overline{\sf b}\widetilde{\chi}_1^0 {\sf b}\overline{\sf b}\widetilde{\chi}_1^0$	900	500	
G3	$\mathrm{pp} o \widetilde{\mathrm{g}}\widetilde{\mathrm{g}} o \mathrm{t} \bar{\mathrm{t}} \widetilde{\chi}_1^0 \mathrm{t} \bar{\mathrm{t}} \widetilde{\chi}_1^0$	850	250	

3 The CMS apparatus

The central feature of the CMS apparatus is a superconducting solenoid of 6 m internal diameter, providing a magnetic field of 3.8 T. Within the superconducting solenoid volume are a silicon pixel and strip tracker, an electromagnetic calorimeter (ECAL) comprising 75 848 lead-tungstate crystals, and a brass/scintillator hadron calorimeter (HCAL). Muons are measured in gas-ionisation detectors embedded in the steel flux return yoke of the magnet. Extensive forward calorimetry complements the coverage provided by the barrel and endcap detectors. The CMS detector is nearly hermetic, which allows for momentum balance measurements in the plane transverse to the beam axis.

CMS uses a right-handed coordinate system, with the origin at the nominal interaction point,

the x axis pointing to the centre of the LHC ring, the y axis pointing up (perpendicular to the plane of the LHC ring), and the z axis along the anticlockwise-beam direction. The polar angle θ (radians) is measured from the positive z axis and the azimuthal angle ϕ (radians) is measured in the x-y plane. Pseudorapidity is defined as $\eta = -\ln[\tan(\theta/2)]$.

The silicon pixel and strip tracking systems measure charged particle trajectories with full azimuthal coverage and a pseudorapidity acceptance of $|\eta| < 2.5$. The resolutions on the transverse momentum ($p_{\rm T}$) and impact parameter of a charged particle with $p_{\rm T} < 40\,{\rm GeV}$ are typically 1% and 15 μ m, respectively. Muons are measured in the pseudorapidity range $|\eta| < 2.4$. Matching muons to tracks measured in the tracking subdetectors results in a $p_{\rm T}$ resolution between 1 and 5% for $p_{\rm T} \le 1\,{\rm TeV}$.

The ECAL has an energy resolution of better than 0.5% for unconverted photons with transverse energies above 100 GeV. The HCAL, when combined with the ECAL, measures jets with a resolution $\Delta E/E \approx 100\%/\sqrt{E\, [{\rm GeV}]} \oplus 5\%$. In the region $|\eta| < 1.74$, the HCAL cells have widths of 0.087 in pseudorapidity and 0.087 in azimuth. In the η - ϕ plane, and for $|\eta| < 1.48$, the HCAL cells map onto 5×5 arrays of ECAL crystals to form calorimeter towers projecting radially outwards from close to the nominal interaction point. At larger values of $|\eta|$, the size of the towers increases and the matching ECAL arrays contain fewer crystals. Within each tower, the energy deposits in ECAL and HCAL cells are summed to define the calorimeter tower energies, subsequently used to provide the energies and directions of hadronic jets.

The first level (L1) of the CMS trigger system, composed of custom hardware processors, uses information from the calorimeters and muon detectors to select the most interesting events in a fixed time interval of less than $4\,\mu s$. The high-level trigger (HLT) processor farm further decreases the event rate, from around $100\,\text{kHz}$ to around $300\,\text{Hz}$, before data are stored.

A more detailed description of the CMS detector can be found in Ref. [33].

4 Event reconstruction and selection

4.1 Definition of α_T

The α_T [25, 34] variable is used to reject multijet events efficiently without significant E_T or with transverse energy mismeasurements, while retaining a large sensitivity to new physics with final-state signatures containing significant E_T .

The measurement of E_T typically relies on independent sources of information from each of the calorimeter, tracking, and muon subdetectors [35]. Relative to other physics objects, this measurement is particularly sensitive to the beam conditions and detector performance. This difficulty is compounded by the high-energy, high-luminosity hadron collider environment at the LHC and the lack of precise theoretical predictions for the kinematic properties and cross sections of multijet events.

Given these difficulties, the variable α_T was developed to avoid direct reliance on a measurement of $\not\!\!E_T$, instead depending solely on the measurements of the transverse energies and (relative) azimuthal angles of jets, which are reconstructed from energy deposits in the calorimeter towers [36]. The variable is intrinsically robust against the presence of jet energy mismeasurements in multijet systems. For dijet events, the α_T variable is defined as [25, 34]:

$$\alpha_{\rm T} = \frac{E_{\rm T}^{\rm j_2}}{M_{\rm T}},\tag{1}$$

where $E_{\rm T}^{\rm j_2}$ is the transverse energy of the less energetic jet and $M_{\rm T}$ is the transverse mass of the dijet system, defined as

$$M_{\rm T} = \sqrt{\left(\sum_{i=1}^{2} E_{\rm T}^{j_i}\right)^2 - \left(\sum_{i=1}^{2} p_x^{j_i}\right)^2 - \left(\sum_{i=1}^{2} p_y^{j_i}\right)^2}.$$
 (2)

where $E_{\mathrm{T}}^{\mathbf{j}_{i}}$, $p_{x}^{\mathbf{j}_{i}}$, and $p_{y}^{\mathbf{j}_{i}}$ are, respectively, the transverse energy and x or y components of the transverse momentum of jet \mathbf{j}_{i} .

For a perfectly measured dijet event with $E_{\rm T}^{\rm j_1}=E_{\rm T}^{\rm j_2}$ and jets back-to-back in ϕ , and in the limit in which the momentum of each jet is large compared with its mass, the value of $\alpha_{\rm T}$ is 0.5. For the case of an imbalance in the measured transverse energies of back-to-back jets, $\alpha_{\rm T}$ is reduced to a value smaller than 0.5, which gives the variable its intrinsic robustness with respect to jet energy mismeasurements. Values significantly greater than 0.5 are observed when the two jets are not back-to-back and are recoiling against significant, genuine $E_{\rm T}$.

The definition of the α_T variable can be generalised for events with two or more jets as follows. The mass scale of the physics processes being probed is characterised by the scalar sum of the transverse energy E_T of jets considered in the analysis, defined as $H_T = \sum_{i=1}^{n_{\text{jet}}} E_T^{j_i}$, where n_{jet} is the number of jets with E_T above a predefined threshold. The estimator for \mathbb{Z}_T is given by the magnitude of the transverse momenta $\vec{p_T}$ vectorial sum over these jets, defined as $\mathbb{H}_T = |\sum_{i=1}^{N_{\text{jet}}} \vec{p_T}^{j_i}|$. For events with three or more jets, a pseudo-dijet system is formed by combining the jets in the event into two pseudo-jets. The total E_T for each of the two pseudo-jets is calculated as the scalar sum of the measured E_T of the contributing jets. The combination chosen is the one that minimises the absolute E_T difference between the two pseudo-jets, ΔH_T . This simple clustering criterion provides the best separation between multijet events and events with genuine \mathbb{Z}_T . Equation (1) can therefore be generalised as:

$$\alpha_{\rm T} = \frac{1}{2} \times \frac{H_{\rm T} - \Delta H_{\rm T}}{\sqrt{{H_{\rm T}}^2 - {H_{\rm T}}^2}} = \frac{1}{2} \times \frac{1 - (\Delta H_{\rm T}/H_{\rm T})}{\sqrt{1 - ({H_{\rm T}}/H_{\rm T})^2}}.$$
 (3)

In the presence of jet energy mismeasurements, the direction and magnitude of the apparent missing transverse energy, \mathcal{H}_T , and energy imbalance of the pseudo-dijet system, ΔH_T , are highly correlated. This correlation is much weaker for R-parity-conserving SUSY with each of the two decay chains producing the LSP.

4.2 Physics objects

Jets are reconstructed from the energy deposits in the calorimeter towers [36], clustered by the infrared-safe anti- $k_{\rm T}$ algorithm [37] with a size parameter of 0.5. In this process, the contribution from each calorimeter tower is assigned a momentum, the absolute value and the direction of which are given by the energy measured in the tower and the position of the tower. The raw jet energy is obtained from the sum of the tower energies and the raw jet momentum by the vectorial sum of the tower momenta, which results in a nonzero jet mass. The raw jet energies are corrected to remove the effects of overlapping pp collisions (pileup) [38, 39] and to establish a relative uniform response of the calorimeter in η and a calibrated absolute response in $p_{\rm T}$.

The presence of a b-quark jet is inferred from a secondary vertex that is displaced in the transverse plane with respect to the main interaction vertex. This is achieved with an algorithm [40] that incorporates several measurements to build a single discriminating variable that can be

used to identify jets originating from bottom quarks with high efficiency and purity. Due to the pixel-detector acceptance, b-quark jets are identified only in the region $|\eta| < 2.4$. In this analysis, the discriminator threshold is chosen such that the probability to misidentify (mistag) jets originating from light-flavour partons (u, d, s quarks or gluons) as b-quark jets is approximately 1% for jets with transverse momenta of 80 GeV [40]. This threshold results in a b-tagging efficiency, i.e. the probability to correctly identify jets as originating from bottom quarks, in the range 60–70% [40], dependent on jet $p_{\rm T}$.

The reconstruction of photons, electrons and muons is described below. The presence (or absence) of these objects is used to define the event samples for the signal and multiple control regions, the latter of which are used to estimate the background contributions from SM processes in the signal region.

The energy of photons [41] is directly obtained from the ECAL measurement, corrected for zero-suppression and pileup effects. Various identification criteria must be met in order to correctly identify photons with high efficiency and suppress the misidentification of electrons, jets, or spurious ECAL noise as photons. These include the requirements that the shower shape of the energy deposition in the ECAL be consistent with that expected from a photon, the energy detected in the HCAL behind the photon shower must not exceed 5% of the photon energy, and no matched hits in the pixel tracker must be found. Isolation from other activity in the event is determined through a combination of independent energy sums obtained from each of the HCAL, ECAL, and tracker subdetectors within a cone of $\Delta R = \sqrt{(\Delta \phi)^2 + (\Delta \eta)^2} = 0.3$ around the photon trajectory. These sums are corrected for pileup effects and for the contributions from the photon itself.

The energy of electrons [42] is determined from a combination of the track momentum at the main interaction vertex, the corresponding ECAL cluster energy, and the energy sum of all bremsstrahlung photons attached to the track. Identification criteria similar to those described above for photons are applied, with additional requirements on the associated track that consider the track quality, energy-momentum matching, and compatibility with the main interaction vertex in terms of the transverse and longitudinal impact parameters.

The energy of muons [43] is obtained from the corresponding track momentum, combining measurements from the muon detectors and both the silicon pixel and strip tracking subdetectors. Various track quality criteria are considered when identifying muons, as are the transverse and longitudinal impact parameters with respect to the main interaction vertex.

Isolation of muons and electrons is based on a combination of independent sums from the HCAL, ECAL, and tracker subdetectors and measured relative to the muon or electron transverse momentum. The isolation sums are determined for a cone of radius $\Delta R = 0.3$ (0.4) around the electron (muon) trajectory and are corrected for the effects of pileup and for the contributions from the lepton itself.

4.3 Event selection for the signal region

Events containing non-collision backgrounds are suppressed by requiring at least one vertex of high- p_T tracks to be reconstructed in the luminous region. In the case of multiple vertices, the main interaction vertex is defined as the one with the highest scalar sum of p_T^2 of all associated tracks.

In order to suppress SM processes with genuine \not E_T from neutrinos in the final state, events are vetoed if they contain an isolated electron or muon with $p_T > 10$ GeV. Events with an isolated photon with $p_T > 25$ GeV are also vetoed to ensure an all-jet final state.

Jets are required to have transverse energy $E_T > 50 \,\text{GeV}$ and $|\eta| < 3.0$. The two highest- E_T jets must each satisfy $E_T > 100 \,\text{GeV}$. These two E_T requirements are relaxed for some signal regions, as described below. The highest- E_T jet is additionally required to satisfy $|\eta| < 2.5$. Events are vetoed that contain rare, spurious signals from the calorimeters [44] that are misidentified as jets. To ensure that the variable H_T is an unbiased estimator of E_T , events are vetoed if any additional jet satisfies both $E_T > 50 \,\text{GeV}$ and $|\eta| > 3$.

Events are required to have $H_{\rm T} > 275\,{\rm GeV}$ to ensure high efficiency for the trigger conditions used to record the event sample, described in Section 4.4. The signal region is divided into eight bins in $H_{\rm T}$: two bins of width 50 GeV in the range $275 < H_{\rm T} < 375\,{\rm GeV}$, five bins of width 100 GeV in the range $375 < H_{\rm T} < 875\,{\rm GeV}$, and a final open bin, $H_{\rm T} > 875\,{\rm GeV}$. As in Ref. [25], the jet $E_{\rm T}$ threshold is scaled down to 37 and 43 GeV for the regions $275 < H_{\rm T} < 325$ and $325 < H_{\rm T} < 375\,{\rm GeV}$, respectively. The threshold for the two highest- $E_{\rm T}$ jets is also scaled accordingly to 73 and 87 GeV. This is done in order to maintain a background composition similar to that observed for the higher $H_{\rm T}$ bins, and also to increase the analysis acceptance for SUSY models characterised by compressed spectra.

Events are further categorised according to the number of jets per event, $2 \le n_{\rm jet} \le 3$ or $n_{\rm jet} \ge 4$, and the number of reconstructed b-quark jets per event, $n_{\rm b} = 0$, 1, 2, 3, or ≥ 4 . For the category of events satisfying $n_{\rm jet} \ge 4$ and $n_{\rm b} \ge 4$, the six highest $H_{\rm T}$ bins are combined to give a final open bin of $H_{\rm T} > 375\,{\rm GeV}$.

For events satisfying the selection criteria described above, the multijet background dominates over all other SM backgrounds. As discussed in Section 4.1, multijet events populate the region $\alpha_T < 0.5$. The α_T distribution is characterised by a sharp edge at 0.5, beyond which the multijet event yield falls by several orders of magnitude. Multijet events with extremely rare but large stochastic fluctuations in the calorimetric measurements of jet energies can lead to values of α_T slightly above 0.5. The edge at 0.5 for multijet events sharpens with increasing H_T , due to corresponding increases in the average jet energy and thus an improvement in the jet energy resolution. This effect yields an exponential dependence on H_T for the ratio of multijet events with a value of α_T above and below a given threshold value (larger than 0.5), as described further in Section 6.

The contribution from multijet events is suppressed by many orders of magnitude by requiring $\alpha_T > 0.55$. As an example, an event that satisfies both $H_T = 275$ (875) GeV and $\alpha_T = 0.55$ must also satisfy $H_T \ge 115$ (365) GeV. However, certain classes of rare background events can lead to values of α_T greater than 0.55, such as those containing beam halo, reconstruction failures, spurious detector noise, or event misreconstruction due to detector inefficiencies. These event classes, with large, non-physical values of E_T , are rejected by applying dedicated vetoes [35], the most important of which are described below.

The first example concerns events containing severe energy mismeasurements caused by jet trajectories coinciding with inefficient regions in the ECAL (which amount to \sim 1% of the ECAL channel count), or the instrumentation gap between the ECAL barrel and endcap systems at $|\eta|=1.48$. These events are identified and vetoed as follows. The negative vector sum of jet transverse momenta when jet j is ignored, defined as $-\sum_{i=1,i\neq j}^{n_{\rm jet}} \vec{p_{\rm T}}^i$, is determined for each ignored jet in turn, $1\leq j< n_{\rm jet}$. An azimuthal distance of $\Delta\phi<0.5$ between the directions of jet j and the corresponding vector sum indicates that jet j has suffered a sufficiently large energy mismeasurement to satisfy $\alpha_{\rm T}>0.55$. The event is rejected if the angular distance in the (η,ϕ) plane between the affected jet and the closest inefficient ECAL region satisfies $\Delta R<0.3$. Similarly, the event is rejected if the trajectory of the affected jet satisfies $\Delta\eta<0.3$ with respect to the ECAL barrel-endcap boundary.

The second example concerns the rare circumstance in which several jets with transverse energies below the E_T thresholds and aligned in ϕ result in significant H_T relative to the value of E_T (which is less sensitive to jet E_T thresholds). This type of background, typical of multijet events, is suppressed while maintaining high efficiency for SM or new physics processes with genuine, significant E_T by requiring $H_T/E_T < 1.25$. The measurement of E_T is provided by the particle-flow (PF) reconstruction framework [45, 46].

Figure 1 shows the α_T distributions of events with $H_T > 375\,\text{GeV}$ that satisfy all the selection criteria described above except the α_T requirement, categorized according to n_{jet} . An inclusive set of trigger conditions is used in order to show the full α_T distribution. The analysis relies on data control samples to estimate the contributions from the multijet and non-multijet backgrounds, as described in Sections 5 and 6. However, for illustration, the expected yields from simulation of multijet events, non-multijet backgrounds with genuine E_T , the sum of these SM backgrounds, and an example signal model, are also shown in Fig. 1. The expected yield for multijet events that satisfy $\alpha_T > 0.55$, as given by simulation, is less than ten events and is negligible with respect to all other SM backgrounds. Figure 1 highlights the ability of the α_T variable to discriminate between multijet events and all other SM or new physics processes with genuine E_T in the final state.




Figure 1: The α_T distributions of events with $H_T > 375\,\text{GeV}$ that satisfy all the selection criteria described above except the α_T requirement, categorised according to $2 \leq n_{\text{jet}} \leq 3$ (left) and $n_{\text{jet}} \geq 4$ (right). An inclusive set of trigger conditions is used to collect the events in data (black solid circles with error bars). Expected yields as given by simulation are also shown for multijet events (green dash-dotted line), non-multijet backgrounds with genuine E_T as described in Section 5 (blue long-dashed line), the sum of all aforementioned SM processes (cyan solid line) and the reference signal model D2 (left, red dotted line) or G2 (right, red dotted line). The statistical uncertainties for the multijet and SM expectations are represented by the hatched areas (visible only for statistically limited bins). The final bin contains all events with $\alpha_T > 3$.

4.4 Trigger conditions

Events are recorded with multiple jet-based trigger conditions, implemented on the HLT computing farm, that require both $H_{\rm T}$ and $\alpha_{\rm T}$ to lie above predetermined thresholds, as summarised in Table 2. Different trigger conditions are used depending on the analysis $H_{\rm T}$ bin. The trigger-level jet energies are corrected to account for scale and pileup effects. The trigger efficiency, defined as the probability with which events that satisfy the signal region selection criteria also satisfy the trigger condition, is measured from data for each $n_{\rm jet}$ category. The efficiency is measured using a data sample of μ + jets events recorded by an independent and unbiased trigger condition that requires an isolated muon satisfying $p_{\rm T} > 24\,{\rm GeV}$ and $|\eta| < 2.1$. The muon is

required to be well separated from the nearest jet j by requiring $\Delta R(\mu, j) > 0.5$ and is ignored in the calculation of H_T and α_T in order to emulate a genuine E_T signature.

The thresholds used in the $H_{\rm T}$ binning scheme are shifted up by 25 GeV with respect to the trigger thresholds in order to maintain high efficiency for the $H_{\rm T}$ component of the trigger condition. The measured efficiencies are summarised in Table 2. Non-negligible inefficiencies, which are accounted for in the final result, are observed only for the lowest $H_{\rm T}$ bin. The HLT-based trigger conditions are dependent on multiple requirements on quantities determined by the L1 trigger logic, which include combinations of scalar sums of jet $E_{\rm T}$ measurements and individual $E_{\rm T}$ thresholds on sub-leading jets. The different efficiencies measured for the two $n_{\rm jet}$ categories in the lowest $H_{\rm T}$ bin are a result of the requirements on L1 trigger quantities that exhibit non-negligible inefficiencies at very low $H_{\rm T}$.

Table 2: Trigger conditions used to record events for each H_T bin and their efficiencies (with statistical uncertainties) measured in data for each H_T bin and n_{jet} category.

Analysis bin	Trigger thresholds		Trigger efficiency (%)		
$H_{\rm T}$ [GeV]	$H_{\rm T}$ [GeV]	α_{T}	$2 \le n_{\rm jet} \le 3$	$n_{\rm jet} \ge 4$	
275–325	250	0.55	$89.1_{-0.4}^{+0.4}$	$83.7^{+0.6}_{-0.6}$	
325–375	300	0.53	$98.7^{+0.2}_{-0.3}$	$98.2^{+0.4}_{-0.5}$	
375–475	350	0.52	$99.0^{+0.4}_{-0.5}$	$99.7^{+0.2}_{-0.6}$	
≥475	400	0.51	$100.0^{+0.0}_{-0.6}$	$100.0^{+0.0}_{-0.8}$	

5 Estimating the non-multijet backgrounds

5.1 Dominant background processes

In the absence of a significant contribution from multijet events, the remaining backgrounds in the signal region stem from SM processes with significant \mathcal{E}_T in the final state.

For events in which no b-quark jets are identified, the largest backgrounds are from the production of W and Z bosons in association with jets. The decay $Z \to \nu \overline{\nu}$ is the only relevant contribution from Z+ jets events. For W+ jets events, the two relevant sources are leptonic decays, in which the lepton is not reconstructed or fails the isolation or acceptance requirements, and the decay $W\to \tau \nu$ in which the τ decays hadronically and is identified as a jet.

For events satisfying $n_b \ge 1$, $t\bar t$ production followed by semileptonic decays becomes the most important background process. For the subset of events satisfying $n_b = 1$ and $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$, the total contribution from the W + jets and Z + jets backgrounds is comparable to the $0 \le n_{\rm jet} \le 3$.

Residual contributions from single-top-quark and diboson production are also expected.

5.2 Definition of the data control samples

Three independent data control samples, binned identically to the signal region, are used to estimate the contributions from the various background processes. These samples are defined by a selection of μ + jets, $\mu\mu$ + jets, and γ + jets events. The event selection criteria for these control samples are defined to ensure that any potential contamination from multijet events is negligible. Furthermore, the selections are also expected to suppress contributions from a

5.3 Method 9

wide variety of SUSY models (signal contamination) to a negligible level. The selection criteria that define the three data control samples are chosen such that the composition of background processes and their kinematic properties resemble as closely as possible those of the signal region once the muon, dimuon system, or photon are ignored when computing quantities such as H_T , ΔH_T , H_T , and α_T . This approach emulates the effects, including misreconstruction and acceptance, that lead to the presence of these background processes in the signal region.

The μ + jets sample is recorded using a trigger condition that requires an isolated muon satisfying $p_T > 24\,\text{GeV}$ and $|\eta| < 2.1$. The event selection requires exactly one isolated muon that satisfies stringent quality criteria, $p_T > 30\,\text{GeV}$, and $|\eta| < 2.1$ in order for the trigger to be maximally efficient at $88.0 \pm 2.0\%$. Furthermore, the transverse mass of the muon and $\not\!\!E_T$ [45, 46] system must be larger than $30\,\text{GeV}$ to ensure a sample rich in W bosons. The muon is required to be separated from the closest jet in the event by the distance $\Delta R > 0.5$. The event is rejected if two muon candidates are identified that have an invariant mass within a window of $\pm 25\,\text{GeV}$ around the mass of the Z boson, regardless of the quality and isolation of the second muon candidate. No selection requirement on α_T is made in order to increase the statistical precision of the predictions derived from this sample, while the impact of relaxing the α_T requirement is tested with a dedicated set of closure tests described in Section 5.4.

The $\mu\mu$ + jets sample uses the same trigger condition and muon identification criteria as the μ + jets sample, except that the threshold for the second, lower- p_T muon is 10 GeV. This leads to a trigger efficiency of 95 \pm 2%, rising to 98 \pm 2% with increasing H_T . The event selection requires exactly two oppositely charged, isolated muons satisfying stringent quality criteria, and an invariant mass within a window of \pm 25 GeV around the mass of the Z boson. Both muons are required to be separated from their closest jets in the event by the distance $\Delta R > 0.5$. Again, no requirement on α_T is made.

The γ + jets sample is selected using a dedicated photon trigger requiring a localised, large energy deposit in the ECAL with $E_{\rm T} > 150\,{\rm GeV}$ that satisfies loose photon identification and isolation criteria [41]. The offline selection requires $H_{\rm T} > 375\,{\rm GeV}$, $\alpha_{\rm T} > 0.55$, and a single photon to be reconstructed with $E_{\rm T} > 165\,{\rm GeV}$, $|\eta| < 1.45$, satisfying tight isolation criteria, and with a minimum distance to any jet of $\Delta R > 1.0$. For these selection criteria, the photon trigger condition is found to be fully efficient.

5.3 Method

The method used to estimate the non-multijet backgrounds in the signal region relies on the use of transfer factors, which are constructed per data control sample in bins of H_T , $n_{\rm jet}$, and $n_{\rm b}$. These transfer factors are determined from simulated event samples, which are produced as follows. The production of W and Z bosons in association with jets is simulated with the MAD-GRAPH V5 [47] event generator. The production of $t\bar{t}$ and single-top quark events is generated with POWHEG [48], and diboson events are produced with PYTHIA 6.4 [49]. For all simulated samples, PYTHIA 6.4 is used to describe parton showering and hadronisation. The description of the detector response is implemented using the GEANT4 [50] package. The simulated samples are normalised using the most accurate cross section calculations currently available, usually with next-to-leading-order (NLO) accuracy. To model the effects of pileup, the simulated events are generated with a nominal distribution of pp interactions per bunch crossing and then reweighted to match the pileup distribution as measured in data.

Each transfer factor is defined as the ratio of expected yields as given by simulation in a given bin of the signal region, $N_{\rm MC}^{\rm signal}$, and the corresponding bin of one of the control samples, $N_{\rm MC}^{\rm control}$. Each transfer factor is then used to extrapolate from the event yield measured in a

data control sample, $N_{
m obs}^{
m control}$, to an expectation for the event yield in the corresponding bin of the signal region, $N_{
m pred}^{
m signal}$, via the expression:

$$N_{\mathrm{pred}}^{\mathrm{signal}} = \frac{N_{\mathrm{MC}}^{\mathrm{signal}}}{N_{\mathrm{MC}}^{\mathrm{control}}} \times N_{\mathrm{obs}}^{\mathrm{control}}.$$
 (4)

Two independent estimates of the irreducible background of $Z \to \nu \overline{\nu}$ + jets events are determined from the data control samples comprising $Z \to \mu \mu$ + jets and γ + jets events, which have similar kinematic properties but different acceptances. The $Z \to \mu \mu$ + jets events have similar kinematic properties when the two muons are ignored, but a smaller branching fraction, while the γ + jets events have similar kinematic properties when the photon is ignored [51], but a larger production cross section.

The μ + jets data sample provides an estimate for the total contribution from all other SM processes, which is dominated by $t\bar{t}$ and W-boson production. Residual contributions from single-top-quark and diboson production are also estimated. For the category of events satisfying $n_b \geq 2$, in which the contribution from $Z \to \nu \bar{\nu} + j$ ets events is suppressed to a negligible level, the μ + jets sample is also used to estimate this small contribution rather than using the statistically limited $\mu\mu$ + jets and γ + jets samples. Hence, only the μ + jets sample is used to estimate the total SM background for events satisfying $n_b \geq 2$, whereas all three data control samples are used for events satisfying $n_b \leq 1$.

In order to maximise sensitivity to potential new physics signatures in final states with multiple b-quark jets, a method that improves the statistical power of the predictions from simulation, particularly for $n_{\rm b} \geq 2$, is employed. The distribution of $n_{\rm b}$ is estimated from generator-level information contained in the simulation. The number of reconstruction-level jets matched to underlying bottom quarks $(n_{\rm b}^{\rm gen})$, charm quarks $(n_{\rm c}^{\rm gen})$, and light-flavoured partons $(n_{\rm q}^{\rm gen})$ per event, $N(n_{\rm b}^{\rm gen}, n_{\rm c}^{\rm gen}, n_{\rm q}^{\rm gen})$, is recorded in bins of $H_{\rm T}$ for each $n_{\rm jet}$ category. The b-tagging efficiency, ϵ , and mistag probabilities, $f_{\rm c}$ and $f_{\rm q}$, are also determined from simulation for each $H_{\rm T}$ bin and $n_{\rm jet}$ category, with each quantity averaged over jet $p_{\rm T}$ and η . Corrections are applied on a jet-by-jet basis to both ϵ , $f_{\rm c}$, and $f_{\rm q}$ in order to match the corresponding measurements from data [40]. This information is sufficient to predict $n_{\rm b}$ and thus also determine the event yield $N(n_{\rm b})$ from simulation for a given $H_{\rm T}$ bin and $n_{\rm jet}$ category with the expression:

$$N(n_{\rm b}) = \sum_{n_{\rm jet}} \sum_{n_{\rm b}} \left(N(n_{\rm b}^{\rm gen}, n_{\rm c}^{\rm gen}, n_{\rm q}^{\rm gen}) \times P_{\rm b} \times P_{\rm c} \times P_{\rm q} \right) , \tag{5}$$

where $n_{\rm b}^{\rm tag}$, $n_{\rm c}^{\rm tag}$, and $n_{\rm q}^{\rm tag}$ are the number of times that a reconstructed b-quark jet is identified as originating from an underlying bottom quark, charm quark, or light-flavoured parton, respectively, and $P_{\rm b} \equiv P(n_{\rm b}^{\rm tag}; n_{\rm b}^{\rm gen}, \epsilon), P_{\rm c} \equiv P(n_{\rm c}^{\rm tag}; n_{\rm c}^{\rm gen}, f_{\rm c}),$ and $P_{\rm q} \equiv P(n_{\rm q}^{\rm tag}; n_{\rm q}^{\rm gen}, f_{\rm q})$ are the binomial probabilities for this to happen. The outer summation considers all possible combinations of $n_{\rm b}^{\rm gen}$, $n_{\rm c}^{\rm gen}$, and $n_{\rm q}^{\rm gen}$ that satisfy $n_{\rm jet} = n_{\rm b}^{\rm gen} + n_{\rm c}^{\rm gen} + n_{\rm q}^{\rm gen}$, while the inner summation considers all possible combinations of $n_{\rm b}^{\rm tag}$, $n_{\rm c}^{\rm tag}$, and $n_{\rm q}^{\rm tag}$ that satisfy $n_{\rm b} = n_{\rm b}^{\rm tag} + n_{\rm c}^{\rm tag} + n_{\rm q}^{\rm tag}$.

The predicted yields are found to be in good statistical agreement with the yields obtained directly from the simulation in the bins with a significant population. The method exploits the ability to make precise measurements of $N(n_{\rm b}^{\rm gen}, n_{\rm c}^{\rm gen})$, ϵ , $f_{\rm c}$, and $f_{\rm q}$ independently of $n_{\rm b}$, which means that event yields for a given b-quark jet multiplicity can be predicted with a higher statistical precision than obtained directly from simulation. Precise measurements of $f_{\rm c}$ and $f_{\rm q}$ are particularly important for events with $n_{\rm b} \geq 3$, which often occur in the SM because

of the presence of mistagged jets in the event. In this case, the largest background is tt, with two correctly tagged b-quark jets and an additional mistagged jet originating from a charm quark or light-flavoured parton.

5.4 Systematic uncertainties on transfer factors

As described in Section 5.3, the method to estimate the background contributions from SM processes with significant E_T is based on an extrapolation from a measurement in a control sample to a yield expectation in the signal region. This approach aims to minimise the sensitivity to simulation mismodelling, as many systematic biases are expected largely to cancel in the ratios used to define the transfer factors. However, a systematic uncertainty is assigned to each transfer factor to account for theoretical uncertainties [51] and residual biases in the simulation modelling of kinematics (e.g. acceptances) and instrumental effects (e.g. reconstruction inefficiencies).

The magnitudes of the systematic uncertainties assigned to the transfer factors are determined from a representative set of closure tests in data. These tests use yields from an event category in one of the three independent data control samples, along with the corresponding transfer factors obtained from simulation, to predict the yields in another event category or data control sample following the prescription defined in Eq. (4). As stated previously, the contamination from multijet events or any potential signal is expected to be negligible. Therefore, the closure tests carried out between control samples probe the properties of the relevant SM non-multijet backgrounds.

Thirteen sets of closure tests are chosen to probe key ingredients of the simulation modelling that may introduce biases in the transfer factors. Each set comprises up to eight independent tests in bins of H_T . Five sets of closure tests are performed independently for each of the two $n_{\rm jet}$ categories, and a further three sets are common to both categories, as shown in Fig. 2. For each $n_{\rm jet}$ category, the first three sets of closure tests are carried out within the μ + jets sample, and probe the modelling of the α_T distribution in genuine E_T events (circles), the relative composition between W + jets and top events (squares), and the modelling of the reconstruction of b-quark jets (triangles), respectively. The fourth set (crosses) addresses the modelling of the vector boson samples by connecting the μ + jets and $\mu\mu$ + jets control samples, with the former sample rich in W + jets events (and also with a significant contribution from top events) and the latter in Z + jets events. The fifth set (solid bullets) deals with the consistency between the $Z \to \mu\mu$ + jets and γ + jets samples, which are both used to provide an estimate of the $Z \to \nu \bar{\nu}$ + jets background. Three further sets of closure tests (inverted triangles, diamonds, asterisks), one per data control sample, probe the simulation modelling of the $n_{\rm jet}$ distribution.

All sets of closure tests demonstrate, given the statistical precision of each test, that there are no significant biases or dependencies on $H_{\rm T}$ exhibited by the transfer factors obtained from simulation. Table 3 summarises the results obtained from constant and linear polynomial fits to each set of closure tests for the two $n_{\rm jet}$ categories. The table also lists the best fit values and uncertainties for the constant polynomial fits, which indicate the level of closure averaged across the full $H_{\rm T}$ range considered in the analysis. All tests are either statistically compatible with zero bias or at the level of a few percent or less. Finally, Table 3 also summarises the best fit values of the slopes of the linear polynomial fits, which are typically of the order 10^{-4} , corresponding to a percent-level change per $100\,\text{GeV}$. However, in all cases, the best fit values are fully compatible with zero, indicating that the level of closure is $H_{\rm T}$ -independent. The χ^2 and number of degrees of freedom (d.o.f.) of each fit are also quoted and indicate a reasonable goodness-of-fit in all cases except one, which concerns the simulation modelling of the $n_{\rm jet}$




Figure 2: Sets of closure tests that probe for possible $H_{\rm T}$ -dependent biases associated with the transfer factors obtained from simulation, for the two event categories satisfying $2 \le n_{\rm jet} \le 3$ (left) and $n_{\rm jet} \ge 4$ (right). Also shown are shaded bands that represent $H_{\rm T}$ -dependent systematic uncertainties.

distribution in the μ + jets sample. The large χ^2 value is mainly attributable to a single outlier in the bin 675 < $H_{\rm T}$ < 775 GeV rather than any significant trend in $H_{\rm T}$.

Table 3: Results from constant and linear polynomial fits to sets of closure tests performed for each n_{jet} category. The symbol identifies the set of closure tests in Fig. 2. The final four rows probe the simulation modelling of the n_{jet} distribution. The [†] indicates the fit repeated with a single outlier removed.

			Constant poly	nomial fit	Linear polyn	omial fit
$n_{\rm jet}$	Symbol	Set of closure tests	Constant	$\chi^2/\text{d.o.f.}$	Slope	$\chi^2/\text{d.o.f.}$
,	•				(10^{-4}GeV^{-1})	
2–3	0	$\alpha_{\rm T} < 0.55 \rightarrow \alpha_{\rm T} > 0.55 (\mu + {\rm jets})$	-0.06 ± 0.02	2.43/7	-1.3 ± 2.2	2.10/6
2-3		$0 \text{ b tags} \rightarrow 1 \text{ b tag}(\mu + \text{jets})$	0.07 ± 0.02	1.49/7	-1.6 ± 1.6	0.54/6
2-3	\triangle	1 b tag \rightarrow 2 b tags(μ + jets)	-0.07 ± 0.03	4.19/7	-2.7 ± 3.0	3.41/6
2-3	×	$\mu + \text{jets} \rightarrow \mu \mu + \text{jets}$	0.10 ± 0.03	5.64/7	-1.1 ± 2.3	5.40/6
2–3	•	$\mu\mu + \text{jets} \rightarrow \gamma + \text{jets}$	-0.06 ± 0.04	5.93/5	4.2 ± 4.3	4.98/4
≥ 4	\bigcirc	$\alpha_{\mathrm{T}} < 0.55 ightarrow \alpha_{\mathrm{T}} > 0.55 (\mu + \mathrm{jets})$	-0.05 ± 0.03	9.58/7	3.0 ± 2.9	8.47/6
≥ 4		$0 \text{ b tags} \rightarrow 1 \text{ b tag}(\mu + \text{jets})$	-0.03 ± 0.03	5.88/7	-1.0 ± 1.9	5.59/6
≥ 4	\triangle	1 b tag \rightarrow 2 b tags(μ + jets)	-0.02 ± 0.03	7.35/7	1.1 ± 2.2	7.08/6
≥ 4	×	$\mu + \text{jets} \rightarrow \mu \mu + \text{jets}$	0.08 ± 0.07	12.9/7	4.8 ± 4.3	11.7/6
≥ 4	•	$\mu\mu + \text{jets} \rightarrow \gamma + \text{jets}$	-0.03 ± 0.10	2.85/5	-4.0 ± 7.0	2.52/4
\geq 2	∇	$2 \le n_{\text{jet}} \le 3 \rightarrow n_{\text{jet}} \ge 4(\mu + \text{jets})$	-0.03 ± 0.02	17.3/7	0.0 ± 1.0	17.3/6
\geq 2 †	∇	$2 \le n_{\text{jet}} \le 3 \rightarrow n_{\text{jet}} \ge 4(\mu + \text{jets})$	-0.04 ± 0.01	6.10/6	-1.4 ± 1.1	4.46/5
\geq 2	\Diamond	$2 \le n_{\text{jet}} \le 3 \rightarrow n_{\text{jet}} \ge 4(\gamma + \text{jets})$	0.12 ± 0.05	2.42/5	6.0 ± 4.7	0.77/4
≥2	*	$2 \le n_{\text{jet}} \le 3 \rightarrow n_{\text{jet}} \ge 4(\mu\mu + \text{jets})$	-0.04 ± 0.07	9.76/7	4.9 ± 4.4	8.51/6

Once it is established that no significant bias or trend is observed for any set of closure tests, uncorrelated systematic uncertainties on the transfer factors are determined for five independent regions in H_T : 275–325, 325–375, 375–575, 575–775, and \geq 775 GeV. Conservative estimates for the systematic uncertainties are based on the variance in the level of closure for all individual tests, weighted according to the statistical uncertainties associated with each test, within a given H_T region. This procedure yields estimates of 10% (10%), 10% (10%), 10% (10%), 20% (20%), and 20% (30%) for the five H_T regions defined above for events satisfying $2 \leq n_{\rm jet} \leq 3$ ($n_{\rm iet} \geq 4$), as indicated by the shaded bands in Fig. 2.

The effect on the transfer factors of uncertainties related to the modelling of b-quark jets in simulation is found to be negligible, at the sub-percent level, in comparison to the aforemen-

tioned H_T -dependent systematic uncertainties. Hence, the same estimates for the systematic uncertainties are used for each n_b category, which are treated as uncorrelated between the n_b categories.

6 Estimating the multijet background

The contribution from multijet events is expected to be negligible, at or below the percentlevel relative to the yields expected from non-multijet backgrounds, even for the most inclusive definition of the signal region, defined by $H_T > 275 \,\text{GeV}$, $\alpha_T > 0.55$, and no requirement on n_{jet} or n_b . The expected yield is further suppressed to $\ll 1$ event with the application of more stringent thresholds on any of the variables H_T , n_{jet} , or n_b .

Any potential contamination from multijet events can be estimated by exploiting the $H_{\rm T}$ dependence of the ratio of events with a value of $\alpha_{\rm T}$ above and below some threshold, $R_{\alpha_{\rm T}}(H_{\rm T})$. This dependence on $H_{\rm T}$ is modelled as a falling exponential function, $R_{\alpha_{\rm T}}(H_{\rm T}) = A {\rm e}^{-kH_{\rm T}}$ [25], where the parameters A and k are the normalisation and decay constant parameters, respectively. The exponential model is validated in a multijet-enriched data sideband, defined by the event selection criteria for the signal region, described in Section 4.3, but with the requirement $H_{\rm T}/E_{\rm T} > 1.25$. A measurement of the decay constant k is made in a further multijet-enriched sample defined by the event selection criteria for the signal region but with the requirement $\alpha_{\rm T} < 0.55$.

The estimate of the multijet contamination in the signal region for a given H_T bin is determined from the product of the ratio R_{α_T} , as given by the exponential model, and the yield in a data control sample defined by the event selection for the signal region but with the requirement $\alpha_T < 0.55$. This event sample is recorded with a set of trigger conditions that require only H_T to be above the same thresholds as used by the signal region triggers listed in Table 2.

Further details on the exponential model and its use in the likelihood model are found in Section 7.

7 Confronting data with the SM-only hypothesis

For a given category of events satisfying requirements on both n_{jet} and n_b , a likelihood model of the observations in multiple data samples is used to obtain a consistent prediction of the SM backgrounds and to test for the presence of a variety of signal models. It is written as:

$$L_{n_{\text{jet}}, n_{\text{b}}} = L_{\text{SR}} \times L_{\mu} \times L_{\mu\mu} \times L_{\gamma}; \qquad (0 \le n_{\text{b}} \le 1)$$
 (6)

$$L_{n_{\text{let}}, n_{\text{b}}} = L_{\text{SR}} \times L_{\mu}, \qquad (n_{\text{b}} \ge 2) \tag{7}$$

where $L_{\rm SR}$ describes the yields in the eight $H_{\rm T}$ bins of the signal region where exactly $n_{\rm b}$ bequark jets are required. In each bin of $H_{\rm T}$, the observation is modelled as a Poisson-distributed variable about the sum of the SM expectation and a potential signal contribution (assumed to be zero in the following discussion), where the SM expectation is the sum of the multijet and non-multijet components. The non-multijet component is related to the expected yields in the μ + jets, and γ + jets control samples via the transfer factors derived from simulation, as described in Section 5.3. The likelihood functions L_{μ} , $L_{\mu\mu}$, and L_{γ} describe the yields in the $H_{\rm T}$ bins of the μ + jets, $\mu\mu$ + jets, and γ + jets control samples. For the category of events

satisfying $n_b \ge 2$, only the μ + jets control sample is used in the likelihood to determine the total contribution from all non-multijet SM backgrounds in the signal region. The estimate of the contribution from multijet events in a given H_T bin of the signal region relies on the exponential model $R_{\alpha_T}(H_T) = A \mathrm{e}^{-kH_T}$, as described in Section 6. The systematic uncertainties (10–30%) associated with the SM background estimates are accounted for with nuisance parameters in the likelihood function, the measurements of which are treated are assumed to follow a lognormal distribution.

In order to test the compatibility of the observed yields with the expectations from only SM processes, the likelihood function is maximised over all fit parameters. Table 4 summarises the observed yields and the SM expectations in bins of $H_{\rm T}$ for events in the signal region categorised according to $n_{\rm jet}$ and $n_{\rm b}$. No significant excess above the SM expectation is observed in the signal region and the control samples are well described by the SM hypothesis. For each of the eight categories of events defined by requirements on $n_{\rm jet}$ and $n_{\rm b}$, the goodness-of-fit of the SM-only hypothesis is determined by considering simultaneously up to eight bins in $H_{\rm T}$ from the signal region and up to 22 bins from the three control samples. The p-values obtained are found to be uniformly distributed in the range 0.0–1.0.

Comparisons of the observed yields and the SM expectations in bins of $H_{\rm T}$ for events categorised according to $n_{\rm jet}$ and containing exactly zero, one, or two b-quark jets are shown in Figs. 3, 4, and 5, respectively. Similarly, Fig. 6 shows the $H_{\rm T}$ -binned observed yields and SM expectations for events satisfying $n_{\rm jet} \geq 4$ and $n_{\rm b} = 3$ (left) or $n_{\rm b} \geq 4$ (right). For illustration, Figs. 3–6 include the expected yields from various reference models, as defined in Table 1. Figure 7 (left column) shows the observed yields and SM expectations in the $H_{\rm T}$ bins of the μ + jets, μ + jets, and γ + jets control samples for events satisfying $2 \leq n_{\rm jet} \leq 3$ and $n_{\rm b} = 0$. Figure 7 (right column) shows the observed yields and SM expectations in the $H_{\rm T}$ bins of the μ + jets sample for events satisfying $n_{\rm jet} \geq 4$ and $n_{\rm b} = 2$, $n_{\rm b} = 3$, or $n_{\rm b} \geq 4$.

The maximum-likelihood values for the decay constant and normalisation parameters, k and A, of the exponential model for the multijet background are obtained independently for each of the eight event categories. The value of the nuisance parameter k is constrained via a measurement in a multijet-enriched data sideband, as described in Section 6. No constraint is applied to the normalisation term. In the nominal fit, the maximum-likelihood value of the normalisation parameter for each event category is found to be compatible with zero within uncertainties. Furthermore, the expected yields obtained from an alternate fit, in which the normalisation parameters are fixed to zero, agree well with those obtained from the nominal fit.

8 Interpretations of the results

Limits are set in the parent sparticle and LSP mass parameter space of the simplified models listed in Table 1. The CL_S method [52, 53] is used to compute the limits, with the one-sided (LHC-style) profile likelihood ratio as the test statistic [54]. The sampling distributions for the test statistic are built by generating pseudo-data from the likelihood function, using the respective maximum-likelihood values of the nuisance parameters under the SM background-only and signal-plus-background hypotheses. Signal contributions in each of the data samples are considered, though the only significant contribution occurs in the signal region and not the control samples. Table 5 specifies the event categories, defined in terms of $n_{\rm jet}$ and $n_{\rm b}$, used to provide interpretations in the different simplified models.

Event samples for the simplified models are generated at leading order with PYTHIA 6.4 [49]. Inclusive, process-dependent, NLO calculations of SUSY production cross sections, with next-

Table 4: Event yields observed in data and SM expectations with their associated uncertainties in bins of $H_{\rm T}$ for events in the signal region that are categorised according to $n_{\rm jet}$ and $n_{\rm b}$. The final $H_{\rm T} > 375\,{\rm GeV}$ bin is inclusive for the $n_{\rm jet} \ge 4$ and $n_{\rm b} \ge 4$ category.

					,		-	0 1		
						H_{T} bin	[GeV]			
	$n_{\rm jet}$	$n_{\rm b}$	275–325	325–375	375–475	475–575	575–675	675–775	775–875	875–∞
SM Data	2–3 2–3	0	6235 ⁺¹⁰⁰ 6232	2900 ⁺⁶⁰ ₋₅₄ 2904	1955 ⁺³⁴ 1965	558 ⁺¹⁴ 552	186 ⁺¹¹ 177	51.3 ^{+3.4} _{-3.8} 58	21.2 ^{+2.3} _{-2.2} 16	16.1 ^{+1.7} _{-1.7} 25
SM Data	2–3 2–3	1 1	$1162_{-29}^{+37} \\ 1164$	$481_{-19}^{+18} \\ 473$	$341_{-16}^{+15} \\ 329$	86.7 ^{+4.2} _{-5.6} 95	$24.8^{+2.8}_{-2.7}$ 23	$7.2_{-1.0}^{+1.1} \\ 8$	$3.3^{+0.7}_{-0.7}$	$2.1_{-0.5}^{+0.5}$ 1
SM Data	2–3 2–3	2 2	$224_{-14}^{+15} \\ 222$	$98.2^{+8.4}_{-6.4}$ 107	59.0 ^{+5.2} _{-6.0} 58	$12.8_{-1.6}^{+1.6} \\ 12$	$3.0^{+0.9}_{-0.7}$	$0.5^{+0.2}_{-0.2}$	$0.1_{-0.1}^{+0.1} \\ 0$	$0.1_{-0.1}^{+0.1} \\ 0$
SM Data	$\geq 4 \\ \geq 4$	0 0	$1010_{-24}^{+34} \\ 1009$	$447_{-16}^{+19} \\ 452$	390^{+19}_{-15} 375	$250_{-11}^{+12} \\ 274$	$111^{+9}_{-7} \\ 113$	$53.3_{-4.3}^{+4.3}$ 56	$18.5_{-2.4}^{+2.4} \\ 16$	$19.4_{-2.7}^{+2.5} \\ 27$
SM Data	≥ 4 ≥ 4	1 1	$521_{-17}^{+25} \\ 515$	232 ⁺¹⁵ ₋₁₂ 236	$188^{+12}_{-11} \\ 204$	106 ⁺⁶ 92	$42.1_{-4.4}^{+4.1} \\ 51$	$17.9_{-2.0}^{+2.2}$ 13	$9.8_{-1.4}^{+1.5}$ 13	$6.8_{-1.1}^{+1.2}$
SM Data	≥ 4 ≥ 4	2 2	$208_{-9}^{+17} \\ 204$	$103^{+9}_{-7} \\ 107$	85.9 ^{+7.2} _{-6.9} 84	$51.7_{-4.7}^{+4.6}$ 59	$19.9_{-3.0}^{+3.4} \\ 24$	$\begin{array}{c} 6.8^{+1.2}_{-1.3} \\ 5 \end{array}$	$1.7_{-0.4}^{+0.7} \\ 1$	$1.3^{+0.4}_{-0.3}$
SM Data	≥ 4 ≥ 4	3	$25.3_{-4.2}^{+5.0} \\ 25$	$11.7_{-1.8}^{+1.7} \\ 13$	$\begin{array}{c} 6.7^{+1.4}_{-1.2} \\ 4 \end{array}$	$3.9^{+0.8}_{-0.8}$	$2.3_{-0.6}^{+0.6}$	$1.2^{+0.3}_{-0.4}$	$0.3^{+0.2}_{-0.1}$	$0.1_{-0.1}^{+0.1} \\ 0$
SM Data	$\geq 4 \\ \geq 4$	$\geq 4 \\ \geq 4$	$0.9^{+0.4}_{-0.7}$	$0.3^{+0.2}_{-0.2}$	$0.6_{-0.3}^{+0.3}$	_ _	_ _	_ _	_ _	_ _
CMS, 11.7 fb ⁻¹ , $(s = 8 \text{ TeV})$ Data (signal region, $n_p = 0$; $2 \le n_j \le 3$) Standard Model + Expected Upc										
Έ,	F-		Sto	ndard Model + Ev	nooted Une	10 ⁺		Standa	rd Model + Evne	lotod'i Inc.




Figure 3: Event yields observed in data (solid circles) and SM expectations with their associated uncertainties (solid lines with bands) in bins of $H_{\rm T}$ for the signal region when requiring exactly zero b-quark jets and $2 \le n_{\rm jet} \le 3$ (left) or $n_{\rm jet} \ge 4$ (right). For illustration only, the expectations for the reference mass points of the signal models D1 (left, red dashed line) and G1 (right, red dashed line) are superimposed on the SM-only expectations.

Table 5: A summary of the event categories used to provide an interpretation in the various simplified models considered in this paper.

Model	$n_{ m jet}$	$n_{\rm b}$
D1	2–3	0
D2	2–3	1, 2
D3	≥ 4	1, 2
G1	≥ 4	0
G2	≥ 4	$2, 3, \ge 4$
G3	≥ 4	$2, 3, \ge 4$

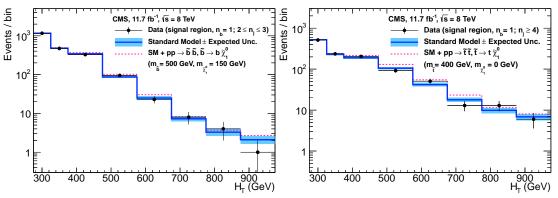


Figure 4: As for Fig. 3, but requiring exactly one b-quark jet and $2 \le n_{\text{jet}} \le 3$ (left) or $n_{\text{jet}} \ge 4$ (right). Example signal yields are for the reference mass points of the signal models D2 (left, red dashed line) and D3 (right, red dashed line).

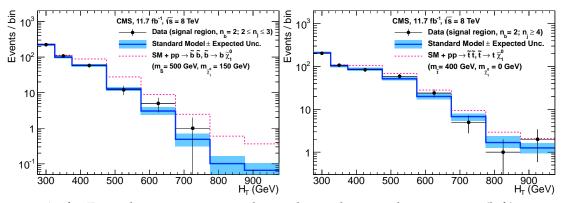


Figure 5: As for Fig. 3, but requiring exactly two b-quark jets and $2 \le n_{\text{jet}} \le 3$ (left) or $n_{\text{jet}} \ge 4$ (right). Example signal yields are for the reference mass points of the signal models D2 (left, red dashed line) and D3 (right, red dashed line).

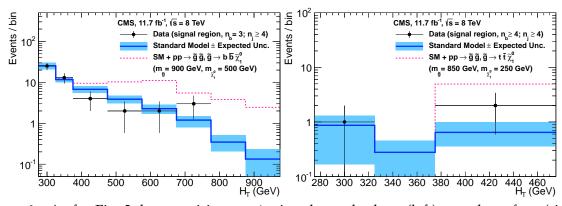


Figure 6: As for Fig. 3, but requiring $n_{\rm jet} \ge 4$ and exactly three (left) or at least four (right) b-quark jets. Example signal yields are for the reference mass points of the signal models G2 (left, red dashed line) and G3 (right, red dashed line).

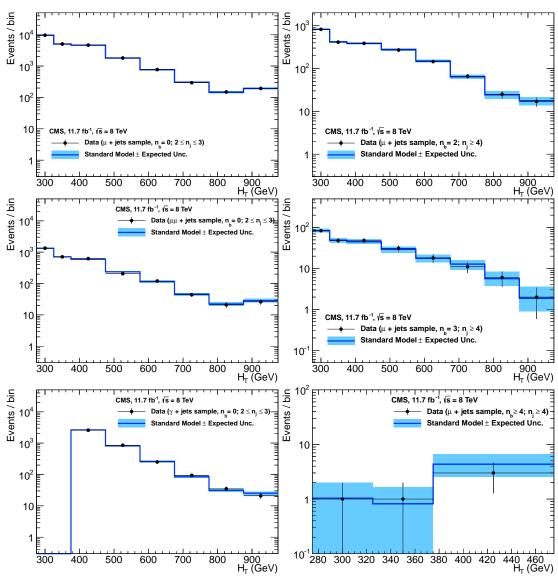


Figure 7: Event yields observed in data (solid circles) and SM expectations with their associated uncertainties (solid lines with bands) in bins of H_T for: the μ + jets (top left), $\mu\mu$ + jets (middle left), and γ + jets (bottom left) control samples when requiring $2 \le n_{\rm jet} \le 3$ and exactly zero b-quark jets; and the μ + jets control sample when requiring $n_{\rm jet} \ge 4$ and exactly two (top right), three (middle right), or at least four (bottom right) b-quark jets.

to-leading-logarithmic (NLL) corrections, are obtained with the program PROSPINO [55–60]. The samples are generated using the CTEQ6L1 [61] PDFs. The distribution of the number of pp interactions per bunch crossing for the simulated samples matches that observed in data.

Various experimental uncertainties on the expected signal yield are considered for each interpretation. Signal acceptance in the kinematic region defined by $0 < m_{\rm parent} - m_{\rm LSP} < 175\,{\rm GeV}$ or $m_{\rm parent} < 300\,{\rm GeV}$ is due in part to the presence of initial-state radiation. Given the large associated uncertainties from simulation for this kinematic region, no interpretation is provided. Otherwise, the experimental systematic uncertainties are determined for each point in the mass parameter space of each simplified model. Models are categorised according to the mass splitting between the parent sparticle and the LSP, with those satisfying $175 < m_{\rm parent} - m_{\rm LSP} < 350\,{\rm GeV}$ deemed to be characterised by a compressed spectrum. For a given category of model, i.e. with a compressed spectrum or otherwise (as defined above), the point-by-point variations in the mass parameter space are small with respect to the absolute values of the systematic uncertainties.

Estimates of the various systematic uncertainties for models with a compressed spectrum or otherwise are summarised in Tables 6 and 7, respectively. Contributions from the analysis selection are dominated by uncertainties on the PDFs, jet energy scale (JES), and modelling of the efficiency and mistag probability of b-quark jets in simulation. The total systematic uncertainties provided in the tables also account for the uncertainty of 4.4% on the luminosity measurement [13] and contributions from other event selection criteria, such as: the trigger conditions; the removal of events containing isolated muons, electrons, or photons; and filters to suppress classes of rare, pathological events, as described in Section 4.3. Each of these individual contributions is below 4%. The total systematic uncertainty on the expected signal yield for the various simplified models is found to be in the range 12%–23% and is accounted for with a nuisance parameter, the measurement of which is assumed to follow a lognormal distribution.

Table 6: Estimates of the dominant systematic uncertainties (%), defined in the text, on the analysis efficiency for various simplified models that are characterised by a small mass splitting (i.e. compressed spectrum) between the parent sparticle and LSP. The totals also reflect contributions from additional systematic uncertainties described in the text. The region $m_{\rm parent}-m_{\rm LSP}<350\,{\rm GeV}$ is kinematically forbidden for the G3 model.

Model	D1	D2	D3	G1	G2	G3
PDF	10.0	10.0	10.0	10.0	10.0	_
JES	4.1	4.8	6.5	5.6	7.3	_
b-tagging	2.4	2.2	0.8	3.1	2.7	_
Total	12.9	13.1	13.9	13.9	14.5	_

Table 7: Estimates of the dominant systematic uncertainties (%), defined in the text, on the analysis efficiency for various simplified models that are characterised by a large mass splitting between the parent sparticle and LSP. The totals also reflect contributions from additional systematic uncertainties described in the text.

Model	D1	D2	D3	G1	G2	G3
PDF	10.0	10.0	10.0	10.0	10.0	10.0
JES	1.1	0.9	3.5	0.8	1.5	0.5
b-tagging	5.8	2.7	1.6	6.6	10.1	19.4
Total	13.4	12.3	12.9	14.0	16.0	23.0

Figure 8 shows the observed upper limit on the production cross section at 95% confidence

level (CL) as a function of the parent sparticle and LSP masses for various simplified models. The point-to-point fluctuations are due to the finite number of pseudo-experiments used to determine the observed upper limit. Also indicated are the observed excluded region assuming NLO+NLL cross sections for squark pair production in the limit of very massive gluinos (or vice versa), the observed excluded region when varying the production cross section by its theoretical uncertainty, and the expected excluded region with the ± 1 standard-deviation variations.

Table 8 lists the expected signal yields and analysis efficiencies in the region $H_{\rm T} > 375\,{\rm GeV}$ for each of the reference models defined in Table 1. The yields and efficiencies are summed over the individual event categories used for each interpretation, as listed in Table 5. The observed and expected upper limits (95% CL) on the cross section are also quoted, which can be compared with the NLO+NLL SUSY production cross section and its theoretical uncertainty.

Table 8: Summary of expected yields, analysis efficiencies, and upper limits for the reference models defined in Table 1 using the event categories defined in Table 5. The first row specifies the reference model. The second and third rows quote the expected yield and analysis efficiency (with statistical uncertainties) for the region $H_T > 375 \,\text{GeV}$. The fourth row quotes the NLO+NLL SUSY production cross section (with theoretical uncertainty), and the fifth and sixth rows quote the observed and expected upper limits (95% CL) on the production cross section.

Reference model	D1	D2	D3	G1	G2	G3
Expected yield	358.3 ± 8.9	78.1 ± 2.4	90.6 ± 2.4	416 ± 13	52.0 ± 1.7	25.3 ± 0.7
Efficiency (%)	16.0 ± 0.4	10.2 ± 0.3	2.9 ± 0.1	10.4 ± 0.3	9.4 ± 0.3	2.9 ± 0.1
Theoretical cross section [fb]	245 ± 44	86 ± 13	357 ± 51	434 ± 81	60 ± 14	97 ± 21
Observed upper limit [fb]	113.2	42.3	360.8	103.0	15.0	46.2
Expected upper limit [fb]	103.1	31.2	240.6	65.2	12.3	35.3

The estimates of mass limits are determined from the observed exclusion based on the theoretical production cross section, less one-standard-deviation uncertainty. The most stringent mass limit on the parent sparticle, $m_{\rm parent}^{\rm best}$ is generally obtained at low LSP masses. This limit weakens for larger values of LSP mass until a value $m_{\rm LSP}^{\rm best}$ is reached, beyond which no limit can be set. Generally speaking, the excluded mass range for $m_{\rm parent}$ is bounded from below by the kinematic region considered for each model, up to $m_{\rm LSP} \approx m_{\rm LSP}^{\rm best}$. This implies that the value of $m_{\rm LSP}^{\rm best}$ is relatively insensitive to the mass splitting, and is generally valid for models characterised by compressed spectra or otherwise. Whether this statement holds true for very small mass splittings, satisfying $m_{\rm parent} - m_{\rm LSP} < 175\,{\rm GeV}$, requires further studies of systematic uncertainties on signal acceptance such as those due to, for example, JES or the identification of b-quark jets. These features can be illustrated in Fig. 8 (middle), where $m_{\rm parent}^{\rm best} = 950\,{\rm GeV}$ for the region $m_{\rm LSP} < 350\,{\rm GeV}$. This limit weakens to 900 GeV when the LSP mass reaches 425 GeV. However, for LSP masses above 450 GeV, no mass range can be excluded for gluinos decaying to first- or second-generation quarks. The reach in LSP mass is stable down to mass splittings of $m_{\rm parent} - m_{\rm LSP} \approx 175\,{\rm GeV}$.

Table 9 summarises the most stringent observed and expected mass limits, in terms of $m_{\rm parent}^{\rm best}$ and $m_{\rm LSP}^{\rm best}$, obtained for the simplified models considered in this paper. The observed exclusion for each simplified model is generally weaker than expected at the level of 1–2 standard deviations. This feature is attributed to the small upward fluctuations in data in either the region $H_{\rm T} > 875\,{\rm GeV}$ for the $n_{\rm b} = 0$ category or $475 < H_{\rm T} < 675\,{\rm GeV}$ for the categories of events satisfying $1 \le n_{\rm b} \le 2$. Candidate events in these regions have been examined and do not exhibit any non-physical behaviour. The expected search sensitivity has improved with respect to the analysis based on the $\sqrt{s} = 7\,{\rm TeV}$ dataset [23] by as much as 225 and 150 GeV for $m_{\rm parent}^{\rm best}$ and

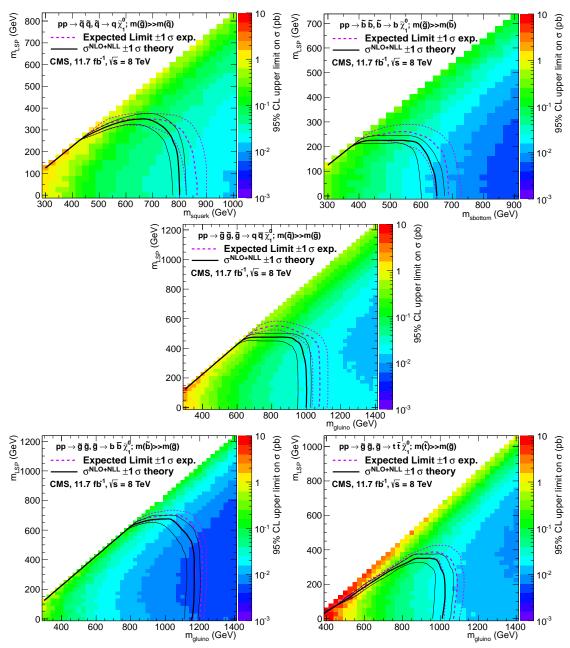


Figure 8: Observed upper limit on the production cross section at 95% CL (indicated by the colour scale) as a function of the parent and LSP sparticle masses for simplified models involving: the direct production of first- and second-generation squarks (D1, top left) and bottom squarks (D2, top right); and pair-produced gluinos each decaying to the LSP and pairs of light quarks (G1, middle), bottom quarks (G2, bottom left), or top quarks (G3, bottom right). The black solid thick line indicates the observed exclusion assuming NLO+NLL SUSY production cross section. The black solid thin lines represent the observed exclusions when varying the cross section by its theoretical uncertainty. The purple dashed thick (thin) line indicates the median $(\pm 1\sigma)$ expected exclusion.

 $m_{\rm LSP}^{\rm best}$, respectively.

Table 9: Summary of the mass limits obtained for various simplified models. The limits indicate the observed (expected) search sensitivity for each simplified model, where $m_{\text{parent}}^{\text{best}}$ and $m_{\text{LSP}}^{\text{best}}$ represent the largest mass beyond which no limit can be set for squarks or gluinos and the LSP, respectively. No observed exclusion is possible in the mass parameter space considered for the model D3.

Model	D1	D2	D3	G1	G2	G3
m _{parent} [GeV]					1125 (1200)	950 (1075)
$m_{\mathrm{LSP}}^{\mathrm{best}}$ [GeV]	325 (350)	200 (250)	-(100)	450 (550)	650 (700)	325 (375)

Figure 9 shows the observed upper limit at 95% CL on the production cross section as a function of the top-squark mass ($m_{\tilde{t}}$) for the model D3 when considering different LSP masses in the range 0–150 GeV. No exclusion on possible top-squark masses is observed when considering the theoretical production cross section, less 1σ uncertainty. However, the expected exclusion covers the ranges 300–520, 320–520, and 420-480 GeV for $m_{\rm LSP}=0$, 50, and 100 GeV, respectively. No exclusion is expected for the LSP with a mass greater than 100 GeV. The expected reach for the D3 model is summarised in Table 9.

9 Summary

An inclusive search for supersymmetry with the CMS experiment is reported, based on a data sample of pp collisions collected at $\sqrt{s}=8$ TeV, corresponding to an integrated luminosity of 11.7 ± 0.5 fb⁻¹. Final states with two or more energetic jets and significant E_T , as expected from the production and decay of massive squarks and gluinos, have been analysed.

The analysis strategy is to maximise the sensitivity of the search to a wide variety of SUSY event topologies arising from squark-squark, squark-gluino, and gluino-gluino production and decay, particularly those with third-generation squark signatures, while still maintaining the inclusive nature of the search. The signal region is binned according to the number of reconstructed jets, the scalar sum of the transverse energy of jets, and the number of jets identified to originate from bottom quarks. The sum of standard model backgrounds per bin has been estimated from a simultaneous binned likelihood fit to event yields in the signal region and μ + jets, $\mu\mu$ + jets, and γ + jets control samples. The observed yields in the signal region are found to be in agreement with the expected contributions from standard model processes. Limits are set in the SUSY particle mass parameter space of simplified models, with an emphasis on the different production mechanisms of coloured SUSY particles, third-generation squark signatures, and compressed-spectrum scenarios. The results can also be used to perform interpretations in other relevant models, such as the CMSSM.

In the context of simplified models, gluino masses below ~ 1 TeV are excluded at the 95% CL under the assumptions that gluinos are produced in pairs and each decays to a quark-antiquark pair and a light LSP via an off-shell squark. The mass limit varies in the range 950–1125 GeV depending on the squark flavour. The most constraining mass limits on the gluino-induced LSP are in the range 325–650 GeV depending on the decay mode. For the direct pair production of squarks, each of which is assumed to decay to a quark and light LSP, masses below 775 and 600 GeV are excluded (95% CL) for first- and second-generation squarks and bottom squarks, respectively. The most constraining mass limits on the LSP from the decays of first- and second-generation squarks and bottom squarks are 325 and 200 GeV, respectively. No exclusion is observed for the direct pair production of top squarks, each of which is assumed to decay to

22 9 Summary

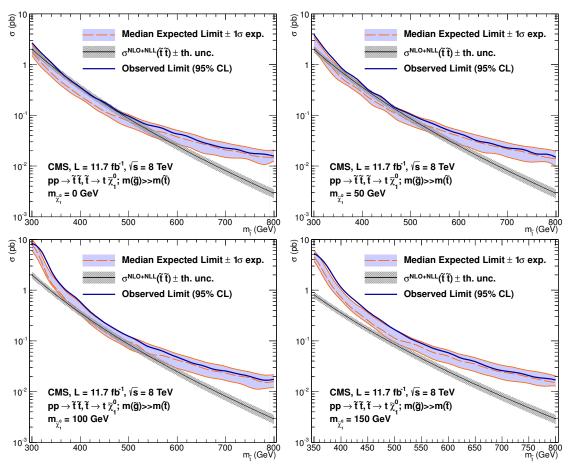


Figure 9: Excluded cross sections versus top-squark mass $m_{\tilde{t}}$ for the model D3, in which pair-produced top squarks each decay to a top quark and the LSP with a mass $m_{LSP}=0$ (top left), 50 (top right), 100 (bottom left), and 150 GeV (bottom right). The observed upper limit (95% CL) on the production cross section is shown as a function of $m_{\tilde{t}}$ (solid line), along with the expected upper limit and $\pm 1\sigma$ experimental uncertainties (long-dashed line with shaded band), and the NLO+NLL top-squark pair-production cross section and theoretical uncertainties (dotted line with shaded band).

a top quark and the LSP. However, an exclusion is expected for top squark masses as high as \sim 500 GeV and an LSP mass as high as 100 GeV. The limits on the LSP masses are also generally valid for compressed-spectrum models with mass splittings between the parent sparticle and LSP as low as \sim 200 GeV.

The analysis strategy reported here, in conjunction with the increase in centre-of-mass energy to 8 TeV, has increased the coverage of SUSY parameter space with respect to previous searches. However, a large range of SUSY parameter space still remains to be probed by the LHC.

Acknowledgements

We congratulate our colleagues in the CERN accelerator departments for the excellent performance of the LHC and thank the technical and administrative staffs at CERN and at other CMS institutes for their contributions to the success of the CMS effort. In addition, we gratefully acknowledge the computing centres and personnel of the Worldwide LHC Computing Grid for delivering so effectively the computing infrastructure essential to our analyses. Finally, we acknowledge the enduring support for the construction and operation of the LHC and the CMS detector provided by the following funding agencies: the Austrian Federal Ministry of Science and Research and the Austrian Science Fund; the Belgian Fonds de la Recherche Scientifique, and Fonds voor Wetenschappelijk Onderzoek; the Brazilian Funding Agencies (CNPq, CAPES, FAPERJ, and FAPESP); the Bulgarian Ministry of Education, Youth and Science; CERN; the Chinese Academy of Sciences, Ministry of Science and Technology, and National Natural Science Foundation of China; the Colombian Funding Agency (COLCIENCIAS); the Croatian Ministry of Science, Education and Sport; the Research Promotion Foundation, Cyprus; the Ministry of Education and Research, Recurrent financing contract SF0690030s09 and European Regional Development Fund, Estonia; the Academy of Finland, Finnish Ministry of Education and Culture, and Helsinki Institute of Physics; the Institut National de Physique Nucléaire et de Physique des Particules / CNRS, and Commissariat à l'Énergie Atomique et aux Énergies Alternatives / CEA, France; the Bundesministerium für Bildung und Forschung, Deutsche Forschungsgemeinschaft, and Helmholtz-Gemeinschaft Deutscher Forschungszentren, Germany; the General Secretariat for Research and Technology, Greece; the National Scientific Research Foundation, and National Office for Research and Technology, Hungary; the Department of Atomic Energy and the Department of Science and Technology, India; the Institute for Studies in Theoretical Physics and Mathematics, Iran; the Science Foundation, Ireland; the Istituto Nazionale di Fisica Nucleare, Italy; the Korean Ministry of Education, Science and Technology and the World Class University program of NRF, Republic of Korea; the Lithuanian Academy of Sciences; the Mexican Funding Agencies (CINVESTAV, CONACYT, SEP, and UASLP-FAI); the Ministry of Science and Innovation, New Zealand; the Pakistan Atomic Energy Commission; the Ministry of Science and Higher Education and the National Science Centre, Poland; the Fundação para a Ciência e a Tecnologia, Portugal; JINR (Armenia, Belarus, Georgia, Ukraine, Uzbekistan); the Ministry of Education and Science of the Russian Federation, the Federal Agency of Atomic Energy of the Russian Federation, Russian Academy of Sciences, and the Russian Foundation for Basic Research; the Ministry of Science and Technological Development of Serbia; the Secretaría de Estado de Investigación, Desarrollo e Innovación and Programa Consolider-Ingenio 2010, Spain; the Swiss Funding Agencies (ETH Board, ETH Zurich, PSI, SNF, UniZH, Canton Zurich, and SER); the National Science Council, Taipei; the Thailand Center of Excellence in Physics, the Institute for the Promotion of Teaching Science and Technology of Thailand and the National Science and Technology Development Agency of Thailand; the Scientific and Technical Research Council of Turkey, and Turkish Atomic Energy Authority; the Science and Technology Facilities Council, UK; the US

Department of Energy, and the US National Science Foundation. Individuals have received support from the Marie-Curie programme and the European Research Council and EPLANET (European Union); the Leventis Foundation; the A. P. Sloan Foundation; the Alexander von Humboldt Foundation; the Belgian Federal Science Policy Office; the Fonds pour la Formation à la Recherche dans l'Industrie et dans l'Agriculture (FRIA-Belgium); the Agentschap voor Innovatie door Wetenschap en Technologie (IWT-Belgium); the Ministry of Education, Youth and Sports (MEYS) of Czech Republic; the Council of Science and Industrial Research, India; the Compagnia di San Paolo (Torino); and the HOMING PLUS programme of Foundation for Polish Science, cofinanced from European Union, Regional Development Fund.

References

- [1] Y. A. Gol'fand and E. P. Likhtman, "Extension of the Algebra of Poincaré Group Generators and Violation of p Invariance", *JETP Lett.* **13** (1971) 323.
- [2] J. Wess and B. Zumino, "Supergauge transformations in four dimensions", *Nucl. Phys. B* **70** (1974) 39, doi:10.1016/0550-3213 (74) 90355-1.
- [3] H. P. Nilles, "Supersymmetry, Supergravity and Particle Physics", *Phys. Reports* **110** (1984) 1, doi:10.1016/0370-1573 (84) 90008-5.
- [4] H. E. Haber and G. L. Kane, "The Search for Supersymmetry: Probing Physics Beyond the Standard Model", *Phys. Reports* **117** (1987) 75, doi:10.1016/0370-1573 (85) 90051-1.
- [5] R. Barbieri, S. Ferrara, and C. A. Savoy, "Gauge Models with Spontaneously Broken Local Supersymmetry", *Phys. Lett. B* **119** (1982) 343, doi:10.1016/0370-2693 (82) 90685-2.
- [6] S. Dawson, E. Eichten, and C. Quigg, "Search for Supersymmetric Particles in Hadron Hadron Collisions", *Phys. Rev. D* **31** (1985) 1581, doi:10.1103/PhysRevD.31.1581.
- [7] E. Witten, "Dynamical Breaking of Supersymmetry", Nucl. Phys. B **188** (1981) 513, doi:10.1016/0550-3213 (81) 90006-7.
- [8] S. Dimopoulos and H. Georgi, "Softly Broken Supersymmetry and SU(5)", *Nucl. Phys. B* **193** (1981) 150, doi:10.1016/0550-3213 (81) 90522-8.
- [9] R. Barbieri and D. Pappadopulo, "S-particles at their naturalness limits", *JHEP* **10** (2009) 061, doi:10.1088/1126-6708/2009/10/061.
- [10] ATLAS Collaboration, "Observation of a new particle in the search for the Standard Model Higgs boson with the ATLAS detector at the LHC", *Phys. Lett. B* **716** (2012) 1, doi:10.1016/j.physletb.2012.08.020.
- [11] CMS Collaboration, "Observation of a new boson at a mass of 125 GeV with the CMS experiment at the LHC", *Phys. Lett. B* **716** (2012) 30, doi:10.1016/j.physletb.2012.08.021.
- [12] G. R. Farrar and P. Fayet, "Phenomenology of the Production, Decay, and Detection of New Hadronic States Associated with Supersymmetry", *Phys. Lett. B* **76** (1978) 575, doi:10.1016/0370-2693 (78) 90858-4.

[13] CMS Collaboration, "CMS Luminosity Based on Pixel Cluster Counting - Summer 2012 Update", CMS Physics Analysis Summary CMS-PAS-LUM-12-001, (2012).

- [14] ATLAS Collaboration, "Search for a supersymmetric partner to the top quark in final states with jets and missing transverse momentum at $\sqrt{s} = 7$ TeV with the ATLAS detector", (2012). arXiv:1208.1447. Submitted to Phys. Rev. Lett.
- [15] ATLAS Collaboration, "Search for squarks and gluinos using final states with jets and missing transverse momentum with the ATLAS detector in proton-proton collisions", *Phys. Lett. B* **710** (2012) 67, doi:10.1016/j.physletb.2012.02.051.
- [16] ATLAS Collaboration, "Search for top and bottom squarks from gluino pair production in final states with missing transverse energy and at least three b-jets with the ATLAS detector", (2012). arXiv:1207.4686. Accepted by EPJC.
- [17] ATLAS Collaboration, "Hunt for new phenomena using large jet multiplicities and missing transverse momentum with ATLAS in 4.7 fb⁻¹ of $\sqrt{s} = 7$ TeV proton-proton collisions", [HEP **07** (2012) 167, doi:10.1007/JHEP07 (2012) 167.
- [18] ATLAS Collaboration, "Search for Scalar Bottom Quark Pair Production with the ATLAS Detector in pp Collisions at $\sqrt{s} = 7$ TeV", Phys. Rev. Lett. 108 (2012) 181802, doi:10.1103/PhysRevLett.108.181802.
- [19] CMS Collaboration, "Search for supersymmetry in events with *b*-quark jets and missing transverse energy in *pp* collisions at 7 TeV", *Phys. Rev. D* **86** (2012) 072010, doi:10.1103/PhysRevD.86.072010.
- [20] CMS Collaboration, "Search for supersymmetry in hadronic final states using M_{T2} in pp collisions at $\sqrt{s} = 7 \text{ TeV}$ ", *JHEP* **10** (2012) 018, doi:10.1007/JHEP10 (2012) 018.
- [21] CMS Collaboration, "Search for New Physics in the Multijet and Missing Transverse Momentum Final State in Proton-Proton Collisions at $\sqrt{s} = 7 \text{ TeV}$ ", Phys. Rev. Lett. 109 (2012) 171803, doi:10.1103/PhysRevLett.109.171803.
- [22] CMS Collaboration, "Inclusive search for squarks and gluinos in pp collisions at $\sqrt{s}=7$ TeV", *Phys. Rev. D* **85** (2012) 012004, doi:10.1103/PhysRevD.85.012004.
- [23] CMS Collaboration, "Search for supersymmetery in final states with missing transverse energy and 0, 1, 2, or \geq 3 b-quark jets in 7 TeV pp collisions using the α_T variable", *JHEP* **01** (2013) 077, doi:10.1007/JHEP01 (2013) 077.
- [24] CMS Collaboration, "Search for Supersymmetry at the LHC in Events with Jets and Missing Transverse Energy", *Phys. Rev. Lett.* **107** (2011) 221804, doi:10.1103/PhysRevLett.107.221804.
- [25] CMS Collaboration, "Search for Supersymmetry in pp Collisions at 7 TeV in Events with Jets and Missing Transverse Energy", *Phys. Lett. B* **698** (2011) 196, doi:10.1016/j.physletb.2011.03.021.
- [26] T. J. LeCompte and S. P. Martin, "Large Hadron Collider reach for supersymmetric models with compressed mass spectra", Phys. Rev. D 84 (2011) 015004, doi:10.1103/PhysRevD.84.015004.

[27] J. Alwall, P. Schuster, and N. Toro, "Simplified Models for a First Characterization of New Physics at the LHC", *Phys. Rev. D* **79** (2009) 075020, doi:10.1103/PhysRevD.79.075020.

- [28] J. Alwall et al., "Model-independent jets plus missing energy searches", *Phys. Rev. D* **79** (2009) 015005, doi:10.1103/PhysRevD.79.015005.
- [29] D. Alves et al., "Simplified models for LHC new physics searches", *J. Phys. G* **39** (2012) 105005, doi:10.1088/0954-3899/39/10/105005.
- [30] A. H. Chamseddine, R. Arnowitt, and P. Nath, "Locally Supersymmetric Grand Unification", *Phys. Rev. Lett.* **49** (1982) 970, doi:10.1103/PhysRevLett.49.970.
- [31] R. Arnowitt and P. Nath, "Supersymmetric mass spectrum in SU(5) supergravity grand unification", *Phys. Rev. Lett.* **69** (1992) 725, doi:10.1103/PhysRevLett.69.725.
- [32] G. L. Kane et al., "Study of constrained minimal supersymmetry", *Phys. Rev. D* **49** (1994) 6173, doi:10.1103/PhysRevD.49.6173.
- [33] CMS Collaboration, "The CMS experiment at the CERN LHC", JINST 3 (2008) S08004, doi:10.1088/1748-0221/3/08/S08004.
- [34] L. Randall and D. Tucker-Smith, "Dijet Searches for Supersymmetry at the Large Hadron Collider", *Phys. Rev. Lett.* **101** (2008) 221803, doi:10.1103/PhysRevLett.101.221803.
- [35] CMS Collaboration, "Missing transverse energy performance of the CMS detector", JINST 6 (2011) P09001, doi:10.1088/1748-0221/6/09/P09001.
- [36] CMS Collaboration, "Determination of Jet Energy Calibration and Transverse Momentum Resolution in CMS", JINST 6 (2011) P11002, doi:10.1088/1748-0221/6/11/P11002.
- [37] M. Cacciari, G. P. Salam, and G. Soyez, "The anti- k_t jet clustering algorithm", *JHEP* **04** (2008) 063, doi:10.1088/1126-6708/2008/04/063.
- [38] M. Cacciari and G. P. Salam, "Pileup subtraction using jet areas", *Phys. Lett. B* **659** (2008) 119, doi:10.1016/j.physletb.2007.09.077.
- [39] M. Cacciari, G. P. Salam, and G. Soyez, "The catchment area of jets", *JHEP* **04** (2008) 005, doi:10.1088/1126-6708/2008/04/005.
- [40] CMS Collaboration, "Identification of b-quark jets with the CMS experiment", (2012). arXiv:1211.4462. Submitted to JINST.
- [41] CMS Collaboration, "Isolated Photon Reconstruction and Identification at \sqrt{s} = 7 TeV", CMS Physics Analysis Summary CMS-PAS-EGM-10-006, (2010).
- [42] CMS Collaboration, "Electron reconstruction and identification at $\sqrt{s} = 7$ TeV", CMS Physics Analysis Summary CMS-PAS-EGM-10-004, (2010).
- [43] CMS Collaboration, "Performance of CMS muon reconstruction in pp collision events at $\sqrt{s} = 7 \,\text{TeV}''$, (2012). arXiv:1206.4071. Submitted to JINST.

[44] CMS Collaboration, "Identification and filtering of uncharacteristic noise in the CMS hadron calorimeter", *JINST* **5** (2010) T03014, doi:10.1088/1748-0221/5/03/T03014.

- [45] CMS Collaboration, "Particle–Flow Event Reconstruction in CMS and Performance for Jets, Taus, and $E_{\rm T}^{\rm miss}$ ", CMS Physics Analysis Summary CMS-PAS-PFT-09-001, (2009).
- [46] CMS Collaboration, "Commissioning of the particle-flow event reconstruction with the first LHC collisions recorded in the CMS detector", CMS Physics Analysis Summary CMS-PAS-PFT-10-001, (2010).
- [47] J. Alwall et al., "MadGraph5: going beyond", JHEP **06** (2011) 128, doi:10.1007/JHEP06(2011)128.
- [48] S. Frixione, P. Nason, and C. Oleari, "Matching NLO QCD computations with parton shower simulations: the POWHEG method", *JHEP* **11** (2007) 070, doi:10.1088/1126-6708/2007/11/070.
- [49] T. Sjöstrand, S. Mrenna, and P. Z. Skands, "PYTHIA 6.4 physics and manual", *JHEP* **05** (2006) 026, doi:10.1088/1126-6708/2006/05/026.
- [50] S. Agostinelli et al., "GEANT4 a simulation toolkit", *Nucl. Instr. and Meth. A* **506** (2003) 250, doi:10.1016/S0168-9002(03)01368-8.
- [51] Z. Bern et al., "Driving missing data at next-to-leading order", *Phys. Rev. D* **84** (2011) 114002, doi:10.1103/PhysRevD.84.114002.
- [52] A. L. Read, "Presentation of search results: the CL_s technique", *J. Phys. G* **28** (2002) 2693, doi:10.1088/0954-3899/28/10/313.
- [53] T. Junk, "Confidence level computation for combining searches with small statistics", *Nucl. Instr. and Meth. A* **434** (1999) 435, doi:10.1016/S0168-9002 (99) 00498-2.
- [54] G. Cowan et al., "Asymptotic formulae for likelihood-based tests of new physics", Eur. Phys. J. C 71 (2011) 1554, doi:10.1140/epjc/s10052-011-1554-0.
- [55] W. Beenakker et al., "Squark and gluino production at hadron colliders", *Nucl. Phys. B* **492** (1997) 51, doi:10.1016/S0550-3213 (97) 80027-2.
- [56] A. Kulesza and L. Motyka, "Soft gluon resummation for the production of gluino-gluino and squark-antisquark pairs at the LHC", *Phys. Rev. D* **80** (2009) 095004, doi:10.1103/PhysRevD.80.095004.
- [57] A. Kulesza and L. Motyka, "Threshold Resummation for Squark-Antisquark and Gluino-Pair Production at the LHC", *Phys. Rev. Lett.* **102** (2009) 111802, doi:10.1103/PhysRevLett.102.111802.
- [58] W. Beenakker et al., "Soft-gluon resummation for squark and gluino hadroproduction", *IHEP* **09** (2009) 041, doi:10.1088/1126-6708/2009/12/041.
- [59] W. Beenakker et al., "Squark and gluino hadroproduction", *Int. J. Mod. Phys. A* **26** (2011) 2637, doi:10.1142/S0217751X11053560.
- [60] M. Krämer et al., "Supersymmetry production cross sections in pp collisions at $\sqrt{s} = 7 \text{ TeV}$ ", (2012). arXiv:1206.2892.

[61] J. Pumplin et al., "New generation of parton distributions with uncertainties from global QCD analysis", JHEP 07 (2002) 012, doi:10.1088/1126-6708/2002/07/012.

A The CMS Collaboration

Yerevan Physics Institute, Yerevan, Armenia

S. Chatrchyan, V. Khachatryan, A.M. Sirunyan, A. Tumasyan

Institut für Hochenergiephysik der OeAW, Wien, Austria

W. Adam, T. Bergauer, M. Dragicevic, J. Erö, C. Fabjan¹, M. Friedl, R. Frühwirth¹, V.M. Ghete, N. Hörmann, J. Hrubec, M. Jeitler¹, W. Kiesenhofer, V. Knünz, M. Krammer¹, I. Krätschmer, D. Liko, I. Mikulec, D. Rabady², B. Rahbaran, C. Rohringer, H. Rohringer, R. Schöfbeck, J. Strauss, A. Taurok, W. Treberer-treberspurg, W. Waltenberger, C.-E. Wulz¹

National Centre for Particle and High Energy Physics, Minsk, Belarus

V. Mossolov, N. Shumeiko, J. Suarez Gonzalez

Universiteit Antwerpen, Antwerpen, Belgium

S. Alderweireldt, M. Bansal, S. Bansal, T. Cornelis, E.A. De Wolf, X. Janssen, A. Knutsson, S. Luyckx, L. Mucibello, S. Ochesanu, B. Roland, R. Rougny, H. Van Haevermaet, P. Van Mechelen, N. Van Remortel, A. Van Spilbeeck

Vrije Universiteit Brussel, Brussel, Belgium

F. Blekman, S. Blyweert, J. D'Hondt, R. Gonzalez Suarez, A. Kalogeropoulos, J. Keaveney, M. Maes, A. Olbrechts, S. Tavernier, W. Van Doninck, P. Van Mulders, G.P. Van Onsem, I. Villella

Université Libre de Bruxelles, Bruxelles, Belgium

B. Clerbaux, G. De Lentdecker, V. Dero, A.P.R. Gay, T. Hreus, A. Léonard, P.E. Marage, A. Mohammadi, T. Reis, L. Thomas, C. Vander Velde, P. Vanlaer, J. Wang

Ghent University, Ghent, Belgium

V. Adler, K. Beernaert, L. Benucci, A. Cimmino, S. Costantini, G. Garcia, M. Grunewald, B. Klein, J. Lellouch, A. Marinov, J. Mccartin, A.A. Ocampo Rios, D. Ryckbosch, M. Sigamani, N. Strobbe, F. Thyssen, M. Tytgat, S. Walsh, E. Yazgan, N. Zaganidis

Université Catholique de Louvain, Louvain-la-Neuve, Belgium

S. Basegmez, G. Bruno, R. Castello, L. Ceard, C. Delaere, T. du Pree, D. Favart, L. Forthomme, A. Giammanco³, J. Hollar, V. Lemaitre, J. Liao, O. Militaru, C. Nuttens, D. Pagano, A. Pin, K. Piotrzkowski, A. Popov⁴, M. Selvaggi, J.M. Vizan Garcia

Université de Mons, Mons, Belgium

N. Beliy, T. Caebergs, E. Daubie, G.H. Hammad

Centro Brasileiro de Pesquisas Fisicas, Rio de Janeiro, Brazil

G.A. Alves, M. Correa Martins Junior, T. Martins, M.E. Pol, M.H.G. Souza

Universidade do Estado do Rio de Janeiro, Rio de Janeiro, Brazil

W.L. Aldá Júnior, W. Carvalho, J. Chinellato⁵, A. Custódio, E.M. Da Costa, D. De Jesus Damiao, C. De Oliveira Martins, S. Fonseca De Souza, H. Malbouisson, M. Malek, D. Matos Figueiredo, L. Mundim, H. Nogima, W.L. Prado Da Silva, A. Santoro, L. Soares Jorge, A. Sznajder, E.J. Tonelli Manganote⁵, A. Vilela Pereira

Universidade Estadual Paulista a, Universidade Federal do ABC b, São Paulo, Brazil

T.S. Anjos^b, C.A. Bernardes^b, F.A. Dias^{a,6}, T.R. Fernandez Perez Tomei^a, E.M. Gregores^b, C. Lagana^a, F. Marinho^a, P.G. Mercadante^b, S.F. Novaes^a, Sandra S. Padula^a

Institute for Nuclear Research and Nuclear Energy, Sofia, Bulgaria

V. Genchev², P. Iaydjiev², S. Piperov, M. Rodozov, S. Stoykova, G. Sultanov, V. Tcholakov, R. Trayanov, M. Vutova

University of Sofia, Sofia, Bulgaria

A. Dimitrov, R. Hadjiiska, V. Kozhuharov, L. Litov, B. Pavlov, P. Petkov

Institute of High Energy Physics, Beijing, China

J.G. Bian, G.M. Chen, H.S. Chen, C.H. Jiang, D. Liang, S. Liang, X. Meng, J. Tao, J. Wang, X. Wang, Z. Wang, H. Xiao, M. Xu

State Key Laboratory of Nuclear Physics and Technology, Peking University, Beijing, China C. Asawatangtrakuldee, Y. Ban, Y. Guo, W. Li, S. Liu, Y. Mao, S.J. Qian, H. Teng, D. Wang, L. Zhang, W. Zou

Universidad de Los Andes, Bogota, Colombia

C. Avila, C.A. Carrillo Montoya, J.P. Gomez, B. Gomez Moreno, J.C. Sanabria

Technical University of Split, Split, Croatia

N. Godinovic, D. Lelas, R. Plestina⁷, D. Polic, I. Puljak

University of Split, Split, Croatia

Z. Antunovic, M. Kovac

Institute Rudjer Boskovic, Zagreb, Croatia

V. Brigljevic, S. Duric, K. Kadija, J. Luetic, D. Mekterovic, S. Morovic, L. Tikvica

University of Cyprus, Nicosia, Cyprus

A. Attikis, G. Mavromanolakis, J. Mousa, C. Nicolaou, F. Ptochos, P.A. Razis

Charles University, Prague, Czech Republic

M. Finger, M. Finger Jr.

Academy of Scientific Research and Technology of the Arab Republic of Egypt, Egyptian Network of High Energy Physics, Cairo, Egypt

Y. Assran⁸, A. Ellithi Kamel⁹, A.M. Kuotb Awad¹⁰, M.A. Mahmoud¹⁰, A. Radi^{11,12}

National Institute of Chemical Physics and Biophysics, Tallinn, Estonia

M. Kadastik, M. Müntel, M. Murumaa, M. Raidal, L. Rebane, A. Tiko

Department of Physics, University of Helsinki, Helsinki, Finland

P. Eerola, G. Fedi, M. Voutilainen

Helsinki Institute of Physics, Helsinki, Finland

J. Härkönen, V. Karimäki, R. Kinnunen, M.J. Kortelainen, T. Lampén, K. Lassila-Perini, S. Lehti, T. Lindén, P. Luukka, T. Mäenpää, T. Peltola, E. Tuominen, J. Tuominiemi, E. Tuovinen, L. Wendland

Lappeenranta University of Technology, Lappeenranta, Finland

A. Korpela, T. Tuuva

DSM/IRFU, CEA/Saclay, Gif-sur-Yvette, France

M. Besancon, S. Choudhury, F. Couderc, M. Dejardin, D. Denegri, B. Fabbro, J.L. Faure, F. Ferri, S. Ganjour, A. Givernaud, P. Gras, G. Hamel de Monchenault, P. Jarry, E. Locci, J. Malcles, L. Millischer, A. Nayak, J. Rander, A. Rosowsky, M. Titov

Laboratoire Leprince-Ringuet, Ecole Polytechnique, IN2P3-CNRS, Palaiseau, France

S. Baffioni, F. Beaudette, L. Benhabib, L. Bianchini, M. Bluj¹³, P. Busson, C. Charlot, N. Daci, T. Dahms, M. Dalchenko, L. Dobrzynski, A. Florent, R. Granier de Cassagnac, M. Haguenauer, P. Miné, C. Mironov, I.N. Naranjo, M. Nguyen, C. Ochando, P. Paganini, D. Sabes, R. Salerno, Y. Sirois, C. Veelken, A. Zabi

Institut Pluridisciplinaire Hubert Curien, Université de Strasbourg, Université de Haute Alsace Mulhouse, CNRS/IN2P3, Strasbourg, France

J.-L. Agram¹⁴, J. Andrea, D. Bloch, D. Bodin, J.-M. Brom, E.C. Chabert, C. Collard, E. Conte¹⁴, F. Drouhin¹⁴, J.-C. Fontaine¹⁴, D. Gelé, U. Goerlach, C. Goetzmann, P. Juillot, A.-C. Le Bihan, P. Van Hove

Université de Lyon, Université Claude Bernard Lyon 1, CNRS-IN2P3, Institut de Physique Nucléaire de Lyon, Villeurbanne, France

S. Beauceron, N. Beaupere, O. Bondu, G. Boudoul, S. Brochet, J. Chasserat, R. Chierici², D. Contardo, P. Depasse, H. El Mamouni, J. Fay, S. Gascon, M. Gouzevitch, B. Ille, T. Kurca, M. Lethuillier, L. Mirabito, S. Perries, L. Sgandurra, V. Sordini, Y. Tschudi, M. Vander Donckt, P. Verdier, S. Viret

Institute of High Energy Physics and Informatization, Tbilisi State University, Tbilisi, Georgia

Z. Tsamalaidze¹⁵

RWTH Aachen University, I. Physikalisches Institut, Aachen, Germany

C. Autermann, S. Beranek, B. Calpas, M. Edelhoff, L. Feld, N. Heracleous, O. Hindrichs, R. Jussen, K. Klein, J. Merz, A. Ostapchuk, A. Perieanu, F. Raupach, J. Sammet, S. Schael, D. Sprenger, H. Weber, B. Wittmer, V. Zhukov⁴

RWTH Aachen University, III. Physikalisches Institut A, Aachen, Germany

M. Ata, J. Caudron, E. Dietz-Laursonn, D. Duchardt, M. Erdmann, R. Fischer, A. Güth, T. Hebbeker, C. Heidemann, K. Hoepfner, D. Klingebiel, P. Kreuzer, M. Merschmeyer, A. Meyer, M. Olschewski, K. Padeken, P. Papacz, H. Pieta, H. Reithler, S.A. Schmitz, L. Sonnenschein, J. Steggemann, D. Teyssier, S. Thüer, M. Weber

RWTH Aachen University, III. Physikalisches Institut B, Aachen, Germany

M. Bontenackels, V. Cherepanov, Y. Erdogan, G. Flügge, H. Geenen, M. Geisler, W. Haj Ahmad, F. Hoehle, B. Kargoll, T. Kress, Y. Kuessel, J. Lingemann², A. Nowack, I.M. Nugent, L. Perchalla, O. Pooth, A. Stahl

Deutsches Elektronen-Synchrotron, Hamburg, Germany

M. Aldaya Martin, I. Asin, N. Bartosik, J. Behr, W. Behrenhoff, U. Behrens, M. Bergholz¹⁶, A. Bethani, K. Borras, A. Burgmeier, A. Cakir, L. Calligaris, A. Campbell, F. Costanza, D. Dammann, C. Diez Pardos, T. Dorland, G. Eckerlin, D. Eckstein, G. Flucke, A. Geiser, I. Glushkov, P. Gunnellini, S. Habib, J. Hauk, G. Hellwig, H. Jung, M. Kasemann, P. Katsas, C. Kleinwort, H. Kluge, M. Krämer, D. Krücker, E. Kuznetsova, W. Lange, J. Leonard, W. Lohmann¹⁶, B. Lutz, R. Mankel, I. Marfin, M. Marienfeld, I.-A. Melzer-Pellmann, A.B. Meyer, J. Mnich, A. Mussgiller, S. Naumann-Emme, O. Novgorodova, F. Nowak, J. Olzem, H. Perrey, A. Petrukhin, D. Pitzl, A. Raspereza, P.M. Ribeiro Cipriano, C. Riedl, E. Ron, M. Rosin, J. Salfeld-Nebgen, R. Schmidt¹⁶, T. Schoerner-Sadenius, N. Sen, M. Stein, R. Walsh, C. Wissing

University of Hamburg, Hamburg, Germany

V. Blobel, H. Enderle, J. Erfle, U. Gebbert, M. Görner, M. Gosselink, J. Haller, R.S. Höing, K. Kaschube, G. Kaussen, H. Kirschenmann, R. Klanner, J. Lange, T. Peiffer, N. Pietsch, D. Rathjens, C. Sander, H. Schettler, P. Schleper, E. Schlieckau, A. Schmidt, T. Schum, M. Seidel, J. Sibille¹⁷, V. Sola, H. Stadie, G. Steinbrück, J. Thomsen, L. Vanelderen

Institut für Experimentelle Kernphysik, Karlsruhe, Germany

C. Barth, C. Baus, J. Berger, C. Böser, T. Chwalek, W. De Boer, A. Descroix, A. Dierlamm,

M. Feindt, M. Guthoff², C. Hackstein, F. Hartmann², T. Hauth², M. Heinrich, H. Held, K.H. Hoffmann, U. Husemann, I. Katkov⁴, J.R. Komaragiri, A. Kornmayer², P. Lobelle Pardo, D. Martschei, S. Mueller, Th. Müller, M. Niegel, A. Nürnberg, O. Oberst, J. Ott, G. Quast, K. Rabbertz, F. Ratnikov, N. Ratnikova, S. Röcker, F.-P. Schilling, G. Schott, H.J. Simonis, F.M. Stober, D. Troendle, R. Ulrich, J. Wagner-Kuhr, S. Wayand, T. Weiler, M. Zeise

Institute of Nuclear and Particle Physics (INPP), NCSR Demokritos, Aghia Paraskevi, Greece

G. Anagnostou, G. Daskalakis, T. Geralis, S. Kesisoglou, A. Kyriakis, D. Loukas, A. Markou, C. Markou, E. Ntomari

University of Athens, Athens, Greece

L. Gouskos, T.J. Mertzimekis, A. Panagiotou, N. Saoulidou, E. Stiliaris

University of Ioánnina, Ioánnina, Greece

X. Aslanoglou, I. Evangelou, G. Flouris, C. Foudas, P. Kokkas, N. Manthos, I. Papadopoulos, E. Paradas

KFKI Research Institute for Particle and Nuclear Physics, Budapest, Hungary

G. Bencze, C. Hajdu, P. Hidas, D. Horvath¹⁸, B. Radics, F. Sikler, V. Veszpremi, G. Vesztergombi¹⁹, A.J. Zsigmond

Institute of Nuclear Research ATOMKI, Debrecen, Hungary

N. Beni, S. Czellar, J. Molnar, J. Palinkas, Z. Szillasi

University of Debrecen, Debrecen, Hungary

J. Karancsi, P. Raics, Z.L. Trocsanyi, B. Ujvari

Panjab University, Chandigarh, India

S.B. Beri, V. Bhatnagar, N. Dhingra, R. Gupta, M. Kaur, M.Z. Mehta, M. Mittal, N. Nishu, L.K. Saini, A. Sharma, J.B. Singh

University of Delhi, Delhi, India

Ashok Kumar, Arun Kumar, S. Ahuja, A. Bhardwaj, B.C. Choudhary, S. Malhotra, M. Naimuddin, K. Ranjan, P. Saxena, V. Sharma, R.K. Shivpuri

Saha Institute of Nuclear Physics, Kolkata, India

S. Banerjee, S. Bhattacharya, K. Chatterjee, S. Dutta, B. Gomber, Sa. Jain, Sh. Jain, R. Khurana, A. Modak, S. Mukherjee, D. Roy, S. Sarkar, M. Sharan

Bhabha Atomic Research Centre, Mumbai, India

A. Abdulsalam, D. Dutta, S. Kailas, V. Kumar, A.K. Mohanty², L.M. Pant, P. Shukla, A. Topkar

Tata Institute of Fundamental Research - EHEP, Mumbai, India

T. Aziz, R.M. Chatterjee, S. Ganguly, M. Guchait²⁰, A. Gurtu²¹, M. Maity²², G. Majumder, K. Mazumdar, G.B. Mohanty, B. Parida, K. Sudhakar, N. Wickramage

Tata Institute of Fundamental Research - HECR, Mumbai, India

S. Banerjee, S. Dugad

Institute for Research in Fundamental Sciences (IPM), Tehran, Iran

H. Arfaei²³, H. Bakhshiansohi, S.M. Etesami²⁴, A. Fahim²³, H. Hesari, A. Jafari, M. Khakzad, M. Mohammadi Najafabadi, S. Paktinat Mehdiabadi, B. Safarzadeh²⁵, M. Zeinali

INFN Sezione di Bari ^a, Università di Bari ^b, Politecnico di Bari ^c, Bari, Italy

M. Abbrescia^{a,b}, L. Barbone^{a,b}, C. Calabria^{a,b,2}, S.S. Chhibra^{a,b}, A. Colaleo^a, D. Creanza^{a,c}, N. De

Filippis^{a,c,2}, M. De Palma^{a,b}, L. Fiore^a, G. Iaselli^{a,c}, G. Maggi^{a,c}, M. Maggi^a, B. Marangelli^{a,b}, S. My^{a,c}, S. Nuzzo^{a,b}, N. Pacifico^a, A. Pompili^{a,b}, G. Pugliese^{a,c}, G. Selvaggi^{a,b}, L. Silvestris^a, G. Singh^{a,b}, R. Venditti^{a,b}, P. Verwilligen^a, G. Zito^a

INFN Sezione di Bologna ^a, Università di Bologna ^b, Bologna, Italy

G. Abbiendi^a, A.C. Benvenuti^a, D. Bonacorsi^{a,b}, S. Braibant-Giacomelli^{a,b}, L. Brigliadori^{a,b}, R. Campanini^{a,b}, P. Capiluppi^{a,b}, A. Castro^{a,b}, F.R. Cavallo^a, M. Cuffiani^{a,b}, G.M. Dallavalle^a, F. Fabbri^a, A. Fanfani^{a,b}, D. Fasanella^{a,b}, P. Giacomelli^a, C. Grandi^a, L. Guiducci^{a,b}, S. Marcellini^a, G. Masetti^a, M. Meneghelli^{a,b,2}, A. Montanari^a, F.L. Navarria^{a,b}, F. Odorici^a, A. Perrotta^a, F. Primavera^{a,b}, A.M. Rossi^{a,b}, T. Rovelli^{a,b}, G.P. Siroli^{a,b}, N. Tosi^{a,b}, R. Travaglini^{a,b}

INFN Sezione di Catania ^a, Università di Catania ^b, Catania, Italy

S. Albergo^{a,b}, M. Chiorboli^{a,b}, S. Costa^{a,b}, R. Potenza^{a,b}, A. Tricomi^{a,b}, C. Tuve^{a,b}

INFN Sezione di Firenze ^a, Università di Firenze ^b, Firenze, Italy

G. Barbagli^a, V. Ciulli^{a,b}, C. Civinini^a, R. D'Alessandro^{a,b}, E. Focardi^{a,b}, S. Frosali^{a,b}, E. Gallo^a, S. Gonzi^{a,b}, P. Lenzi^{a,b}, M. Meschini^a, S. Paoletti^a, G. Sguazzoni^a, A. Tropiano^{a,b}

INFN Laboratori Nazionali di Frascati, Frascati, Italy

L. Benussi, S. Bianco, S. Colafranceschi²⁶, F. Fabbri, D. Piccolo

INFN Sezione di Genova ^a, Università di Genova ^b, Genova, Italy

P. Fabbricatore^a, R. Musenich^a, S. Tosi^a,^b

INFN Sezione di Milano-Bicocca ^a, Università di Milano-Bicocca ^b, Milano, Italy

A. Benaglia^a, F. De Guio^{a,b}, L. Di Matteo^{a,b,2}, S. Fiorendi^{a,b}, S. Gennai^{a,2}, A. Ghezzi^{a,b}, M.T. Lucchini², S. Malvezzi^a, R.A. Manzoni^{a,b}, A. Martelli^{a,b}, A. Massironi^{a,b}, D. Menasce^a, L. Moroni^a, M. Paganoni^{a,b}, D. Pedrini^a, S. Ragazzi^{a,b}, N. Redaelli^a, T. Tabarelli de Fatis^{a,b}

INFN Sezione di Napoli ^a, Università di Napoli 'Federico II' ^b, Università della Basilicata (Potenza) ^c, Università G. Marconi (Roma) ^d, Napoli, Italy

S. Buontempo^a, N. Cavallo^{a,c}, A. De Cosa^{a,b,2}, O. Dogangun^{a,b}, F. Fabozzi^{a,c}, A.O.M. Iorio^{a,b}, L. Lista^a, S. Meola^{a,d,2}, M. Merola^a, P. Paolucci^{a,2}

INFN Sezione di Padova ^a, Università di Padova ^b, Università di Trento (Trento) ^c, Padova, Italy

P. Azzi^a, N. Bacchetta^{a,2}, P. Bellan^{a,b}, D. Bisello^{a,b}, A. Branca^{a,b}, R. Carlin^{a,b}, P. Checchia^a, T. Dorigo^a, U. Dosselli^a, M. Galanti^{a,b}, F. Gasparini^{a,b}, U. Gasparini^{a,b}, P. Giubilato^{a,b}, A. Gozzelino^a, K. Kanishchev^{a,c}, S. Lacaprara^a, I. Lazzizzera^{a,c}, M. Margoni^{a,b}, G. Maron^{a,27}, A.T. Meneguzzo^{a,b}, M. Nespolo^a, J. Pazzini^{a,b}, N. Pozzobon^{a,b}, P. Ronchese^{a,b}, F. Simonetto^{a,b}, E. Torassa^a, M. Tosi^{a,b}, S. Ventura^a, P. Zotto^{a,b}, G. Zumerle^{a,b}

INFN Sezione di Pavia ^a, Università di Pavia ^b, Pavia, Italy

M. Gabusi^{a,b}, S.P. Ratti^{a,b}, C. Riccardi^{a,b}, P. Vitulo^{a,b}

INFN Sezione di Perugia ^a, Università di Perugia ^b, Perugia, Italy

M. Biasini^{a,b}, G.M. Bilei^a, L. Fanò^{a,b}, P. Lariccia^{a,b}, G. Mantovani^{a,b}, M. Menichelli^a, A. Nappi^{$a,b\dagger$}, F. Romeo^{a,b}, A. Saha^a, A. Santocchia^{a,b}, A. Spiezia^{a,b}, S. Taroni^{a,b}

INFN Sezione di Pisa ^a, Università di Pisa ^b, Scuola Normale Superiore di Pisa ^c, Pisa, Italy

P. Azzurri^{a,c}, G. Bagliesi^a, T. Boccali^a, G. Broccolo^{a,c}, R. Castaldi^a, R.T. D'Agnolo^{a,c,2}, R. Dell'Orso^a, F. Fiori^{a,b,2}, L. Foà^{a,c}, A. Giassi^a, A. Kraan^a, F. Ligabue^{a,c}, T. Lomtadze^a, L. Martini^{a,28}, A. Messineo^{a,b}, F. Palla^a, A. Rizzi^{a,b}, A.T. Serban^a, P. Spagnolo^a, P. Squillacioti^a, R. Tenchini^a, G. Tonelli^{a,b}, A. Venturi^a, P.G. Verdini^a, C. Vernieri^{a,c}

INFN Sezione di Roma ^a, Università di Roma ^b, Roma, Italy

L. Barone^{a,b}, F. Cavallari^a, D. Del Re^{a,b}, M. Diemoz^a, C. Fanelli^{a,b}, M. Grassi^{a,b,2}, E. Longo^{a,b}, F. Margaroli^{a,b}, P. Meridiani^{a,2}, F. Micheli^{a,b}, S. Nourbakhsh^{a,b}, G. Organtini^{a,b}, R. Paramatti^a, S. Rahatlou^{a,b}, L. Soffi^{a,b}

INFN Sezione di Torino ^a, Università di Torino ^b, Università del Piemonte Orientale (Novara) ^c, Torino, Italy

N. Amapane^{a,b}, R. Arcidiacono^{a,c}, S. Argiro^{a,b}, M. Arneodo^{a,c}, C. Biino^a, N. Cartiglia^a, S. Casasso^{a,b}, M. Costa^{a,b}, N. Demaria^a, C. Mariotti^{a,2}, S. Maselli^a, E. Migliore^{a,b}, V. Monaco^{a,b}, M. Musich^{a,2}, M.M. Obertino^{a,c}, N. Pastrone^a, M. Pelliccioni^a, A. Potenza^{a,b}, A. Romero^{a,b}, M. Ruspa^{a,c}, R. Sacchi^{a,b}, A. Solano^{a,b}, A. Staiano^a, U. Tamponi^a

INFN Sezione di Trieste ^a, Università di Trieste ^b, Trieste, Italy

S. Belforte^a, V. Candelise^{a,b}, M. Casarsa^a, F. Cossutti^{a,2}, G. Della Ricca^{a,b}, B. Gobbo^a, M. Marone^{a,b,2}, D. Montanino^{a,b}, A. Penzo^a, A. Schizzi^{a,b}, A. Zanetti^a

Kangwon National University, Chunchon, Korea

T.Y. Kim, S.K. Nam

Kyungpook National University, Daegu, Korea

S. Chang, D.H. Kim, G.N. Kim, J.E. Kim, D.J. Kong, Y.D. Oh, H. Park, D.C. Son

Chonnam National University, Institute for Universe and Elementary Particles, Kwangju, Korea

J.Y. Kim, Zero J. Kim, S. Song

Korea University, Seoul, Korea

S. Choi, D. Gyun, B. Hong, M. Jo, H. Kim, T.J. Kim, K.S. Lee, D.H. Moon, S.K. Park, Y. Roh

University of Seoul, Seoul, Korea

M. Choi, J.H. Kim, C. Park, I.C. Park, S. Park, G. Ryu

Sungkyunkwan University, Suwon, Korea

Y. Choi, Y.K. Choi, J. Goh, M.S. Kim, E. Kwon, B. Lee, J. Lee, S. Lee, H. Seo, I. Yu

Vilnius University, Vilnius, Lithuania

I. Grigelionis, A. Juodagalvis

Centro de Investigacion y de Estudios Avanzados del IPN, Mexico City, Mexico

H. Castilla-Valdez, E. De La Cruz-Burelo, I. Heredia-de La Cruz, R. Lopez-Fernandez, J. Martínez-Ortega, A. Sanchez-Hernandez, L.M. Villasenor-Cendejas

Universidad Iberoamericana, Mexico City, Mexico

S. Carrillo Moreno, F. Vazquez Valencia

Benemerita Universidad Autonoma de Puebla, Puebla, Mexico

H.A. Salazar Ibarguen

Universidad Autónoma de San Luis Potosí, San Luis Potosí, Mexico

E. Casimiro Linares, A. Morelos Pineda, M.A. Reyes-Santos

University of Auckland, Auckland, New Zealand

D. Krofcheck

University of Canterbury, Christchurch, New Zealand

A.J. Bell, P.H. Butler, R. Doesburg, S. Reucroft, H. Silverwood

National Centre for Physics, Quaid-I-Azam University, Islamabad, Pakistan

M. Ahmad, M.I. Asghar, J. Butt, H.R. Hoorani, S. Khalid, W.A. Khan, T. Khurshid, S. Qazi, M.A. Shah, M. Shoaib

National Centre for Nuclear Research, Swierk, Poland

H. Bialkowska, B. Boimska, T. Frueboes, M. Górski, M. Kazana, K. Nawrocki, K. Romanowska-Rybinska, M. Szleper, G. Wrochna, P. Zalewski

Institute of Experimental Physics, Faculty of Physics, University of Warsaw, Warsaw, Poland G. Brona, K. Bunkowski, M. Cwiok, W. Dominik, K. Doroba, A. Kalinowski, M. Konecki, J. Krolikowski, M. Misiura, W. Wolszczak

Laboratório de Instrumentação e Física Experimental de Partículas, Lisboa, Portugal

N. Almeida, P. Bargassa, A. David, P. Faccioli, P.G. Ferreira Parracho, M. Gallinaro, J. Seixas², J. Varela, P. Vischia

Joint Institute for Nuclear Research, Dubna, Russia

P. Bunin, I. Golutvin, I. Gorbunov, V. Karjavin, V. Konoplyanikov, G. Kozlov, A. Lanev, A. Malakhov, P. Moisenz, V. Palichik, V. Perelygin, M. Savina, S. Shmatov, S. Shulha, N. Skatchkov, V. Smirnov, A. Zarubin

Petersburg Nuclear Physics Institute, Gatchina (St. Petersburg), Russia

S. Evstyukhin, V. Golovtsov, Y. Ivanov, V. Kim, P. Levchenko, V. Murzin, V. Oreshkin, I. Smirnov, V. Sulimov, L. Uvarov, S. Vavilov, A. Vorobyev, An. Vorobyev

Institute for Nuclear Research, Moscow, Russia

Yu. Andreev, A. Dermenev, S. Gninenko, N. Golubev, M. Kirsanov, N. Krasnikov, V. Matveev, A. Pashenkov, D. Tlisov, A. Toropin

Institute for Theoretical and Experimental Physics, Moscow, Russia

V. Epshteyn, M. Erofeeva, V. Gavrilov, N. Lychkovskaya, V. Popov, G. Safronov, S. Semenov, A. Spiridonov, V. Stolin, E. Vlasov, A. Zhokin

P.N. Lebedev Physical Institute, Moscow, Russia

V. Andreev, M. Azarkin, I. Dremin, M. Kirakosyan, A. Leonidov, G. Mesyats, S.V. Rusakov, A. Vinogradov

Skobeltsyn Institute of Nuclear Physics, Lomonosov Moscow State University, Moscow, Russia

A. Belyaev, E. Boos, V. Bunichev, M. Dubinin⁶, L. Dudko, A. Ershov, A. Gribushin, V. Klyukhin, O. Kodolova, I. Lokhtin, A. Markina, S. Obraztsov, V. Savrin, A. Snigirev

State Research Center of Russian Federation, Institute for High Energy Physics, Protvino, Russia

I. Azhgirey, I. Bayshev, S. Bitioukov, V. Kachanov, A. Kalinin, D. Konstantinov, V. Krychkine, V. Petrov, R. Ryutin, A. Sobol, L. Tourtchanovitch, S. Troshin, N. Tyurin, A. Uzunian, A. Volkov

University of Belgrade, Faculty of Physics and Vinca Institute of Nuclear Sciences, Belgrade, Serbia

P. Adzic²⁹, M. Ekmedzic, D. Krpic²⁹, J. Milosevic

Centro de Investigaciones Energéticas Medioambientales y Tecnológicas (CIEMAT), Madrid, Spain

M. Aguilar-Benitez, J. Alcaraz Maestre, C. Battilana, E. Calvo, M. Cerrada, M. Chamizo Llatas², N. Colino, B. De La Cruz, A. Delgado Peris, D. Domínguez Vázquez, C. Fernandez Bedoya,

J.P. Fernández Ramos, A. Ferrando, J. Flix, M.C. Fouz, P. Garcia-Abia, O. Gonzalez Lopez, S. Goy Lopez, J.M. Hernandez, M.I. Josa, G. Merino, J. Puerta Pelayo, A. Quintario Olmeda, I. Redondo, L. Romero, J. Santaolalla, M.S. Soares, C. Willmott

Universidad Autónoma de Madrid, Madrid, Spain

C. Albajar, J.F. de Trocóniz

Universidad de Oviedo, Oviedo, Spain

H. Brun, J. Cuevas, J. Fernandez Menendez, S. Folgueras, I. Gonzalez Caballero, L. Lloret Iglesias, J. Piedra Gomez

Instituto de Física de Cantabria (IFCA), CSIC-Universidad de Cantabria, Santander, Spain J.A. Brochero Cifuentes, I.J. Cabrillo, A. Calderon, S.H. Chuang, J. Duarte Campderros, M. Fernandez, G. Gomez, J. Gonzalez Sanchez, A. Graziano, C. Jorda, A. Lopez Virto, J. Marco, R. Marco, C. Martinez Rivero, F. Matorras, F.J. Munoz Sanchez, T. Rodrigo, A.Y. Rodríguez-Marrero, A. Ruiz-Jimeno, L. Scodellaro, I. Vila, R. Vilar Cortabitarte

CERN, European Organization for Nuclear Research, Geneva, Switzerland

D. Abbaneo, E. Auffray, G. Auzinger, M. Bachtis, P. Baillon, A.H. Ball, D. Barney, J. Bendavid, J.F. Benitez, C. Bernet⁷, G. Bianchi, P. Bloch, A. Bocci, A. Bonato, C. Botta, H. Breuker, T. Camporesi, G. Cerminara, T. Christiansen, J.A. Coarasa Perez, D. d'Enterria, A. Dabrowski, A. De Roeck, S. De Visscher, S. Di Guida, M. Dobson, N. Dupont-Sagorin, A. Elliott-Peisert, J. Eugster, W. Funk, G. Georgiou, M. Giffels, D. Gigi, K. Gill, D. Giordano, M. Giunta, F. Glege, R. Gomez-Reino Garrido, P. Govoni, S. Gowdy, R. Guida, J. Hammer, M. Hansen, P. Harris, C. Hartl, J. Harvey, B. Hegner, A. Hinzmann, V. Innocente, P. Janot, K. Kaadze, E. Karavakis, K. Kousouris, K. Krajczar, P. Lecoq, Y.-J. Lee, C. Lourenço, M. Malberti, L. Malgeri, M. Mannelli, L. Masetti, F. Meijers, S. Mersi, E. Meschi, R. Moser, M. Mulders, P. Musella, E. Nesvold, L. Orsini, E. Palencia Cortezon, E. Perez, L. Perrozzi, A. Petrilli, A. Pfeiffer, M. Pierini, M. Pimiä, D. Piparo, G. Polese, L. Quertenmont, A. Racz, W. Reece, J. Rodrigues Antunes, G. Rolandi³⁰, C. Rovelli³¹, M. Rovere, H. Sakulin, F. Santanastasio, C. Schäfer, C. Schwick, I. Segoni, S. Sekmen, A. Sharma, P. Siegrist, P. Silva, M. Simon, P. Sphicas³², D. Spiga, M. Stoye, A. Tsirou, G.I. Veres¹⁹, J.R. Vlimant, H.K. Wöhri, S.D. Worm³³, W.D. Zeuner

Paul Scherrer Institut, Villigen, Switzerland

W. Bertl, K. Deiters, W. Erdmann, K. Gabathuler, R. Horisberger, Q. Ingram, H.C. Kaestli, S. König, D. Kotlinski, U. Langenegger, F. Meier, D. Renker, T. Rohe

Institute for Particle Physics, ETH Zurich, Zurich, Switzerland

F. Bachmair, L. Bäni, P. Bortignon, M.A. Buchmann, B. Casal, N. Chanon, A. Deisher, G. Dissertori, M. Dittmar, M. Donegà, M. Dünser, P. Eller, C. Grab, D. Hits, P. Lecomte, W. Lustermann, A.C. Marini, P. Martinez Ruiz del Arbol, N. Mohr, F. Moortgat, C. Nägeli³⁴, P. Nef, F. Nessi-Tedaldi, F. Pandolfi, L. Pape, F. Pauss, M. Peruzzi, F.J. Ronga, M. Rossini, L. Sala, A.K. Sanchez, A. Starodumov³⁵, B. Stieger, M. Takahashi, L. Tauscher[†], A. Thea, K. Theofilatos, D. Treille, C. Urscheler, R. Wallny, H.A. Weber

Universität Zürich, Zurich, Switzerland

C. Amsler³⁶, V. Chiochia, C. Favaro, M. Ivova Rikova, B. Kilminster, B. Millan Mejias, P. Otiougova, P. Robmann, H. Snoek, S. Tupputi, M. Verzetti

National Central University, Chung-Li, Taiwan

M. Cardaci, K.H. Chen, C. Ferro, C.M. Kuo, S.W. Li, W. Lin, Y.J. Lu, R. Volpe, S.S. Yu

National Taiwan University (NTU), Taipei, Taiwan

P. Bartalini, P. Chang, Y.H. Chang, Y.W. Chang, Y. Chao, K.F. Chen, C. Dietz, U. Grundler, W.-

S. Hou, Y. Hsiung, K.Y. Kao, Y.J. Lei, R.-S. Lu, D. Majumder, E. Petrakou, X. Shi, J.G. Shiu, Y.M. Tzeng, M. Wang

Chulalongkorn University, Bangkok, Thailand

B. Asavapibhop, N. Suwonjandee

Cukurova University, Adana, Turkey

A. Adiguzel, M.N. Bakirci³⁷, S. Cerci³⁸, C. Dozen, I. Dumanoglu, E. Eskut, S. Girgis, G. Gokbulut, E. Gurpinar, I. Hos, E.E. Kangal, A. Kayis Topaksu, G. Onengut, K. Ozdemir, S. Ozturk³⁹, A. Polatoz, K. Sogut⁴⁰, D. Sunar Cerci³⁸, B. Tali³⁸, H. Topakli³⁷, M. Vergili

Middle East Technical University, Physics Department, Ankara, Turkey

I.V. Akin, T. Aliev, B. Bilin, S. Bilmis, M. Deniz, H. Gamsizkan, A.M. Guler, G. Karapinar⁴¹, K. Ocalan, A. Ozpineci, M. Serin, R. Sever, U.E. Surat, M. Yalvac, M. Zeyrek

Bogazici University, Istanbul, Turkey

E. Gülmez, B. Isildak⁴², M. Kaya⁴³, O. Kaya⁴³, S. Ozkorucuklu⁴⁴, N. Sonmez⁴⁵

Istanbul Technical University, Istanbul, Turkey

H. Bahtiyar⁴⁶, E. Barlas, K. Cankocak, Y.O. Günaydin⁴⁷, F.I. Vardarlı, M. Yücel

National Scientific Center, Kharkov Institute of Physics and Technology, Kharkov, Ukraine L. Levchuk, P. Sorokin

University of Bristol, Bristol, United Kingdom

J.J. Brooke, E. Clement, D. Cussans, H. Flacher, R. Frazier, J. Goldstein, M. Grimes, G.P. Heath, H.F. Heath, L. Kreczko, Z. Meng, S. Metson, D.M. Newbold³³, K. Nirunpong, A. Poll, S. Senkin, V.J. Smith, T. Williams

Rutherford Appleton Laboratory, Didcot, United Kingdom

L. Basso⁴⁸, K.W. Bell, A. Belyaev⁴⁸, C. Brew, R.M. Brown, D.J.A. Cockerill, J.A. Coughlan, K. Harder, S. Harper, J. Jackson, E. Olaiya, D. Petyt, B.C. Radburn-Smith, C.H. Shepherd-Themistocleous, I.R. Tomalin, W.J. Womersley

Imperial College, London, United Kingdom

R. Bainbridge, G. Ball, O. Buchmuller, D. Burton, D. Colling, N. Cripps, M. Cutajar, P. Dauncey, G. Davies, M. Della Negra, W. Ferguson, J. Fulcher, A. Gilbert, A. Guneratne Bryer, G. Hall, Z. Hatherell, J. Hays, G. Iles, M. Jarvis, G. Karapostoli, M. Kenzie, R. Lucas³³, L. Lyons, A.-M. Magnan, J. Marrouche, B. Mathias, R. Nandi, J. Nash, A. Nikitenko³⁵, J. Pela, M. Pesaresi, K. Petridis, M. Pioppi⁴⁹, D.M. Raymond, S. Rogerson, A. Rose, C. Seez, P. Sharp[†], A. Sparrow, A. Tapper, M. Vazquez Acosta, T. Virdee, S. Wakefield, N. Wardle, T. Whyntie

Brunel University, Uxbridge, United Kingdom

M. Chadwick, J.E. Cole, P.R. Hobson, A. Khan, P. Kyberd, D. Leggat, D. Leslie, W. Martin, I.D. Reid, P. Symonds, L. Teodorescu, M. Turner

Baylor University, Waco, USA

J. Dittmann, K. Hatakeyama, A. Kasmi, H. Liu, T. Scarborough

The University of Alabama, Tuscaloosa, USA

O. Charaf, S.I. Cooper, C. Henderson, P. Rumerio

Boston University, Boston, USA

A. Avetisyan, T. Bose, C. Fantasia, A. Heister, P. Lawson, D. Lazic, J. Rohlf, D. Sperka, J. St. John, L. Sulak

Brown University, Providence, USA

J. Alimena, S. Bhattacharya, G. Christopher, D. Cutts, Z. Demiragli, A. Ferapontov, A. Garabedian, U. Heintz, G. Kukartsev, E. Laird, G. Landsberg, M. Luk, M. Narain, M. Segala, T. Sinthuprasith, T. Speer

University of California, Davis, Davis, USA

R. Breedon, G. Breto, M. Calderon De La Barca Sanchez, M. Caulfield, S. Chauhan, M. Chertok, J. Conway, R. Conway, P.T. Cox, J. Dolen, R. Erbacher, M. Gardner, R. Houtz, W. Ko, A. Kopecky, R. Lander, O. Mall, T. Miceli, R. Nelson, D. Pellett, F. Ricci-Tam, B. Rutherford, M. Searle, J. Smith, M. Squires, M. Tripathi, R. Yohay

University of California, Los Angeles, USA

V. Andreev, D. Cline, R. Cousins, J. Duris, S. Erhan, P. Everaerts, C. Farrell, M. Felcini, J. Hauser, M. Ignatenko, C. Jarvis, G. Rakness, P. Schlein[†], P. Traczyk, V. Valuev, M. Weber

University of California, Riverside, Riverside, USA

J. Babb, R. Clare, M.E. Dinardo, J. Ellison, J.W. Gary, F. Giordano, G. Hanson, H. Liu, O.R. Long, A. Luthra, H. Nguyen, S. Paramesvaran, J. Sturdy, S. Sumowidagdo, R. Wilken, S. Wimpenny

University of California, San Diego, La Jolla, USA

W. Andrews, J.G. Branson, G.B. Cerati, S. Cittolin, D. Evans, A. Holzner, R. Kelley, M. Lebourgeois, J. Letts, I. Macneill, B. Mangano, S. Padhi, C. Palmer, G. Petrucciani, M. Pieri, M. Sani, V. Sharma, S. Simon, E. Sudano, M. Tadel, Y. Tu, A. Vartak, S. Wasserbaech⁵⁰, F. Würthwein, A. Yagil, J. Yoo

University of California, Santa Barbara, Santa Barbara, USA

D. Barge, R. Bellan, C. Campagnari, M. D'Alfonso, T. Danielson, K. Flowers, P. Geffert, C. George, F. Golf, J. Incandela, C. Justus, P. Kalavase, D. Kovalskyi, V. Krutelyov, S. Lowette, R. Magaña Villalba, N. Mccoll, V. Pavlunin, J. Ribnik, J. Richman, R. Rossin, D. Stuart, W. To, C. West

California Institute of Technology, Pasadena, USA

A. Apresyan, A. Bornheim, J. Bunn, Y. Chen, E. Di Marco, J. Duarte, D. Kcira, Y. Ma, A. Mott, H.B. Newman, C. Rogan, M. Spiropulu, V. Timciuc, J. Veverka, R. Wilkinson, S. Xie, Y. Yang, R.Y. Zhu

Carnegie Mellon University, Pittsburgh, USA

V. Azzolini, A. Calamba, R. Carroll, T. Ferguson, Y. Iiyama, D.W. Jang, Y.F. Liu, M. Paulini, J. Russ, H. Vogel, I. Vorobiev

University of Colorado at Boulder, Boulder, USA

J.P. Cumalat, B.R. Drell, W.T. Ford, A. Gaz, E. Luiggi Lopez, U. Nauenberg, J.G. Smith, K. Stenson, K.A. Ulmer, S.R. Wagner

Cornell University, Ithaca, USA

J. Alexander, A. Chatterjee, N. Eggert, L.K. Gibbons, W. Hopkins, A. Khukhunaishvili, B. Kreis, N. Mirman, G. Nicolas Kaufman, J.R. Patterson, A. Ryd, E. Salvati, W. Sun, W.D. Teo, J. Thom, J. Thompson, J. Tucker, Y. Weng, L. Winstrom, P. Wittich

Fairfield University, Fairfield, USA

D. Winn

Fermi National Accelerator Laboratory, Batavia, USA

S. Abdullin, M. Albrow, J. Anderson, G. Apollinari, L.A.T. Bauerdick, A. Beretvas, J. Berryhill, P.C. Bhat, K. Burkett, J.N. Butler, V. Chetluru, H.W.K. Cheung, F. Chlebana, S. Cihangir,

V.D. Elvira, I. Fisk, J. Freeman, Y. Gao, E. Gottschalk, L. Gray, D. Green, O. Gutsche, R.M. Harris, J. Hirschauer, B. Hooberman, S. Jindariani, M. Johnson, U. Joshi, B. Klima, S. Kunori, S. Kwan, J. Linacre, D. Lincoln, R. Lipton, J. Lykken, K. Maeshima, J.M. Marraffino, V.I. Martinez Outschoorn, S. Maruyama, D. Mason, P. McBride, K. Mishra, S. Mrenna, Y. Musienko⁵¹, C. Newman-Holmes, V. O'Dell, O. Prokofyev, E. Sexton-Kennedy, S. Sharma, W.J. Spalding, L. Spiegel, L. Taylor, S. Tkaczyk, N.V. Tran, L. Uplegger, E.W. Vaandering, R. Vidal, J. Whitmore, W. Wu, F. Yang, J.C. Yun

University of Florida, Gainesville, USA

D. Acosta, P. Avery, D. Bourilkov, M. Chen, T. Cheng, S. Das, M. De Gruttola, G.P. Di Giovanni, D. Dobur, A. Drozdetskiy, R.D. Field, M. Fisher, Y. Fu, I.K. Furic, J. Hugon, B. Kim, J. Konigsberg, A. Korytov, A. Kropivnitskaya, T. Kypreos, J.F. Low, K. Matchev, P. Milenovic⁵², G. Mitselmakher, L. Muniz, R. Remington, A. Rinkevicius, N. Skhirtladze, M. Snowball, J. Yelton, M. Zakaria

Florida International University, Miami, USA

V. Gaultney, S. Hewamanage, L.M. Lebolo, S. Linn, P. Markowitz, G. Martinez, J.L. Rodriguez

Florida State University, Tallahassee, USA

T. Adams, A. Askew, J. Bochenek, J. Chen, B. Diamond, S.V. Gleyzer, J. Haas, S. Hagopian, V. Hagopian, K.F. Johnson, H. Prosper, V. Veeraraghavan, M. Weinberg

Florida Institute of Technology, Melbourne, USA

M.M. Baarmand, B. Dorney, M. Hohlmann, H. Kalakhety, F. Yumiceva

University of Illinois at Chicago (UIC), Chicago, USA

M.R. Adams, L. Apanasevich, V.E. Bazterra, R.R. Betts, I. Bucinskaite, J. Callner, R. Cavanaugh, O. Evdokimov, L. Gauthier, C.E. Gerber, D.J. Hofman, S. Khalatyan, P. Kurt, F. Lacroix, C. O'Brien, C. Silkworth, D. Strom, P. Turner, N. Varelas

The University of Iowa, Iowa City, USA

U. Akgun, E.A. Albayrak, B. Bilki⁵³, W. Clarida, K. Dilsiz, F. Duru, S. Griffiths, J.-P. Merlo, H. Mermerkaya⁵⁴, A. Mestvirishvili, A. Moeller, J. Nachtman, C.R. Newsom, H. Ogul, Y. Onel, F. Ozok⁴⁶, S. Sen, P. Tan, E. Tiras, J. Wetzel, T. Yetkin⁵⁵, K. Yi

Johns Hopkins University, Baltimore, USA

B.A. Barnett, B. Blumenfeld, S. Bolognesi, D. Fehling, G. Giurgiu, A.V. Gritsan, G. Hu, P. Maksimovic, M. Swartz, A. Whitbeck

The University of Kansas, Lawrence, USA

P. Baringer, A. Bean, G. Benelli, R.P. Kenny Iii, M. Murray, D. Noonan, S. Sanders, R. Stringer, J.S. Wood

Kansas State University, Manhattan, USA

A.F. Barfuss, I. Chakaberia, A. Ivanov, S. Khalil, M. Makouski, Y. Maravin, S. Shrestha, I. Svintradze

Lawrence Livermore National Laboratory, Livermore, USA

J. Gronberg, D. Lange, F. Rebassoo, D. Wright

University of Maryland, College Park, USA

A. Baden, B. Calvert, S.C. Eno, J.A. Gomez, N.J. Hadley, R.G. Kellogg, T. Kolberg, Y. Lu, M. Marionneau, A.C. Mignerey, K. Pedro, A. Peterman, A. Skuja, J. Temple, M.B. Tonjes, S.C. Tonwar

Massachusetts Institute of Technology, Cambridge, USA

A. Apyan, G. Bauer, W. Busza, E. Butz, I.A. Cali, M. Chan, V. Dutta, G. Gomez Ceballos, M. Goncharov, Y. Kim, M. Klute, A. Levin, P.D. Luckey, T. Ma, S. Nahn, C. Paus, D. Ralph, C. Roland, G. Roland, G.S.F. Stephans, F. Stöckli, K. Sumorok, K. Sung, D. Velicanu, R. Wolf, B. Wyslouch, M. Yang, Y. Yilmaz, A.S. Yoon, M. Zanetti, V. Zhukova

University of Minnesota, Minneapolis, USA

B. Dahmes, A. De Benedetti, G. Franzoni, A. Gude, J. Haupt, S.C. Kao, K. Klapoetke, Y. Kubota, J. Mans, N. Pastika, R. Rusack, M. Sasseville, A. Singovsky, N. Tambe, J. Turkewitz

University of Mississippi, Oxford, USA

L.M. Cremaldi, R. Kroeger, L. Perera, R. Rahmat, D.A. Sanders, D. Summers

University of Nebraska-Lincoln, Lincoln, USA

E. Avdeeva, K. Bloom, S. Bose, D.R. Claes, A. Dominguez, M. Eads, J. Keller, I. Kravchenko, J. Lazo-Flores, S. Malik, G.R. Snow

State University of New York at Buffalo, Buffalo, USA

A. Godshalk, I. Iashvili, S. Jain, A. Kharchilava, A. Kumar, S. Rappoccio, Z. Wan

Northeastern University, Boston, USA

G. Alverson, E. Barberis, D. Baumgartel, M. Chasco, J. Haley, D. Nash, T. Orimoto, D. Trocino, D. Wood, J. Zhang

Northwestern University, Evanston, USA

A. Anastassov, K.A. Hahn, A. Kubik, L. Lusito, N. Mucia, N. Odell, B. Pollack, A. Pozdnyakov, M. Schmitt, S. Stoynev, M. Velasco, S. Won

University of Notre Dame, Notre Dame, USA

D. Berry, A. Brinkerhoff, K.M. Chan, M. Hildreth, C. Jessop, D.J. Karmgard, J. Kolb, K. Lannon, W. Luo, S. Lynch, N. Marinelli, D.M. Morse, T. Pearson, M. Planer, R. Ruchti, J. Slaunwhite, N. Valls, M. Wayne, M. Wolf

The Ohio State University, Columbus, USA

L. Antonelli, B. Bylsma, L.S. Durkin, C. Hill, R. Hughes, K. Kotov, T.Y. Ling, D. Puigh, M. Rodenburg, G. Smith, C. Vuosalo, G. Williams, B.L. Winer, H. Wolfe

Princeton University, Princeton, USA

E. Berry, P. Elmer, V. Halyo, P. Hebda, J. Hegeman, A. Hunt, P. Jindal, S.A. Koay, D. Lopes Pegna, P. Lujan, D. Marlow, T. Medvedeva, M. Mooney, J. Olsen, P. Piroué, X. Quan, A. Raval, H. Saka, D. Stickland, C. Tully, J.S. Werner, S.C. Zenz, A. Zuranski

University of Puerto Rico, Mayaguez, USA

E. Brownson, A. Lopez, H. Mendez, J.E. Ramirez Vargas

Purdue University, West Lafayette, USA

E. Alagoz, D. Benedetti, G. Bolla, D. Bortoletto, M. De Mattia, A. Everett, Z. Hu, M. Jones, O. Koybasi, M. Kress, N. Leonardo, V. Maroussov, P. Merkel, D.H. Miller, N. Neumeister, I. Shipsey, D. Silvers, A. Svyatkovskiy, M. Vidal Marono, H.D. Yoo, J. Zablocki, Y. Zheng

Purdue University Calumet, Hammond, USA

S. Guragain, N. Parashar

Rice University, Houston, USA

A. Adair, B. Akgun, K.M. Ecklund, F.J.M. Geurts, W. Li, B.P. Padley, R. Redjimi, J. Roberts, J. Zabel

University of Rochester, Rochester, USA

B. Betchart, A. Bodek, R. Covarelli, P. de Barbaro, R. Demina, Y. Eshaq, T. Ferbel, A. Garcia-Bellido, P. Goldenzweig, J. Han, A. Harel, D.C. Miner, G. Petrillo, D. Vishnevskiy, M. Zielinski

The Rockefeller University, New York, USA

A. Bhatti, R. Ciesielski, L. Demortier, K. Goulianos, G. Lungu, S. Malik, C. Mesropian

Rutgers, The State University of New Jersey, Piscataway, USA

S. Arora, A. Barker, J.P. Chou, C. Contreras-Campana, E. Contreras-Campana, D. Duggan, D. Ferencek, Y. Gershtein, R. Gray, E. Halkiadakis, D. Hidas, A. Lath, S. Panwalkar, M. Park, R. Patel, V. Rekovic, J. Robles, K. Rose, S. Salur, S. Schnetzer, C. Seitz, S. Somalwar, R. Stone, M. Walker

University of Tennessee, Knoxville, USA

G. Cerizza, M. Hollingsworth, S. Spanier, Z.C. Yang, A. York

Texas A&M University, College Station, USA

R. Eusebi, W. Flanagan, J. Gilmore, T. Kamon⁵⁶, V. Khotilovich, R. Montalvo, I. Osipenkov, Y. Pakhotin, A. Perloff, J. Roe, A. Safonov, T. Sakuma, I. Suarez, A. Tatarinov, D. Toback

Texas Tech University, Lubbock, USA

N. Akchurin, J. Damgov, C. Dragoiu, P.R. Dudero, C. Jeong, K. Kovitanggoon, S.W. Lee, T. Libeiro, I. Volobouev

Vanderbilt University, Nashville, USA

E. Appelt, A.G. Delannoy, S. Greene, A. Gurrola, W. Johns, C. Maguire, Y. Mao, A. Melo, M. Sharma, P. Sheldon, B. Snook, S. Tuo, J. Velkovska

University of Virginia, Charlottesville, USA

M.W. Arenton, M. Balazs, S. Boutle, B. Cox, B. Francis, J. Goodell, R. Hirosky, A. Ledovskoy, C. Lin, C. Neu, J. Wood

Wayne State University, Detroit, USA

S. Gollapinni, R. Harr, P.E. Karchin, C. Kottachchi Kankanamge Don, P. Lamichhane, A. Sakharov

University of Wisconsin, Madison, USA

M. Anderson, D.A. Belknap, L. Borrello, D. Carlsmith, M. Cepeda, S. Dasu, E. Friis, K.S. Grogg, M. Grothe, R. Hall-Wilton, M. Herndon, A. Hervé, P. Klabbers, J. Klukas, A. Lanaro, C. Lazaridis, R. Loveless, A. Mohapatra, M.U. Mozer, I. Ojalvo, G.A. Pierro, I. Ross, A. Savin, W.H. Smith, J. Swanson

†: Deceased

- 1: Also at Vienna University of Technology, Vienna, Austria
- 2: Also at CERN, European Organization for Nuclear Research, Geneva, Switzerland
- 3: Also at National Institute of Chemical Physics and Biophysics, Tallinn, Estonia
- 4: Also at Skobeltsyn Institute of Nuclear Physics, Lomonosov Moscow State University, Moscow, Russia
- 5: Also at Universidade Estadual de Campinas, Campinas, Brazil
- 6: Also at California Institute of Technology, Pasadena, USA
- 7: Also at Laboratoire Leprince-Ringuet, Ecole Polytechnique, IN2P3-CNRS, Palaiseau, France
- 8: Also at Suez Canal University, Suez, Egypt
- 9: Also at Cairo University, Cairo, Egypt
- 10: Also at Fayoum University, El-Fayoum, Egypt

- 11: Also at British University in Egypt, Cairo, Egypt
- 12: Now at Ain Shams University, Cairo, Egypt
- 13: Also at National Centre for Nuclear Research, Swierk, Poland
- 14: Also at Université de Haute Alsace, Mulhouse, France
- 15: Also at Joint Institute for Nuclear Research, Dubna, Russia
- 16: Also at Brandenburg University of Technology, Cottbus, Germany
- 17: Also at The University of Kansas, Lawrence, USA
- 18: Also at Institute of Nuclear Research ATOMKI, Debrecen, Hungary
- 19: Also at Eötvös Loránd University, Budapest, Hungary
- 20: Also at Tata Institute of Fundamental Research HECR, Mumbai, India
- 21: Now at King Abdulaziz University, Jeddah, Saudi Arabia
- 22: Also at University of Visva-Bharati, Santiniketan, India
- 23: Also at Sharif University of Technology, Tehran, Iran
- 24: Also at Isfahan University of Technology, Isfahan, Iran
- 25: Also at Plasma Physics Research Center, Science and Research Branch, Islamic Azad University, Tehran, Iran
- 26: Also at Facoltà Ingegneria, Università di Roma, Roma, Italy
- 27: Also at Laboratori Nazionali di Legnaro dell' INFN, Legnaro, Italy
- 28: Also at Università degli Studi di Siena, Siena, Italy
- 29: Also at Faculty of Physics, University of Belgrade, Belgrade, Serbia
- 30: Also at Scuola Normale e Sezione dell'INFN, Pisa, Italy
- 31: Also at INFN Sezione di Roma, Roma, Italy
- 32: Also at University of Athens, Athens, Greece
- 33: Also at Rutherford Appleton Laboratory, Didcot, United Kingdom
- 34: Also at Paul Scherrer Institut, Villigen, Switzerland
- 35: Also at Institute for Theoretical and Experimental Physics, Moscow, Russia
- 36: Also at Albert Einstein Center for Fundamental Physics, Bern, Switzerland
- 37: Also at Gaziosmanpasa University, Tokat, Turkey
- 38: Also at Adiyaman University, Adiyaman, Turkey
- 39: Also at The University of Iowa, Iowa City, USA
- 40: Also at Mersin University, Mersin, Turkey
- 41: Also at Izmir Institute of Technology, Izmir, Turkey
- 42: Also at Ozyegin University, Istanbul, Turkey
- 43: Also at Kafkas University, Kars, Turkey
- 44: Also at Suleyman Demirel University, Isparta, Turkey
- 45: Also at Ege University, Izmir, Turkey
- 46: Also at Mimar Sinan University, Istanbul, Istanbul, Turkey
- 47: Also at Kahramanmaras Sütcü Imam University, Kahramanmaras, Turkey
- 48: Also at School of Physics and Astronomy, University of Southampton, Southampton, United Kingdom
- 49: Also at INFN Sezione di Perugia; Università di Perugia, Perugia, Italy
- 50: Also at Utah Valley University, Orem, USA
- 51: Also at Institute for Nuclear Research, Moscow, Russia
- 52: Also at University of Belgrade, Faculty of Physics and Vinca Institute of Nuclear Sciences, Belgrade, Serbia
- 53: Also at Argonne National Laboratory, Argonne, USA
- 54: Also at Erzincan University, Erzincan, Turkey
- 55: Also at Yildiz Technical University, Istanbul, Turkey
- 56: Also at Kyungpook National University, Daegu, Korea