

PUB-76-178-E

E-5370, E-0001
Phys. Rev. Lett.

EVIDENCE FOR PARITY NON-CONSERVATION IN THE WEAK NEUTRAL CURRENT*

A. Benvenuti, D. Cline, F. Messing**, W. Ford, R. Imlay⁺, T. Y. Ling,
A. K. Mann, D. D. Reeder, C. Rubbia, R. Stefanski, L. Sulak, and P. Wanderer⁺⁺

Department of Physics
Harvard University
Cambridge, Massachusetts 02138

Department of Physics
University of Pennsylvania
Philadelphia, Pennsylvania 19174

Department of Physics
University of Wisconsin
Madison, Wisconsin 53706

Fermilab
P. O. Box 500
Batavia, Illinois 60510

ABSTRACT

Measurements of R^{ν} and $R^{\bar{\nu}}$, the ratios of neutral current to charged current ν and $\bar{\nu}$ cross sections, yield neutral current rates for ν and $\bar{\nu}$ that are consistent with a pure (V-A) interaction but 3 standard deviations from pure V or pure A, indicating the presence of parity violation in the weak neutral current.

* Work supported in part by the U.S. Energy Research and Development Administration.

** Now at Cornell University, Ithaca, NY 14853.

+ Now at Rutgers University, New Brunswick, NJ 08903.

++ Now at Brookhaven National Laboratory, Upton, NY 11973.

The existence of a weak neutral current interaction has been inferred from the discovery of ν and $\bar{\nu}$ inelastic collisions with nucleons that have no final state muons.¹ This Letter reports the most recent results of our study of the nature of the weak neutral current. The 3200 events reported here are greater in number and were produced by neutrino beams of substantially higher purity than those utilized previously by us.² Furthermore, the data were acquired during different running conditions, making possible important tests for systematic errors. We have extracted from the data values of R^ν and $R^{\bar{\nu}}$, the ratios of neutral to charged current cross sections for ν and $\bar{\nu}$, which lead directly to values of the neutral current cross sections. These are compared with theoretical values for different forms of the space-time structure of the weak neutral current, and lead to the conclusion that a parity violating component is present in that current.

The apparatus, which is described in greater detail elsewhere,³ is shown in Fig. 1a. The spectra of the incident ν and $\bar{\nu}$ beams are shown in Fig. 1b. Neutrino interactions which produced a hadronic cascade with energy $E_H > 4$ GeV triggered the apparatus with $> 99\%$ efficiency. Counter A and the first 7 calorimeters were in anticoincidence. Pulse height information from the last 8 calorimeter modules yielded the value of E_H . In addition, the wide gap spark chambers (WGSC) were photographed in two $\pm 7.5^\circ$ stereo views and in a 90° stereo view. Muons were identified by their presence in detectors 1 or 2 located downstream of the iron hadron filter.

Detector 1 consists of a 3.6m x 3.6m scintillation counter together with a 2.8m x 2.8m WGSC; detector 2 is solely a 2.8m x 2.8m WGSC. The muon identifiers have high acceptance for charge current events (CC), ϵ_μ ; a small probability of hadron punch-through for neutral current events (NC), ϵ_p ; and redundancy. In the experiments reported

here, ϵ_μ is very near unity and therefore the determination of the NC/CC ratios is only weakly dependent on the details of the calculation of ϵ_μ . That calculation takes into account the spatial and energy distribution of the ν beams, muon ionization energy loss and multiple scattering, resolution in the measurement of E_H , and the properties of the CC events as determined from these same data and reported elsewhere.⁴ Values of ϵ_μ and other characteristics of the data are given in Table I. The dependence of ϵ_p on E_H and longitudinal position was obtained directly from measurements made on the CC data. For the 1975 Quadrupole Triplet data, $\langle \epsilon_p \rangle \approx 0.1$.

Candidates for both charged and neutral current interactions were selected from a scan of the film. The scanning efficiency was >95% and was the same for NC and CC events because the scanning criteria involved only properties of event vertices. The vertex was measured in three views and its location checked for consistency with the electronic information. The small fiducial region shown in Fig. 1a was chosen to insure high muon detection efficiency and good shower containment, and to reject neutron backgrounds. As with previous data,² no significant evidence for neutron contamination was found.

The values of R , after correction for muon efficiency and hadron punch-through, were found to be independent of the transverse and longitudinal position of the interaction. Figure 2 illustrates this for the longitudinal coordinate. The agreement between the corrected values of R for the detectors shown in Fig. 2b indicates that the corrections are well understood. Comparison of the raw and corrected values of R for detector 1 shows the small magnitude of the net correction for this detector.

For each of the three measurements with nearly pure ν beams a value of R^ν for $E_H > 4$ GeV was obtained by correcting the ratio R of the NC and CC events given in Table I for the $\bar{\nu}$ content of the beams. Similarly, a value

of $R^{\bar{\nu}}$ for $E_H > 4$ GeV was extracted from a measurement with a relatively pure $\bar{\nu}$ beam. These results are given with their respective values of $\langle E_{\nu, \bar{\nu}} \rangle$ in Table II. The corrections for ν_e contamination are negligible.

We previously reported the values $R^{\nu} = 0.11 \pm 0.05$ and $R^{\bar{\nu}} = 0.32 \pm 0.09$,² also for $E_H > 4$ GeV. The difference between the earlier value of R^{ν} and the values given in Table II is due to the difficulty of the method used to extract R^{ν} and $R^{\bar{\nu}}$ from the first data samples which were either statistically limited or obtained from a beam with a significant admixture of $\bar{\nu}$ ($\alpha \approx 0.62$).

To determine the space-time structure of the weak neutral current from these data, it is necessary to obtain $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}$ from the relation $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu} = (R^{\bar{\nu}}/R^{\nu})(\sigma_c^{\bar{\nu}}/\sigma_c^{\nu})$, because the ratio of the charged current cross sections $\sigma_c^{\bar{\nu}}/\sigma_c^{\nu}$ is changing with energy.⁴ To obtain $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}$, however, the effect of the experimental requirement $E_H > 4$ GeV must first be considered. If the neutral current has the (V-A) form, exclusion of events with $E_H < 4$ GeV has no effect on the measured values of R^{ν} and $R^{\bar{\nu}}$. More generally, for any linear combination of V and A, $R^{\nu}(E_H > 0) \geq R^{\nu}(E_H > 4)$, while $R^{\bar{\nu}}(E_H > 0) \leq R^{\bar{\nu}}(E_H > 4)$, so that $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu} \leq [\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}]_{(V-A)}$. We find directly the numerical upper limit on $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}$ at $\langle E_{\nu, \bar{\nu}} \rangle = 41$ GeV from

$$\frac{\sigma_N^{\bar{\nu}}}{\sigma_N^{\nu}} \leq \frac{R^{\bar{\nu}}}{R^{\nu}} \cdot \frac{\sigma_c^{\bar{\nu}}}{\sigma_c^{\nu}} = \left(\frac{0.39 \pm 0.10}{0.29 \pm 0.04} \right) (0.45 \pm 0.08) = 0.61 \pm 0.25, \quad (1)$$

where R^{ν} and $R^{\bar{\nu}}$ are obtained from Table II, and $\sigma_c^{\bar{\nu}}/\sigma_c^{\nu}$ at 41 GeV is taken from reference 4. Note that the values of R^{ν} in Table II are approximately constant over the average energy interval from 53 to 85 GeV. This largely justifies the extrapolation of constant R^{ν} to 41 GeV, and implies, within experimental error, a linear rise with energy of the total neutral current cross section for neutrinos.

We can obtain $\bar{\sigma}_N^{\bar{\nu}}/\sigma_N^{\nu}$, rather than its upper limit, by correcting for unobserved events with $E_H < 4$ GeV according to various forms of the neutral current interaction. The high energy of the neutrino beams, particularly the 1975 QT beam, gives rise to few events with $E_H < 4$ GeV, so that for any combination of V and A the difference between $R^{\nu}(E_H > 0)$ and the measured values of $R^{\nu}(E_H > 4)$ is negligible. The ratio $\bar{R}^{\bar{\nu}}$ is more sensitive to the exact form of the interaction because of the lower $\langle E_{\bar{\nu}} \rangle$. Thus for (V-A), $\bar{R}^{\bar{\nu}}(E_H > 0) = \bar{R}^{\bar{\nu}}(E_H > 4)$; while for pure V or A, $\bar{R}^{\bar{\nu}}(E_H > 0) = 0.71 \bar{R}^{\bar{\nu}}(E_H > 4)$; and for (V + A), $\bar{R}^{\bar{\nu}}(E_H > 0) = 0.63 \bar{R}^{\bar{\nu}}(E_H > 4)$. We compare in Table III the corrected, experimental values of $\bar{\sigma}_N^{\bar{\nu}}/\sigma_N^{\nu}$ with the expected values of this ratio for several admixtures of V and A. It is clear that (V + A) is ruled out. Furthermore, the experimental value for pure V or A is 3 standard deviations away from the value expected for either of those pure forms, while (V-A) is within 1 standard deviation of the expected value. The best fit to the data is one for which the corrected measurement of $\bar{\sigma}_N^{\bar{\nu}}/\sigma_N^{\nu}$ agrees with the expected value, and is (V-0.8A). These results are confirmed by the measured, essentially uniform dependences of R^{ν} and $\bar{R}^{\bar{\nu}}$ on E_H which do not, however, sensitively discriminate among the possible forms of the neutral current.

In summary, measurements of neutral current and charged current inelastic scattering of ν and $\bar{\nu}$ rule out (V+A), and are incompatible with a pure V or pure A form for the weak neutral current. The experimental results require a significant parity violating component in the weak neutral current, and are consistent with (V-A).

We thank Mr. W. Grant and Mrs. A. Black for their diligent scanning efforts. One of us (P.W.) thanks Brookhaven National Laboratory for support during the last phase of this work.

References

1. G. Myatt, Proc. 6th Intl. Symposium on Electron and Photon Interactions at High Energies, p. 389, Bonn, 1973 (North-Holland, Amsterdam);
F. J. Hasert et al., Phys. Lett. 46B, 138 (1973);
A. Benvenuti et al., Phys. Rev. Lett. 32, 800 (1974).
2. B. Aubert et al., Phys. Rev. Lett. 32, 1454, 1457 (1974).
3. A. Benvenuti et al., Nucl. Instr. and Meth. 125, 447, 457 (1975).
4. A. Benvenuti et al., "A Measurement of the Ratio $\sigma_c(\nu_\mu + N \rightarrow \mu^+ + x) / \sigma_c(\nu_\mu + N \rightarrow \mu^- + x)$ at High Energy", HPWF preprint 76/2, March 1976, submitted to Phys. Rev. Lett.

FIGURE CAPTIONS

- Fig. 1 (a) Sketch of the apparatus. (b) Neutrino spectra used in these experiments.
- Fig. 2 (a) Raw ratio of the number of muonless events to the number with detected muons, versus module number as defined in Fig. 1a. (b) R, the raw ratio corrected for muon detection inefficiencies and hadron punch-through, versus module number.

Table I. Relevant parameters for the four experiments reported here.

The numbers of events have been corrected for muon detection efficiency and hadron punch-through. The parameter α , obtained from the measured CC events, indicates the composition of the beams.

Beam Type	$\alpha \equiv \frac{N_{\mu^-}}{N_{\mu^-} + N_{\mu^+}}$	Number of Events		Muon detection efficiency ϵ_{μ}		Hadron filter thickness (cm)
		Neutral	Charged	Det. 1	Det. 2	
Single horn	0.94	266	857	0.83	*	35
1974 Quadrupole Triplet	0.83	158	599	0.84	*	35
1975 Quadrupole Triplet	0.86	300	1042	0.95	0.84	70
Double horn with plug	0.27	69	198	0.98	0.84	70

* Detector 2 had a different geometry for these experiments.

Table II. The values of R^ν or $R^{\bar{\nu}}$ for $E_H > 4$ GeV.

Beam type	R^ν	$R^{\bar{\nu}}$	Comment
Single horn	0.31 ± 0.06		Pure ν beam, $\langle E_\nu \rangle = 53$ GeV
1974 Quadru- pole triplet	0.24 ± 0.06		Mixed beam $\langle E_\nu \rangle = 78$ GeV
1975 Quadru- pole triplet	0.29 ± 0.04		Mixed beam $\langle E_\nu \rangle = 85$ GeV
Double horn, with plug		0.39 ± 0.10	Pure $\bar{\nu}$ beam $\langle E_{\bar{\nu}} \rangle = 41$ GeV

Table III. The measured values of $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}$, after correction for the loss of events with $E_H < 4$ GeV according to the form of the weak neutral current in the first column. The corresponding values of $\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}$, expected from theory, are given in column three. An antiquark contribution of 5% has been assumed.

Form of the weak neutral current	$\sigma_N^{\bar{\nu}}/\sigma_N^{\nu}$	
	Corrected experimental value	Expected value
V - A	0.61 ± 0.25	0.38
V or A	0.40 ± 0.17	1.00
V + A	0.37 ± 0.16	2.65
V - 0.8 A	0.48 ± 0.20	0.48

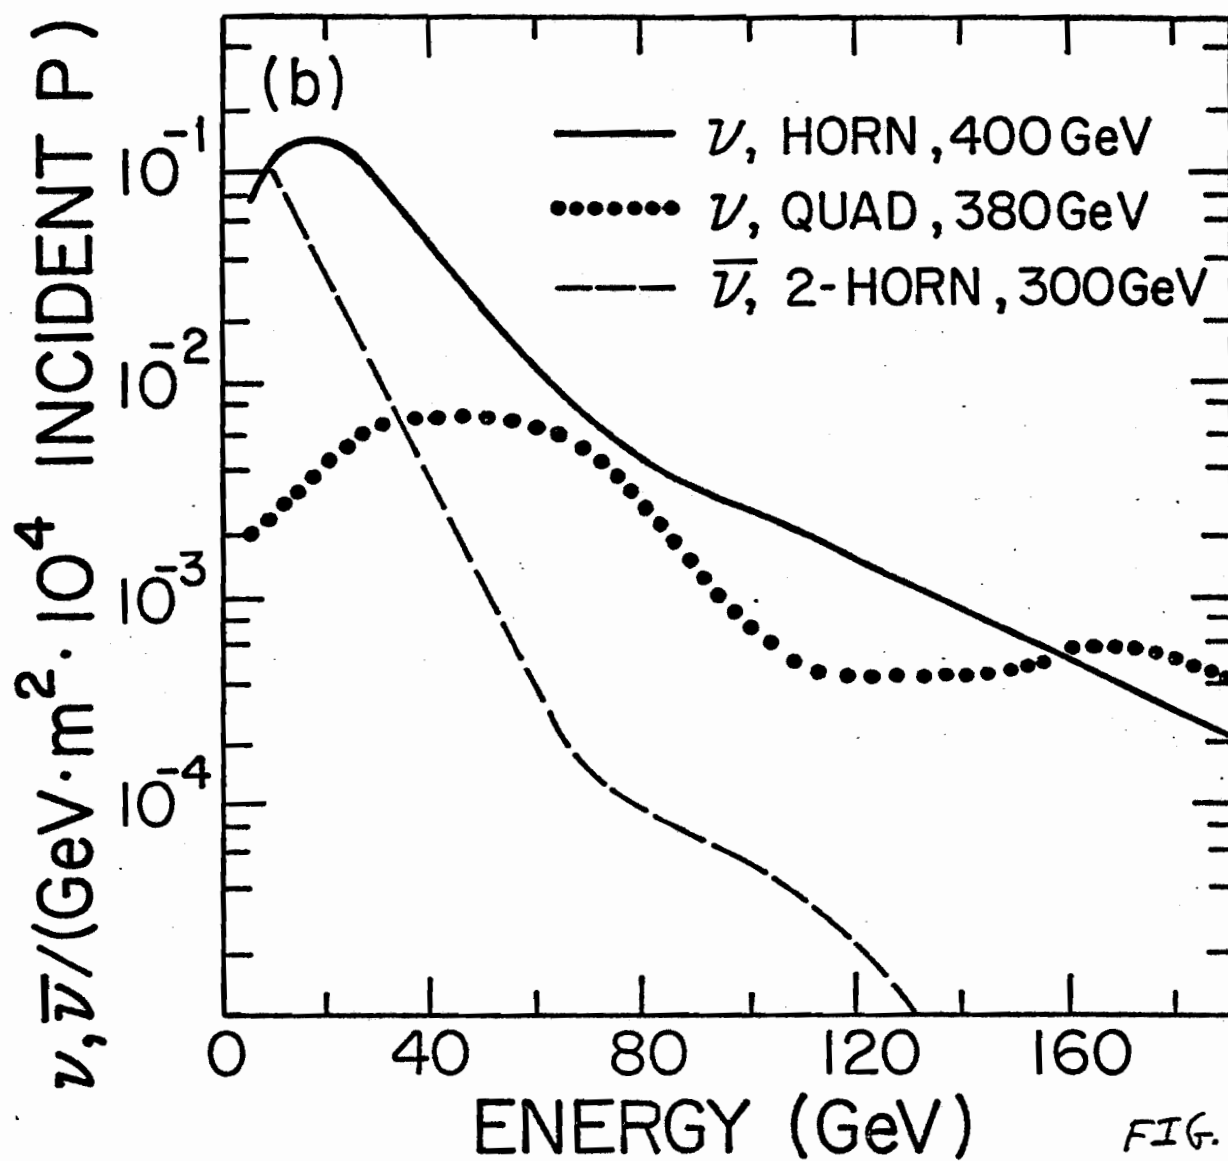
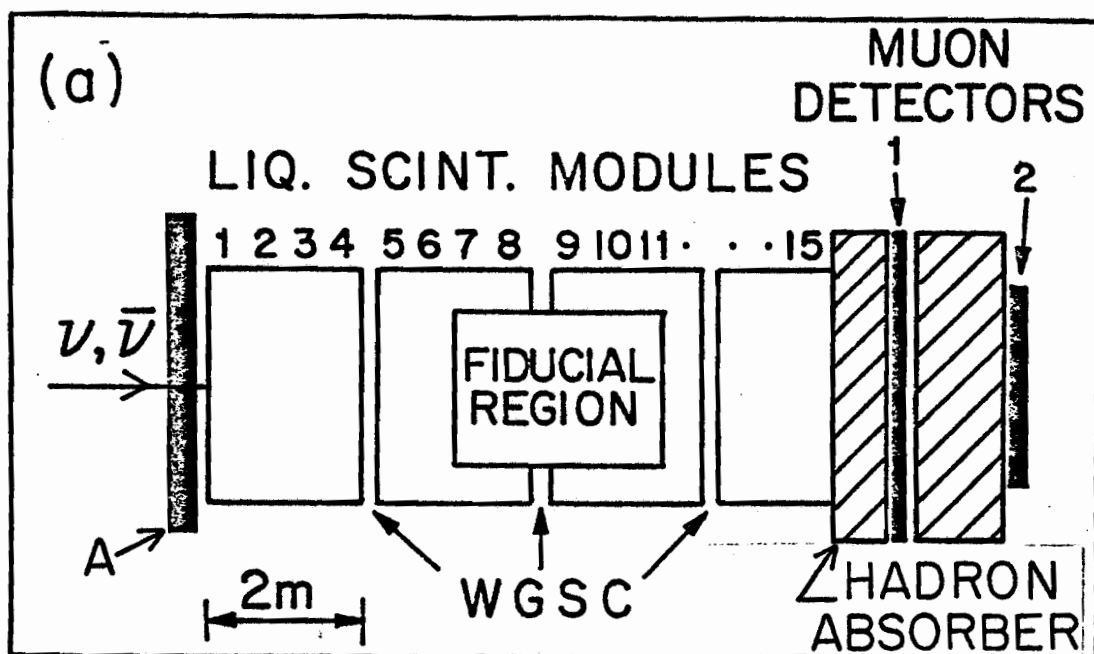


FIG. 1

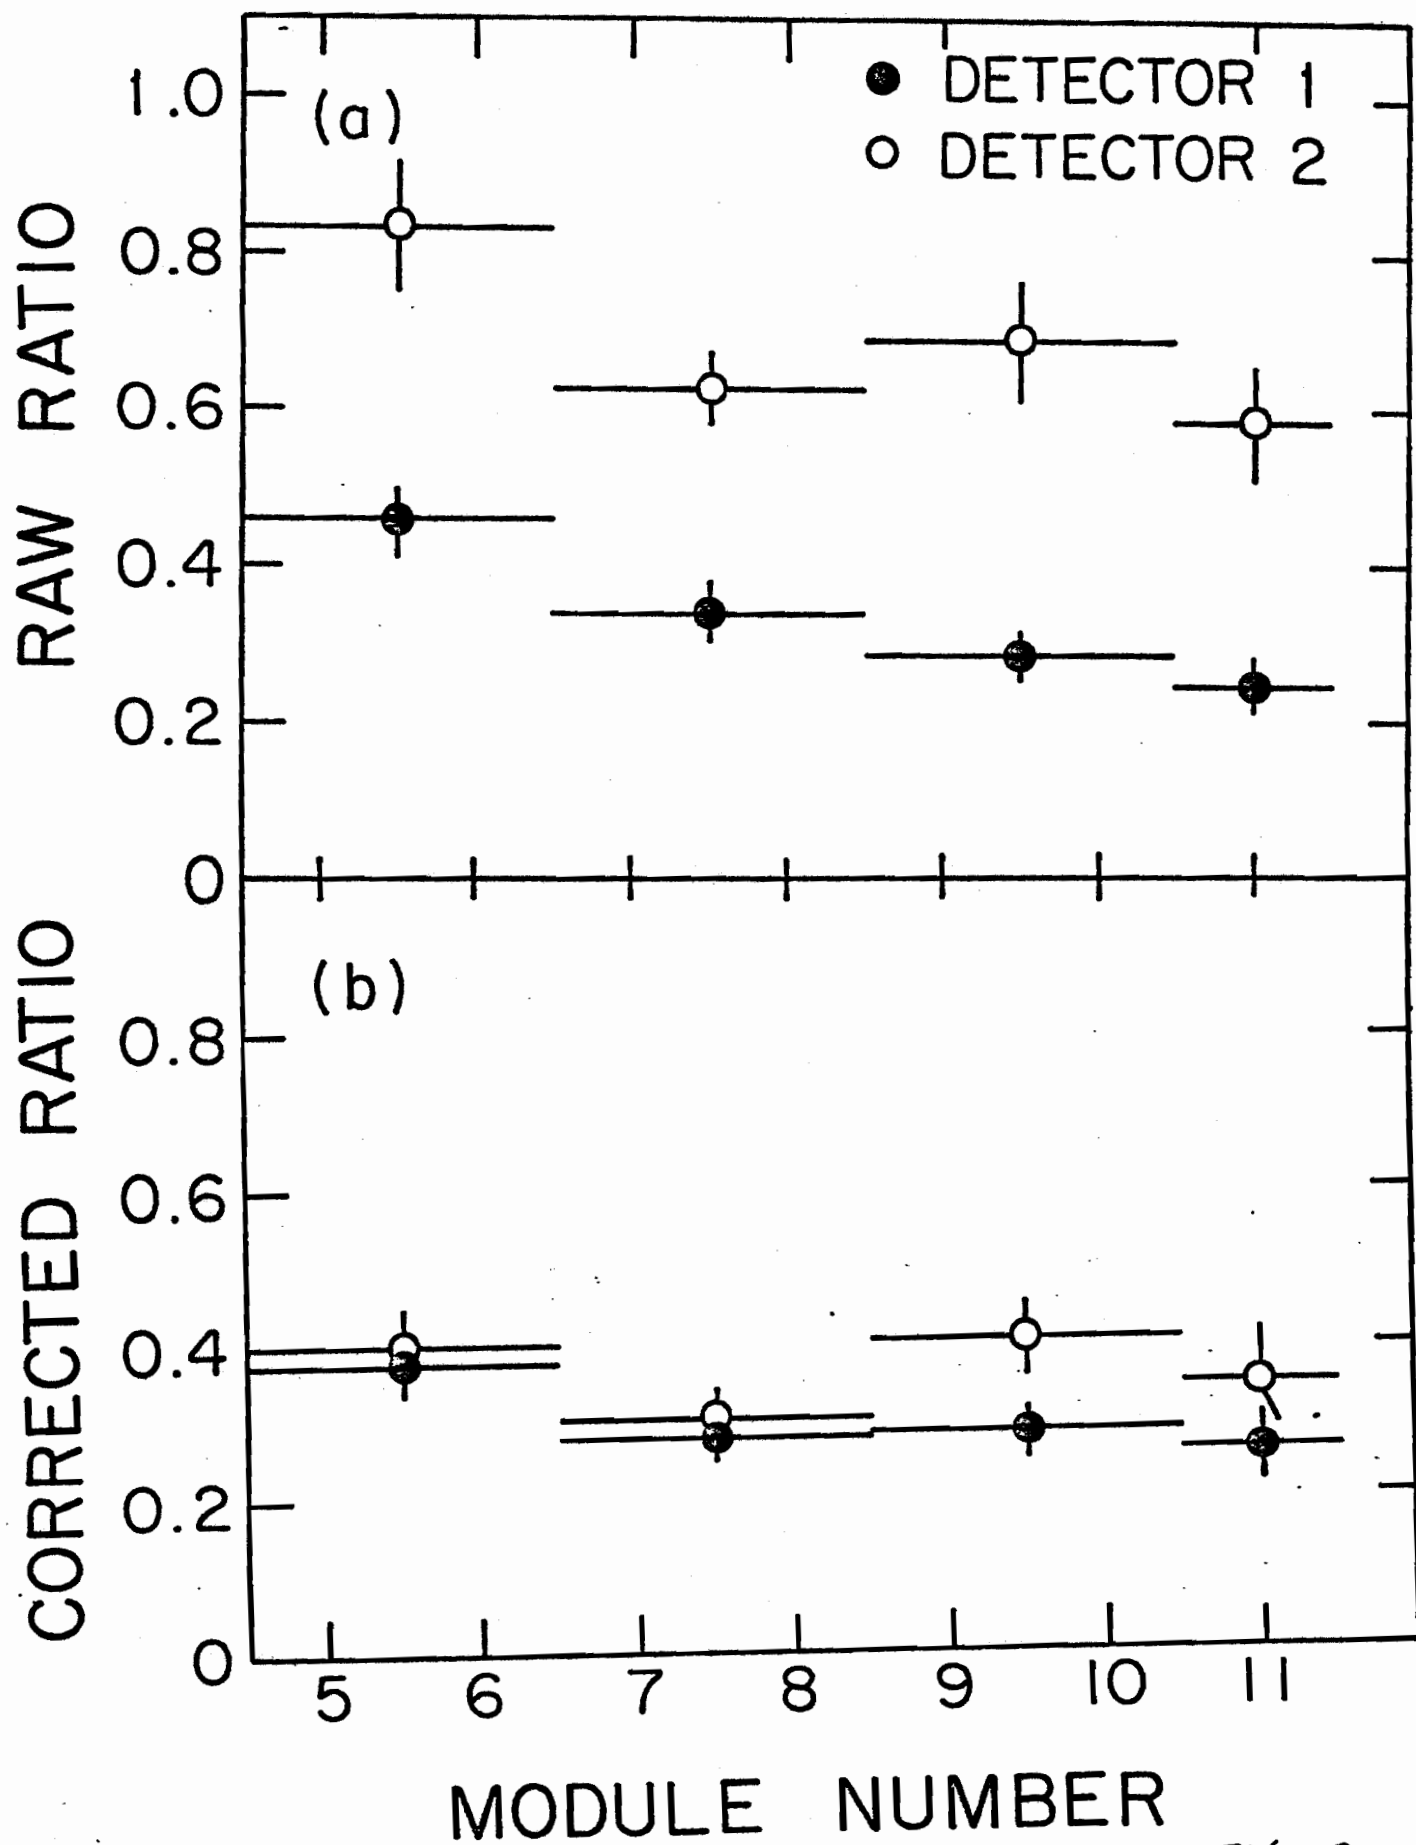


FIG. 2