

Fermi National Accelerator Laboratory

FERMILAB-Pub-98/319-E

CDF

**Measurement of the Top Quark Mass
with the Collider Detector at Fermilab**

F. Abe et al.

The CDF Collaboration

*Fermi National Accelerator Laboratory
P.O. Box 500, Batavia, Illinois 60510*

November 1998

Submitted to *Physical Review Letters*

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Distribution

Approved for public release; further dissemination unlimited.

Copyright Notification

This manuscript has been authored by Universities Research Association, Inc. under contract No. DE-AC02-76CHO3000 with the U.S. Department of Energy. The United States Government and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government Purposes.

October 12, 1998

Measurement of the Top Quark Mass with the Collider Detector at Fermilab

F. Abe,¹⁷ H. Akimoto,³⁹ A. Akopian,³¹ M. G. Albrow,⁷ A. Amadon,⁵ S. R. Amendolia,²⁷
D. Amidei,²⁰ J. Antos,³³ S. Aota,³⁷ G. Apollinari,³¹ T. Arisawa,³⁹ T. Asakawa,³⁷
W. Ashmanskas,¹⁸ M. Atac,⁷ P. Azzi-Bacchetta,²⁵ N. Bacchetta,²⁵ S. Bagdasarov,³¹
M. W. Bailey,²² P. de Barbaro,³⁰ A. Barbaro-Galtieri,¹⁸ V. E. Barnes,²⁹ B. A. Barnett,¹⁵
M. Barone,⁹ G. Bauer,¹⁹ T. Baumann,¹¹ F. Bedeschi,²⁷ S. Behrends,³ S. Belforte,²⁷
G. Bellettini,²⁷ J. Bellinger,⁴⁰ D. Benjamin,³⁵ J. Bensinger,³ A. Beretvas,⁷ J. P. Berge,⁷
J. Berryhill,⁵ S. Bertolucci,⁹ S. Bettelli,²⁷ B. Bevensee,²⁶ A. Bhatti,³¹ K. Biery,⁷
C. Bigongiari,²⁷ M. Binkley,⁷ D. Bisello,²⁵ R. E. Blair,¹ C. Blocker,³ K. Bloom,²⁰
S. Blusk,³⁰ A. Bodek,³⁰ W. Bokhari,²⁶ G. Bolla,²⁹ Y. Bonushkin,⁴ D. Bortoletto,²⁹ J.
Boudreau,²⁸ L. Breccia,² C. Bromberg,²¹ N. Bruner,²² R. Brunetti,² E. Buckley-Geer,⁷
H. S. Budd,³⁰ K. Burkett,¹¹ G. Busetto,²⁵ A. Byon-Wagner,⁷ K. L. Byrum,¹
M. Campbell,²⁰ A. Caner,²⁷ W. Carithers,¹⁸ D. Carlsmith,⁴⁰ J. Cassada,³⁰ A. Castro,²⁵
D. Cauz,³⁶ A. Cerri,²⁷ P. S. Chang,³³ P. T. Chang,³³ H. Y. Chao,³³ J. Chapman,²⁰
M. -T. Cheng,³³ M. Chertok,³⁴ G. Chiarelli,²⁷ C. N. Chiou,³³ F. Chlebana,⁷
L. Christofek,¹³ R. Cropp,¹⁴ M. L. Chu,³³ S. Cihangir,⁷ A. G. Clark,¹⁰ M. Cobal,²⁷
E. Cocca,²⁷ M. Contreras,⁵ J. Conway,³² J. Cooper,⁷ M. Cordelli,⁹ D. Costanzo,²⁷
C. Couyoumtzelis,¹⁰ D. Cronin-Hennessy,⁶ R. Culbertson,⁵ D. Dagenhart,³⁸ T. Daniels,¹⁹
F. DeJongh,⁷ S. Dell'Agnello,⁹ M. Dell'Orso,²⁷ R. Demina,⁷ L. Demortier,³¹ M. Deninno,²
P. F. Derwent,⁷ T. Devlin,³² J. R. Dittmann,⁶ S. Donati,²⁷ J. Done,³⁴ T. Dorigo,²⁵
N. Eddy,¹³ K. Einsweiler,¹⁸ J. E. Elias,⁷ R. Ely,¹⁸ E. Engels, Jr.,²⁸ W. Erdmann,⁷
D. Errede,¹³ S. Errede,¹³ Q. Fan,³⁰ R. G. Feild,⁴¹ Z. Feng,¹⁵ C. Ferretti,²⁷ I. Fiori,²

B. Flaughner,⁷ G. W. Foster,⁷ M. Franklin,¹¹ J. Freeman,⁷ J. Friedman,¹⁹ H. Frisch,⁵
 Y. Fukui,¹⁷ S. Gadomski,¹⁴ S. Galeotti,²⁷ M. Gallinaro,²⁶ O. Ganel,³⁵ M. Garcia-Sciveres,¹⁸
 A. F. Garfinkel,²⁹ C. Gay,⁴¹ S. Geer,⁷ D. W. Gerdes,²⁰ P. Giannetti,²⁷ N. Giokaris,³¹
 P. Giromini,⁹ G. Giusti,²⁷ M. Gold,²² A. Gordon,¹¹ A. T. Goshaw,⁶ Y. Gotra,²⁸
 K. Goulianos,³¹ H. Grassmann,³⁶ L. Groer,³² C. Grosso-Pilcher,⁵ G. Guillian,²⁰
 J. Guimaraes da Costa,¹⁵ R. S. Guo,³³ C. Haber,¹⁸ E. Hafen,¹⁹ S. R. Hahn,⁷ R. Hamilton,¹¹
 T. Handa,¹² R. Handler,⁴⁰ W. Hao,³⁵ F. Happacher,⁹ K. Hara,³⁷ A. D. Hardman,²⁹
 R. M. Harris,⁷ F. Hartmann,¹⁶ J. Hauser,⁴ E. Hayashi,³⁷ J. Heinrich,²⁶ A. Heiss,¹⁶
 B. Hinrichsen,¹⁴ K. D. Hoffman,²⁹ M. Hohlmann,⁵ C. Holck,²⁶ R. Hollebeek,²⁶
 L. Holloway,¹³ Z. Huang,²⁰ B. T. Huffman,²⁸ R. Hughes,²³ J. Huston,²¹ J. Huth,¹¹
 H. Ikeda,³⁷ M. Incagli,²⁷ J. Incandela,⁷ G. Introzzi,²⁷ J. Iwai,³⁹ Y. Iwata,¹² E. James,²⁰
 H. Jensen,⁷ U. Joshi,⁷ E. Kajfasz,²⁵ H. Kambara,¹⁰ T. Kamon,³⁴ T. Kaneko,³⁷ K. Karr,³⁸
 H. Kasha,⁴¹ Y. Kato,²⁴ T. A. Keaffaber,²⁹ K. Kelley,¹⁹ R. D. Kennedy,⁷ R. Kephart,⁷
 D. Kestenbaum,¹¹ D. Khazins,⁶ T. Kikuchi,³⁷ B. J. Kim,²⁷ H. S. Kim,¹⁴ S. H. Kim,³⁷
 Y. K. Kim,¹⁸ L. Kirsch,³ S. Klimenko,⁸ D. Knoblauch,¹⁶ P. Koehn,²³ A. Königeter,¹⁶
 K. Kondo,³⁷ J. Konigsberg,⁸ K. Kordas,¹⁴ A. Korytov,⁸ E. Kovacs,¹ W. Kowald,⁶
 J. Kroll,²⁶ M. Kruse,³⁰ S. E. Kuhlmann,¹ E. Kuns,³² K. Kurino,¹² T. Kuwabara,³⁷
 A. T. Laasanen,²⁹ S. Lami,²⁷ S. Lammel,⁷ J. I. Lamoureux,³ M. Lancaster,¹⁸ M. Lanzoni,²⁷
 G. Latino,²⁷ T. LeCompte,¹ S. Leone,²⁷ J. D. Lewis,⁷ M. Lindgren,⁴ T. M. Liss,¹³
 J. B. Liu,³⁰ Y. C. Liu,³³ N. Lockyer,²⁶ O. Long,²⁶ M. Loreti,²⁵ D. Lucchesi,²⁷ P. Lukens,⁷
 S. Lusin,⁴⁰ J. Lys,¹⁸ K. Maeshima,⁷ P. Maksimovic,¹¹ M. Mangano,²⁷ M. Mariotti,²⁵
 J. P. Marriner,⁷ G. Martignon,²⁵ A. Martin,⁴¹ J. A. J. Matthews,²² P. Mazzanti,²
 K. McFarland,³⁰ P. McIntyre,³⁴ P. Melese,³¹ M. Menguzzato,²⁵ A. Menzione,²⁷ E. Meschi,²⁷
 S. Metzler,²⁶ C. Miao,²⁰ T. Miao,⁷ G. Michail,¹¹ R. Miller,²¹ H. Minato,³⁷ S. Miscetti,⁹
 M. Mishina,¹⁷ S. Miyashita,³⁷ N. Moggi,²⁷ E. Moore,²² Y. Morita,¹⁷ A. Mukherjee,⁷
 T. Muller,¹⁶ P. Murat,²⁷ S. Murgia,²¹ M. Musy,³⁶ H. Nakada,³⁷ T. Nakaya,⁵ I. Nakano,¹²
 C. Nelson,⁷ D. Neuberger,¹⁶ C. Newman-Holmes,⁷ C.-Y. P. Ngan,¹⁹ L. Nodulman,¹
 A. Nomerotski,⁸ S. H. Oh,⁶ T. Ohmoto,¹² T. Ohsugi,¹² R. Oishi,³⁷ M. Okabe,³⁷

T. Okusawa,²⁴ J. Olsen,⁴⁰ C. Pagliarone,²⁷ R. Paoletti,²⁷ V. Papadimitriou,³⁵
 S. P. Pappas,⁴¹ N. Parashar,²⁷ A. Parri,⁹ J. Patrick,⁷ G. Pauletta,³⁶ M. Paulini,¹⁸
 A. Perazzo,²⁷ L. Pescara,²⁵ M. D. Peters,¹⁸ T. J. Phillips,⁶ G. Piacentino,²⁷ M. Pillai,³⁰
 K. T. Pitts,⁷ R. Plunkett,⁷ A. Pompos,²⁹ L. Pondrom,⁴⁰ J. Proudfoot,¹ F. Ptohos,¹¹
 G. Punzi,²⁷ K. Ragan,¹⁴ D. Reher,¹⁸ M. Reischl,¹⁶ A. Ribon,²⁵ F. Rimondi,² L. Ristori,²⁷
 W. J. Robertson,⁶ A. Robinson,¹⁴ T. Rodrigo,²⁷ S. Rolli,³⁸ L. Rosenson,¹⁹ R. Roser,¹³
 T. Saab,¹⁴ W. K. Sakumoto,³⁰ D. Saltzberg,⁴ A. Sansoni,⁹ L. Santi,³⁶ H. Sato,³⁷
 P. Schlabach,⁷ E. E. Schmidt,⁷ M. P. Schmidt,⁴¹ A. Scott,⁴ A. Scribano,²⁷ S. Segler,⁷
 S. Seidel,²² Y. Seiya,³⁷ F. Semeria,² T. Shah,¹⁹ M. D. Shapiro,¹⁸ N. M. Shaw,²⁹
 P. F. Shepard,²⁸ T. Shibayama,³⁷ M. Shimojima,³⁷ M. Shochet,⁵ J. Siegrist,¹⁸ A. Sill,³⁵
 P. Sinervo,¹⁴ P. Singh,¹³ K. Sliwa,³⁸ C. Smith,¹⁵ F. D. Snider,¹⁵ J. Spalding,⁷ T. Speer,¹⁰
 P. Sphicas,¹⁹ F. Spinella,²⁷ M. Spiropulu,¹¹ L. Spiegel,⁷ L. Stanco,²⁵ J. Steele,⁴⁰
 A. Stefanini,²⁷ R. Ströhmer,^{7a} J. Strogas,¹³ F. Strumia,¹⁰ D. Stuart,⁷ K. Sumorok,¹⁹
 J. Suzuki,³⁷ T. Suzuki,³⁷ T. Takahashi,²⁴ T. Takano,²⁴ R. Takashima,¹² K. Takikawa,³⁷
 M. Tanaka,³⁷ B. Tannenbaum,⁴ F. Tartarelli,²⁷ W. Taylor,¹⁴ M. Tecchio,²⁰ P. K. Teng,³³
 Y. Teramoto,²⁴ K. Terashi,³⁷ S. Tether,¹⁹ D. Theriot,⁷ T. L. Thomas,²²
 R. Thurman-Keup,¹ M. Timko,³⁸ P. Tipton,³⁰ A. Titov,³¹ S. Tkaczyk,⁷ D. Toback,⁵
 K. Tollefson,³⁰ A. Tollestrup,⁷ H. Toyoda,²⁴ W. Trischuk,¹⁴ J. F. de Troconiz,¹¹ S. Truitt,²⁰
 J. Tseng,¹⁹ N. Turini,²⁷ T. Uchida,³⁷ F. Ukegawa,²⁶ J. Valls,³² S. C. van den Brink,¹⁵
 S. Vejcik, III,²⁰ G. Velez,²⁷ I. Volobouev,¹⁸ R. Vidal,⁷ R. Vilar,^{7a} D. Vucinic,¹⁹
 R. G. Wagner,¹ R. L. Wagner,⁷ J. Wahl,⁵ N. B. Wallace,²⁷ A. M. Walsh,³² C. Wang,⁶
 C. H. Wang,³³ M. J. Wang,³³ A. Warburton,¹⁴ T. Watanabe,³⁷ T. Watts,³² R. Webb,³⁴
 C. Wei,⁶ H. Wenzel,¹⁶ W. C. Wester, III,⁷ A. B. Wicklund,¹ E. Wicklund,⁷ R. Wilkinson,²⁶
 H. H. Williams,²⁶ P. Wilson,⁷ B. L. Winer,²³ D. Winn,²⁰ D. Wolinski,²⁰ J. Wolinski,²¹
 S. Worm,²² X. Wu,¹⁰ J. Wyss,²⁷ A. Yagil,⁷ W. Yao,¹⁸ K. Yasuoka,³⁷ G. P. Yeh,⁷ P. Yeh,³³
 J. Yoh,⁷ C. Yosef,²¹ T. Yoshida,²⁴ I. Yu,⁷ A. Zanetti,³⁶ F. Zetti,²⁷ and S. Zucchelli²

(CDF Collaboration)

- ¹ *Argonne National Laboratory, Argonne, Illinois 60439*
- ² *Istituto Nazionale di Fisica Nucleare, University of Bologna, I-40127 Bologna, Italy*
- ³ *Brandeis University, Waltham, Massachusetts 02254*
- ⁴ *University of California at Los Angeles, Los Angeles, California 90024*
- ⁵ *University of Chicago, Chicago, Illinois 60637*
- ⁶ *Duke University, Durham, North Carolina 27708*
- ⁷ *Fermi National Accelerator Laboratory, Batavia, Illinois 60510*
- ⁸ *University of Florida, Gainesville, Florida 32611*
- ⁹ *Laboratori Nazionali di Frascati, Istituto Nazionale di Fisica Nucleare, I-00044 Frascati, Italy*
- ¹⁰ *University of Geneva, CH-1211 Geneva 4, Switzerland*
- ¹¹ *Harvard University, Cambridge, Massachusetts 02138*
- ¹² *Hiroshima University, Higashi-Hiroshima 724, Japan*
- ¹³ *University of Illinois, Urbana, Illinois 61801*
- ¹⁴ *Institute of Particle Physics, McGill University, Montreal H3A 2T8, and University of Toronto,
Toronto M5S 1A7, Canada*
- ¹⁵ *The Johns Hopkins University, Baltimore, Maryland 21218*
- ¹⁶ *Institut für Experimentelle Kernphysik, Universität Karlsruhe, 76128 Karlsruhe, Germany*
- ¹⁷ *National Laboratory for High Energy Physics (KEK), Tsukuba, Ibaraki 305, Japan*
- ¹⁸ *Ernest Orlando Lawrence Berkeley National Laboratory, Berkeley, California 94720*
- ¹⁹ *Massachusetts Institute of Technology, Cambridge, Massachusetts 02139*
- ²⁰ *University of Michigan, Ann Arbor, Michigan 48109*
- ²¹ *Michigan State University, East Lansing, Michigan 48824*
- ²² *University of New Mexico, Albuquerque, New Mexico 87131*
- ²³ *The Ohio State University, Columbus, Ohio 43210*
- ²⁴ *Osaka City University, Osaka 588, Japan*
- ²⁵ *Università di Padova, Istituto Nazionale di Fisica Nucleare, Sezione di Padova, I-35131 Padova, Italy*
- ²⁶ *University of Pennsylvania, Philadelphia, Pennsylvania 19104*
- ²⁷ *Istituto Nazionale di Fisica Nucleare, University and Scuola Normale Superiore of Pisa, I-56100 Pisa, Italy*

- ²⁸ *University of Pittsburgh, Pittsburgh, Pennsylvania 15260*
- ²⁹ *Purdue University, West Lafayette, Indiana 47907*
- ³⁰ *University of Rochester, Rochester, New York 14627*
- ³¹ *Rockefeller University, New York, New York 10021*
- ³² *Rutgers University, Piscataway, New Jersey 08855*
- ³³ *Academia Sinica, Taipei, Taiwan 11530, Republic of China*
- ³⁴ *Texas A&M University, College Station, Texas 77843*
- ³⁵ *Texas Tech University, Lubbock, Texas 79409*
- ³⁶ *Istituto Nazionale di Fisica Nucleare, University of Trieste/ Udine, Italy*
- ³⁷ *University of Tsukuba, Tsukuba, Ibaraki 315, Japan*
- ³⁸ *Tufts University, Medford, Massachusetts 02155*
- ³⁹ *Waseda University, Tokyo 169, Japan*
- ⁴⁰ *University of Wisconsin, Madison, Wisconsin 53706*
- ⁴¹ *Yale University, New Haven, Connecticut 06520*

(October 12, 1998)

Abstract

We present a new measurement of the top quark mass in $t\bar{t}$ events in which both W bosons from top quarks decay into leptons ($e\nu, \mu\nu$). We use events collected by the CDF experiment from $p\bar{p}$ collisions at $\sqrt{s}=1.8$ TeV at the Tevatron collider. We measure a top quark mass of $167.4 \pm 10.3(\text{stat}) \pm 4.8(\text{syst}) \text{ GeV}/c^2$ from a sample of eight events. We combine this result with previous CDF measurements in other decay channels to obtain a mass value of $176.0 \pm 6.5 \text{ GeV}/c^2$.

PACS numbers: 14.65.Ha, 13.85.Qk, 13.85.Ni

Typeset using REVTeX

A precise measurement of the top quark mass is an important ingredient in testing the consistency of the standard model with experimental data. In addition, precise W and top mass measurements can provide information on the mass of the Higgs boson, which is a remnant of the mechanism that gives rise to spontaneous electroweak symmetry breaking. Using 109 pb^{-1} of data accumulated by the CDF experiment at the Fermilab Tevatron from 1992 through 1995, we report an improved measurement of the top quark mass using dilepton events originating predominantly from $t\bar{t} \rightarrow W^+bW^-\bar{b} \rightarrow (\ell^+\nu b)(\ell^-\bar{\nu}\bar{b})$, where $\ell = e$ or μ . This measurement supersedes our previously reported result in the dilepton channel [1]. The previous result was obtained by comparing data with Monte Carlo simulation of $t\bar{t}$ events for two kinematic variables, the b -jet energies and the invariant masses of the lepton and b -jet systems. Here we make use of all available information in the event and obtain a more precise measurement. We combine the result from the dilepton channel with those from the lepton plus jets channel ($t\bar{t} \rightarrow W^+bW^-\bar{b} \rightarrow (\ell^+\nu b)(q\bar{q}'\bar{b})$) [2] and the all-hadronic channel ($t\bar{t} \rightarrow (q\bar{q}'b)(\bar{q}q'\bar{b})$) [3] to obtain an overall top quark mass value from the CDF data.

The CDF detector consists of a magnetic spectrometer surrounded by calorimeters and muon chambers [4]. A four-layer silicon vertex detector (SVX) [5], located immediately outside the beampipe, is surrounded by the central tracking chamber (CTC) which is inside a 1.4 T superconducting solenoid. This tracking system is used to measure the momenta of charged particles. Electromagnetic and hadronic calorimeters, located outside the CTC, are segmented in projective towers and cover the pseudorapidity region $|\eta| < 4.2$ [6]. They are used to identify electron and photon candidates and jets, and are used to measure the missing transverse energy (\cancel{E}_T) which can indicate the presence of energetic neutrinos. Outside the calorimeters, drift chambers in the region $|\eta| < 1.0$ provide for muon identification. A three-level trigger selects events that contain a high P_T electron or muon for this analysis.

We apply the same event selection criteria and use identical background calculations as those employed in the previous mass analyses of the dilepton channel [1]. We require two high transverse momentum ($P_T > 20 \text{ GeV}/c$) oppositely charged leptons (e or μ) in the central detector region ($|\eta| < 1$), with at least one of them well isolated from nearby tracks

and calorimeter activity. To reject $Z \rightarrow \ell^+ \ell^- X$ events we require that the dilepton invariant mass, M_{ee} or $M_{\mu\mu}$, be outside the interval 75-105 GeV/ c^2 , and remove events containing an isolated photon with $E_T > 10$ GeV if they are consistent with radiative Z decays. We require at least two jets in the region $|\eta| < 2.0$, each with observed $E_T > 10$ GeV in a cone radius $\Delta R = \sqrt{\Delta\eta^2 + \Delta\phi^2} = 0.4$, and require $|\cancel{E}_T| > 25$ GeV as a signature for missing neutrinos. To reject events in which \cancel{E}_T is due to lepton or jet energy mismeasurements we require $|\cancel{E}_T| > 50$ GeV if \cancel{E}_T is close to a lepton or a jet ($\Delta\phi(\cancel{E}_T, \ell \text{ or } j) < 20^\circ$). Finally, we require $H_T > 170$ GeV, where H_T is the scalar sum of the $|P_T|$ of the two leptons (E_T for electrons), the E_T of the two highest E_T jets and $|\cancel{E}_T|$. We obtain a sample of eight candidate events. The expected background of 1.3 ± 0.3 events consists of events in which a track or a jet is misidentified as a lepton (0.29 events), Drell-Yan production (0.35 events), WW production (0.24 events), $Z \rightarrow \tau\tau$ decays (0.26 events) and $Z \rightarrow \mu\mu$ decays in which μ tracks are mismeasured (0.20 events).

To extract a top mass measurement from these events the jet energies are corrected for losses in cracks between detector components, absolute energy scale, contributions from the underlying event and multiple interactions, and losses outside the clustering cone. These corrections are determined from a combination of Monte Carlo simulation and data [2]. An additional energy correction is applied to jets containing a muon to take into account the low calorimeter response to muons (we add the E_T of the muon to the energy) and missing neutrinos from semileptonic decays of heavy quarks in the jets. We obtain a corrected \cancel{E}_T by correcting each of its components, *i.e.*, the jets, the leptons and the energy which has not been clustered into jets.

The procedure used here has two steps: we reconstruct each event to obtain a top mass estimate for the event, then we apply a likelihood method to obtain an overall mass value in the presence of background. Each candidate event is reconstructed according to the $t\bar{t}$ decay hypothesis in the dilepton channel:

$$t \rightarrow W^+ b \rightarrow \ell_1^+ \nu_1 b$$

$$\bar{t} \rightarrow W^- \bar{b} \rightarrow \ell_2^- \bar{\nu}_2 \bar{b}$$

The two highest E_T jets in the event are assumed to be the b -jets from top decays. We assume the b -jet mass to be $5 \text{ GeV}/c^2$. After applying the invariant mass constraints $m(\ell_1 \nu_1) = m(\ell_2 \bar{\nu}_2) = m_W$ and $m(\ell_1 \nu_1 b) = m(\ell_2 \bar{\nu}_2 \bar{b})$, the system remains underconstrained due to the two unmeasured neutrinos. Therefore, for any assumed top mass value m_t , we use a weighting technique to determine a function, $f(m_t)$, from which we extract a top mass value [7]. We proceed as follows. We assume a top quark mass (m_t) and the two neutrino η values (η_1, η_2 , see below) and solve for the neutrino momenta, up to a four-fold ambiguity (two $P_z(\nu)$ choices for each ν) for each of the two jet charged-lepton pairings. We then assign a weight to each solution by comparing \cancel{E}_T^P , the sum of the neutrino transverse momenta for that solution, to \cancel{E}_T^m , the measured missing transverse energy after proper correction:

$$g(m_t, \eta_1, \eta_2) = \exp\left(-\frac{(\cancel{E}_T^P - \cancel{E}_T^m)^2}{2\sigma^2}\right)$$

where σ is the \cancel{E}_T resolution for that event (see below).

For each choice of m_t , η_1 , and η_2 we take into account the detector resolution for jets and leptons by sampling (*i.e.* fluctuating) the measured quantities many times according to their resolutions. The Gaussian resolutions for electrons and muons are $\sigma_E/E = \sqrt{(0.135)^2/E_T + (0.02)^2}$ and $\sigma(1/P_T) = 0.11\%$, where E_T , in GeV, is the electron energy measured in the calorimeter and P_T is the beam-constrained muon momentum measured in the CTC. For jets we use an E_T dependent Gaussian resolution appropriate for b -partons derived from the HERWIG $t\bar{t}$ Monte Carlo, in conjunction with detector simulation, assuming a top mass of $170 \text{ GeV}/c^2$ [9]. The \cancel{E}_T is recomputed for each sampling using the new jet and lepton energies. This procedure takes into account all the uncertainties in the \cancel{E}_T measurement except for the resolution of the unclustered energy measurement, which is estimated to be 4 GeV for both transverse components for low luminosity events. Hence we use $\sigma = 4\sqrt{n} \text{ GeV}$ in the above expression for $g(m_t, \eta_1, \eta_2)$, where n is the number of interactions in the event. This value has been obtained from minimum bias events and for

each event is properly scaled to take into account the effect of multiple interactions at high luminosity.

For each assumed top mass value we use several (100) values of the two neutrino η_1 and η_2 , chosen from distributions obtained from the HERWIG Monte Carlo predictions [8]. They are consistent with independent Gaussian distributions with $\sigma = 1.0$ unit of η . The weight is summed for all samplings as well as over all η_1, η_2 values and all the eight possible combinations; thus for each event at each top mass, m_t , we evaluate an overall weight:

$$f(m_t) = \sum_{\eta_1, \eta_2, E_{T_i}, \ell_1, \ell_2} g(m_t, \eta_1, \eta_2)$$

where E_{T_i} refers to all the jets in the event. We then compute the weight as a function of the top mass in 2.5 GeV/ c^2 steps in the range 90-290 GeV/ c^2 .

The $f(m_t)$ distribution for each of the eight candidate events, normalized to unity, is shown in Figure 1. For each event, i , we use this distribution to determine a top mass estimate, m_i , by averaging the values of m_t corresponding to values of $f(m_t)$ closest to and greater than $f(m_t)_{max}/2$ on either side of the maximum. The m_i distribution for the eight events is shown in Figure 2, together with the Monte Carlo expectation for background alone, and top plus background normalized to the data.

Given the m_i distribution for a sample of N events, we use a maximum likelihood method similar to that employed in the lepton plus jets mass analysis [9] to extract a top mass value. We write the likelihood as:

$$\mathcal{L} = G(n_b; \bar{n}_b, \sigma_b) \cdot P(N; n_s + n_b) \cdot \prod_i \frac{n_s T(m_i, m_t) + n_b B(m_i)}{n_s + n_b}$$

where $T(m_i, m_t)$ and $B(m_i)$ are the probability density functions (templates) for reconstructing a mass m_i from $t\bar{t}$ events with a true top mass m_t and from background events, respectively; n_s and n_b are the numbers of $t\bar{t}$ and background events; $G(n_b; \bar{n}_b, \sigma_b)$ is a Gaussian in n_b with mean \bar{n}_b (1.3 events) and width σ_b (0.3 events) and $P(N; n_s + n_b)$ is a Poisson distribution in N with mean $n_s + n_b$. The top templates, $T(m_i, m_t)$, are obtained by performing the dilepton mass reconstruction algorithm on HERWIG $t\bar{t}$ Monte Carlo samples,

and parameterizing the resulting reconstructed mass distributions as smooth functions of both m_i and m_t [2]. The background templates, $B(m_i)$, are derived from data and Monte Carlo [1]. The likelihood fit gives the top mass measurement and a statistical error taken from the change in the $-\log(\mathcal{L})$ of 0.5 units from its minimum value.

To check the likelihood fitting technique, we use Monte Carlo events to perform many pseudo-experiments for several input top mass values. At each top mass value each experiment consists of a total of eight top and background events, with the number of background events drawn from a binomial distribution with a mean of 1.3 ± 0.3 events. The mass estimate for each event is drawn from the appropriate parameterized template. For each experiment we obtain a mass, m_{exp} , and a statistical error, σ_{exp} . We study the distributions of the pulls, $(m_{exp} - m_t)/\sigma_{exp}$, and find that the medians are consistent with zero and the widths are at most 1.1. We take this width into account by multiplying the error returned by the fit by a factor 1.1. This factor is included in all statistical errors on the dilepton measurements given below.

We apply the likelihood method to the data shown in Figure 2. The inset shows the negative log-likelihood as a function of the top mass, from which we determine a top quark mass value of 167.4 ± 10.3 (stat) GeV/c^2 . Monte Carlo studies performed with pseudo-experiments yield an 8% probability for one such experiment to have a statistical error $\leq 10.3 \text{ GeV}/c^2$ at a mass of $167 \text{ GeV}/c^2$. In comparison, the previous result was 161 ± 17 (stat) GeV/c^2 [1].

The mass reconstruction procedure used here is quite different from that used for the lepton plus jets sample [2]. In that case there is only one missing neutrino, and a kinematic fit with two constraints can be performed. We cross-check the present procedure by applying it to the five events of the lepton plus four jets mass sample in which two jets are tagged as b -jets by the SVX [2]. We assume that the two untagged jets are the products of the hadronic W decay and mimic the dilepton decay by treating the highest E_T untagged jet as a lepton and the second untagged jet as a neutrino. The present likelihood method then gives a top quark mass from the five events of $181.5 \pm 12.6 \text{ GeV}/c^2$, which differs by 11 GeV/c^2 from

that obtained with the lepton plus jets kinematic fit procedures, $170.1 \pm 9.3 \text{ GeV}/c^2$ [2]. In comparison, Monte Carlo studies show that the difference in mass obtained with the two methods is expected to be centered at zero with a resolution of $14 \text{ GeV}/c^2$.

The systematic errors on the mass measurement are estimated with the same general procedure as in the lepton plus jets mass analysis [2]: we generate new top mass distributions by varying the appropriate quantities in the Monte Carlo simulation and then performing likelihood fits to many experiments of eight events each using the standard templates. The mass shifts obtained determine the systematic errors, which are summarized in Table I. The largest contribution comes from the systematic uncertainties on the jet energy. The second largest source, the uncertainty in modeling initial or final state radiation in $t\bar{t}$ events, is estimated using events generated with the PYTHIA Monte Carlo program [10] to isolate the effects on the top mass due to initial and final state radiation jets. The error due to background shape is estimated by refitting the data with three different backgrounds: W^+W^- , fake leptons, and the sum of the two with the appropriate weights. That due to the choice of parton distribution functions ($0.6 \text{ GeV}/c^2$) is estimated by using an alternative set of functions in the HERWIG Monte Carlo. The effect due to the choice of Monte Carlo generator ($0.6 \text{ GeV}/c^2$) is estimated by comparing the mass value obtained with events from the HERWIG and PYTHIA Monte Carlo samples. The total systematic error amounts to $4.8 \text{ GeV}/c^2$.

Table I includes the systematic errors for the other two decay channels. The systematic error due to hard gluon radiation uncertainty in the lepton plus jets [2] and the all-hadronic [3] channels are now evaluated in the same way as described above. For the all-hadronic case the old value of $8.0 \text{ GeV}/c^2$ was an overly conservative estimate. Also, the “fit procedure” systematic in the all-hadronic channel ($5.0 \text{ GeV}/c^2$) has been removed as being overly conservative. The overall systematic error for the lepton plus jets channel has increased from 4.9 to $5.3 \text{ GeV}/c^2$, and that for the all-hadronic channel is reduced from 12.0 to $5.7 \text{ GeV}/c^2$. The new top mass measurement for the dilepton channel and those for the other two channels with revised systematic errors are shown in Table II.

The results for the three channels are combined with standard methods [11] to yield an overall CDF mass measurement. The three statistical errors are taken as uncorrelated, while the systematic errors are assumed to be either entirely correlated or uncorrelated between any two channels. The primary systematic error, that due to jet energy uncertainty, is taken as entirely correlated among all channels, as is the systematic error due to the Monte Carlo model used (gluon radiation and simulation entries in Table I). The combined result is

$$m_t = 176.0 \pm 6.5 \text{ GeV}/c^2$$

including both statistical and systematic errors. In Table II we show the combined value with separate statistical and systematic errors. They are obtained by defining the combined statistical error as the sum in quadrature of the weighted individual statistical errors, and the systematic error as the difference in quadrature of the total and statistical errors. The relative contributions from the three channels are 67% for lepton plus jets, 18% for dileptons and 15% for all-hadronic.

We thank the Fermilab staff and the technical staffs of the participating institutions for their contributions. This work was supported by the U.S. Department of Energy and National Science Foundation, the Italian Istituto Nazionale di Fisica Nucleare, the Ministry of Science, Culture, and Education of Japan, the Natural Sciences and Engineering Research Council of Canada, the National Science Council of the Republic of China, and the A. P. Sloan Foundation.

REFERENCES

- [1] F. Abe *et al.*, Phys. Rev. Lett. **80**, 2779 (1998).
- [2] F. Abe, *et al.*, Phys. Rev. Lett. **80**, 2767 (1998).
- [3] F. Abe, *et al.*, Phys. Rev. Lett. **79**, 1992 (1997).
- [4] F. Abe *et al.*, Nucl. Instrum. Methods, A **271**, 387 (1988).
- [5] D. Amidei *et al.*, Nucl. Instrum. Methods, A **350**, 73 (1994). P. Azzi *et al.*, Nucl. Instrum. Methods, A **360**, 137 (1995).
- [6] In the CDF coordinate system, θ and ϕ are the polar and azimuthal angles, respectively, with respect to the proton beam direction which defines the z axis. The pseudorapidity η is defined as $-\ln(\tan \frac{\theta}{2})$. The transverse momentum of a particle with momentum P is $P_T = P \sin \theta$. The analogous quantity using energy, defined as $E_T = E \sin \theta$, is called transverse energy. The missing transverse energy \cancel{E}_T is defined as $-\sum E_T^i \hat{r}_i$, where \hat{r}_i is a unit vector in the transverse plane pointing to the center of calorimeter tower i and E_T^i is the transverse energy deposited in that tower. Only towers with $|\eta| < 3.6$ are included.
- [7] K. Kondo, J. Phys. Soc. Jpn. **57**, 4126 (1988) and *ibid.* **60**, 836 (1991). R.H. Dalitz and G.R. Goldstein, Phys. Rev. D **45**, 1531 (1992). B. Abbott *et al.*, Phys. Rev. Lett. **80**, 2063 (1998).
- [8] G. Marchesini and B. Webber, Nucl. Phys. **B310**, 461 (1988). HERWIG version 5.6 was used in this analysis.
- [9] F. Abe, *et al.*, Phys. Rev. D **50**, 2966 (1994).
- [10] T. Sjöstrand, Comput. Phys. Commun. **82**, 74 (1994). PYTHIA version 5.7 was used in this analysis.
- [11] Particle Data Group, R.M. Barnett *et al.*, Phys. Rev. D **54**, 1 (1996), p. 161.

TABLES

TABLE I. Systematic errors (in GeV/c^2) on the top mass measurement for the three $t\bar{t}$ decay channels. The Monte Carlo modeling term includes effects from: parton density functions and b-tag uncertainty where applicable. For the lepton plus jet channel the Monte Carlo statistics term was included in the statistical error.

Channel	dilepton	ℓ +jets	all-had.
Jet energy scale	3.8	4.4	5.0
Initial and final state radiation	2.7	2.6	1.8
Monte Carlo modeling	0.6	0.5	0.2
Monte Carlo generator	0.6	0.1	0.8
Background shape	0.3	1.3	1.7
Monte Carlo statistics	0.7	n.a.	0.6
Total	4.8	5.3	5.7

TABLE II. Summary of top mass measurements with the CDF detector

Channel	Top mass (GeV/c^2)	Reference
Dilepton	$167.4 \pm 10.3 \pm 4.8$	this paper
Lepton + jets	$175.9 \pm 4.8 \pm 5.3$	[2], this paper
All-hadronic	$186.0 \pm 10.0 \pm 5.7$	[3], this paper
Combined	$176.0 \pm 4.0 \pm 5.1$	this paper

FIGURES

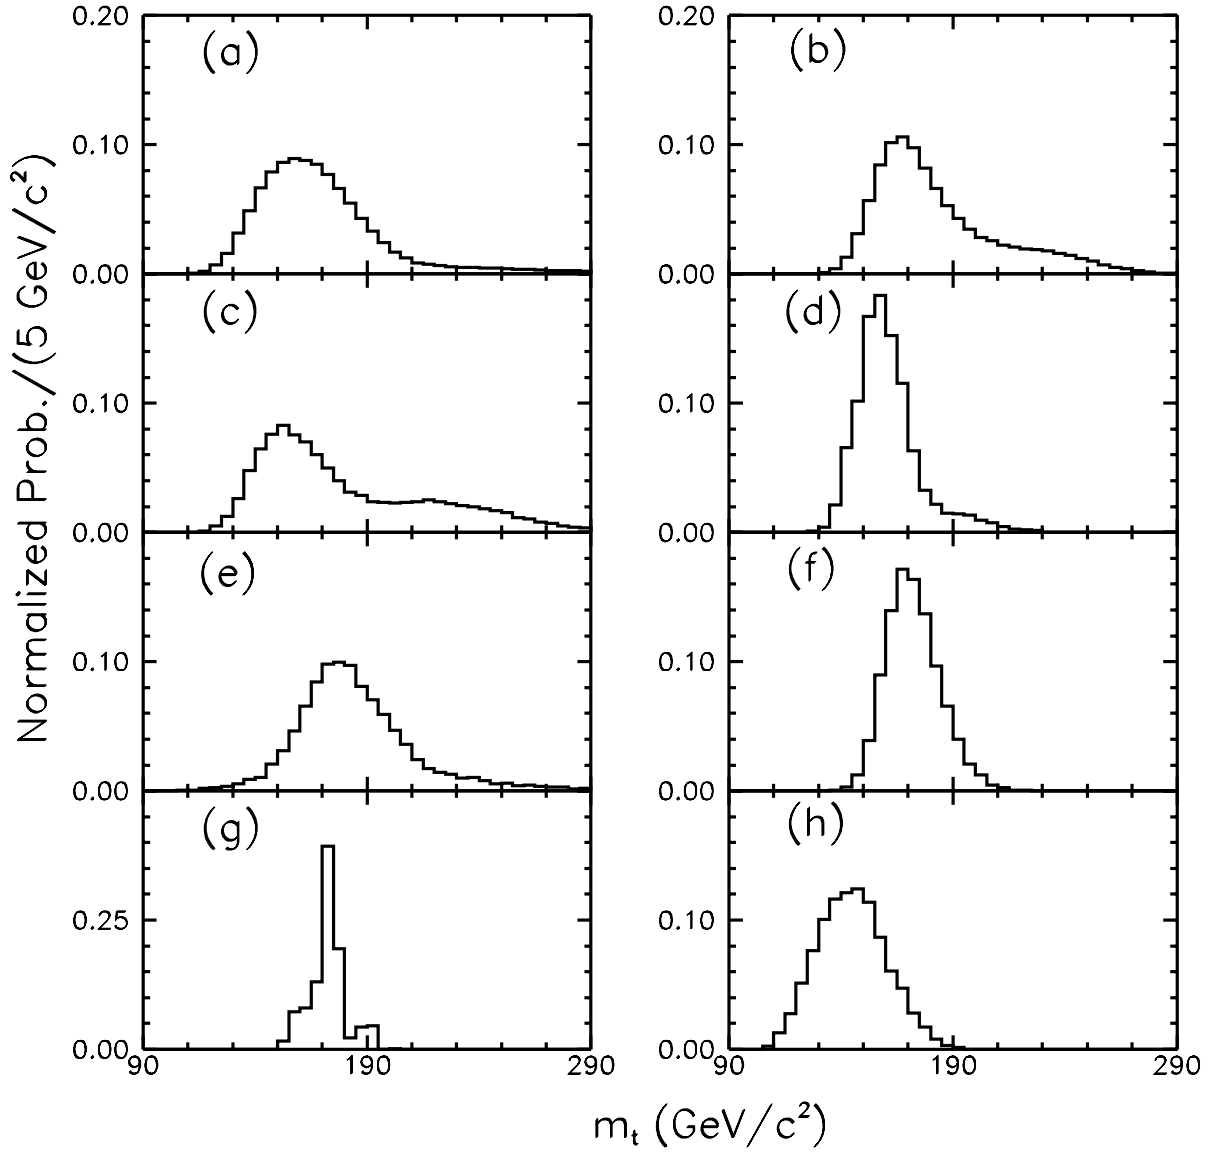


FIG. 1. Weight distribution normalized to unity as a function of m_t for the eight dilepton top candidate events (a-h).

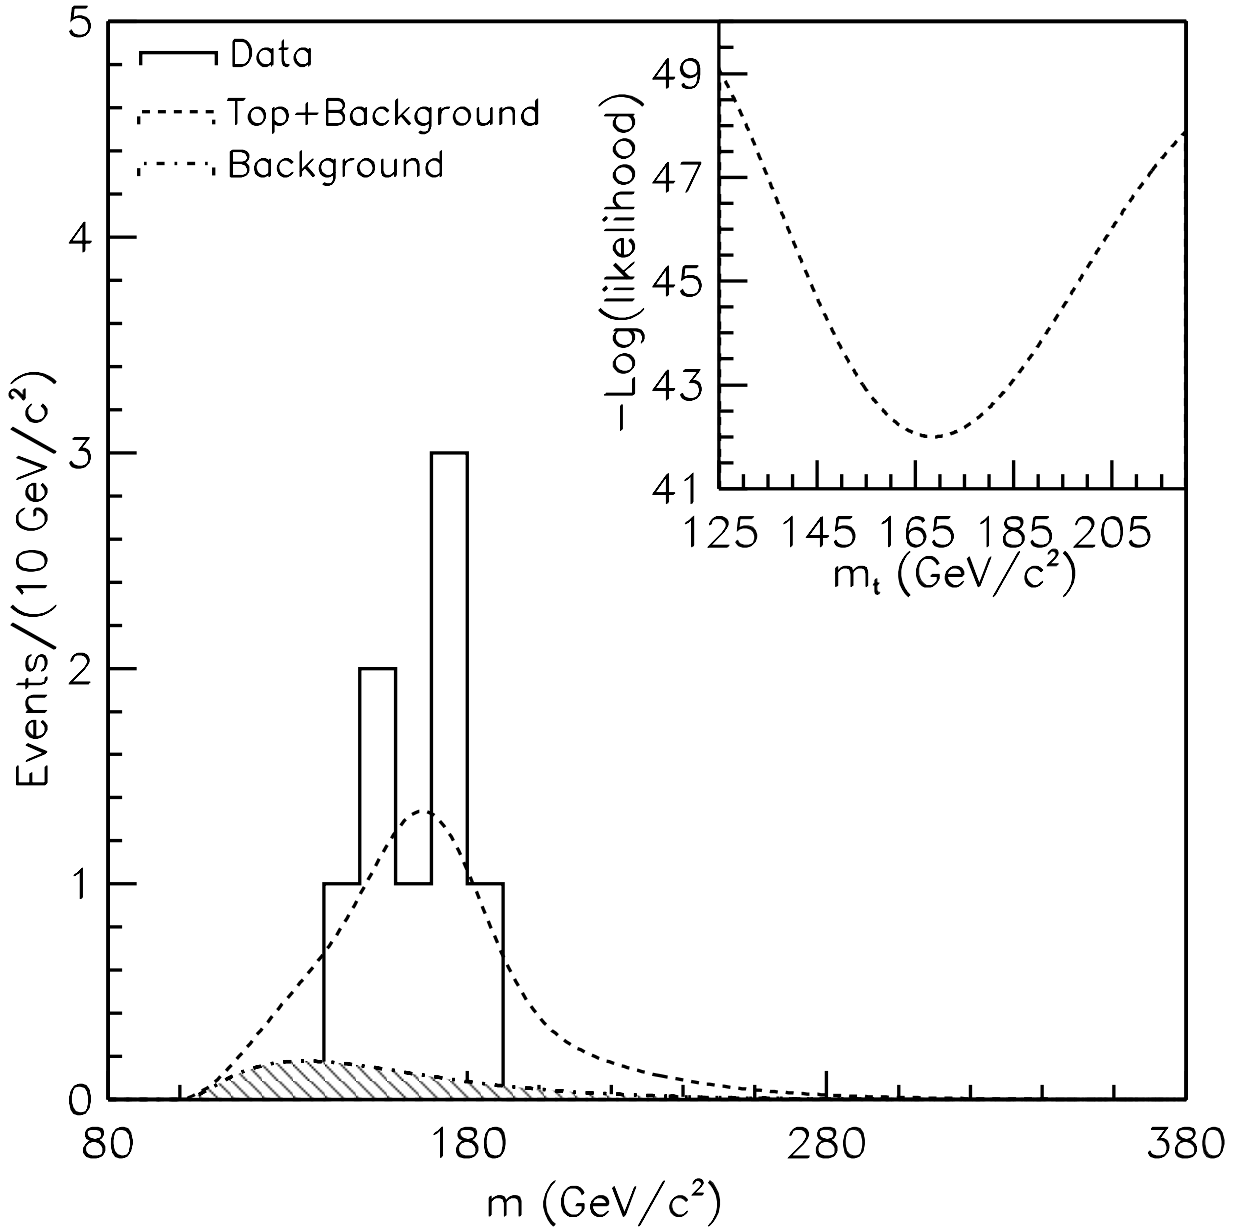


FIG. 2. Reconstructed top mass for the eight dilepton events (solid). Background distribution (shaded, 1.3 events) and top Monte Carlo (6.7 events) added to background (dashed). The negative log-likelihood distribution as a function of the top mass is shown in the inset.