



Fermi National Accelerator Laboratory

FERMILAB-Pub-99/243-E

CDF

**Measurement of b Quark Fragmentation Fractions in $p\bar{p}$ Collisions
at $\sqrt{s} = 1.8$ TeV**

T. Affolder et al.
For the CDF Collaboration

*Fermi National Accelerator Laboratory
P.O. Box 500, Batavia, Illinois 60510*

October 1999

Submitted to *Physical Review Letters*

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Distribution

Approved for public release; further dissemination unlimited.

Copyright Notification

This manuscript has been authored by Universities Research Association, Inc. under contract No. DE-AC02-76CH03000 with the U.S. Department of Energy. The United States Government and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government Purposes.

Measurement of b Quark Fragmentation Fractionsin $p\bar{p}$ Collisions at $\sqrt{s} = 1.8$ TeV

T. Affolder,²¹ H. Akimoto,⁴² A. Akopian,³⁵ M. G. Albrow,¹⁰ P. Amaral,⁷
 S. R. Amendolia,³¹ D. Amidei,²⁴ J. Antos,¹ G. Apollinari,³⁵ T. Arisawa,⁴² T. Asakawa,⁴⁰
 W. Ashmanskas,⁷ M. Atac,¹⁰ P. Azzi-Bacchetta,²⁹ N. Bacchetta,²⁹ M. W. Bailey,²⁶
 S. Bailey,¹⁴ P. de Barbaro,³⁴ A. Barbaro-Galtieri,²¹ V. E. Barnes,³³ B. A. Barnett,¹⁷
 M. Barone,¹² G. Bauer,²² F. Bedeschi,³¹ S. Belforte,³⁹ G. Bellettini,³¹ J. Bellinger,⁴³
 D. Benjamin,⁹ J. Bensinger,⁴ A. Beretvas,¹⁰ J. P. Berge,¹⁰ J. Berryhill,⁷ S. Bertolucci,¹²
 B. Bevensee,³⁰ A. Bhatti,³⁵ C. Bigongiari,³¹ M. Binkley,¹⁰ D. Bisello,²⁹ R. E. Blair,²
 C. Blocker,⁴ K. Bloom,²⁴ B. Blumenfeld,¹⁷ B. S. Blusk,³⁴ A. Bocci,³¹ A. Bodek,³⁴
 W. Bokhari,³⁰ G. Bolla,³³ Y. Bonushkin,⁵ D. Bortoletto,³³ J. Boudreau,³² A. Brandl,²⁶
 S. van den Brink,¹⁷ C. Bromberg,²⁵ N. Bruner,²⁶ E. Buckley-Geer,¹⁰ J. Budagov,⁸
 H. S. Budd,³⁴ K. Burkett,¹⁴ G. Busetto,²⁹ A. Byon-Wagner,¹⁰ K. L. Byrum,²
 M. Campbell,²⁴ A. Caner,³¹ W. Carithers,²¹ J. Carlson,²⁴ D. Carlsmith,⁴³ J. Cassada,³⁴
 A. Castro,²⁹ D. Cauz,³⁹ A. Cerri,³¹ P. S. Chang,¹ P. T. Chang,¹ J. Chapman,²⁴ C. Chen,³⁰
 Y. C. Chen,¹ M. -T. Cheng,¹ M. Chertok,³⁷ G. Chiarelli,³¹ I. Chirikov-Zorin,⁸
 G. Chlachidze,⁸ F. Chlebana,¹⁰ L. Christofek,¹⁶ M. L. Chu,¹ S. Cihangir,¹⁰ C. I. Ciobanu,²⁷
 A. G. Clark,¹³ M. Cobal,³¹ E. Cocca,³¹ A. Connolly,²¹ J. Conway,³⁶ J. Cooper,¹⁰
 M. Cordelli,¹² J. Guimaraes da Costa,²⁴ D. Costanzo,³¹ J. Cranshaw,³⁸
 D. Cronin-Hennessy,⁹ R. Cropp,²³ R. Culbertson,⁷ D. Dagenhart,⁴¹ F. DeJongh,¹⁰
 S. Dell'Agnello,¹² M. Dell'Orso,³¹ R. Demina,¹⁰ L. Demortier,³⁵ M. Deninno,³
 P. F. Derwent,¹⁰ T. Devlin,³⁶ J. R. Dittmann,¹⁰ S. Donati,³¹ J. Done,³⁷ T. Dorigo,¹⁴
 N. Eddy,¹⁶ K. Einsweiler,²¹ J. E. Elias,¹⁰ E. Engels, Jr.,³² W. Erdmann,¹⁰ D. Errede,¹⁶
 S. Errede,¹⁶ Q. Fan,³⁴ R. G. Feild,⁴⁴ C. Ferretti,³¹ I. Fiori,³ B. Flaughner,¹⁰ G. W. Foster,¹⁰

M. Franklin,¹⁴ J. Freeman,¹⁰ J. Friedman,²² Y. Fukui,²⁰ S. Gadomski,²³ S. Galeotti,³¹
 M. Gallinaro,³⁵ T. Gao,³⁰ M. Garcia-Sciveres,²¹ A. F. Garfinkel,³³ P. Gatti,²⁹ C. Gay,⁴⁴
 S. Geer,¹⁰ D. W. Gerdes,²⁴ P. Giannetti,³¹ P. Giromini,¹² V. Glagolev,⁸ M. Gold,²⁶
 J. Goldstein,¹⁰ A. Gordon,¹⁴ A. T. Goshaw,⁹ Y. Gotra,³² K. Goulianos,³⁵ H. Grassmann,³⁹
 C. Green,³³ L. Groer,³⁶ C. Grosso-Pilcher,⁷ M. Guenther,³³ G. Guillian,²⁴ R. S. Guo,¹
 C. Haber,²¹ E. Hafen,²² S. R. Hahn,¹⁰ C. Hall,¹⁴ T. Handa,¹⁵ R. Handler,⁴³ W. Hao,³⁸
 F. Happacher,¹² K. Hara,⁴⁰ A. D. Hardman,³³ R. M. Harris,¹⁰ F. Hartmann,¹⁸
 K. Hatakeyama,³⁵ J. Hauser,⁵ J. Heinrich,³⁰ A. Heiss,¹⁸ B. Hinrichsen,²³ K. D. Hoffman,³³
 C. Holck,³⁰ R. Hollebeek,³⁰ L. Holloway,¹⁶ R. Hughes,²⁷ J. Huston,²⁵ J. Huth,¹⁴ H. Ikeda,⁴⁰
 M. Incagli,³¹ J. Incandela,¹⁰ G. Introzzi,³¹ J. Iwai,⁴² Y. Iwata,¹⁵ E. James,²⁴ H. Jensen,¹⁰
 M. Jones,³⁰ U. Joshi,¹⁰ H. Kambara,¹³ T. Kamon,³⁷ T. Kaneko,⁴⁰ K. Karr,⁴¹ H. Kasha,⁴⁴
 Y. Kato,²⁸ T. A. Keaffaber,³³ K. Kelley,²² M. Kelly,²⁴ R. D. Kennedy,¹⁰ R. Kephart,¹⁰
 D. Khazins,⁹ T. Kikuchi,⁴⁰ M. Kirk,⁴ B. J. Kim,¹⁹ H. S. Kim,²³ S. H. Kim,⁴⁰ Y. K. Kim,²¹
 L. Kirsch,⁴ S. Klimenko,¹¹ D. Knoblauch,¹⁸ P. Koehn,²⁷ A. Köngeter,¹⁸ K. Kondo,⁴²
 J. Konigsberg,¹¹ K. Kordas,²³ A. Korytov,¹¹ E. Kovacs,² J. Kroll,³⁰ M. Kruse,³⁴
 S. E. Kuhlmann,² K. Kurino,¹⁵ T. Kuwabara,⁴⁰ A. T. Laasanen,³³ N. Lai,⁷ S. Lami,³⁵
 S. Lammel,¹⁰ J. I. Lamoureux,⁴ M. Lancaster,²¹ G. Latino,³¹ T. LeCompte,² A. M. Lee IV,⁹
 S. Leone,³¹ J. D. Lewis,¹⁰ M. Lindgren,⁵ T. M. Liss,¹⁶ J. B. Liu,³⁴ Y. C. Liu,¹ N. Lockyer,³⁰
 M. Loreti,²⁹ D. Lucchesi,²⁹ P. Lukens,¹⁰ S. Lusin,⁴³ J. Lys,²¹ R. Madrak,¹⁴ K. Maeshima,¹⁰
 P. Maksimovic,¹⁴ L. Malferrari,³ M. Mangano,³¹ M. Mariotti,²⁹ G. Martignon,²⁹
 A. Martin,⁴⁴ J. A. J. Matthews,²⁶ P. Mazzanti,³ K. S. McFarland,³⁴ P. McIntyre,³⁷
 E. McKigney,³⁰ M. Menguzzato,²⁹ A. Menzione,³¹ E. Meschi,³¹ C. Mesropian,³⁵ C. Miao,²⁴
 T. Miao,¹⁰ R. Miller,²⁵ J. S. Miller,²⁴ H. Minato,⁴⁰ S. Miscetti,¹² M. Mishina,²⁰ N. Moggi,³¹
 E. Moore,²⁶ R. Moore,²⁴ Y. Morita,²⁰ A. Mukherjee,¹⁰ T. Muller,¹⁸ A. Munar,³¹
 P. Murat,³¹ S. Murgia,²⁵ M. Musy,³⁹ J. Nachtman,⁵ S. Nahn,⁴⁴ H. Nakada,⁴⁰ T. Nakaya,⁷
 I. Nakano,¹⁵ C. Nelson,¹⁰ D. Neuberger,¹⁸ C. Newman-Holmes,¹⁰ C.-Y. P. Ngan,²²
 P. Nicolaidi,³⁹ H. Niu,⁴ L. Nodulman,² A. Nomerotski,¹¹ S. H. Oh,⁹ T. Ohmoto,¹⁵
 T. Ohsugi,¹⁵ R. Oishi,⁴⁰ T. Okusawa,²⁸ J. Olsen,⁴³ C. Pagliarone,³¹ F. Palmonari,³¹

R. Paoletti,³¹ V. Papadimitriou,³⁸ S. P. Pappas,⁴⁴ A. Parri,¹² D. Partos,⁴ J. Patrick,¹⁰
 G. Pauletta,³⁹ M. Paulini,²¹ A. Perazzo,³¹ L. Pescara,²⁹ T. J. Phillips,⁹ G. Piacentino,³¹
 K. T. Pitts,¹⁰ R. Plunkett,¹⁰ A. Pompos,³³ L. Pondrom,⁴³ G. Pope,³² F. Prokoshin,⁸
 J. Proudfoot,² F. Ptohos,¹² G. Punzi,³¹ K. Ragan,²³ D. Reher,²¹ W. Riegler,¹⁴ A. Ribon,²⁹
 F. Rimondi,³ L. Ristori,³¹ W. J. Robertson,⁹ A. Robinson,²³ T. Rodrigo,⁶ S. Rolli,⁴¹
 L. Rosenson,²² R. Roser,¹⁰ R. Rossin,²⁹ W. K. Sakumoto,³⁴ D. Saltzberg,⁵ A. Sansoni,¹²
 L. Santi,³⁹ H. Sato,⁴⁰ P. Savard,²³ P. Schlabach,¹⁰ E. E. Schmidt,¹⁰ M. P. Schmidt,⁴⁴
 M. Schmitt,¹⁴ L. Scodellaro,²⁹ A. Scott,⁵ A. Scribano,³¹ S. Segler,¹⁰ S. Seidel,²⁶ Y. Seiya,⁴⁰
 A. Semenov,⁸ F. Semeria,³ T. Shah,²² M. D. Shapiro,²¹ P. F. Shepard,³² T. Shibayama,⁴⁰
 M. Shimojima,⁴⁰ M. Shochet,⁷ J. Siegrist,²¹ G. Signorelli,³¹ A. Sill,³⁸ P. Sinervo,²³
 P. Singh,¹⁶ A. J. Slaughter,⁴⁴ K. Sliwa,⁴¹ C. Smith,¹⁷ F. D. Snider,¹⁰ A. Solodsky,³⁵
 J. Spalding,¹⁰ T. Speer,¹³ P. Sphicas,²² F. Spinella,³¹ M. Spiropulu,¹⁴ L. Spiegel,¹⁰
 L. Stanco,²⁹ J. Steele,⁴³ A. Stefanini,³¹ J. Strologas,¹⁶ F. Strumia,¹³ D. Stuart,¹⁰
 K. Sumorok,²² T. Suzuki,⁴⁰ R. Takashima,¹⁵ K. Takikawa,⁴⁰ M. Tanaka,⁴⁰ T. Takano,²⁸
 B. Tannenbaum,⁵ W. Taylor,²³ M. Tecchio,²⁴ P. K. Teng,¹ K. Terashi,⁴⁰ S. Tether,²²
 D. Theriot,¹⁰ R. Thurman-Keup,² P. Tipton,³⁴ S. Tkaczyk,¹⁰ K. Tollefson,³⁴
 A. Tollestrup,¹⁰ H. Toyoda,²⁸ W. Trischuk,²³ J. F. de Troconiz,¹⁴ S. Truitt,²⁴ J. Tseng,²²
 N. Turini,³¹ F. Ukegawa,⁴⁰ J. Valls,³⁶ S. Vejcik III,¹⁰ G. Velev,³¹ R. Vidal,¹⁰ R. Vilar,⁶
 I. Vologouev,²¹ D. Vucinic,²² R. G. Wagner,² R. L. Wagner,¹⁰ J. Wahl,⁷ N. B. Wallace,³⁶
 A. M. Walsh,³⁶ C. Wang,⁹ C. H. Wang,¹ M. J. Wang,¹ T. Watanabe,⁴⁰ T. Watts,³⁶
 R. Webb,³⁷ H. Wenzel,¹⁸ W. C. Wester III,¹⁰ A. B. Wicklund,² E. Wicklund,¹⁰
 H. H. Williams,³⁰ P. Wilson,¹⁰ B. L. Winer,²⁷ D. Winn,²⁴ S. Wolbers,¹⁰ D. Wolinski,²⁴
 J. Wolinski,²⁵ S. Worm,²⁶ X. Wu,¹³ J. Wyss,³¹ A. Yagil,¹⁰ W. Yao,²¹ G. P. Yeh,¹⁰ P. Yeh,¹
 J. Yoh,¹⁰ C. Yosef,²⁵ T. Yoshida,²⁸ I. Yu,¹⁹ S. Yu,³⁰ A. Zanetti,³⁹ F. Zetti,²¹ and
 S. Zucchelli³

(CDF Collaboration)

¹ *Institute of Physics, Academia Sinica, Taipei, Taiwan 11529, Republic of China*

- ² *Argonne National Laboratory, Argonne, Illinois 60439*
- ³ *Istituto Nazionale di Fisica Nucleare, University of Bologna, I-40127 Bologna, Italy*
- ⁴ *Brandeis University, Waltham, Massachusetts 02254*
- ⁵ *University of California at Los Angeles, Los Angeles, California 90024*
- ⁶ *Instituto de Fisica de Cantabria, University of Cantabria, 39005 Santander, Spain*
- ⁷ *Enrico Fermi Institute, University of Chicago, Chicago, Illinois 60637*
- ⁸ *Joint Institute for Nuclear Research, RU-141980 Dubna, Russia*
- ⁹ *Duke University, Durham, North Carolina 27708*
- ¹⁰ *Fermi National Accelerator Laboratory, Batavia, Illinois 60510*
- ¹¹ *University of Florida, Gainesville, Florida 32611*
- ¹² *Laboratori Nazionali di Frascati, Istituto Nazionale di Fisica Nucleare, I-00044 Frascati, Italy*
- ¹³ *University of Geneva, CH-1211 Geneva 4, Switzerland*
- ¹⁴ *Harvard University, Cambridge, Massachusetts 02138*
- ¹⁵ *Hiroshima University, Higashi-Hiroshima 724, Japan*
- ¹⁶ *University of Illinois, Urbana, Illinois 61801*
- ¹⁷ *The Johns Hopkins University, Baltimore, Maryland 21218*
- ¹⁸ *Institut für Experimentelle Kernphysik, Universität Karlsruhe, 76128 Karlsruhe, Germany*
- ¹⁹ *Korean Hadron Collider Laboratory: Kyungpook National University, Taegu 702-701; Seoul National University, Seoul 151-742; and SungKyunKwan University, Suwon 440-746; Korea*
- ²⁰ *High Energy Accelerator Research Organization (KEK), Tsukuba, Ibaraki 305, Japan*
- ²¹ *Ernest Orlando Lawrence Berkeley National Laboratory, Berkeley, California 94720*
- ²² *Massachusetts Institute of Technology, Cambridge, Massachusetts 02139*
- ²³ *Institute of Particle Physics: McGill University, Montreal H3A 2T8; and University of Toronto, Toronto M5S 1A7;*
Canada
- ²⁴ *University of Michigan, Ann Arbor, Michigan 48109*
- ²⁵ *Michigan State University, East Lansing, Michigan 48824*
- ²⁶ *University of New Mexico, Albuquerque, New Mexico 87131*
- ²⁷ *The Ohio State University, Columbus, Ohio 43210*

- ²⁸ *Osaka City University, Osaka 588, Japan*
- ²⁹ *Universita di Padova, Istituto Nazionale di Fisica Nucleare, Sezione di Padova, I-35131 Padova, Italy*
- ³⁰ *University of Pennsylvania, Philadelphia, Pennsylvania 19104*
- ³¹ *Istituto Nazionale di Fisica Nucleare, University and Scuola Normale Superiore of Pisa, I-56100 Pisa, Italy*
- ³² *University of Pittsburgh, Pittsburgh, Pennsylvania 15260*
- ³³ *Purdue University, West Lafayette, Indiana 47907*
- ³⁴ *University of Rochester, Rochester, New York 14627*
- ³⁵ *Rockefeller University, New York, New York 10021*
- ³⁶ *Rutgers University, Piscataway, New Jersey 08855*
- ³⁷ *Texas A&M University, College Station, Texas 77843*
- ³⁸ *Texas Tech University, Lubbock, Texas 79409*
- ³⁹ *Istituto Nazionale di Fisica Nucleare, University of Trieste/ Udine, Italy*
- ⁴⁰ *University of Tsukuba, Tsukuba, Ibaraki 305, Japan*
- ⁴¹ *Tufts University, Medford, Massachusetts 02155*
- ⁴² *Waseda University, Tokyo 169, Japan*
- ⁴³ *University of Wisconsin, Madison, Wisconsin 53706*
- ⁴⁴ *Yale University, New Haven, Connecticut 06520*

(September 20, 1999)

Abstract

We have studied the production of B hadrons in 1.8-TeV $p\bar{p}$ collisions. We present measurements of the fragmentation fractions, f_u , f_d , f_s and f_{baryon} , of produced b quarks that yield B^+ , B^0 , B_s^0 and $\bar{\Lambda}_b^0$ hadrons. Reconstruction of several electron-charm final states yields $f_s/(f_u + f_d) = 0.213 \pm 0.068$ and $f_{baryon}/(f_u + f_d) = 0.118 \pm 0.042$, assuming $f_u = f_d$. If all B hadrons produced in $p\bar{p}$ collisions cascade to one of these four hadrons, we determine $f_u = f_d =$

0.375 ± 0.023 , $f_s = 0.160 \pm 0.044$ and $f_{baryon} = 0.090 \pm 0.029$. If we do not assume $f_u = f_d$, we find $f_d/f_u = 0.84 \pm 0.16$.

PACS Numbers: 13.60.Le, 13.60.Rj, 14.65.Fy, 13.87.Fh

Bottom (b) quarks are not observed as independent entities but are confined with a partner antiquark or diquark inside hadrons. Once a b quark is produced, the process by which it combines with quarks and gluons to form a hadron is called fragmentation and is governed by the strong force, described by the theory of Quantum Chromodynamics (QCD) [1]. In this fragmentation process, the color force field creates additional quark-antiquark partners that then combine with the bottom quark to create a B hadron.

The process by which a bottom quark fragments into a hadron cannot be reliably calculated using perturbative QCD methods. Therefore, the fragmentation properties of the b quark must be determined empirically. In this Letter, we investigate one such property, namely the flavor dependence of the fragmentation process for bottom quarks produced in 1.8-TeV $p\bar{p}$ collisions. Our results provide the most accurate measurements of this flavor dependence and for the first time bring together in one study all previously studied B hadrons.

We define f_u , f_d , f_s and f_{baryon} to be the probabilities that the fragmentation of a \bar{b} quark will result in a weakly decaying B^+ , B^0 , B_s^0 meson and $\bar{\Lambda}_b^0$ baryon, respectively. We explicitly include in these “fragmentation fractions” contributions from production of heavier B hadrons that decay into final states containing a B^+ , B^0 , B_s^0 meson or $\bar{\Lambda}_b^0$ baryon. The ALEPH experiment used reconstructed $B_s^0 \rightarrow D_s^- l^+ \nu X$ decays produced in e^+e^- collisions at the Z^0 resonance to determine the value $f_s = 0.120_{-0.034}^{+0.045}$ [2,3]. The LEP Working Group on B Oscillations has compiled $B^0\bar{B}^0$ mixing results from the four LEP experiments and the Collider Detector at Fermilab (CDF) experiment for the mixing parameters $\bar{\chi}$ and Δm_d [3]. The average values of these parameters constrain the value of f_s , yielding the result $f_s = 0.101_{-0.019}^{+0.020}$ [3]. The CDF experiment has measured $f_s/(f_u + f_d) = 0.210 \pm 0.036_{-0.030}^{+0.038}$ using double semileptonic decays $b \rightarrow c\mu X$ with $c \rightarrow s\mu X$ [4]. The ALEPH and DELPHI experiments measured f_{baryon} by reconstructing $\bar{\Lambda}_b^0 \rightarrow \Lambda_c^- l^+ \nu X$ decays [5,6]. Their combined result is $f_{baryon} = 0.101_{-0.031}^{+0.039}$ [3]. The CLEO experiment determined the quantity analogous to f_d/f_u , $f^0/f^+ = (\Upsilon(4S) \rightarrow B^0\bar{B}^0)/(\Upsilon(4S) \rightarrow B^+B^-) = 0.88 \pm 0.16$ and 0.90 ± 0.14 , by reconstructing $B \rightarrow D^*l\nu$ decays [7] and $B \rightarrow J/\psi K^{(*)}$ decays [8], respectively. Both of

these measurements are consistent with the isospin symmetry expectation that $f_d = f_u$.

Our measurement is performed by reconstructing B hadron semileptonic decays to electrons and charm hadrons from a 107 pb^{-1} sample of 1.8-TeV $p\bar{p}$ collisions recorded by CDF during 1992-95. The ratios of the b quark fragmentation fractions, namely f_d/f_u , $f_s/(f_u + f_d)$ and $f_{baryon}/(f_u + f_d)$, are determined from the B hadron production ratios. We reconstruct the B hadrons in the following decay modes and their charge conjugates: $B^+ \rightarrow \bar{D}^0 e^+ \nu_e X$ where $\bar{D}^0 \rightarrow K^+ \pi^-$; $B^0 \rightarrow D^{*-} e^+ \nu_e X$ where $D^{*-} \rightarrow \bar{D}^0 \pi^-$ and $\bar{D}^0 \rightarrow K^+ \pi^-$; $B^0 \rightarrow D^- e^+ \nu_e X$ where $D^- \rightarrow K^+ \pi^- \pi^-$; $B_s^0 \rightarrow D_s^- e^+ \nu_e X$ where $D_s^- \rightarrow \phi \pi^-$ and $\phi \rightarrow K^+ K^-$; and $\bar{\Lambda}_b^0 \rightarrow \Lambda_c^- e^+ \nu_e X$ where $\Lambda_c^- \rightarrow \bar{p} K^+ \pi^-$. The average transverse momentum of the B hadrons we reconstruct is $20 \text{ GeV}/c$.

The CDF detector has been described in detail elsewhere [9]. The CDF coordinate system defines the z axis along the proton beam direction and the polar angle θ with respect to the z axis. The azimuthal angle ϕ is measured in the plane transverse to the beam. The relevant detector components for this measurement are the charged-particle tracking system and the calorimeters. The tracking detectors lie inside a 1.4-T solenoidal magnetic field. The silicon vertex detector (SVX), positioned immediately outside the beampipe, provides precise charged particle reconstruction and allows identification of displaced vertices from secondary decays. The central tracking chamber (CTC), which encompasses the SVX, measures the momenta of charged particles over a pseudorapidity range $|\eta| < 1.1$, where $\eta \equiv -\ln \tan(\theta/2)$. The central electromagnetic (CEM) and hadronic (CHA) calorimeters, arranged in a projective tower geometry, surround the tracking volume and are used to measure clusters of energy deposited by electrons, photons and hadrons. The central electromagnetic strip chamber (CES), embedded in the CEM at the position of shower maximum, measures the electromagnetic shower profiles in the ϕ and z directions.

A three level trigger system is used to identify electron candidates, with the first level requiring a CEM energy deposition greater than 8 GeV. The electron candidates satisfy a Level 2 trigger that requires a spatial match between a track in the CTC with $P_T > 7.5 \text{ GeV}/c$ and an energy cluster in the CEM with $E_T > 8.0 \text{ GeV}$, where $P_T \equiv P \sin \theta$ and $E_T \equiv E \sin \theta$.

The fraction of hadronic energy in the cluster is required to be small. We require a spatial match of the CTC track to a cluster of energy in the CES and apply a threshold requirement to the energy deposition in the CES. The Level 3 trigger requires that the lateral shower profiles in the CES and CEM be consistent with those expected for an electron, and re-applies the previous trigger criteria with greater precision. Approximately six million electron candidates survive this trigger selection. We reduce the sample to three million candidates by applying more stringent criteria [10]. We require that the fraction of hadronic energy in the cluster be less than 4%. We reject electron candidates that are likely to be from photon conversions and from W^\pm and Z^0 boson decays. Finally, to ensure a uniform electron identification efficiency in the different B hadron decay topologies, we reject candidates with more than one track pointing at the CEM cluster and demand that the ratio of cluster energy to track momentum be in the range $0.75 < E_T/P_T < 1.40$.

The semileptonic B hadron decays are identified by reconstructing the charm hadron in the vicinity of the electron. The \bar{D}^0 meson is reconstructed by identifying the products of the $\bar{D}^0 \rightarrow K^+\pi^-$ decay in a cone $R \equiv \sqrt{(\Delta\eta)^2 + (\Delta\phi)^2} = 1.0$ around the electron track. The charge correlation between the electron and the charm hadron daughters from semileptonic B hadron decays is exploited to reduce the contamination from random combinations of leptons and charmed hadrons. Particles arising from the weak decay of a B hadron are normally displaced from the primary vertex. Therefore, we require the charm-hadron daughter tracks to have an impact parameter (d_0) inconsistent with zero ($|d_0|/\sigma(d_0) > 1.5$, where $\sigma(d_0)$ is the uncertainty on d_0). The combinatorial background is further reduced by requiring that $P_T(K) > 1.2 \text{ GeV}/c$ and $P_T(\pi) > 0.5 \text{ GeV}/c$, which are the same criteria used in the reconstruction of the other channels, except where noted. The daughter tracks are required to be consistent with coming from a secondary vertex that is displaced in the transverse plane from the $p\bar{p}$ interaction point ($L_{xy}/\sigma(L_{xy}) > 1$). Finally, the invariant mass of the electron-charm system is required to be less than $5.0 \text{ GeV}/c^2$.

The invariant mass of the $K\pi$ candidates in the electron sample is shown in Fig. 1(a). To this distribution we fit the sum of a Gaussian signal and an exponential background and

count $1848 \pm 58 \bar{D}^0$ signal events. We observe no significant signal in the combinations with the wrong electron-hadron charge correlation.

The D^{*-} meson is reconstructed in the $D^{*-} \rightarrow \bar{D}^0 \pi^-$ channel. We consider \bar{D}^0 candidates with $1.80 < M(K\pi) < 1.95 \text{ GeV}/c^2$, where M is the mass, and consider all charged particles with $P_T > 0.4 \text{ GeV}/c$ for the additional pion. The mass difference distribution, $\Delta M = M(K\pi\pi) - M(K\pi)$, is shown in Fig. 1(b). To this distribution we fit a double-Gaussian signal and a background modeled by a threshold function. We reconstruct $249 \pm 19 D^{*-}$ signal events.

The D^- meson is reconstructed in the $D^- \rightarrow K^+ \pi^- \pi^-$ channel. In this channel, the three daughter tracks are required to form a vertex. The invariant mass distribution of the $K\pi\pi$ candidates is shown in Fig. 1(c). To this distribution we fit the sum of a Gaussian signal and a linear background and count $736 \pm 62 D^-$ signal events.

The D_s^- meson candidates are identified by looking for the products of the $D_s^- \rightarrow \phi \pi^-$ decay, where $\phi \rightarrow K^+ K^-$. Both kaons and the pion are required to come from a common vertex. This decay chain provides two additional criteria effective in rejecting combinatorial backgrounds. First, we require that the mass of the $K^+ K^-$ system be within $0.010 \text{ GeV}/c^2$ of the world average ϕ mass of $1.019 \text{ GeV}/c^2$. Second, we impose the criterion $|\cos \psi| > 0.4$, where ψ is the helicity angle between the D_s and K meson candidates in the ϕ rest frame. The invariant mass distribution of the $KK\pi$ candidates is shown in Fig. 1(d). We reconstruct $59 \pm 10 D_s^-$ signal events.

The Λ_c^- baryon candidates are identified by looking for the products of the $\Lambda_c^- \rightarrow \bar{p} K^+ \pi^-$ decay. We require $P_T(p) > 2.0 \text{ GeV}/c$. Since the relative combinatorial background under the Λ_c^- signal is large, we also require that the specific ionization (dE/dx) deposited by the proton candidate in the CTC be consistent with that expected for a proton. The invariant mass distribution of the $pK\pi$ candidates is shown in Fig. 1(e). We reconstruct $79 \pm 17 \Lambda_c^-$ signal events.

The $D_s^- e^+$ and $\Lambda_c^- e^+$ final states represent relatively pure samples of the B_s^0 and $\bar{\Lambda}_b^0$

hadrons, respectively. However, the remaining electron-charm final states that we reconstruct come from several B -meson species through feed-down from vector and orbitally-excited D meson decays. For example, the decay $B_s^0 \rightarrow D_s^{*-} e^+ \nu_e$ can be followed by the decay $D_s^{*-} \rightarrow D^- K^0$. This channel contributes to the $D^- e^+$ sample but reflects B_s^0 production rather than B^0 production. We use the branching fractions for each decay to determine the feed-down contributions. These branching fractions are derived from the measured values [3] according to the spectator model and isospin symmetries [10].

The spectator model predicts that the inclusive semileptonic decay widths for the various B hadrons are equal, yielding, for example, the relation

$$\mathcal{B}(B_s^0 \rightarrow e^+ \nu_e X) = \frac{\tau(B_s^0)}{\langle \tau(B) \rangle} \mathcal{B}(B \rightarrow e^+ \nu_e X),$$

where \mathcal{B} represents the branching fraction and τ is the lifetime. A similar relationship holds for the exclusive semileptonic branching fractions for the three B mesons. We use isospin symmetry to calculate the branching fractions for the D^* and D^{**} decays that feed down into the final state D mesons that we reconstruct.

The acceptance and reconstruction efficiency for each final state vary according to whether the D meson is produced directly in the B meson decay or is the daughter of an excited D meson state. Several efficiencies, such as the electron identification efficiency, the conversion removal efficiency and the two-track finding efficiency, cancel in the ratio of fragmentation fractions. Of the remaining efficiencies, the single-track finding efficiency and the electron trigger efficiency are measured using CDF data. We use a Monte Carlo calculation to determine all other acceptances and efficiencies. This uses a next-to-leading order perturbative calculation of the differential cross section for b -quark production in $p\bar{p}$ collisions [11] followed by fragmentation governed by the Peterson formulation [12]. We use the ISGW [13] model to determine the semileptonic B hadron decay kinematics [14].

The systematic uncertainties on the reconstruction efficiencies include those associated with the tracking and trigger efficiencies and Monte Carlo statistics. We also assign an uncertainty to account for the poor knowledge of the $\bar{\Lambda}_b^0$ production polarization in $p\bar{p}$

collisions. Finally, we consider the possibility that the Peterson fragmentation parameter ϵ_b may differ for each B hadron species. We assign the fractional uncertainties of 6.4% and 6.1% to account for the possible variation of ϵ_b for B_s^0 and $\bar{\Lambda}_b^0$ hadrons, respectively. We determine these values by calculating the larger variation in the reconstruction efficiency for values of ϵ_b one standard deviation away from a central value of $\epsilon_b = 0.006 \pm 0.002$ [15]. These contributions represent the largest uncertainties associated with the reconstruction efficiencies. The total fractional systematic uncertainties are $\pm 2.1\%$, $\pm 3.4\%$, $\pm 5.4\%$, $\pm 7.3\%$, and $\pm 8.7\%$ for $B^+ \rightarrow \bar{D}^0 e^+ \nu_e X$, $B^0 \rightarrow D^- e^+ \nu_e X$, $B^0 \rightarrow D^{*-} e^+ \nu_e X$, $B_s^0 \rightarrow D_s^- e^+ \nu_e X$ and $\bar{\Lambda}_b^0 \rightarrow \Lambda_c^- e^+ \nu_e X$ decays, respectively.

In order to determine the fragmentation fractions taking into account the cross contamination and feed-down, we fit the five observed event yields and their uncertainties to the three ratios of fragmentation fractions. We formulate the problem by defining a χ^2 function comparing the predicted with observed event yields. We allow the semileptonic branching fractions for the B mesons to vary in the fit, constrained to their measured or calculated uncertainties. We note that the measured branching fractions include the implicit assumption that $f^0/f^+ = 1$.

We make this measurement assuming isospin symmetry by fixing $f_d/f_u = 1$ in the fit. The fit results in the values $f_s/(f_u + f_d) = 0.213 \pm 0.068$ and $f_{baryon}/(f_u + f_d) = 0.118 \pm 0.042$, where uncertainties on the event yields, the reconstruction efficiencies and the branching fractions are included. We can determine the absolute fragmentation fraction values from our fits by assuming that the B^0 , B^+ , B_s^0 and $\bar{\Lambda}_b^0$ hadrons saturate the b -quark production rate, i.e., $f_u + f_d + f_s + f_{baryon} \equiv 1$. This relationship yields $f_u = f_d = 0.375 \pm 0.023$, $f_s = 0.160 \pm 0.044$ and $f_{baryon} = 0.090 \pm 0.029$. By incorporating another term in the χ^2 function, we have combined these results together with the complementary measurement by CDF of f_s using double semimuonic decays [4] to determine the more precise values of $f_u = f_d = 0.375 \pm 0.015$, $f_s = 0.160 \pm 0.025$ and $f_{baryon} = 0.090 \pm 0.028$. Results for the fragmentation fractions obtained using all available measured exclusive semileptonic branching fractions instead of employing the spectator model predictions are consistent with

the results presented here.

By relaxing the isospin symmetry requirement, we find that $f_d/f_u = 0.84 \pm 0.16$, consistent with isospin symmetry and the measurements of f^0/f^+ by the CLEO collaboration. The individual values for f_s and f_{baryon} remain unchanged.

In conclusion, we have measured the four b quark fragmentation fractions for weakly decaying B hadrons produced in $p\bar{p}$ collisions. We measure $f_{baryon} = 0.090 \pm 0.029$, in good agreement with measurements made on B hadrons produced in high energy e^+e^- collisions at LEP. The $p\bar{p}$ result, $f_s = 0.160 \pm 0.025$, is two standard deviations higher than the current world average value, which is dominated by LEP measurements and by inference from $B^0\bar{B}^0$ mixing measurements.

We thank the Fermilab staff and the technical staff at the participating institutions for their essential contributions to this research. This work is supported by the U. S. Department of Energy and the National Science Foundation; the Natural Sciences and Engineering Research Council of Canada; the Istituto Nazionale di Fisica Nucleare of Italy; the Ministry of Education, Science and Culture of Japan; the National Science Council of the Republic of China; and the A. P. Sloan Foundation.

REFERENCES

- [1] S. Weinberg, Phys. Rev. Lett. **31**, 494 (1973); H. Fritzsch, M. Gell-Mann, and H. Leutwyler, Phys. Lett. **47B**, 365 (1973); D. J. Gross and F. Wilczek, Phys. Rev. D **8**, 3633 (1973).
- [2] ALEPH Collaboration, D. Buskulic *et al.*, Phys. Lett. B **361**, 221 (1995).
- [3] C. Caso *et al.*, Eur. Phys. J. **C3**, 1 (1998). This analysis assumes, as does ours, that $\Lambda_c^- l^+ \nu$ is the dominant semileptonic $\bar{\Lambda}_b^0$ final state.
- [4] CDF Collaboration, F. Abe *et al.*, Phys. Rev. D **60**, 051101 (1999).
- [5] ALEPH Collaboration, R. Barate *et al.*, Eur. Phys. J. **C2**, 197 (1998).
- [6] DELPHI Collaboration, P. Abreu *et al.*, Z. Phys. **C68**, 375 (1995).
- [7] CLEO Collaboration, B. Barish *et al.*, Phys. Rev. D **51**, 1014 (1995).
- [8] CLEO Collaboration, C. P. Jessop *et al.*, Phys. Rev. Lett. **79**, 4533 (1997).
- [9] CDF Collaboration, F. Abe *et al.*, Nucl. Instrum. Meth. Phys. Res. A **271**, 387 (1988); D. Amidei *et al.*, Nucl. Instrum. Meth. Phys. Res. A **350**, 73 (1994); CDF Collaboration, F. Abe *et al.*, Phys. Rev. D **52**, 4784 (1995); P. Azzi *et al.*, Nucl. Instrum. Meth. Phys. Res. A **360**, 137 (1995).
- [10] W. Taylor, Ph.D. thesis, University of Toronto, 1999. See <http://fnalpubs.fnal.gov/archive/1999/thesis/t-taylor.ps>.
- [11] P. Nason, S. Dawson, and R. K. Ellis, Nucl. Phys. **B327**, 49 (1989); **B335**, 260(E) (1990).
- [12] C. Peterson, D. Schlatter, I. Schmitt, and P. M. Zerwas, Phys. Rev. D **27**, 105 (1983).
- [13] B. Grinstein, M. B. Wise, and N. Isgur, Phys. Rev. Lett. **56**, 298 (1986); N. Isgur *et al.*, Phys. Rev. D **39**, 799 (1989).

- [14] P. Avery, K. Read, and G. Trahern, CLEO Report No. CSN-212 (1985), unpublished.
- [15] J. Chrin, Z. Phys. C**36**, 163 (1987). This value encompasses more recent measurements, including OPAL Collaboration, G. Alexander *et al.*, Phys. Lett. B **364**, 93 (1995) and ALEPH Collaboration, D. Buskulic *et al.*, Phys. Lett. B **357**, 699 (1995).

FIGURES

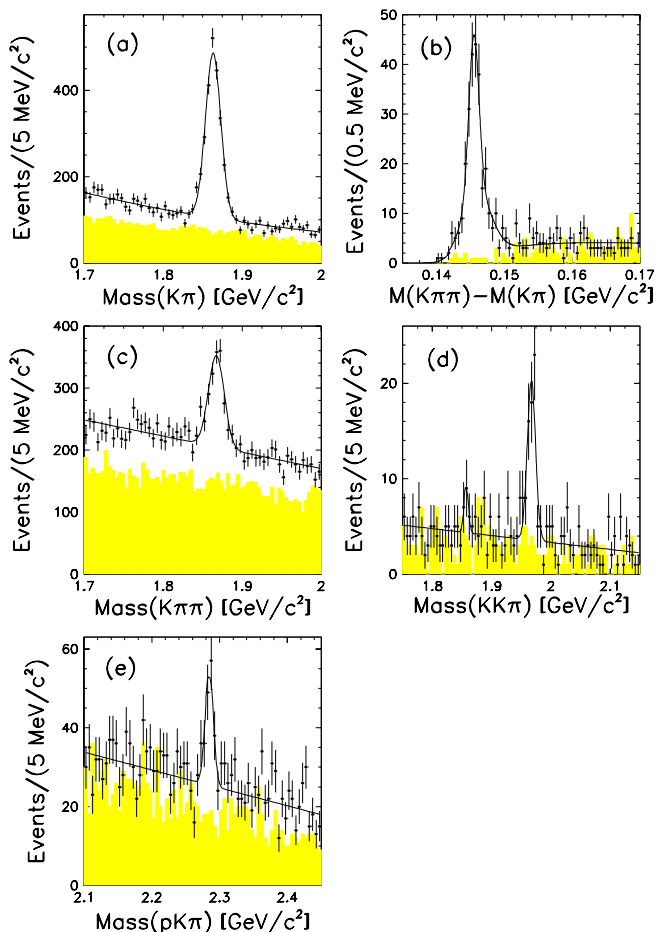


FIG. 1. Invariant mass distributions of charm hadron candidates in 107 pb^{-1} of inclusive electron data. a) $K\pi$ invariant mass distribution for \overline{D}^0 candidates. b) Mass difference distribution, $\Delta M = M(K\pi\pi) - M(K\pi)$, for D^{*-} candidates. c) $K\pi\pi$ invariant mass distribution for D^- candidates. d) $KK\pi$ invariant mass distribution for D_s^- candidates. e) $pK\pi$ invariant mass distribution for Λ_c^- candidates. The shaded histograms represent the combinations with the wrong electron-hadron charge correlation. The shaded area in a) has been scaled by 0.5 for display purposes.