



Fermi National Accelerator Laboratory

FERMILAB-Pub-99/249-E

CDF

**Search for a W' Boson via the Decay Mode
 $W' \rightarrow \mu\nu_\mu$ in 1.8 TeV $p\bar{p}$ Collisions**

F. Abe et al.

The CDF Collaboration

*Fermi National Accelerator Laboratory
P.O. Box 500, Batavia, Illinois 60510*

October 1999

Submitted to *Physical Review Letters*

Disclaimer

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Distribution

Approved for public release; further dissemination unlimited.

Copyright Notification

This manuscript has been authored by Universities Research Association, Inc. under contract No. DE-AC02-76CH03000 with the U.S. Department of Energy. The United States Government and the publisher, by accepting the article for publication, acknowledges that the United States Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this manuscript, or allow others to do so, for United States Government Purposes.

September 16, 1999

**Search for a W' Boson via the Decay Mode $W' \rightarrow \mu\nu_\mu$ in 1.8 TeV
 $p\bar{p}$ Collisions**

F. Abe,¹⁷ H. Akimoto,³⁹ A. Akopian,³¹ M. G. Albrow,⁷ S. R. Amendolia,²⁷ D. Amidei,²⁰
 J. Antos,³³ S. Aota,³⁷ G. Apollinari,³¹ T. Arisawa,³⁹ T. Asakawa,³⁷ W. Ashmanskas,⁵
 M. Atac,⁷ P. Azzi-Bacchetta,²⁵ N. Bacchetta,²⁵ S. Bagdasarov,³¹ M. W. Bailey,²² P. de
 Barbaro,³⁰ A. Barbaro-Galtieri,¹⁸ V. E. Barnes,²⁹ B. A. Barnett,¹⁵ M. Barone,⁹ G. Bauer,¹⁹
 F. Bedeschi,²⁷ S. Behrends,³ S. Belforte,²⁷ G. Bellettini,²⁷ J. Bellinger,⁴⁰ D. Benjamin,⁶
 J. Bensinger,³ A. Beretvas,⁷ J. P. Berge,⁷ J. Berryhill,⁵ S. Bertolucci,⁹ S. Bettelli,²⁷
 B. Bevensee,²⁶ A. Bhatti,³¹ K. Biery,⁷ C. Bigongiari,²⁷ M. Binkley,⁷ D. Bisello,²⁵
 R. E. Blair,¹ C. Blocker,³ K. Bloom,²⁰ S. Blusk,³⁰ A. Bodek,³⁰ W. Bokhari,²⁶ G. Bolla,²⁹
 Y. Bonushkin,⁴ D. Bortoletto,²⁹ J. Boudreau,²⁸ A. Brandl,²² L. Breccia,² C. Bromberg,²¹
 N. Bruner,²² R. Brunetti,² E. Buckley-Geer,⁷ H. S. Budd,³⁰ K. Burkett,¹¹ G. Busetto,²⁵
 A. Byon-Wagner,⁷ K. L. Byrum,¹ M. Campbell,²⁰ A. Caner,²⁷ W. Carithers,¹⁸
 D. Carlsmith,⁴⁰ J. Cassada,³⁰ A. Castro,²⁵ D. Cauz,³⁶ A. Cerri,²⁷ P. S. Chang,³³
 P. T. Chang,³³ H. Y. Chao,³³ J. Chapman,²⁰ M. -T. Cheng,³³ M. Chertok,³⁴ G. Chiarelli,²⁷
 C. N. Chiou,³³ F. Chlebana,⁷ L. Christofek,¹³ M. L. Chu,³³ S. Cihangir,⁷ A. G. Clark,¹⁰
 M. Cokal,²⁷ E. Cocca,²⁷ M. Contreras,⁵ J. Conway,³² J. Cooper,⁷ M. Cordelli,⁹
 D. Costanzo,²⁷ C. Couyoumtzelis,¹⁰ D. Cronin-Hennessy,⁶ R. Cropp,¹⁴ R. Culbertson,⁵
 D. Dagenhart,³⁸ T. Daniels,¹⁹ F. DeJongh,⁷ S. Dell'Agnello,⁹ M. Dell'Orso,²⁷ R. Demina,⁷
 L. Demortier,³¹ M. Deninno,² P. F. Derwent,⁷ T. Devlin,³² J. R. Dittmann,⁶ S. Donati,²⁷
 J. Done,³⁴ T. Dorigo,²⁵ N. Eddy,¹³ K. Einsweiler,¹⁸ J. E. Elias,⁷ R. Ely,¹⁸ E. Engels, Jr.,²⁸
 W. Erdmann,⁷ D. Errede,¹³ S. Errede,¹³ Q. Fan,³⁰ R. G. Feild,⁴¹ Z. Feng,¹⁵ C. Ferretti,²⁷

I. Fiori,² B. Flaughner,⁷ G. W. Foster,⁷ M. Franklin,¹¹ J. Freeman,⁷ J. Friedman,¹⁹
 H. Frisch,⁵ Y. Fukui,¹⁷ S. Gadomski,¹⁴ S. Galeotti,²⁷ M. Gallinaro,²⁶ O. Ganel,³⁵
 M. Garcia-Sciveres,¹⁸ A. F. Garfinkel,²⁹ C. Gay,⁴¹ S. Geer,⁷ D. W. Gerdes,²⁰ P. Giannetti,²⁷
 N. Giokaris,³¹ P. Giromini,⁹ G. Giusti,²⁷ M. Gold,²² A. Gordon,¹¹ A. T. Goshaw,⁶
 Y. Gotra,²⁸ K. Goulianos,³¹ H. Grassmann,³⁶ C. Green,²⁹ L. Groer,³² C. Grosso-Pilcher,⁵
 G. Guillian,²⁰ J. Guimaraes da Costa,¹⁵ R. S. Guo,³³ C. Haber,¹⁸ E. Hafen,¹⁹ S. R. Hahn,⁷
 R. Hamilton,¹¹ T. Handa,¹² R. Handler,⁴⁰ W. Hao,³⁵ F. Happacher,⁹ K. Hara,³⁷
 A. D. Hardman,²⁹ R. M. Harris,⁷ F. Hartmann,¹⁶ J. Hauser,⁴ E. Hayashi,³⁷ J. Heinrich,²⁶
 A. Heiss,¹⁶ B. Hinrichsen,¹⁴ K. D. Hoffman,²⁹ C. Holck,²⁶ R. Hollebeek,²⁶ L. Holloway,¹³
 Z. Huang,²⁰ B. T. Huffman,²⁸ R. Hughes,²³ J. Huston,²¹ J. Huth,¹¹ H. Ikeda,³⁷ M. Incagli,²⁷
 J. Incandela,⁷ G. Introzzi,²⁷ J. Iwai,³⁹ Y. Iwata,¹² E. James,²⁰ H. Jensen,⁷ U. Joshi,⁷
 E. Kajfasz,²⁵ H. Kambara,¹⁰ T. Kamon,³⁴ T. Kaneko,³⁷ K. Karr,³⁸ H. Kasha,⁴¹ Y. Kato,²⁴
 T. A. Keaffaber,²⁹ K. Kelley,¹⁹ M. Kelly,²⁰ R. D. Kennedy,⁷ R. Kephart,⁷ D. Kestenbaum,¹¹
 D. Khazins,⁶ T. Kikuchi,³⁷ M. Kirk,³ B. J. Kim,²⁷ H. S. Kim,¹⁴ S. H. Kim,³⁷ Y. K. Kim,¹⁸
 L. Kirsch,³ S. Klimenko,⁸ D. Knoblauch,¹⁶ P. Koehn,²³ A. Köngeter,¹⁶ K. Kondo,³⁷
 J. Konigsberg,⁸ K. Kordas,¹⁴ A. Korytov,⁸ E. Kovacs,¹ W. Kowald,⁶ J. Kroll,²⁶ M. Kruse,³⁰
 S. E. Kuhlmann,¹ E. Kuns,³² K. Kurino,¹² T. Kuwabara,³⁷ A. T. Laasanen,²⁹ S. Lami,²⁷
 S. Lammel,⁷ J. I. Lamoureux,³ M. Lancaster,¹⁸ M. Lanzoni,²⁷ G. Latino,²⁷ T. LeCompte,¹
 A. M. Lee IV,⁶ S. Leone,²⁷ J. D. Lewis,⁷ M. Lindgren,⁴ T. M. Liss,¹³ J. B. Liu,³⁰
 Y. C. Liu,³³ N. Lockyer,²⁶ O. Long,²⁶ M. Loreti,²⁵ D. Lucchesi,²⁷ P. Lukens,⁷ S. Lusin,⁴⁰
 J. Lys,¹⁸ K. Maeshima,⁷ P. Maksimovic,¹¹ M. Mangano,²⁷ M. Mariotti,²⁵ J. P. Marriner,⁷
 G. Martignon,²⁵ A. Martin,⁴¹ J. A. J. Matthews,²² P. Mazzanti,² K. McFarland,³⁰
 P. McIntyre,³⁴ P. Melese,³¹ M. Menguzzato,²⁵ A. Menzione,²⁷ E. Meschi,²⁷ S. Metzler,²⁶
 C. Miao,²⁰ T. Miao,⁷ G. Michail,¹¹ R. Miller,²¹ H. Minato,³⁷ S. Miscetti,⁹ M. Mishina,¹⁷
 S. Miyashita,³⁷ N. Moggi,²⁷ E. Moore,²² Y. Morita,¹⁷ A. Mukherjee,⁷ T. Muller,¹⁶
 A. Munar,²⁷ P. Murat,²⁷ S. Murgia,²¹ M. Musy,³⁶ H. Nakada,³⁷ T. Nakaya,⁵ I. Nakano,¹²
 C. Nelson,⁷ D. Neuberger,¹⁶ C. Newman-Holmes,⁷ C.-Y. P. Ngan,¹⁹ H. Niu,³
 L. Nodulman,¹ A. Nomerotski,⁸ S. H. Oh,⁶ T. Ohmoto,¹² T. Ohsugi,¹² R. Oishi,³⁷

M. Okabe,³⁷ T. Okusawa,²⁴ J. Olsen,⁴⁰ C. Pagliarone,²⁷ R. Paoletti,²⁷ V. Papadimitriou,³⁵
S. P. Pappas,⁴¹ N. Parashar,²⁷ A. Parri,⁹ D. Partos,³ J. Patrick,⁷ G. Pauletta,³⁶
M. Paulini,¹⁸ A. Perazzo,²⁷ L. Pescara,²⁵ M. D. Peters,¹⁸ T. J. Phillips,⁶ G. Piacentino,²⁷
M. Pillai,³⁰ K. T. Pitts,⁷ R. Plunkett,⁷ A. Pompos,²⁹ L. Pondrom,⁴⁰ J. Proudfoot,¹
F. Ptohos,¹¹ G. Punzi,²⁷ K. Ragan,¹⁴ D. Reher,¹⁸ A. Ribon,²⁵ F. Rimondi,² L. Ristori,²⁷
W. J. Robertson,⁶ A. Robinson,¹⁴ T. Rodrigo,²⁷ S. Rolli,³⁸ L. Rosenson,¹⁹ R. Roser,⁷
T. Saab,¹⁴ W. K. Sakumoto,³⁰ D. Saltzberg,⁴ A. Sansoni,⁹ L. Santi,³⁶ H. Sato,³⁷
P. Savard,¹⁴ P. Schlabach,⁷ E. E. Schmidt,⁷ M. P. Schmidt,⁴¹ A. Scott,⁴ A. Scribano,²⁷
S. Segler,⁷ S. Seidel,²² Y. Seiya,³⁷ F. Semeria,² T. Shah,¹⁹ M. D. Shapiro,¹⁸ N. M. Shaw,²⁹
P. F. Shepard,²⁸ T. Shibayama,³⁷ M. Shimojima,³⁷ M. Shochet,⁵ J. Siegrist,¹⁸ A. Sill,³⁵
P. Sinervo,¹⁴ P. Singh,¹³ K. Sliwa,³⁸ C. Smith,¹⁵ F. D. Snider,⁷ J. Spalding,⁷ T. Speer,¹⁰
P. Sphicas,¹⁹ F. Spinella,²⁷ M. Spiropulu,¹¹ L. Spiegel,⁷ L. Stanco,²⁵ J. Steele,⁴⁰
A. Stefanini,²⁷ R. Ströhmer,^{7a} J. Strologas,¹³ F. Strumia,¹⁰ D. Stuart,⁷ K. Sumorok,¹⁹
J. Suzuki,³⁷ T. Suzuki,³⁷ T. Takahashi,²⁴ T. Takano,²⁴ R. Takashima,¹² K. Takikawa,³⁷
M. Tanaka,³⁷ B. Tannenbaum,⁴ F. Tartarelli,²⁷ W. Taylor,¹⁴ M. Tecchio,²⁰ P. K. Teng,³³
Y. Teramoto,²⁴ K. Terashi,³⁷ S. Tether,¹⁹ D. Theriot,⁷ T. L. Thomas,²²
R. Thurman-Keup,¹ M. Timko,³⁸ P. Tipton,³⁰ A. Titov,³¹ S. Tkaczyk,⁷ D. Toback,⁵
K. Tollefson,³⁰ A. Tollestrup,⁷ H. Toyoda,²⁴ W. Trischuk,¹⁴ J. F. de Troconiz,¹¹ S. Truitt,²⁰
J. Tseng,¹⁹ N. Turini,²⁷ T. Uchida,³⁷ F. Ukegawa,²⁶ J. Valls,³² S. C. van den Brink,¹⁵
S. Vejcik III,⁷ G. Velez,²⁷ R. Vidal,⁷ R. Vilar,^{7a} I. Vologouev,¹⁸ D. Vucinic,¹⁹
R. G. Wagner,¹ R. L. Wagner,⁷ J. Wahl,⁵ N. B. Wallace,²⁷ A. M. Walsh,³² C. Wang,⁶
C. H. Wang,³³ M. J. Wang,³³ A. Warburton,¹⁴ T. Watanabe,³⁷ T. Watts,³² R. Webb,³⁴
C. Wei,⁶ H. Wenzel,¹⁶ W. C. Wester III,⁷ A. B. Wicklund,¹ E. Wicklund,⁷ R. Wilkinson,²⁶
H. H. Williams,²⁶ P. Wilson,⁷ B. L. Winer,²³ D. Winn,²⁰ D. Wolinski,²⁰ J. Wolinski,²¹
S. Worm,²² X. Wu,¹⁰ J. Wyss,²⁷ A. Yagil,⁷ W. Yao,¹⁸ K. Yasuoka,³⁷ G. P. Yeh,⁷ P. Yeh,³³
J. Yoh,⁷ C. Yosef,²¹ T. Yoshida,²⁴ I. Yu,⁷ A. Zanetti,³⁶ F. Zetti,²⁷ and S. Zucchelli²

(CDF Collaboration)

- ¹ *Argonne National Laboratory, Argonne, Illinois 60439*
- ² *Istituto Nazionale di Fisica Nucleare, University of Bologna, I-40127 Bologna, Italy*
- ³ *Brandeis University, Waltham, Massachusetts 02254*
- ⁴ *University of California at Los Angeles, Los Angeles, California 90024*
- ⁵ *University of Chicago, Chicago, Illinois 60637*
- ⁶ *Duke University, Durham, North Carolina 27708*
- ⁷ *Fermi National Accelerator Laboratory, Batavia, Illinois 60510*
- ⁸ *University of Florida, Gainesville, Florida 32611*
- ⁹ *Laboratori Nazionali di Frascati, Istituto Nazionale di Fisica Nucleare, I-00044 Frascati, Italy*
- ¹⁰ *University of Geneva, CH-1211 Geneva 4, Switzerland*
- ¹¹ *Harvard University, Cambridge, Massachusetts 02138*
- ¹² *Hiroshima University, Higashi-Hiroshima 724, Japan*
- ¹³ *University of Illinois, Urbana, Illinois 61801*
- ¹⁴ *Institute of Particle Physics, McGill University, Montreal H3A 2T8, and University of Toronto,
Toronto M5S 1A7, Canada*
- ¹⁵ *The Johns Hopkins University, Baltimore, Maryland 21218*
- ¹⁶ *Institut für Experimentelle Kernphysik, Universität Karlsruhe, 76128 Karlsruhe, Germany*
- ¹⁷ *National Laboratory for High Energy Physics (KEK), Tsukuba, Ibaraki 305, Japan*
- ¹⁸ *Ernest Orlando Lawrence Berkeley National Laboratory, Berkeley, California 94720*
- ¹⁹ *Massachusetts Institute of Technology, Cambridge, Massachusetts 02139*
- ²⁰ *University of Michigan, Ann Arbor, Michigan 48109*
- ²¹ *Michigan State University, East Lansing, Michigan 48824*
- ²² *University of New Mexico, Albuquerque, New Mexico 87131*
- ²³ *The Ohio State University, Columbus, Ohio 43210*
- ²⁴ *Osaka City University, Osaka 588, Japan*
- ²⁵ *Universita di Padova, Istituto Nazionale di Fisica Nucleare, Sezione di Padova, I-35131 Padova, Italy*
- ²⁶ *University of Pennsylvania, Philadelphia, Pennsylvania 19104*
- ²⁷ *Istituto Nazionale di Fisica Nucleare, University and Scuola Normale Superiore of Pisa, I-56100 Pisa, Italy*

- ²⁸ *University of Pittsburgh, Pittsburgh, Pennsylvania 15260*
- ²⁹ *Purdue University, West Lafayette, Indiana 47907*
- ³⁰ *University of Rochester, Rochester, New York 14627*
- ³¹ *Rockefeller University, New York, New York 10021*
- ³² *Rutgers University, Piscataway, New Jersey 08855*
- ³³ *Academia Sinica, Taipei, Taiwan 11530, Republic of China*
- ³⁴ *Texas A&M University, College Station, Texas 77843*
- ³⁵ *Texas Tech University, Lubbock, Texas 79409*
- ³⁶ *Istituto Nazionale di Fisica Nucleare, University of Trieste/ Udine, Italy*
- ³⁷ *University of Tsukuba, Tsukuba, Ibaraki 305, Japan*
- ³⁸ *Tufts University, Medford, Massachusetts 02155*
- ³⁹ *Waseda University, Tokyo 169, Japan*
- ⁴⁰ *University of Wisconsin, Madison, Wisconsin 53706*
- ⁴¹ *Yale University, New Haven, Connecticut 06520*

Abstract

We report the results of a search for a W' boson produced in $p\bar{p}$ collisions at a center-of-mass energy of 1.8 TeV using a 107 pb^{-1} data sample recorded by the Collider Detector at Fermilab. We consider the decay channel $W' \rightarrow \mu\nu_\mu$ and search for anomalous production of high transverse mass $\mu\nu_\mu$ lepton pairs. We observe no excess of events above background and set limits on the rate of W' boson production and decay relative to Standard Model W boson production and decay using a fit of the transverse mass distribution observed. If we assume Standard Model strength couplings of the W' boson to quark and lepton pairs, we exclude a W' boson with invariant mass less than $660 \text{ GeV}/c^2$

at 95% confidence level.

PACS Numbers: 13.85.Rm, 14.70.Pw

Three of the four known forces of nature, the strong, electromagnetic and weak force, are described by the Standard Model using a local gauge theory that accounts for each interaction using a vector boson force carrier [1]. The predictions of this model have been confirmed by the discoveries of the W and Z^0 bosons, the carriers of the weak force, and high precision measurements of their properties. The Standard Model is not a complete theory, however, as it fails to explain the number of lepton and quark generations, the rather large mass scale between the very lightest and very heaviest of the fundamental fermions, and the number or structure of the gauge symmetries that exist in nature. It is still an open experimental question as to whether additional forces exist. Evidence for a new force could come from observation of the corresponding force carrier.

Previous searches have been conducted for possible new force carriers that couple to μ final states in a manner similar to the vector bosons that mediate the weak force. These searches have yielded null results, and have set model-dependent limits on the rate at which such a particle is produced and its mass. The most sensitive searches have been performed at the Fermilab Tevatron Collider. A Z' boson with a mass $< 690 \text{ GeV}/c^2$ has been excluded at 95% confidence level (CL) [2]. Searches considering the decay mode $W' \rightarrow \mu\nu_\mu$ have excluded a W' boson with mass $< 435 \text{ GeV}/c^2$ at 95% CL [4]. These mass limits all assume that the new vector boson's couplings to leptonic final states will be given by the Standard Model, which predicts that the total width of the boson increases linearly with $M_{W'}$, where $M_{W'}$ is the mass of the boson. Indirect searches studying, for example, the Michel spectrum in μ decay have resulted in more model-independent limits with less sensitivity [5]. Searches in other channels have also been used to place constraints on possible W' masses: The most stringent exclude a W' boson at 95% CL with a mass $< 720 \text{ GeV}/c^2$ that decays via $W' \rightarrow e\nu_e$ [3].

In this letter, we present the results of a new search for a W' boson in the $\mu\nu_\mu$ decay mode. We use a data sample of 107 pb^{-1} of 1.8 TeV $p\bar{p}$ collisions recorded by the Collider Detector at Fermilab (CDF) detector during 1992-95. This search is based on an analysis of high mass $\mu\nu_\mu$ candidate final states, and is sensitive to a variety of new phenomena that

would result in anomalous production of such high mass events. We use these data to set limits on the production cross section times branching fraction of the process

$$p\bar{p} \rightarrow W'X \rightarrow \mu\nu_\mu X, \quad (1)$$

normalizing the candidate event sample to the large observed $W \rightarrow \mu\nu_\mu$ signal in the same event sample. This search assumes that the decay $W' \rightarrow WZ^0$ is suppressed [6] and that $M_\nu \ll M_{W'}$, where M_ν is the mass of the neutrino from a W' boson decay. We also assume that the daughter neutrino does not decay within the detector volume.

In this search, we select events that are consistent with the production of both the Standard Model W boson, followed by the decay $W \rightarrow \mu\nu_\mu$, and any heavier object that decays in the same manner. We place limits on the production and decay rate of such a massive object relative to the production and decay rate of the W boson. This approach avoids the need to make an absolute cross section measurement or upper limit, and avoids many of the uncertainties associated with such a technique. We subsequently use our relative production and decay rate upper limits to set lower limits on the mass of such a W' boson. However, these upper limits place constraints on any processes that generate high mass $\mu\nu_\mu$ pairs, and represent an increase of a factor of 20 in sensitivity from earlier searches in this channel. Additional details of this analysis are presented in Ref. [7].

The CDF detector is described in detail elsewhere [8]. The detector has a charged particle tracking system immersed in a 1.41 T solenoidal magnetic field, which is coaxial with the $p\bar{p}$ beams. The tracking system consists of solid state tracking detectors and drift chambers that measure particle momentum with an accuracy of $\sigma_{p_T}/p_T \sim 0.001p_T$, where p_T is the momentum of the charged particle measured in GeV/ c transverse to the $p\bar{p}$ beam line. The tracking system is surrounded by segmented electromagnetic and hadronic calorimeters that measure the flow of energy associated with particles that interact hadronically or electromagnetically out to a pseudorapidity $|\eta|$ of 4.2 [9]. A set of charged particle detectors outside the calorimeter is used to identify muon candidates with $|\eta| < 1.0$.

Candidate events were identified in the CDF trigger system by the requirement of at

least one muon candidate with $p_T > 9$ or 12 GeV/ c , depending on running conditions. The event sample was subsequently refined after full event reconstruction by requiring a well-identified muon candidate with momentum $p_T > 20$ GeV/ c and by requiring that the missing transverse energy in the event, \cancel{E}_T , be greater than 20 GeV.

Additional requirements were imposed to reject specific sources of backgrounds. Events consistent with arising from QCD dijet production, where one jet is misidentified as a muon candidate, were rejected by requiring that the muon candidate was isolated from energy flow in the event and that the energy deposited in the calorimeter by the muon candidate was consistent with that arising from a minimum ionizing particle. Events due to Drell-Yan production of dimuons (dominated by the decay $Z^0 \rightarrow \mu^+ \mu^-$) were rejected by vetoing events if a second isolated muon candidate with $p_T > 15$ GeV/ c was found in the event. Finally, events arising from cosmic rays were rejected by imposing tight requirements between the timing of the beam interaction and the muon candidate passing through the calorimeter, and by removing events that had evidence of a second charged particle observed within 0.05 radians of being back-to-back with the μ candidate.

This selection resulted in a sample of $31\,992$ events. The distribution of the transverse mass

$$M_T \equiv \sqrt{2p_T \cancel{E}_T (1 - \cos \phi_{\mu\nu})}, \quad (2)$$

where $\phi_{\mu\nu}$ is the azimuthal angle between the μ candidate and the missing transverse energy vector, shows a clear Jacobian peak that is associated with the production and decay of the W boson. This distribution, illustrated in Fig. 1, also shows a smoothly falling distribution above the Jacobian peak with little obvious structure.

In order to understand the composition of this high transverse mass sample, we fit the M_T distribution between 40 and 2000 GeV/ c^2 using an unbinned maximum likelihood technique, which included contributions from a hypothetical W' boson decaying to the $\mu\nu_\mu$ final state, $W \rightarrow \mu\nu_\mu$ decay and all other significant background sources. The largest background sources were the production and decay of the W and Z^0 bosons into final states

consisting of muons. These included the decay modes $W \rightarrow \mu\nu_\mu$, $W \rightarrow \tau\nu_\tau \rightarrow \mu\nu_\mu\nu_\tau$, $Z^0 \rightarrow \tau^+\tau^- \rightarrow \mu X$, and $Z^0 \rightarrow \mu^+\mu^-$. The other background sources were muons arising from top quark production and “fake” muons arising from QCD dijet production. The shape of the M_T distributions for the W' signal and the backgrounds from W and Z^0 production were calculated using a Monte Carlo technique employing the PYTHIA programme [11]. We used a next-to-leading order theoretical prediction for the p_T and η dependence of W' and W production [12]. Our model included a simulation of the CDF detector that was derived from studies of $Z^0 \rightarrow \mu^+\mu^-$ candidate events.

Studies of specific data samples constrained the size and shape of the other possible background contributions. The relative size of the various W and Z^0 boson decay modes and $t\bar{t}$ production were determined using the measured production ratios and branching fractions to these final states [10]. The size of the dijet background was determined by studying the characteristics of event samples enriched in this dijet contamination. The total number of events with $M_T > 200$ GeV/ c^2 from Standard Model sources was estimated from the fit to the M_T distribution between 40 and 2000 GeV/ c^2 to be 11.8 ± 0.9 events, with the largest contribution arising from off-mass-shell W boson production. This agrees with the observed yield of 14 events in this M_T region.

The results of the fit to the M_T data distribution assuming only contributions from W production and decay and the other known background sources are plotted in Fig. 1. The agreement between the data distribution and the fit prediction is good. A small excess of events with transverse masses around 200 GeV/ c^2 is not statistically significant. The contributions from the various background sources are listed in Table I.

Our Monte Carlo calculation together with the detector model was used to determine the ratio of acceptances for detection of W' and W bosons. This ratio rises as a function of $M_{W'}$, peaking at ~ 1.7 for $M_{W'} = 300$ GeV/ c^2 , and then falling to ~ 1.5 for $M_{W'} = 800$ GeV/ c^2 . The initial increase in acceptance is due to a heavier W' boson being produced more centrally. The subsequent decrease results from very high energy muon daughters depositing significant amounts of energy in the calorimeter.

We set upper limits on the relative contribution of a W' boson by fitting the data distribution to a combination of the background distributions described above and a W' M_T distribution expected from the production and decay of a W' boson of a given mass. The results of the fit, expressed as the ratio of observed W' boson candidates to the number expected assuming Standard Model strength couplings, are shown in Table II. We then used the resulting likelihood function to set a 95% CL upper limit on this ratio, also shown in Table II. In setting these limits, we only considered the likelihood function in the “physical region” where this ratio was greater than or equal to zero. We note that these limits are insensitive to the assumed width of the W' boson, as the width of the expected signal distribution is dominated by detector resolution for W' masses greater than approximately 300 GeV/ c^2 .

The procedure used to calculate this upper limit incorporated various systematic uncertainties using the method given in [10]. The largest resulted from the choice of parton distribution function, which at the highest masses contributed $\sim \pm 10\%$ uncertainty to the relative W and W' production cross section. We used the CTEQ 4A1 parton distribution functions with a four-momentum transfer squared $Q^2 = M_{W'}^2$ for our result [13] but employed several parton distribution functions to determine our sensitivity to this choice. Other systematic uncertainties included those arising from our knowledge of the track p_T resolution and the uncertainty in acceptance arising from variations in the W' boson p_T distribution. The total systematic uncertainty varied from 4% for $M_{W'} = 200$ GeV/ c^2 to 12% for $M_{W'} = 700$ GeV/ c^2 . These were incorporated into our upper limits using a procedure that convoluted the likelihood function determined by our fit to the M_T distribution with the probability distribution functions associated with each uncertainty. The results are dominated by the statistical uncertainties of the data sample. We also computed cross section upper limits by counting signal events above background in the high transverse mass region and obtained comparable results to the likelihood fit, though these depended on the region chosen for signal events.

We can convert the 95% CL upper limit on the relative cross sections and decay rates into

a lower limit on the mass of the W' boson by excluding all masses where our 95% CL limit on the ratio of cross sections times branching fractions is less than unity. We determined the predicted cross sections using a parton-level matrix element calculation and the CTEQ 4A1 parton distribution functions, taking into account the fact that a W' boson with a mass above approximately $180 \text{ GeV}/c^2$ decays into three quark generations.

The resulting upper limit on the W' boson cross section versus $M_{W'}$ is shown in Fig. 2, where we have now normalized our upper limits on the production cross section ratios using the predicted W boson production cross section, which is consistent with measurements [14]. We compare this upper limit with the predictions for a W' boson with Standard Model strength couplings, also shown in the figure. This allows us to exclude a W' boson with mass between 200 and $660 \text{ GeV}/c^2$. Taking into account the previous searches in this channel, a W' boson with Standard Model strength couplings and mass below $660 \text{ GeV}/c^2$ can be excluded. This corresponds to an increase in sensitivity of approximately a factor of 20 from the earlier studies of this final state.

In summary, we have performed a search for the production of a new heavy vector gauge boson in $1.8 \text{ TeV } p\bar{p}$ collisions and decaying into the $\mu\nu_\mu$ final state. We use a fit of the M_T distribution to exclude a W' boson with mass $< 660 \text{ GeV}/c^2$ at 95% CL, assuming Standard Model strength couplings. This limit is comparable to those set using the $e\nu_e$ decay modes, and represents a significant improvement in sensitivity for W' boson searches using the muon decay mode.

ACKNOWLEDGEMENTS

We thank the Fermilab staff and the technical staff at the participating institutions for their essential contributions to this research. This work is supported by the U. S. Department of Energy and the National Science Foundation; the Natural Sciences and Engineering Research Council of Canada; the Istituto Nazionale di Fisica Nucleare of Italy; the Ministry of Education, Science and Culture of Japan; the National Science Council of the Republic

of China; and the A. P. Sloan Foundation.

REFERENCES

- [1] S. L. Glashow, Nucl. Phys. **22**, 579 (1961); S. Weinberg, Phys. Rev. Lett. **19**, 1264 (1967); A. Salam, in *Elementary Particle Theory*, edited by N. Svartholm (Almqvist and Wiksells, Stockholm, 1968), p. 367.
- [2] CDF Collaboration, F. Abe *et al.*, Phys. Rev. Lett. **79**, 2192 (1997).
- [3] DØ Collaboration, S. Abachi *et al.*, Phys. Rev. Lett. **76**, 3271 (1996).
- [4] CDF Collaboration, F. Abe *et al.*, Phys. Rev. Lett. **67**, 2609 (1991).
- [5] A. Jodidio *et al.*, Phys. Rev. D **34**, 1967 (1986); D **37**, 237(E) (1988); J. Imazato *et al.*, Phys. Rev. Lett. **69**, 877 (1992).
- [6] G. Altarelli *et al.*, Z. Phys. C **45**, 109 (1989).
- [7] H.S. Kim, Ph.D. thesis (unpublished), University of Toronto, 1999.
- [8] CDF Collaboration, F. Abe *et al.*, Nucl. Instrum. Methods Phys. Res. A **271**, 387 (1988); D. Amidei *et al.*, Nucl. Instrum. Methods Phys. Res. A **350**, 73 (1994); CDF Collaboration, F. Abe *et al.*, Phys. Rev. D **52**, 4784 (1995); P. Azzi *et al.*, Nucl. Instrum. Methods Phys. Res. A **360**, 137 (1995).
- [9] We use a coordinate system where the polar angle to the proton beam is denoted by θ , ϕ is the azimuthal angle about this beam axis, and $\eta \equiv -\ln \tan(\theta/2)$.
- [10] Particle Data Group, R. M. Barnett *et al.*, Phys. Rev. D **54**, 1 (1996).
- [11] T. J. Sjöstrand, Comput. Phys. Commun. **82**, 74 (1994).
- [12] P. B. Arnold and R. P. Kauffman, Nucl. Phys. **B349**, 381 (1991); G. A. Ladinsky and C.-P. Yuan, Phys. Rev. D **50**, 4239 (1994).
- [13] CTEQ Collaboration, H. L. Lai *et al.*, Phys. Rev. D **55**, 1280 (1997).
- [14] CDF Collaboration, F. Abe *et al.*, Phys. Rev. Lett. **69**, 28 (1992); DØ Collaboration,

F. Abachi *et al.*, Phys. Rev. Lett. **75**, 1456 (1995).

FIGURES

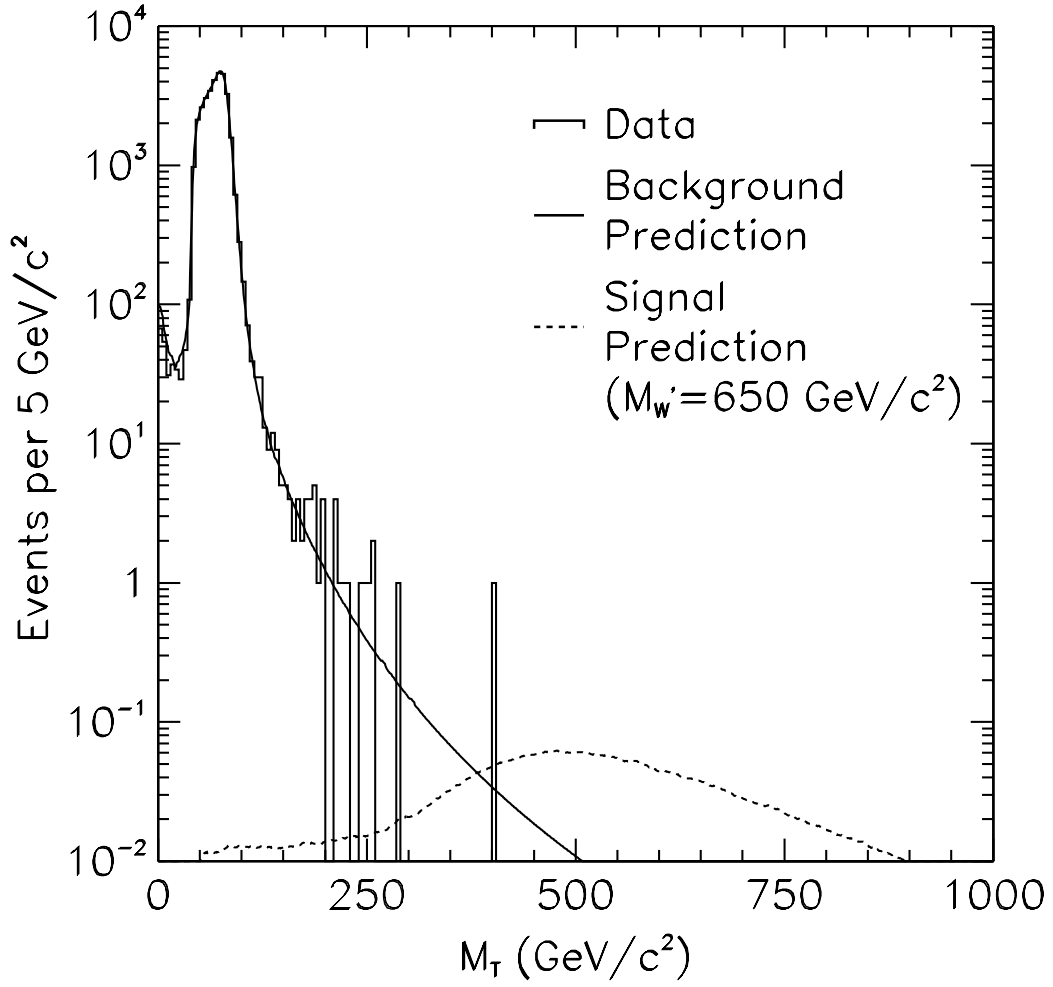


FIG. 1. The transverse mass spectrum of the $\mu\nu_\mu$ candidate events. The background rate is predicted from the fit described in the text. The distribution expected from the production of a W' boson with a mass of $650 \text{ GeV}/c^2$ is illustrated by the dashed distribution.

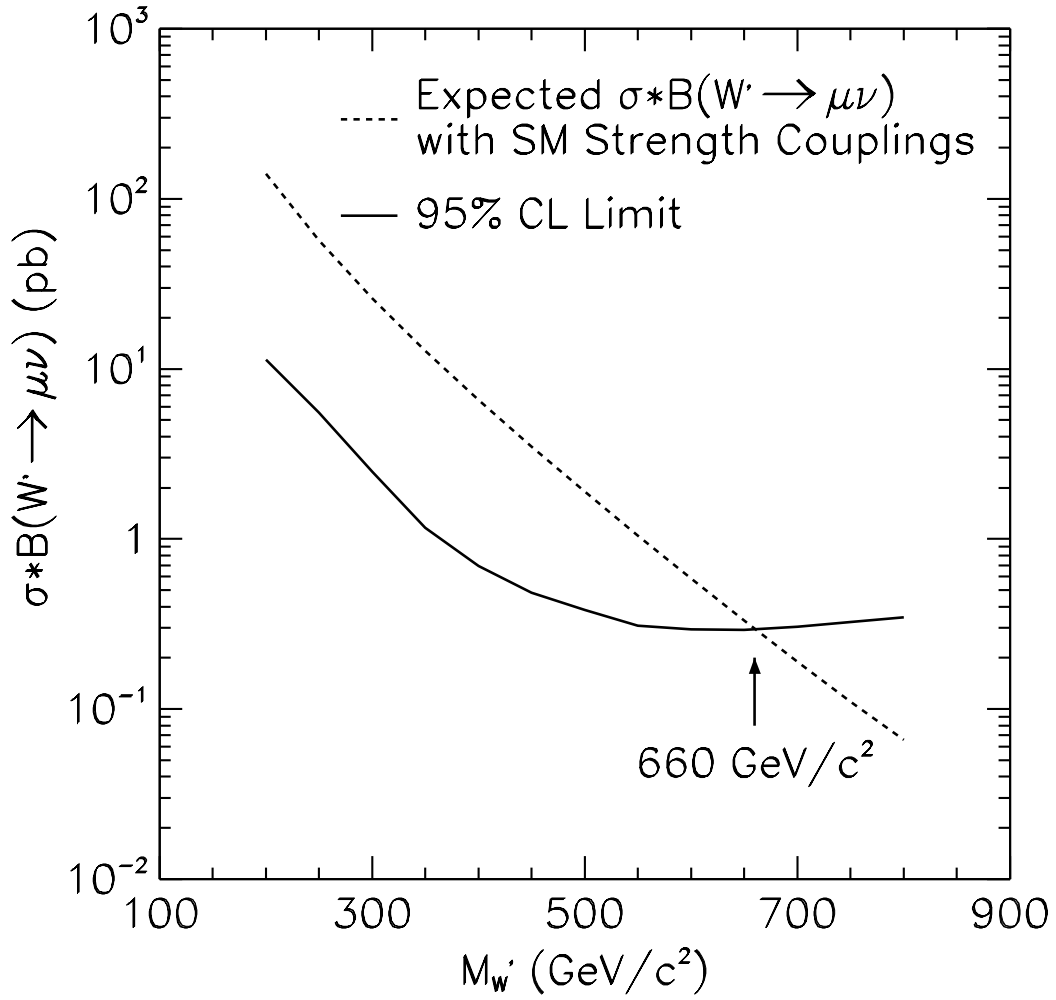


FIG. 2. The upper limits on the W' boson production cross section as a function of the W' boson mass.

TABLES

TABLE I. The event yields for the background sources above and below $M_T = 200 \text{ GeV}/c^2$.

Uncertainties are correlated.

Process	Fitted Event Yield	
	($40 < M_T < 200 \text{ GeV}/c^2$)	($M_T > 200 \text{ GeV}/c^2$)
$W \rightarrow \mu\nu_\mu$	27925 ± 209	8.99 ± 0.81
$W \rightarrow \tau\nu_\tau$	687 ± 27	0.04 ± 0.01
$Z/\gamma \rightarrow \mu\mu$	2824 ± 196	2.02 ± 0.35
$Z/\gamma \rightarrow \tau\tau$	47 ± 3	0.02 ± 0.02
$t\bar{t}$	14_{-3}^{+4}	$0.29_{-0.06}^{+0.07}$
QCD	74 ± 37	$0.42_{-0.42}^{+0.43}$

TABLE II. The expected number of events from W' boson production, N_{exp} , assuming Standard Model strength couplings and normalized to the observed W boson yield. We also show the rate of W' boson production and decay relative to the rate predicted using Standard Model couplings, and the 95% CL upper limit on this relative rate as a function of $M_{W'}$. The uncertainties are statistical and do not include the systematic uncertainties. The 95% CL upper limit includes both statistical and systematic uncertainties.

$M_{W'}$ (GeV/ c^2)	N_{exp} (Events)	$\frac{\sigma \cdot \mathcal{B}(W' \rightarrow \mu\nu_\mu)}{\sigma \cdot \mathcal{B}(W' \rightarrow \mu\nu_\mu)_{SM}}$	
		Fit	Upper Limit
200	2330 ± 100	$0.009^{+0.004}_{-0.004}$	0.08
250	984 ± 45	$0.011^{+0.007}_{-0.006}$	0.10
300	456 ± 26	$0.006^{+0.011}_{-0.006}$	0.10
350	224 ± 13	$0.000^{+0.014}_{-0.006}$	0.09
400	115 ± 8	$0.000^{+0.018}_{-0.002}$	0.11
450	60.2 ± 3.5	$0.000^{+0.026}_{-0.000}$	0.14
500	32.5 ± 2.4	$0.000^{+0.039}_{-0.000}$	0.20
550	17.2 ± 1.4	$0.000^{+0.058}_{-0.000}$	0.30
600	9.69 ± 0.84	$0.000^{+0.096}_{-0.000}$	0.50
650	5.37 ± 0.50	$0.000^{+0.159}_{-0.000}$	0.83
700	3.01 ± 0.31	$0.000^{+0.273}_{-0.000}$	1.90
750	1.72 ± 0.21	$0.000^{+0.495}_{-0.000}$	2.94