

## Observation of muon intensity variations by season with the MINOS far detector

P. Adamson,<sup>8</sup> C. Andreopoulos,<sup>19</sup> K. E. Arms,<sup>14</sup> R. Armstrong,<sup>12</sup> D. J. Auty,<sup>23</sup> D. S. Ayres,<sup>1</sup> C. Backhouse,<sup>17</sup> J. Barnett,<sup>17</sup> G. Barr,<sup>17</sup> W. L. Barrett,<sup>29</sup> B. R. Becker,<sup>14</sup> M. Bishai,<sup>4</sup> A. Blake,<sup>6</sup> B. Bock,<sup>15</sup> G. J. Bock,<sup>8</sup> D. J. Boehnlein,<sup>8</sup> D. Bogert,<sup>8</sup> C. Bower,<sup>12</sup> S. Cavanaugh,<sup>9</sup> J. D. Chapman,<sup>6</sup> D. Cherdack,<sup>26</sup> S. Childress,<sup>8</sup> B. C. Choudhary,<sup>8,\*</sup> J. H. Cobb,<sup>17</sup> S. J. Coleman,<sup>28</sup> D. Cronin-Hennessy,<sup>14</sup> A. J. Culling,<sup>6</sup> I. Z. Danko,<sup>18</sup> J. K. de Jong,<sup>17,11</sup> N. E. Devenish,<sup>23</sup> M. V. Diwan,<sup>4</sup> M. Dorman,<sup>13</sup> C. O. Escobar,<sup>7</sup> J. J. Evans,<sup>13,17</sup> E. Falk,<sup>23</sup> G. J. Feldman,<sup>9</sup> T. H. Fields,<sup>1</sup> M. V. Frohne,<sup>10,3</sup> H. R. Gallagher,<sup>26</sup> A. Godley,<sup>21</sup> M. C. Goodman,<sup>1</sup> P. Gouffon,<sup>20</sup> R. Gran,<sup>15</sup> E. W. Grashorn,<sup>14,15,†</sup> K. Grzelak,<sup>27,17</sup> A. Habig,<sup>15</sup> D. Harris,<sup>8</sup> P. G. Harris,<sup>23</sup> J. Hartnell,<sup>23,19</sup> R. Hatcher,<sup>8</sup> K. Heller,<sup>14</sup> A. Himmel,<sup>5</sup> A. Holin,<sup>13</sup> J. Hylen,<sup>8</sup> G. M. Irwin,<sup>22</sup> Z. Isvan,<sup>18</sup> D. E. Jaffe,<sup>4</sup> C. James,<sup>8</sup> D. Jensen,<sup>8</sup> T. Kafka,<sup>26</sup> S. M. S. Kasahara,<sup>14</sup> G. Koizumi,<sup>8</sup> S. Kopp,<sup>25</sup> M. Kordosky,<sup>28,13</sup> K. Korman,<sup>15</sup> D. J. Koskinen,<sup>13,15,‡</sup> Z. Krahn,<sup>14</sup> A. Kreymer,<sup>8</sup> K. Lang,<sup>25</sup> J. Ling,<sup>21</sup> P. J. Litchfield,<sup>14</sup> L. Loiacono,<sup>25</sup> P. Lucas,<sup>8</sup> J. Ma,<sup>25</sup> W. A. Mann,<sup>26</sup> M. L. Marshak,<sup>14</sup> J. S. Marshall,<sup>6</sup> N. Mayer,<sup>12</sup> A. M. McGowan,<sup>1,14,§</sup> R. Mehdiyev,<sup>25</sup> J. R. Meier,<sup>14</sup> M. D. Messier,<sup>12</sup> C. J. Metelko,<sup>19</sup> D. G. Michael,<sup>5,¶</sup> W. H. Miller,<sup>14</sup> S. R. Mishra,<sup>21</sup> J. Mitchell,<sup>6</sup> C. D. Moore,<sup>8</sup> J. Morfín,<sup>8</sup> L. Mualem,<sup>5</sup> S. Mufson,<sup>12</sup> J. Musser,<sup>12</sup> D. Naples,<sup>18</sup> J. K. Nelson,<sup>28</sup> H. B. Newman,<sup>5</sup> R. J. Nichol,<sup>13</sup> T. C. Nicholls,<sup>19</sup> J. P. Ochoa-Ricoux,<sup>5</sup> W. P. Oliver,<sup>26</sup> R. Ospanov,<sup>25,\*\*</sup> S. Osprey,<sup>17</sup> J. Paley,<sup>12</sup> R. B. Patterson,<sup>5</sup> T. Patzak,<sup>30</sup> G. Pawloski,<sup>22</sup> G. F. Pearce,<sup>19</sup> E. A. Peterson,<sup>14</sup> R. Pittam,<sup>17</sup> R. K. Plunkett,<sup>8</sup> A. Rahaman,<sup>21</sup> R. A. Rameika,<sup>8</sup> T. M. Raufer,<sup>19,17</sup> B. Rebel,<sup>8</sup> J. Reichenbacher,<sup>1</sup> P. A. Rodrigues,<sup>17</sup> C. Rosenfeld,<sup>21</sup> H. A. Rubin,<sup>11</sup> V. A. Ryabov,<sup>31</sup> M. C. Sanchez,<sup>1,9</sup> N. Saoulidou,<sup>8</sup> J. Schneps,<sup>26</sup> P. Schreiner,<sup>3</sup> P. Shanahan,<sup>8</sup> W. Smart,<sup>8</sup> C. Smith,<sup>23,5</sup> A. Sousa,<sup>9,17</sup> B. Speakman,<sup>14</sup> P. Stamoulis,<sup>2</sup> M. Strait,<sup>14</sup> N. Tagg,<sup>16,26</sup> R. L. Talaga,<sup>1</sup> J. Thomas,<sup>13</sup> M. A. Thomson,<sup>6</sup> J. L. Thron,<sup>1,††</sup> G. Tinti,<sup>17</sup> R. Toner,<sup>6</sup> V. A. Tsarev,<sup>31</sup> G. Tzanakos,<sup>2</sup> J. Urheim,<sup>12</sup> P. Vahle,<sup>28,13</sup> B. Viren,<sup>4</sup> M. Watabe,<sup>24</sup> A. Weber,<sup>17</sup> R. C. Webb,<sup>24</sup> N. West,<sup>17</sup> C. White,<sup>11</sup> L. Whitehead,<sup>4</sup> S. G. Wojcicki,<sup>22</sup> D. M. Wright,<sup>32</sup> T. Yang,<sup>22</sup> M. Zois,<sup>2</sup> K. Zhang,<sup>4</sup> and R. Zwaska<sup>8</sup>

(The MINOS Collaboration)

<sup>1</sup>Argonne National Laboratory, Argonne, Illinois 60439, USA

<sup>2</sup>Department of Physics, University of Athens, GR-15771 Athens, Greece

<sup>3</sup>Physics Department, Benedictine University, Lisle, Illinois 60532, USA

<sup>4</sup>Brookhaven National Laboratory, Upton, New York 11973, USA

<sup>5</sup>Lauritsen Laboratory, California Institute of Technology, Pasadena, California 91125, USA

<sup>6</sup>Cavendish Laboratory, University of Cambridge, Madingley Road, Cambridge CB3 0HE, United Kingdom

<sup>7</sup>Universidade Estadual de Campinas, IFGW-UNICAMP, CP 6165, 13083-970, Campinas, SP, Brazil

<sup>8</sup>Fermi National Accelerator Laboratory, Batavia, Illinois 60510, USA

<sup>9</sup>Department of Physics, Harvard University, Cambridge, Massachusetts 02138, USA

<sup>10</sup>Holy Cross College, Notre Dame, Indiana 46556, USA

<sup>11</sup>Physics Division, Illinois Institute of Technology, Chicago, Illinois 60616, USA

<sup>12</sup>Indiana University, Bloomington, Indiana 47405, USA

<sup>13</sup>Department of Physics and Astronomy, University College London, Gower Street, London WC1E 6BT, United Kingdom

<sup>14</sup>University of Minnesota, Minneapolis, Minnesota 55455, USA

<sup>15</sup>Department of Physics, University of Minnesota – Duluth, Duluth, Minnesota 55812, USA

<sup>16</sup>Otterbein College, Westerville, Ohio 43081, USA

<sup>17</sup>Department of Physics, University of Oxford, Oxford OX1 3RH, United Kingdom

<sup>18</sup>Department of Physics and Astronomy, University of Pittsburgh, Pittsburgh, Pennsylvania 15260, USA

<sup>19</sup>Rutherford Appleton Laboratory, Science and Technology Facilities Council, Harwell Science and Innovation Campus, Didcot, OX11 0QX, United Kingdom

<sup>20</sup>Instituto de Física, Universidade de São Paulo, CP 66318, 05315-970, São Paulo, SP, Brazil

<sup>21</sup>Department of Physics and Astronomy, University of South Carolina, Columbia, South Carolina 29208, USA

<sup>22</sup>Department of Physics, Stanford University, Stanford, California 94305, USA

<sup>23</sup>Department of Physics and Astronomy, University of Sussex, Falmer, Brighton BN1 9QH, United Kingdom

<sup>24</sup>Physics Department, Texas A&M University, College Station, Texas 77843, USA

<sup>25</sup>Department of Physics, University of Texas at Austin, 1 University Station C1600, Austin, Texas 78712, USA

<sup>26</sup>Physics Department, Tufts University, Medford, Massachusetts 02155, USA

<sup>27</sup>Department of Physics, University of Warsaw, Hoża 69, PL-00-681 Warsaw, Poland

<sup>28</sup>Department of Physics, College of William & Mary, Williamsburg, Virginia 23187, USA

<sup>29</sup>Physics Department, Western Washington University, Bellingham, Washington 98225, USA

<sup>30</sup>APC – Université Paris 7 Denis Diderot, 10, rue Alice Domon et Léonie Duquet, F-75205 Paris Cedex 13, France

<sup>31</sup>Nuclear Physics Department, Lebedev Physical Institute, Leninsky Prospect 53, 119991 Moscow, Russia

<sup>32</sup>Lawrence Livermore National Laboratory, Livermore, California 94550, USA

(Dated: September 14, 2009)

The temperature of the upper atmosphere affects the height of primary cosmic ray interactions and the production of high-energy cosmic ray muons which can be detected deep underground. The MINOS far detector at Soudan MN, USA, has collected over 67 million cosmic ray induced muons. The underground muon rate

measured over a period of five years exhibits a 4% peak-to-peak seasonal variation which is highly correlated with the temperature in the upper atmosphere. The coefficient,  $\alpha_T$ , relating changes in the muon rate to changes in atmospheric temperature was found to be:  $\alpha_T = 0.874 \pm 0.009$  (stat.)  $\pm 0.010$  (syst.). Pions and kaons in the primary hadronic interactions of cosmic rays in the atmosphere contribute differently to  $\alpha_T$  due to the different masses and lifetimes. This allows the measured value of  $\alpha_T$  to be interpreted as a measurement of the  $K/\pi$  ratio for  $E_p \gtrsim 7$  TeV of  $0.13 \pm 0.08$ , consistent with the expectation from collider experiments.

## I. INTRODUCTION

When very high energy cosmic rays interact in the stratosphere, mesons are produced in the primary hadronic interaction. These mesons either interact and produce lower energy hadronic cascades, or decay into high energy muons which can be observed deep underground. While the temperature of the troposphere varies considerably within the day, the temperature of the stratosphere remains nearly constant, usually changing on the timescale of seasons (with the exception of the occasional Sudden Stratospheric Warming [1]). An increase in temperature of the stratosphere causes a decrease in density. This reduces the chance of meson interaction, resulting in a larger fraction decaying to produce muons. This results in a higher muon rate observed deep underground [2–4]. The majority of muons detected in the MINOS far detector are produced in the decay of pions although the decays of kaons must be considered for a more complete description of the flux [5].

MINOS is a long baseline neutrino oscillation experiment [6, 7], with a neutrino source and near detector at Fermi National Accelerator Laboratory in Batavia, IL, and a far detector at the Soudan Underground Mine State Park in northern Minnesota. This paper describes cosmic ray data taken in the far detector, a scintillator and steel tracking calorimeter located 0.72 km underground (2080 mwe, meters water equivalent) [8]. It has a 5.4 kton mass and a  $6.91 \times 10^6$  cm<sup>2</sup>sr [9] acceptance. Because of its depth, MINOS detects cosmic-ray muons with energy at the surface,  $E > 0.7$  TeV. These high energy muons are mostly produced from the decays of the mesons produced in the primary hadronic interaction. This, coupled with the large acceptance, makes it possible to detect small seasonal temperature fluctuations in the upper atmosphere. The far detector is the deepest underground detector with a magnetic field, allowing the separation of particles by charge.

The MINOS data are correlated with atmospheric tem-

perature measurements at the Soudan site provided by the European Centre for Medium-Range Weather Forecasts (ECMWF) [10]. This temperature data set has higher precision than any other used for the seasonal variation analysis [2, 4, 11–17]. The 67.32 million muon events used in this analysis were collected over five years, from August 1, 2003 to July 31, 2008, a period that includes five complete annual cycles. The seasonal variations in muon rate were compared to a theoretical model which extends the pion-only model of [3] to include the contribution from kaons.

## II. THE EXPERIMENTAL EFFECTIVE TEMPERATURE COEFFICIENT

### A. Experimental Intensity

The underground muon intensity depends on the threshold energy  $E$  and the cosine of the zenith angle  $\theta$ . The change in the surface muon intensity,  $\Delta I_\mu(E, \cos \theta)$  occurring at the MINOS far detector site can be written as [18, 19]:

$$\Delta I_\mu = \int_0^\infty dX W(X) \Delta T(X) \quad (1)$$

where  $\Delta T(X)$  is the change in atmospheric temperature at atmospheric depth  $X$ , and the weight  $W(X)$  reflects the temperature dependence of the production of mesons in the atmosphere and their decay into muons that can be observed in the far detector. A temperature coefficient  $\alpha(X)$  can be defined as:

$$\alpha(X) = \frac{T(X)}{T_\mu^0} W(X), \quad (2)$$

where  $I_\mu^0$  is the muon intensity evaluated at a given value of atmospheric temperature  $T_0$ . The phenomenological relationship between the atmospheric temperature fluctuations and muon intensity variations can now be written as [2, 3]:

$$\frac{\Delta I_\mu}{I_\mu^0} = \int_0^\infty dX \alpha(X) \frac{\Delta T(X)}{T_0}. \quad (3)$$

The atmosphere consists of many levels that vary continuously in both temperature and pressure. To simplify calculations, the atmosphere is approximated by an isothermal body with an effective temperature,  $T_{\text{eff}}$ , obtained from a weighted average over the atmospheric depth:

$$T_{\text{eff}} = \frac{\int_0^\infty dX T(X) W(X)}{\int_0^\infty dX W(X)}. \quad (4)$$

\*Now at Department of Physics and Astrophysics, University of Delhi, Delhi 110007, India.

†Now at Center for Cosmology and Astro Particle Physics, Ohio State University, Columbus, Ohio 43210, USA.

‡Now at Department of Physics, Penn State University, State College PA 16802.

§Now at Physics Department, St. John Fisher College, Rochester, New York 14618 USA.

¶Deceased.

\*\*Now at Department of Physics and Astronomy, University of Pennsylvania, Philadelphia, PA 19104-6396

††Now at Nuclear Nonproliferation Division, Threat Reduction Directorate, Los Alamos National Laboratory, Los Alamos, New Mexico 87545, USA.

An “effective temperature coefficient”,  $\alpha_T$  can then be defined

$$\alpha_T = \frac{T_{\text{eff}}}{I_\mu^0} \int_0^\infty dX W(X). \quad (5)$$

With these definitions in place, the relationship between atmospheric temperature fluctuations and muon intensity variations can now be written as:

$$\frac{\Delta I_\mu}{I_\mu^0} = \alpha_T \frac{\Delta T_{\text{eff}}}{T_{\text{eff}}}. \quad (6)$$

The configuration and geometric acceptance of the far detector remain constant over time. Therefore, the rate,  $R_\mu$  of muons observed in the detector is proportional to the incident muon intensity and varies with the effective atmospheric temperature as follows:

$$\frac{\Delta R_\mu}{\langle R_\mu \rangle} = \alpha_T \frac{\Delta T_{\text{eff}}}{\langle T_{\text{eff}} \rangle}. \quad (7)$$

In practice, the observed muon rates and the temperature data are averaged over the period of a day. The effective temperature is obtained from a weighted average of temperature measurements obtained at a set of discrete pressure levels.

The weight  $W(X)$  can be written as the sum  $W^\pi + W^K$ , representing the contribution of pions and kaons to the overall variation in muon intensity. The weights  $W^{\pi,K}$  are given by [18, 19]:

$$W^{\pi,K}(X) \simeq \frac{(1 - X/\Lambda'_{\pi,K})^2 e^{-X/\Lambda_{\pi,K}} A_{\pi,K}^1}{\gamma + (\gamma + 1) B_{\pi,K}^1 K(X) (E_{\text{th}} \cos \theta / \epsilon_{\pi,K})^2}, \quad (8)$$

where

$$K(X) \equiv \frac{(1 - X/\Lambda'_{\pi,K})^2}{(1 - e^{-X/\Lambda'_{\pi,K}}) \Lambda'_{\pi,K} / X}. \quad (9)$$

The parameters  $A_{\pi,K}^1$  include the amount of inclusive meson production in the forward fragmentation region, masses of mesons and muons, and muon spectral index; the inputted values are  $A_\pi^1 = 1$  and  $A_K^1 = 0.38 \cdot r_{K/\pi}$  [18, 19], where  $r_{K/\pi}$  is the K/ $\pi$  ratio. The parameters  $B_{\pi,K}^1$  reflect the relative atmospheric attenuation of mesons; The threshold energy,  $E_{\text{th}}$ , is the energy required for a muon to survive to a particular depth; The attenuation lengths for the cosmic ray primaries, pions and kaons are  $\Lambda_N$ ,  $\Lambda_\pi$  and  $\Lambda_K$  respectively with  $1/\Lambda'_{\pi,K} \equiv 1/\Lambda_N - 1/\Lambda_{\pi,K}$ . The muon spectral index is given by  $\gamma$ . The meson critical energy,  $\epsilon_{\pi,K}$ , is the meson energy for which decay and interaction have an equal probability. The values for these parameters can be found in Table I.

Since the temperature is measured at discrete levels, the integral is represented by a sum over the atmospheric levels  $X_n$ :


$$T_{\text{eff}} \simeq \frac{\sum_{n=0}^N \Delta X_n T(X_n) (W_n^\pi + W_n^K)}{\sum_{n=0}^N \Delta X_n (W_n^\pi + W_n^K)} \quad (10)$$

where  $W_n^{\pi,K}$  is  $W^{\pi,K}$  evaluated at  $X_n$ . The temperature and pressure vary continuously through the atmosphere. Fig. 1

**TABLE I:** Input  $W(X)$  parameter values.

Parameter	Value
$A_\pi^1$	1 [18, 19]
$A_K^1$	$0.38 \cdot r_{K/\pi}$ [18, 19]
$r_{K/\pi}$	$0.149 [20] \pm 0.06 [21]$
$B_\pi^1$	$1.460 \pm 0.007$ [18, 19]
$B_K^1$	$1.740 \pm 0.028$ [18, 19]
$\Lambda_N$	120 g/cm <sup>2</sup> [20]
$\Lambda_\pi$	180 g/cm <sup>2</sup> [20]
$\Lambda_K$	160 g/cm <sup>2</sup> [20]
$\langle E_{\text{th}} \cos \theta \rangle$	$0.73 \pm 0.1$ TeV
$\gamma$	$1.7 \pm 0.1$ [5]
$\epsilon_\pi$	$0.114 \pm 0.003$ TeV [18, 19]
$\epsilon_K$	$0.851 \pm 0.014$ TeV [18, 19]


(solid line) shows the average temperature from 2003-2008 above Soudan as a function of pressure level in the atmosphere [10]. The height axis on the right represents the average log-pressure height, the height of a pressure level relative to the surface pressure, corresponding to the average temperatures plotted here. The dashed line is the weight as a function of pressure level  $W(X)$ , obtained from Eq. 8 and normalized to one, used to calculate the effective temperature.

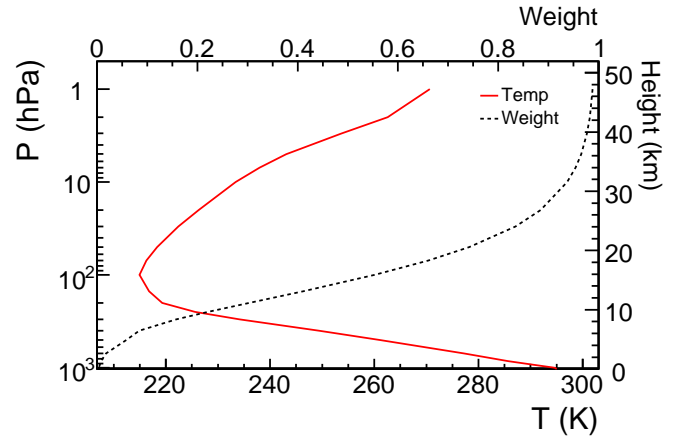

**FIG. 1:** The five year average temperature at various pressure levels (solid line). The range is from 1000 hPa (1 hPa = 1.019 g/cm<sup>2</sup>), near Earth’s surface, to 1 hPa (nearly 50 km), near the top of the stratosphere. The height axis on the right represents the average log-pressure height corresponding to the average temperatures plotted here. The dashed line is the weight as a function of pressure level ( $X$ ) used to find  $T_{\text{eff}}$ . The weights are determined by Eq. 8, normalized to one.

The dashed weight curve in Fig. 1 shows that the temperature fluctuations higher in the atmosphere have a greater effect on the production of muons visible at a depth of 2100 mwe. High energy mesons produced at the top of the atmosphere are more likely to decay, producing muons visible to MINOS,

than those produced lower in the atmosphere. Note that the expression used to calculate  $T_{\text{eff}}$  in the pion scaling limit, ignoring the kaon contribution, is the same as the MACRO calculation [3]. The effective temperature coefficient,  $\alpha_T$ , is a function of both the muon threshold energy and the  $K/\pi$  ratio. As the energy increases, the muon intensity becomes more dependent on the meson critical energy, which in turn is proportional to the atmospheric temperature. The effective temperature coefficient thus reflects the fraction of mesons that are sensitive to atmospheric temperature variations, and for energies much greater than the critical energy, the value of  $\alpha_T$  approaches unity. At the depth of the MINOS far detector, the vertical muon threshold energy lies between the pion and kaon critical energies. Therefore, because the muon energy is close to the parent meson's energy, a larger  $K/\pi$  ratio results in a smaller value of  $\alpha_T$ .

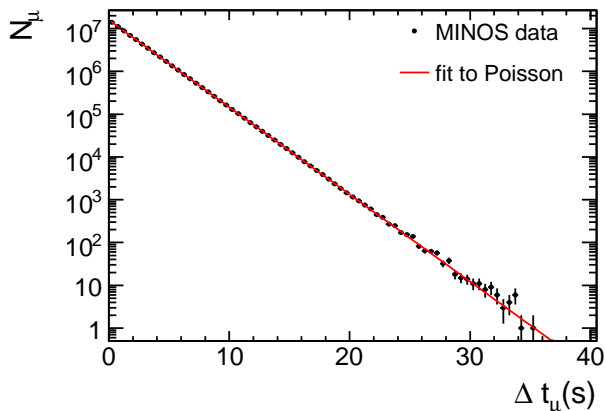

**FIG. 2:** The time between consecutive cosmic ray muon arrivals, fit with a Poisson distribution. The fit gives  $\chi^2/N_{Dof} = 55.2/68$ ;  $\langle R_\mu \rangle = 0.4692 \pm 0.0001$  Hz (from slope). The Poissonian nature of the muon arrival times demonstrates the absence of short timescale systematic effects on the data.

## B. The Data


The muon data for this analysis were accumulated over a five year span, beginning on August 1, 2003. Data quality cuts were performed to ensure a clean sample of muons (Pre-Analysis cuts) [5], and timing cuts were applied to exclude muons induced by NuMI beam interactions [6]. After all cuts were applied the initial sample of 68.66 million muons was reduced to 67.32 million muons [18]. A plot of the time between consecutive muon arrivals in the MINOS data is shown in Fig. 2. The distribution is well described by a Poisson distribution [18, 22] with mean rate  $\langle R_\mu \rangle = 0.4692 \pm 0.0001$  Hz, demonstrating the absence of short-timescale systematic effects on the data. The average muon rate was calculated for each day by dividing the number of observed muons by the detector livetime.

The temperature data for the Soudan site was obtained from ECMWF, which collates a number of different types of observations (e.g. surface, satellite and upper air sounding) at many locations around the globe, and uses a global atmospheric model to interpolate to a particular location. For this analysis, the ECMWF model produced atmospheric temperatures at 21 discrete pressure levels: 1000, 925, 850, 700, 500, 400, 300, 250, 200, 150, 100, 70, 50, 30, 20, 10, 7, 5, 3, 2 and 1 hPa (1 hPa = 1.019 g/cm<sup>2</sup>), at four times, 0000 h, 0600 h, 1200 h and 1800 h each day. The effective temperature,  $T_{\text{eff}}$ , was calculated four times each day using Eq. 10. A mean value  $\langle T_{\text{eff}} \rangle$  and error was obtained from these four daily measurements. The ECMWF temperature data was cross-checked using the Integrated Global Radiosonde Archive (IGRA) of temperature measurements [23]. The distribution of the differences between ECMWF and IGRA temperature values at International Falls, MN was well described by a Gaussian distribution with  $\sigma = 0.31$  K.


Fig. 3 shows the percentage deviation in the mean daily muon rate,  $\Delta R_\mu$ , over the entire set of data, with statistical error bars. A typical day at  $\langle R_\mu \rangle = 0.4692$  Hz yields  $\sim 40,000$  muons, resulting in error bars of order 0.5%. The variation with season can be seen, with maxima in August and minima in February. These maxima peak at rates that are within 0.5% of each other. For the five year period  $\langle T_{\text{eff}} \rangle = 222.06$  K. The distribution of  $\Delta T_{\text{eff}}$  over the data period can be seen in Fig. 4, with strong periodic seasonal correlation with the data. There is also striking correspondence between Fig. 3 and Fig. 4 for small term maxima and minima over a few days' span.

A plot of  $\Delta R_\mu / \langle R_\mu \rangle (\Delta T_{\text{eff}})$  was produced (Fig. 5) for each day's  $\Delta R_\mu$  and  $\Delta T_{\text{eff}}$  data to quantify the daily correlation between rate and temperature. To find the value for  $\alpha_T$ , a linear regression was performed using the MINUIT [24] fitting package. This package performs a linear regression accounting for error bars on both the x and y axis using a numerical minimization method. The result of this fit is a slope of  $\alpha_T = 0.874 \pm 0.009$  (statistical errors only), and the correlation coefficient (R-value) between these two distributions is 0.90.

The effects of systematic uncertainties were evaluated by modifying parameters and recalculating  $\alpha_T$ . Table II shows the difference in calculated  $\alpha_T$  for the modified parameters. The largest systematic errors are: a) the  $\pm 0.06$  uncertainty in meson production ratio [21]; b) the  $\pm 0.31$  K uncertainty in mean effective temperature, estimated by comparing ECMWF temperatures at International Falls, MN, to those of the IGRA [23] measurements; c) the  $\pm 0.12$  TeV uncertainty in muon threshold energy, estimated from uncertainties in the rock overburden above the far detector. These systematic errors were added in quadrature and are included with the error from the linear fit to obtain the experimental value of  $\alpha_T = 0.874 \pm 0.009$  (stat.)  $\pm 0.010$  (syst.).

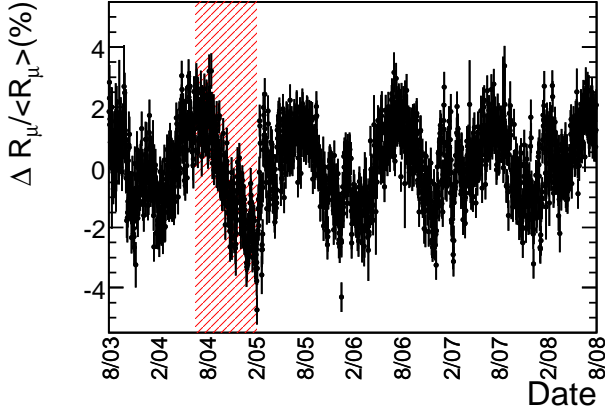


**FIG. 3:** The daily deviation from the mean rate of cosmic ray muon arrivals from 8/03-8/08, shown here with statistical error bars. The periodic fluctuations have the expected maxima in August, minima in February. The hatched region indicates the period of time when the detector ran with the magnetic field reversed from the normal configuration.

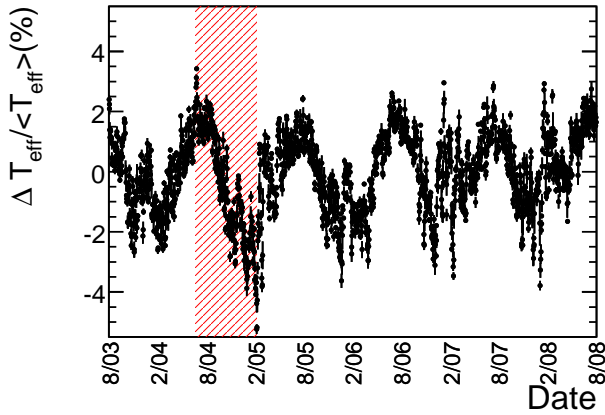

**FIG. 4:** The daily deviation from the mean effective temperature over a period of five years, beginning when the far detector was complete, 08/03-08/08. The hatched region indicates the period of time when the detector ran with the magnetic field reversed from the normal configuration.

**TABLE II:** Systematic errors on the experimental parameter inputs to  $\alpha_T$ .

Parameter	$\Delta\alpha_T$
meson production ratio, $r_{K/\pi} = 0.149 \pm 0.06$ [21]	0.007
mean effective temperature, $\langle T_{\text{eff}} \rangle = 222.06 \pm 0.32$ K	0.0051
threshold energy, $\langle E_{\text{th}} \cos \theta \rangle = 0.73 \pm 0.1$ TeV	0.0042
kaon constant, $B_K^1 = 1.740 \pm 0.028$	0.00046
pion constant, $B_\pi^1 = 1.460 \pm 0.007$	0.000063
<b>Total</b>	<b>0.010</b>

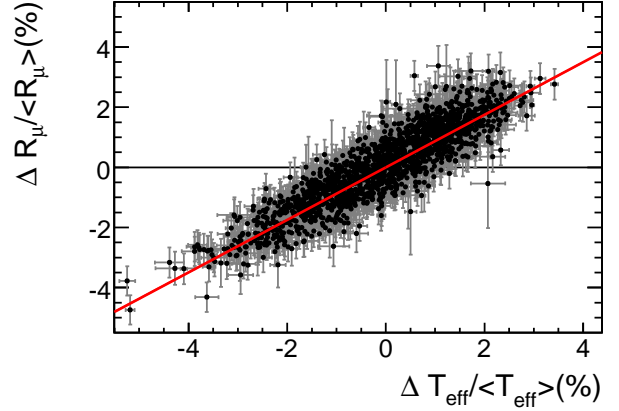

**FIG. 5:** A plot of  $\Delta R_\mu / \langle R_\mu \rangle$  as a function of  $\Delta T_{\text{eff}} / \langle T_{\text{eff}} \rangle$  for single muons, fit by a line with the y-intercept fixed at 0. The fit has a  $\chi^2/N_{Dof} = 1905/1797$ , and the slope is  $\alpha_T = 0.874 \pm 0.009$ .

### C. Charge Separated

To obtain a sample of events with well-measured charge sign, further selection requirements were applied to the length and radius of curvature of muon tracks. These cuts, taken from previous investigations of the muon charge ratio at MINOS [5], have the effect of reducing the average energy at Earth's surface of the selected muon sample.

In all, 5.7% of the data set survived the cuts for both the forward and reverse field detector configurations. For the charge-separated samples linear regressions yielded effective temperature coefficients,  $\alpha(\mu^+) = 0.78 \pm 0.05$  and  $\alpha(\mu^-) = 0.77 \pm 0.06$  with  $\chi^2/N_{Dof}$  of 1920/1755 and 1770/1753 respectively. These numbers are consistent with each other, so there is no measurable difference between the temperature effect on  $\mu^+$  and  $\mu^-$ . The value of the charge-separated  $\alpha_T$  is expected to be smaller than the previous  $\alpha_T$  with no charge separation because the change in selection cuts change the distribution that is integrated over.

This phenomenology can be applied to changes in the charge ratio. The charge ratio is given by  $r = N_{\mu^+}/N_{\mu^-}$ , and an effective temperature charge ratio coefficient  $r_T$  can be written:

$$\frac{\Delta r}{\langle r \rangle} = r_T \frac{\Delta T_{\text{eff}}}{\langle T_{\text{eff}} \rangle} \quad (11)$$

where  $\Delta r \equiv N_{\mu^+}/N_{\mu^-} - \langle r \rangle$ . This same analysis was performed on the daily deviation of the charge ratio, and for the charge ratio sample,  $r_T = 0.11 \pm 0.12$ .

### III. DISCUSSION

#### A. Predicted $\alpha_T$

The theoretical prediction of  $\alpha_T$  can be written as [2]:

$$\alpha_T = -\frac{E_{\text{th}}}{I_\mu^0} \frac{\partial I_\mu}{\partial E_{\text{th}}} - \gamma \quad (12)$$

The prediction for  $\alpha_T$  can be calculated using the differential muon intensity [20]:

$$\alpha_T = \frac{1}{D_\pi} \frac{1/\epsilon_K + A_K^1 (D_\pi/D_K)^2/\epsilon_\pi}{1/\epsilon_K + A_K^1 (D_\pi/D_K)/\epsilon_\pi} \quad (13)$$

where

$$D_{\pi,K} = \frac{\gamma}{\gamma + 1} \frac{\epsilon_{\pi,K}}{1.1 E_{\text{th}} \cos \theta} + 1, \quad (14)$$


Note that this can be reduced to MACRO's previously published expression  $(\alpha_T)_\pi$  [3], by setting  $A_K = 0$  (no kaon contribution).  $A_K^1 = 0.38 \cdot r_{K/\pi}$  is the same as in Sec. II.

A numerical integration using a Monte Carlo method was performed to find the expected value of the seasonal effect coefficient,  $\langle \alpha_T \rangle_{\text{Th}}$ , for the far detector. A set of muons was generated by drawing values of  $E_\mu$  and  $\cos \theta$  separately from the differential intensity of muons at the surface, calculated in [20]. A random azimuthal angle,  $\phi$ , was assigned to each event and combined with  $\cos \theta$  and the Soudan rock overburden map [5] to find the slant depth,  $S(\cos \theta, \phi)$ , of the event. This was converted into the corresponding threshold energy,  $E_{\text{th}}$ , required for a muon on the surface to propagate to the far detector. Events satisfying  $E_\mu > E_{\text{th}}$  were retained, and the mean value of  $\alpha_T$  was found for a sample of 10,000 events, giving  $\langle \alpha_T \rangle_{\text{Th}} = 0.871 \pm 0.025$  for MINOS. When this calculation is performed using the lower energy charge-separated energy spectrum, the result is an  $\langle \alpha_T \rangle_{\text{Th}}$  value that is lower by 0.025.

The systematic uncertainty on  $\langle \alpha_T \rangle_{\text{Th}}$  was found by modifying the input parameters and recalculating  $\alpha_T$ . The dominant contributions were from: a) the  $\pm 0.06$  uncertainty in meson production ratio; b) the  $\pm 10\%$  in rock map uncertainty<sup>1</sup>; c) the  $\pm 0.1$  uncertainty in muon spectral index; d) the  $\pm 0.014$  TeV uncertainty in kaon critical energy; and e) the  $\pm 0.003$  TeV uncertainty in pion critical energy. These uncertainties are summarized in Table III.

**TABLE III:** Systematic errors on the theoretical parameter inputs to  $\alpha_T$ .

Parameter	$\Delta \alpha_T$
meson production ratio, $K/\pi = 0.149 \pm 0.06$ [21]	0.021
rock map uncertainty $\pm 10\%$	0.015
muon spectral index, $\gamma = 1.7 \pm 0.1$	0.0022
kaon critical energy, $\epsilon_K = 0.851 \pm 0.014$ TeV	0.0016
pion critical energy, $\epsilon_\pi = 0.114 \pm 0.003$ TeV	0.0002
<b>Theoretical Total</b>	<b>0.025</b>

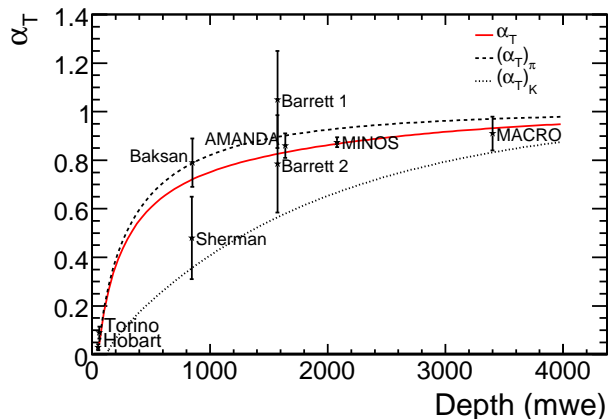

**FIG. 6:** The theoretical prediction for  $\alpha_T$  as a function of detector depth. The dashed (top) curve is the prediction using the pion-only model (of MACRO) and the dotted (bottom) curve is the prediction using a kaon-only model. The solid (middle) curve is the new prediction including both K and  $\pi$ . These curves are illustrative only as the definition of effective temperature used to calculate the experimental values also depends on the  $K/\pi$  ratio. The data from other experiments are shown for comparison only, and are from Barrett 1, 2 [2], AMANDA [4], MACRO [11], Torino [12], Sherman [15], Hobart [16] and Baksan [17].

Fig. 6 shows effective temperature coefficients from MINOS and other underground experiments, including those of the MACRO survey [3], as a function of detector depth. The MINOS and Sherman [15] effective temperature coefficients shown in Fig. 6 were calculated using Eq. 10. The other experimental data points are taken from the MACRO survey [3] and were calculated using a definition which excluded the contributions from kaons and were limited by temperature measurements up to  $20 \text{ g/cm}^2$ ; when the MINOS result is recalculated with this definition the effective temperature coefficient decreases to  $\alpha_T = 0.835$ . To compare the experimental values with the theoretical model, Eq. 13, the expected effective temperature coefficient as a function of depth was calculated using the numerical integration method outlined earlier, using standard rock and a flat overburden, and is shown in Fig. 6 as the solid line. There is qualitative agreement between the prediction and the experimentally measured values, but quantitative comparisons would require recalculating the experi-

<sup>1</sup> The rock map is not a determination of the slant depth by geophysical means. It was created by measuring the muon flux coming from a particular solid angle region on the sky and then normalizing to the All-world Crouch underground muon intensity curve [25]. This was done with both Soudan 2 data [26] and with MINOS data [5], and these calculations were shown to agree to within 10%. Average cosmic ray muon flux, like those determined here and in [5] can be determined using this method, although in any particular direction the rock map can be much different from what was calculated (e.g., in the direction of iron veins).




mental values using the kaon-inclusive definition of effective temperature. The two dashed lines in Fig. 6 show the effective temperature dependence for the extreme pion-only and kaon-only predictions. Fig. 6 is illustrative only, as the dependence of the experimentally measured effective temperature coefficient on the input  $K/\pi$  ratio is not explicitly shown.

## B. Measurement of Atmospheric $K/\pi$ Ratio

The uncertainty on the atmospheric  $K/\pi$  ratio in the current cosmic ray flux models is of order 40% [21]. There has not been a measurement of this ratio with cosmic rays. Previous measurements have been made at accelerators for p-p collisions [27], Au+Au collisions [28], Pb+Pb collisions [29, 30]. Many other older measurements are summarized in [31]. The experimental and theoretical values of  $\alpha_T$  can be combined to give a new measurement of the  $K/\pi$  ratio for the reaction  $p + A_{\text{atm}}$ , with  $E_p \gtrsim 7$  TeV. The theoretical  $\alpha_T$  depends directly on the  $K/\pi$  ratio, as a consequence of the different interaction and decay properties of kaons and pions in the atmosphere. Since kaons and pions have different critical energies and attenuation lengths, the effective temperature also depends on the  $K/\pi$  ratio, and therefore the experimental  $\alpha_T$  is a weak function of the  $K/\pi$  ratio. By plotting the experimental and theoretical values of  $\alpha_T$  as functions of the  $K/\pi$  ratio and finding the intersection of the two curves, a measurement of the  $K/\pi$  ratio can be obtained.


Fig. 7 shows the experimental and theoretical values of  $\alpha_T$  as a function of the  $K/\pi$  ratio for the MINOS data. The er-

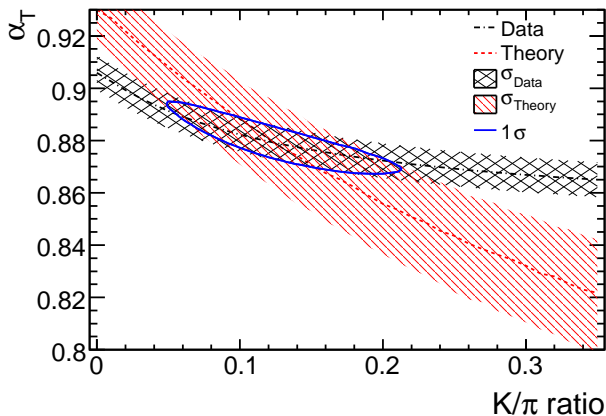

**FIG. 7:** The MINOS experimental  $\alpha_T$  as a function of the  $K/\pi$  ratio (dot-dash line), with its error given by the cross-hatched region, on the same axes as the theoretical  $\alpha_T$  as a function of the  $K/\pi$  ratio (dashed line), with its error given by the hatched region. The error on the experimental  $\alpha_T$  (from Table II  $E_{\text{th}} \cos \theta$ ,  $B_{\pi,K}^1$  and  $\langle T_{\text{eff}} \rangle$ ) plus statistical error is  $\pm 0.013$ , and the theoretical  $\alpha_T$  error (from  $\epsilon_{\pi,K}$  and the rock map, Table III) is  $\pm 0.015$  at the best fit point. The intersection is at  $K/\pi = 0.13 \pm 0.08$ . The solid line denotes the  $1\sigma$  contour around the best fit.

rors in the experimental and theoretical values of  $\alpha_T$  are taken to be  $\pm 0.013$  and  $\pm 0.015$  respectively, obtained by combining the statistical errors in quadrature with the systematic errors in Tables II and III, but omitting the error in the  $K/\pi$  ratio in each case. The error on the theoretical value of  $\alpha_T$  grows with increasing  $K/\pi$  ratio because  $\epsilon_K$  has a larger uncertainty than  $\epsilon_\pi$ , so a larger contribution from kaons introduces more uncertainty. The intersection of the two curves occurs at  $K/\pi = 0.13 \pm 0.08$ . The uncertainty is estimated by assuming Gaussian errors for the theoretical and experimental values of  $\alpha_T$  and performing a  $\chi^2$  minimization to determine the  $\Delta\chi^2 = 1$  contour that encompasses the best fit point.

Previous measurements of the  $K/\pi$  ratio do not directly compare to this indirect measurement. Nevertheless, the central value of MINOS's measurement is consistent with the collider-based direct measurements, although the indirect error bars are several times as large as those on the direct measurements. A comparison of this measurement to other measurements is shown in Fig. 8. Only the MINOS result is for

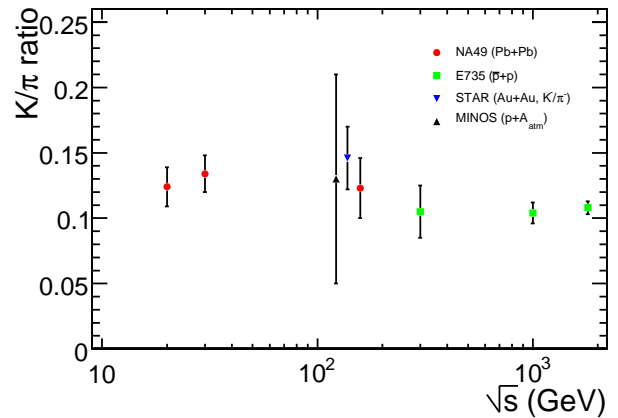

**FIG. 8:** A compilation of selected measurements of  $K/\pi$  for various center of mass energies. The STAR value was from Au+Au collisions at RHIC [28], the NA49 measurement was from Pb+Pb collisions at SPS [29, 30], and the E735 measurement was from  $\bar{p}+p$  collisions at the Tevatron [32].

a reaction where the interacting particles do not have equivalent energy in the laboratory frame. Nevertheless, they are all presented on the same axes for a broad overview. The central value of MINOS' indirect cosmic ray-based  $K/\pi$  measurement is consistent with the collider-based direct measurements, and the associated error bars span the dispersion in those direct measurements.

## IV. CONCLUSIONS

A five year sample of 67.32 million cosmic ray induced muons has been collected by the MINOS far detector and daily rate fluctuations have been compared to

daily fluctuations in atmospheric temperature. These distributions were shown to be highly correlated, with a correlation coefficient of 0.90. The constant of proportionality relating the two distributions,  $\alpha_T$ , was found to be  $0.874 \pm 0.009$  (stat.)  $\pm 0.010$  (syst.). This value is in good agreement with the theoretical expectation of  $\langle \alpha_T \rangle = 0.871 \pm 0.025$ . A measurement of the temperature dependence of the rate of  $\mu^+$  separate from  $\mu^-$  was performed for the first time. There is no statistically significant difference between  $\alpha_T(\mu^+)$  and  $\alpha_T(\mu^-)$ .

The experimental value of  $\alpha_T$  for the combined muon sample has the lowest uncertainty of any such measurement. While other experiments have estimated the effect of atmospheric temperature on kaon induced muons [2, 3], this is the first result to quantify the kaon-inclusive effective temperature coefficient. The new kaon-inclusive model fits the MINOS far detector data better than the pion only model [3] and suggests a measurement of the atmospheric  $K/\pi$  ratio. Applying the differing temperature variations of kaon and pion decay to the seasonal variations analysis allowed the first measurement of the atmospheric  $K/\pi$  ratio for  $E_p \gtrsim 7$  TeV. It was found to be  $K/\pi = 0.13 \pm 0.08$ .

## V. ACKNOWLEDGMENTS

We thank the Fermilab staff and the technical staffs of the participating institutions for their vital contributions. This work was supported by the U.S. Department of Energy, the U.K. Science and Technologies Facilities Council, the U.S. National Science Foundation, the State and University of Minnesota, the Office of Special Accounts for Research Grants of the University of Athens, Greece, FAPESP (Fundacao de Amparo a Pesquisa do Estado de Sao Paulo) and CNPq (Conselho Nacional de Desenvolvimento Cientifico e Tecnologico) in Brazil. We gratefully acknowledge the Minnesota Department of Natural Resources for their assistance and for allowing us access to the facilities of the Soudan Underground Mine State Park and the crew of the Soudan Underground Physics Laboratory for their tireless work in building and operating the MINOS far detector. We also acknowledge the BADC and the ECMWF for providing the environmental data for this project.

- 
- [1] S. Osprey et al., *Geophys. Res. Lett.* **36**, L05809 (2009).  
 [2] P. Barrett et al., *Rev. Mod. Phys.* **24**, 133 (1952).  
 [3] M. Ambrosio et al. (MACRO), *Astropart. Phys.* **7**, 109 (1997).  
 [4] A. Bouchta (AMANDA), *Proc. 26th Int. Cosmic Ray Conf., Salt Lake City 2*, 108 (1999).  
 [5] P. Adamson et al. (MINOS), *Phys. Rev.* **D76**, 052003 (2007).  
 [6] P. Adamson et al. (MINOS), *Phys. Rev.* **D77**, 072002 (2008).  
 [7] P. Adamson et al. (MINOS), *Phys. Rev.* **D73**, 072002 (2006), hep-ex/0512036.  
 [8] D. G. Michael et al. (MINOS), *Nucl. Instrum. Methods* **596**, 190 (2008).  
 [9] B. J. Rebel (2004), PhD Dissertation, Indiana University FERMILAB-THESIS-2004-33.  
 [10] European Centre for Medium-Range Weather Forecasts ECMWF Operational Analysis data, [Internet] British Atmospheric Data Centre **2006-2007** (Available from <http://badc.nerc.ac.uk/data/ecmwf-op/>).  
 [11] M. Ambrosio et al. (MACRO), *Phys. Rev.* **D67**, 042002 (2003).  
 [12] G. Cini Castagnoli and M. Doderio (Torino), *II Nuovo Cim. B* **51**, 525 (1967).  
 [13] J. Humble et al. (Poatina), *Proc. 16th Int. Cosmic Ray Conf., Kyoto 4*, 258 (1979).  
 [14] D. Cutler et al. (Utah), *Proc. 17th Int. Cosmic Ray Conf., Paris 4*, 290 (1981).  
 [15] N. Sherman, *Phys. Rev.* **93**, 208 (1954).  
 [16] A. Fenton, R. Jacklyn, and R. Taylor (Hobart), *II Nuovo Cim. B* **22**, 285 (1961).  
 [17] Y. Andreyev et al. (Baksan), *Proc. 20th Int. Cosmic Ray Conf., Moscow 3*, 270 (1987).  
 [18] E. W. Grashorn (2008), PhD Dissertation, University of Minnesota FERMILAB-THESIS-2008-06.  
 [19] E. W. Grashorn et al., *Astropart. Phys.*, to be submitted (2009).  
 [20] T. K. Gaisser (1990), *Cosmic rays and particle physics*, Cambridge, UK: Univ. Pr.  
 [21] G. D. Barr, T. K. Gaisser, S. Robbins, and T. Stanev, *Phys. Rev.* **D74**, 094009 (2006).  
 [22] S. P. Ahlen et al. (MACRO), *Nucl. Phys.* **B370**, 432 (1992).  
 [23] I. Durre, R. S. Vose, and D. Wuertz, *Journal of Climate* **19**, 53 (2006).  
 [24] F. James and M. Roos, *Comput. Phys. Commun.* **10**, 343 (1975).  
 [25] M. Crouch, *Proc. 20th Int. Cosmic Ray Conf., Moscow 6*, 165 (1987).  
 [26] S. M. Kasahara, Ph.D. Thesis, University of Minnesota, UMI-97-21625 (1997).  
 [27] A. M. Rossi et al., *Nucl. Phys.* **B84**, 269 (1975).  
 [28] C. Adler et al. (STAR), *Phys. Lett.* **B595**, 143 (2004).  
 [29] S. V. Afanasiev et al. (NA49), *Phys. Rev.* **C66**, 054902 (2002).  
 [30] C. Alt et al. (NA49), *Eur. Phys. J.* **C45**, 343 (2006).  
 [31] M. Gazdzicki and D. Roehrich, *Z. Phys.* **C65**, 215 (1995).  
 [32] T. Alexopoulos et al. (E735), *Phys. Rev.* **D48**, 984 (1993).