CERN-PH-EP/2014-071  
2014/05/09

CMS-EXO-12-024

# Search for massive resonances in dijet systems containing jets tagged as W or Z boson decays in pp collisions at $\sqrt{s} = 8 \text{ TeV}$

The CMS Collaboration\*

## Abstract

A search is reported for massive resonances decaying into a quark and a vector boson (W or Z), or two vector bosons (WW, WZ, or ZZ). The analysis is performed on an inclusive sample of multijet events corresponding to an integrated luminosity of  $19.7 \text{ fb}^{-1}$ , collected in proton-proton collisions at a centre-of-mass energy of 8 TeV with the CMS detector at the LHC. The search uses novel jet-substructure identification techniques that provide sensitivity to the presence of highly boosted vector bosons decaying into a pair of quarks. Exclusion limits are set at a confidence level of 95% on the production of: (i) excited quark resonances  $q^*$  decaying to  $qW$  and  $qZ$  for masses less than 3.2 TeV and 2.9 TeV, respectively, (ii) a Randall–Sundrum graviton  $G_{\text{RS}}$  decaying into WW for masses below 1.2 TeV, and (iii) a heavy partner of the W boson  $W'$  decaying into WZ for masses less than 1.7 TeV. For the first time mass limits are set on  $W' \rightarrow WZ$  and  $G_{\text{RS}} \rightarrow WW$  in the all-jets final state. The mass limits on  $q^* \rightarrow qW$ ,  $q^* \rightarrow qZ$ ,  $W' \rightarrow WZ$ ,  $G_{\text{RS}} \rightarrow WW$  are the most stringent to date. A model with a “bulk” graviton  $G_{\text{bulk}}$  that decays into WW or ZZ bosons is also studied.

*Submitted to the Journal of High Energy Physics*



# 1 Introduction

Several models of physics beyond the standard model (SM) predict the existence of resonances with masses above 1 TeV that decay into a quark and a W or Z vector boson, or into two vector bosons. In proton-proton (pp) collisions at the energies reached at the Large Hadron Collider (LHC), vector bosons emerging from such decays usually would have sufficiently large momenta so that the hadronization products of their  $\bar{q}q(\prime)$  decays would merge into a single massive jet [1]. We present a search for events containing one or two jets of this kind in pp collisions at a centre-of-mass energy of  $\sqrt{s} = 8$  TeV. The data sample, corresponding to an integrated luminosity of  $19.7 \text{ fb}^{-1}$ , was collected with the CMS detector at the LHC.

The signal is characterized by a peak in the dijet invariant mass distribution  $m_{jj}$  over a continuous background from SM processes, comprised mainly of multijet events from quantum chromodynamic (QCD) processes. The sensitivity to jets from W or Z bosons is enhanced through the use of jet-substructure techniques that help differentiate such jets from remnants of quarks and gluons [2, 3], providing the possibility of “W/Z-tagging”. This search is an update of a previous CMS study [4] performed using data from pp collisions at  $\sqrt{s} = 7$  TeV. Besides increased data-sample size and larger signal cross sections from the increase in centre-of-mass energy, this analysis also benefits from an improved W/Z-tagger based on “N-subjettiness” variables, introduced in Ref. [5] and defined in Section 3.

We consider four reference processes that yield one W/Z-tagged or two W/Z-tagged all-jet events: (i) an excited quark  $q^*$  [6, 7] that decays into a quark and either a W or a Z boson, (ii) a Randall–Sundrum (RS) graviton  $G_{\text{RS}}$  that decays into WW or ZZ bosons [8, 9], (iii) a “bulk” graviton  $G_{\text{bulk}}$  that decays into WW or ZZ [10–12], and (iv) a heavy partner of the SM W boson ( $W'$ ) that decays into WZ [13].

Results from previous searches for these signal models include limits placed on the production of  $q^*$  at the LHC as dijet [14–16] or  $\gamma$ +jet [17] resonances, with a  $q^*$  lighter than  $\approx 3.5$  TeV at a confidence level (CL) of 95% [14]. Specific searches for resonant  $qW$  and  $qZ$  final states at the Tevatron [18, 19] exclude  $q^*$  decays into  $qW$  or  $qZ$  with  $m_{q^*} < 0.54$  TeV, and results from the LHC [4, 20] exclude  $q^*$  decays into  $qW$  or  $qZ$  for  $m_{q^*} < 2.4$  TeV and  $m_{q^*} < 2.2$  TeV, respectively.

Resonances in final states containing candidates for WW or ZZ systems have also been sought [21–24], with lower limits set on the masses of  $G_{\text{RS}}$  and  $G_{\text{bulk}}$  as a function of the coupling parameter  $k/\bar{M}_{\text{Pl}}$ , where  $k$  reflects the curvature of the warped space, and  $\bar{M}_{\text{Pl}}$  is the reduced Planck mass ( $\bar{M}_{\text{Pl}} \equiv M_{\text{Pl}}/\sqrt{8\pi}$ ) [8, 9]. The bulk graviton model is an extension of the original RS model that addresses the flavour structure of the SM through localization of fermions in the warped extra dimension. The experimental signatures of the  $G_{\text{RS}}$  and  $G_{\text{bulk}}$  models differ in that  $G_{\text{bulk}}$  favours the production of gravitons through gluon fusion, with a subsequent decay into vector bosons, rather than production and decay through fermions or photons, as the coupling to these is highly suppressed. As a consequence,  $G_{\text{bulk}}$  preferentially produces W and Z bosons that are longitudinally polarized, while  $G_{\text{RS}}$  favours the production of transversely polarized W or Z bosons. In this study, we use an improved calculation of the  $G_{\text{bulk}}$  production cross section [10, 25] that predicts a factor of four smaller yield than assumed in previous studies [21, 22].

The most stringent limits on  $W'$  boson production are those reported for searches in leptonic final states [26, 27], with the current limit specified by  $m_{W'} > 2.9$  TeV. Depending on the chirality of the  $W'$  couplings, this limit could change by  $\approx 0.1$  TeV. Searches for  $W'$  in the WZ channel have also been reported [22, 28, 29] and set a lower limit of  $m_{W'} > 1.1$  TeV.

The CMS detector, the data, and the event simulations are described briefly in Section 2. Event reconstruction, including details of W/Z-tagging, and selection criteria are discussed in Sec-

tion 3. Section 4 presents studies of dijet mass spectra, including SM background estimates. The systematic uncertainties are discussed in Section 5, the interpretation of the results in terms of the benchmark signal models is presented in Section 6, and the results are summarized in Section 7.

## 2 The CMS detector, data, and simulated event samples

The CMS detector [30] is well-suited to reconstructing particle jets, as it contains highly segmented electromagnetic and hadronic calorimeters and a fine-grained precision tracking system. Charged-particle trajectories are reconstructed in the inner silicon tracker, which consists of a pixel detector surrounded by silicon strip detectors and is immersed in a 3.8 T magnetic field. A lead tungstate crystal electromagnetic calorimeter (ECAL) and a brass/scintillator hadron calorimeter (HCAL) surround the tracking volume, and provide complementary information for reconstructing photons, electrons, and jets. Muon trajectories are measured in gas ionization detectors embedded in the outer steel return yoke of the CMS magnet.

CMS uses a coordinate system with the origin located at the nominal collision point, the  $x$  axis pointing towards the centre of the LHC ring, the  $y$  axis pointing up (perpendicular to the plane containing the LHC ring), and the  $z$  axis along the counterclockwise beam direction. The azimuthal angle,  $\phi$ , is measured with respect to the  $x$  axis in the  $(x, y)$  plane, and the polar angle,  $\theta$ , is defined with respect to the  $z$  axis. The tracker covers the full azimuthal range of  $0 \leq \phi < 2\pi$  within  $|\eta| < 2.5$ , where  $\eta$  is the pseudorapidity defined as  $\eta = -\ln[\tan(\theta/2)]$ . The coverages of the ECAL and HCAL extend to  $|\eta| < 3$  and  $|\eta| < 5$ , respectively. The calorimeter cells are grouped into towers projecting radially outward from the centre of the detector. In the central region ( $|\eta| < 1.74$ ) the towers have dimensions  $\Delta\eta = \Delta\phi = 0.087$  radians, and these increase with  $|\eta|$  in the forward regions.

The signals of interest are simulated using JHUGEN [31, 32], PYTHIA 6.426 [33], and HERWIG++ 2.5.0 [34] Monte Carlo (MC) event generators, and processed through a simulation of the CMS detector, based on GEANT4 [35]. Tune Z2\* [36] is used in PYTHIA, while the version 23 tune [34] is used in HERWIG++. The CTEQ61L [37] parton distribution functions (PDF) are used for PYTHIA and the MRST2001 [38] leading-order (LO) PDF for HERWIG++. The  $q^* \rightarrow W+\text{jet}$  and  $Z+\text{jet}$  processes are generated using PYTHIA.

The RS graviton production is studied for  $k/\overline{M}_{\text{Pl}} = 0.1$ , which sets the resonance widths at  $\approx 1\%$  of the resonance mass, a factor of five smaller than the experimental resolution in  $m_{jj}$  for resonance masses considered in the analysis. RS graviton cross sections from PYTHIA are used in the analysis to maintain consistency in comparisons with related studies [21]. On the other hand, HERWIG++ contains a more precise description of the angular distributions for  $G_{\text{RS}}$  production than PYTHIA [39], and is therefore used to model the  $G_{\text{RS}}$  signal.

Bulk graviton events are generated with  $k/\overline{M}_{\text{Pl}}$  ranging from 0.1 to 0.5. Due to the detector resolution on the  $m_{jj}$  peak, the increase of the resonance width with  $k/\overline{M}_{\text{Pl}}$  has no impact on the signal distribution for  $k/\overline{M}_{\text{Pl}}$  values in the considered range. The reference samples are generated assuming  $k/\overline{M}_{\text{Pl}} = 0.2$ , with JHUGEN interfaced to PYTHIA for the showering and hadronization of quarks. Bulk graviton production is studied up to  $k/\overline{M}_{\text{Pl}} = 0.5$ , where the resonance width is  $\approx 1\%$  of the resonance mass. The  $W' \rightarrow WZ$  process is generated using PYTHIA, assuming SM  $V - A$  couplings [33]. The cross section values are scaled to next-to-next-to-leading order (NNLO) values with the K-factors obtained using the simulation code FEWZ 2.0 [40].

All simulated samples are passed through the standard CMS event reconstruction software. Data are compared to simulated samples of multijet events, generated using both HERWIG++ and MADGRAPH 5v1.3.30 [41], and interfaced to PYTHIA for parton showering and hadronization. The simulated sample of multijet events serves only to provide guidance and cross-checks, as the distribution of the background is modelled from data.

### 3 Event reconstruction and selections

This study considers events selected online by at least one of two specific algorithms. One is based on the scalar sum of the transverse momenta  $p_T$  of the jets, and the other on the invariant mass  $m_{jj}$  of the two jets with highest  $p_T$ . Both online and offline, the information from the individual detectors is combined to reconstruct a global view of the event, as described below.

Events must have at least one reconstructed vertex with  $|z| < 24$  cm. The primary vertex is defined as the one with the largest summed  $p_T^2$  of its associated tracks. Individual particles are reconstructed and identified using the particle-flow (PF) algorithm [42, 43], and divided into five categories: muons, electrons, photons (including their conversions into  $e^+e^-$  pairs), charged hadrons, and neutral hadrons. Charged PF candidates not originating from the primary vertex are discarded, which reduces the contamination from additional pp interactions in the same or neighbouring bunch crossings (pileup). Ignoring isolated muons, jets are clustered from the remaining PF candidates using the Cambridge–Aachen (CA) [44, 45] jet clustering algorithm, as implemented in FASTJET [46, 47]. A distance parameter  $R = 0.8$  is used for the CA algorithm. An event-by-event correction based on the jet area method [48–50] is applied to remove the remaining energy deposited by neutral particles originating from other interaction vertices. The pileup-subtracted jet four-momenta are then corrected to account for the difference between the measured and true energies of hadrons [50]. Finally, events with jets originating from calorimeter noise are rejected, requiring that a fraction of the jet energy is also detected in the tracking system. Following this selection, the jet reconstruction efficiencies (estimated from simulation) are larger than 99.9%, and contribute negligibly to the systematic uncertainties for signal events.

Events are selected by requiring at least two jets with  $p_T > 30$  GeV and  $|\eta| < 2.5$ . The two jets of highest  $p_T$  are required to have a pseudorapidity separation  $|\Delta\eta| < 1.3$  to reduce background from multijet events [51]. The invariant mass of the two selected jets is required to have  $m_{jj} > 890$  GeV, which leads to a 99% trigger efficiency, with a negligible systematic uncertainty.

The event selection efficiency for signal is estimated using fully simulated signal event samples, as described below. These studies also show that less than 1% of the events decaying to WW or ZZ that pass the event selection criteria are from  $WW \rightarrow \ell\nu_\ell\bar{q}q'$  or  $ZZ \rightarrow \ell^+\ell^-\bar{q}q$  decays, where  $\ell$  refers to a muon or an electron. Further, less than 1% of the selected WW events are from  $WW \rightarrow \tau\nu_\tau\bar{q}q'$  decays, and only 3% of the selected ZZ events correspond to  $ZZ \rightarrow \tau^+\tau^-\bar{q}q$  decays. Hence, these contaminants are negligible and the event selection efficiency is dominated by the final states where the W and Z bosons decay to quarks.

To clarify the discussion of acceptance effects, in the following we consider the global efficiency approximated by the product of “nominal acceptances” and the W/Z tagging efficiency, restricted to final states where the W and Z bosons decay to quarks. A matching is required within  $\Delta R = \sqrt{(\Delta\eta)^2 + (\Delta\phi)^2} < 0.5$  of the generated W and Z bosons decaying to quarks and their reconstructed single jets, as part of the nominal acceptances. The product of nominal acceptances and the W/Z tagging efficiency, ignoring leptonic decays and the correlations between detector acceptance and W/Z tagging, agree to better than 10% with the full simulations.

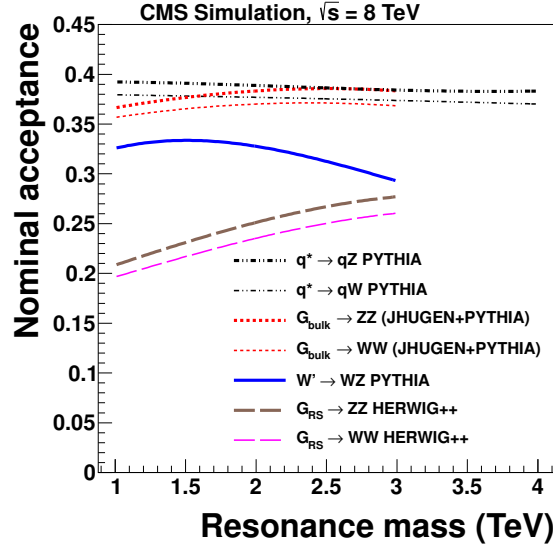


Figure 1: The fraction of simulated signal events expected for vector bosons decaying into two quarks, reconstructed as two jets, that pass the geometrical acceptance criteria ( $|\eta| < 2.5$ ,  $|\Delta\eta| < 1.3$ ), shown as a function of the dijet invariant mass.

In the analysis, the global efficiency is estimated from the full simulation of signal events, without applying the matching requirement. In this way, the correlations between the acceptance and  $W/Z$ -tagging efficiency are taken into proper account.

The nominal acceptance, shown in Fig. 1 as a function of the dijet resonance mass for several signals, takes into account the angular acceptance ( $|\eta| < 2.5$ ,  $|\Delta\eta| < 1.3$ ), the matching, and the branching fraction into quark final states. The acceptance for the  $G_{RS}$  model is lower than for the  $G_{bulk}$  model, primarily because the  $G_{RS}$  model predicts a wider distribution in  $|\Delta\eta|$ . The rise in acceptance for the  $G_{RS}$  model is primarily due to the narrowing of the  $|\eta|$  distribution with increasing resonance mass.

The two jets of highest  $p_T$  are chosen as candidates of highly boosted  $W$  or  $Z$  bosons decaying to quarks, and passed through a tagging algorithm based on jet pruning [2, 52–54]. Each jet is reclustered using all the particles that form the original CA jet, associating with each step of the recombination procedure a measure of the jet’s “softness”. The CA clustering algorithm starts from a set of “protojets” given by the PF particles. Iteratively these protojets are combined with each other until a set of jets is found. Given two protojets  $i, j$  of transverse momenta  $p_T^i$  and  $p_T^j$ , the recombination, that is the sum of their transverse momenta  $p_T^p$ , is considered soft if: (i) its hardness  $z$  is found to be  $z < 0.1$ , where  $z$  is the smaller of the two values of  $p_T^i/p_T^p$  and  $p_T^j/p_T^p$ , or (ii) when the two protojets have a distance  $\Delta R$  larger than some  $D_{cut}$ , where the value of  $D_{cut}$  is given by  $m^{orig}/p_T^{orig}$ , with  $m^{orig}$  and  $p_T^{orig}$  representing the mass and  $p_T$  of the original CA jet. If a recombination is identified as soft, the protojet with smaller  $p_T$  is discarded. If the pruned jet has a mass within  $70 < m_j < 100$  GeV, it is tagged as a  $W/Z$  candidate. The distributions of  $m_j$  for data, and for simulated signal and background samples, are shown in Fig. 2 (left). Fully merged jets from  $W$  and  $Z$  decays are expected to generate a peak at  $m_j \approx 80$ – $90$  GeV, while jets from multijet events and not-fully-merged  $W$  and  $Z$  bosons give rise to a peak around 20 GeV. The disagreement observed at small values of  $m_j$  [55] can be ignored, as the  $W$  and  $Z$  candidates with  $m_j < 70$  GeV are not considered in the analysis and the overall background normalization is determined with a fit to the data.

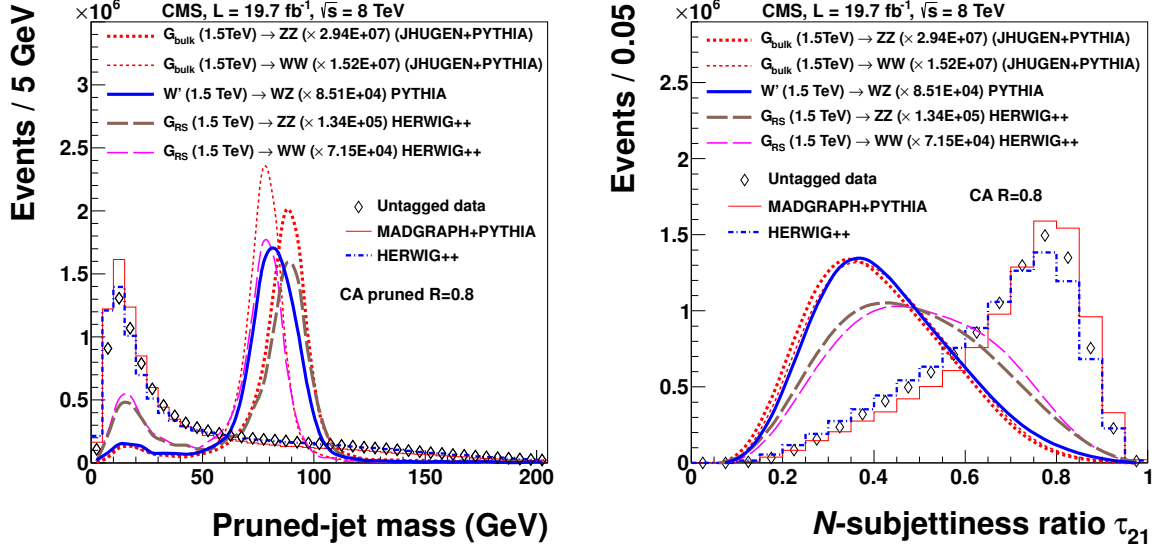


Figure 2: Distribution for (left) pruned-jet mass  $m_j$  and (right) jet  $N$ -subjettiness ratio  $\tau_{21}$  in data, and in simulations of signal and background events. All simulated distributions are scaled to match the number of events in data. MADGRAPH/PYTHIA and HERWIG++ refer to QCD multijet event simulations.

We achieve additional discrimination against multijet events by considering the distribution of jet constituents relative to the jet axis. In particular, we quantify how well the constituents of a given jet can be arranged into  $N$  subjets. This is done by reconstructing the full set of jet constituents (before pruning) with the  $k_T$  algorithm [56] and halting the reclustering when  $N$  distinguishable protojets are formed. The directions of the  $N$  jets are used as the reference axes to compute the  $N$ -subjettiness [5, 57, 58]  $\tau_N$  of the original jet, defined as

$$\tau_N = \frac{1}{d_0} \sum_k p_{T,k} \min(\Delta R_{1,k}, \Delta R_{2,k}, \dots, \Delta R_{N,k}), \quad (1)$$

where  $p_{T,k}$  is the  $p_T$  of the particle constituent  $k$  of the original jet, and  $\Delta R_{n,k}$  is its angular distance from the axis of the  $n$ th subjet (with  $n = 1, 2, \dots, N$ ). The normalization factor  $d_0$  for  $\tau_N$  is  $d_0 = \sum_k p_{T,k} R_0$ , with  $R_0$  set to the distance parameter  $R$  of the original CA jet. To improve the discriminating power, we perform a one-pass optimization of the directions of the subjet axes by minimizing  $\tau_N$  [3, 57]. By using the smallest  $\Delta R_{n,k}$  to weight the value of  $p_{T,k}$  in Eq. (1),  $\tau_N$  yields small values when the jet originates from the hadronization of  $N$  quarks. We therefore use the ratio  $\tau_{21} = \tau_2/\tau_1$  as a discriminant between the two-pronged  $W \rightarrow \bar{q}q'$  or  $Z \rightarrow \bar{q}q$  decays and single jets in multijet events. The discriminating power of  $\tau_{21}$  for different resonance models can be seen in Fig. 2 (right). The MC simulations of multijet background and the data peak near  $\approx 0.8$ , whereas the signal distributions have a larger fraction of events at smaller values of  $\tau_{21}$ .

Differences are observed in signal distributions predicted with HERWIG++ (for  $G_{RS}$ ), with PYTHIA ( $q^*$ ,  $W'$ ), and with JHUGEN/PYTHIA ( $G_{bulk}$ ), for the mass  $m_j$  of pruned jets and for  $\tau_{21}$ . These differences arise from unlike polarization of the vector bosons in the various signals models and from differences between HERWIG++ and PYTHIA in the modelling of the showering and hadronization of partons. In particular, values for the polarization of the vector bosons are related to different predictions for  $\tau_{21}$  in the  $G_{RS}$  and  $G_{bulk}$  models as noted in Ref. [3]. Differences in the modelling of the small  $m_j$  regions for pruned jets have been observed previously [55]. The showering and hadronization differences are taken into account in the estimation of systematic

uncertainties, as discussed below.

We select ‘‘high-purity’’ (HP) W/Z jets by requiring  $\tau_{21} \leq 0.5$ , and ‘‘low-purity’’ (LP) W/Z jets by requiring  $0.5 < \tau_{21} < 0.75$ . Events with just one W/Z tag are classified according to these two categories. The events with two W/Z-tagged jets are always required to have one HP W/Z tag, and are similarly divided into HP and LP events, depending on whether the other W/Z-tagged jet is of high or low purity. The selection criterion for the HP category is chosen to give optimal average performance for the models used in this search. The LP category adds sensitivity, especially at large values of  $m_{jj}$ , where the W/Z-tagging efficiency drops along with the background rate.

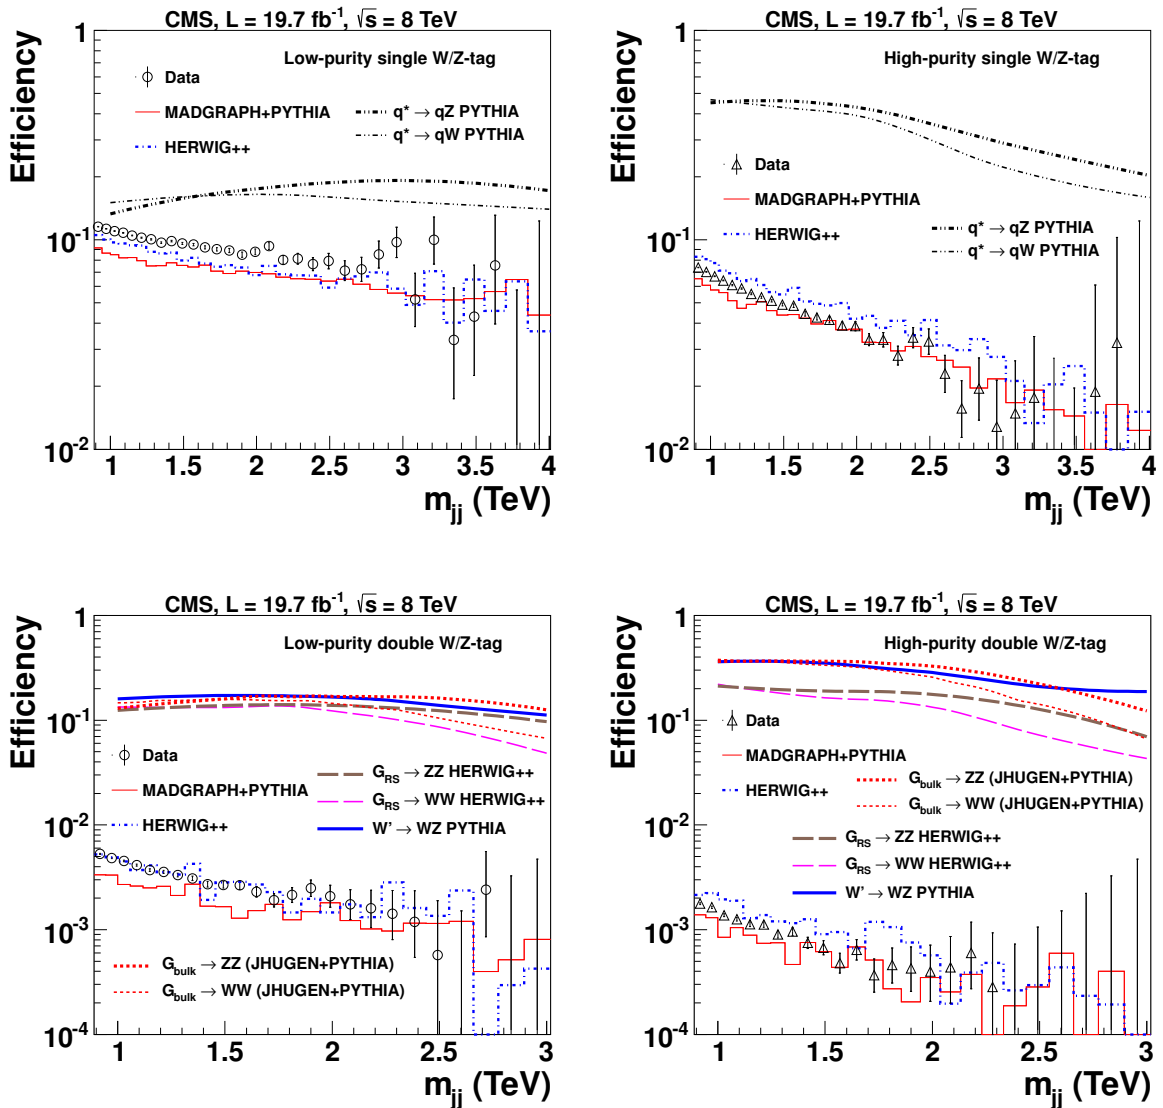


Figure 3: Efficiency of W and Z selections as a function of  $m_{jj}$  in data, and in simulations of signal and background events, with (upper left) one LP or (upper right) HP W/Z-tag, and the fraction of (lower left) doubly-tagged events in the LP and (lower right) HP category. The efficiency is computed for  $W/Z \rightarrow \bar{q}q' \rightarrow \text{jets}$  events, where the jets have  $|\eta| < 2.5$  and  $|\Delta\eta| < 1.3$ . MADGRAPH/PYTHIA and HERWIG++ refer to QCD multijet event simulations.

The expected efficiencies of the W and Z selection criteria for signal and background events



in different event categories are shown in Fig. 3 as a function of  $m_{jj}$ . As expected from Fig. 2 (right), the background simulation shows disagreements in modelling the background selection efficiency in data; however, the dependence as a function of  $p_T$  is well modelled. While the background simulation is not used to model the background in the analysis, it shows how well the simulation models the  $p_T$  dependence of substructure variables. The W/Z-tagging efficiency for signal events in the HP categories drops at high  $p_T$ , while it is more stable in the LP categories, primarily because the  $\tau_{21}$  distribution is  $p_T$ -dependent.

The modelling of the signal efficiency is cross-checked through a W-tagging efficiency estimated using merged  $W \rightarrow \bar{q}q'$  decays in  $t\bar{t}$  events [3]. The efficiency is obtained using  $\ell$ +jets events with two b-tagged jets, one of which has  $p_T > 200$  GeV. Such events are dominated by  $t\bar{t}$  production. The data are compared to simulated  $t\bar{t}$  events, generated with MADGRAPH, interfaced to PYTHIA for parton showering, and provide scale factors of  $0.86 \pm 0.07$  and  $1.39 \pm 0.75$ , respectively, for HP and LP events. These scale factors are used to match the simulated samples to data. The uncertainties in the scale factors contribute to the systematic uncertainty in the selection efficiency for signal.

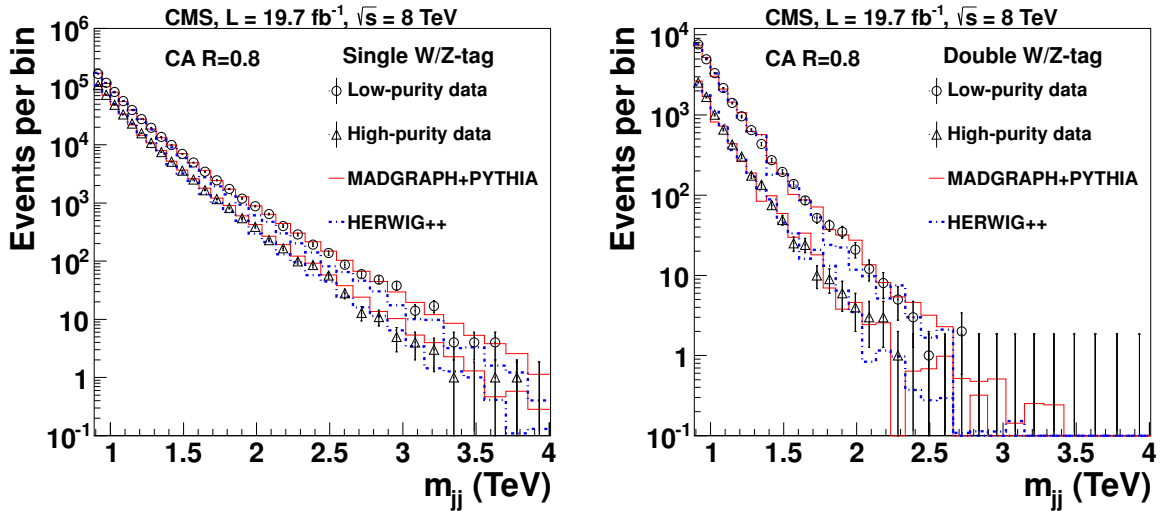


Figure 4: The  $m_{jj}$  distributions for (left) singly and (right) doubly tagged events in data, and for QCD multijet (MADGRAPH/PYTHIA and HERWIG++) simulations, normalized to data.

The  $m_{jj}$  distributions for singly and doubly tagged LP and HP event samples are shown in Fig. 4. These distributions provide the basis for the search. The analogous distributions from MADGRAPH/PYTHIA and HERWIG++ multijet simulations, normalized to the number of events in data, are shown. Only the dominant background from multijet production without systematic uncertainties is shown in this comparison. The prediction from HERWIG++ decreases more steeply with an increase in  $m_{jj}$  than that for MADGRAPH/PYTHIA. We estimate from simulation that backgrounds from  $t\bar{t}$ , W+jets and Z+jets events with the vector bosons decaying into quark final states contribute less than 2% of total background.

## 4 The search for a peak in the mass spectrum

Figure 5 shows the  $m_{jj}$  distributions expected for the HP category of  $G_{RS} \rightarrow ZZ/WW$ ,  $G_{\text{bulk}} \rightarrow ZZ/WW$ ,  $W' \rightarrow WZ$ , and  $q^* \rightarrow qW/qZ$ , for four resonance masses. A linear interpolation between a set of reference distributions (corresponding to masses of 1.0, 1.5, 1.8, 2.0, 2.2, 2.5,

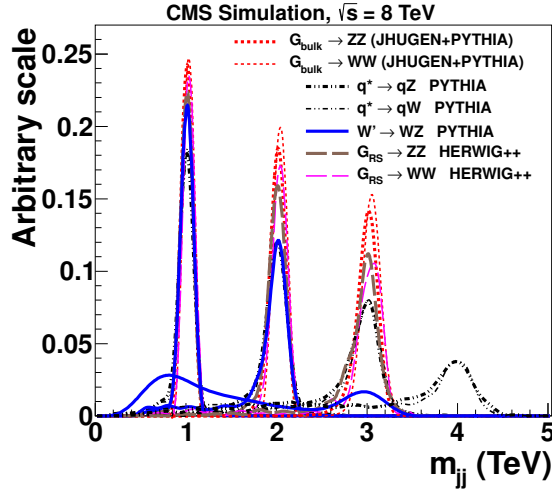


Figure 5: Distribution in  $m_{jj}$  expected in the HP categories for models corresponding to the resonance masses of 1, 2, 3, and 4 TeV. All distributions are normalized to the same area.

3.0, and 4.0 TeV) is used to obtain the expected distribution for other values of resonance mass. Because of the interplay between the PDF and the resonance width, the  $W'$  distribution for large resonance masses is also characterized by a contribution at small masses that peaks near  $\approx 0.8$  TeV. This search is not sensitive to this component because of the overwhelming background from multijet production.

Background from multijet events is modelled by a smoothly falling distribution for each event category, given by the empirical probability density function

$$P_D(m_{jj}) = \frac{P_0(1 - m_{jj}/\sqrt{s})^{P_1}}{(m_{jj}/\sqrt{s})^{P_2}}. \quad (2)$$

For each category, the normalization factor  $P_0$  and the two parameters  $P_1$  and  $P_2$  are treated as uncorrelated. This parameterization was deployed successfully in searches in dijet mass spectra [51]. A Fisher F-test [59] is used to check that no additional parameters are needed to model the individual background distribution, for each of the four cases considered.

We search for a peak on top of the falling background spectrum by means of a maximum likelihood fit to the data. The likelihood  $\mathcal{L}$ , computed using events binned as a function of  $m_{jj}$ , is written as

$$\mathcal{L} = \prod_i \frac{\lambda_i^{n_i} e^{-\lambda_i}}{n_i!}, \quad (3)$$

where  $\lambda_i = \mu N_i(S) + N_i(B)$ ,  $\mu$  is a scale factor for the signal,  $N_i(S)$  is the number expected from the signal, and  $N_i(B)$  is the number expected from multijet background. The parameter  $n_i$  quantifies the number of events in the  $i^{\text{th}}$   $m_{jj}$  mass bin. The background  $N_i(B)$  is described by the functional form of Eq. (2). While maximizing the likelihood as a function of the resonance mass,  $\mu$  as well as the parameters of the background function are left floating.

Figure 6 shows the  $m_{jj}$  spectra in data with a single W/Z-tag, and with a double W/Z-tag. The solid curves represent the results of the maximum likelihood fit to the data, fixing the number of expected signal events to 0, while the bottom panels show the corresponding pull distributions, quantifying the agreement between the background-only hypothesis and the data. The

expected contributions from  $q^*$  and  $G_{RS}$  resonances for respective masses of 3.0 and 1.5 TeV, scaled to their corresponding cross sections, are given by the dash-dotted curves.

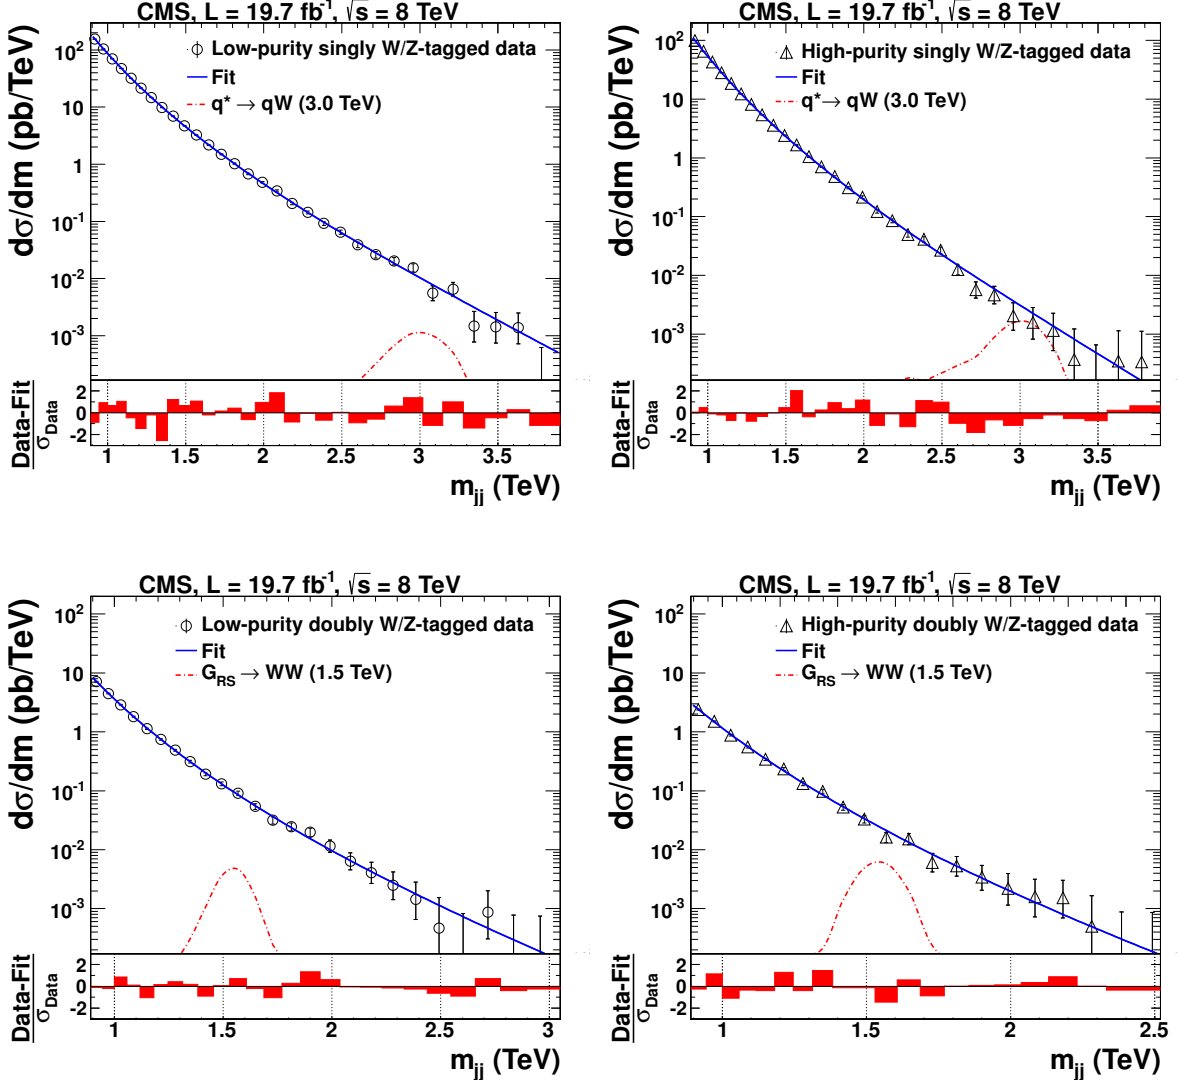


Figure 6: Distribution in  $m_{jj}$ , respectively, for (upper left) singly-tagged LP events and (upper right) HP events, and for (lower left) doubly-tagged LP events and (lower right) HP events. The solid curves represent the results of fitting Eq. (2) to the data. The distribution for  $q^* \rightarrow qW$  and  $G_{RS} \rightarrow WW$  contributions, scaled to their corresponding cross sections, are given by the dash-dotted curves. The corresponding pull distributions ( $\frac{\text{Data-Fit}}{\sigma_{\text{Data}}}$ , where  $\sigma_{\text{Data}}$  represents the statistical uncertainty in the data in a bin in  $m_{jj}$ ) are shown below each  $m_{jj}$  plot.

We quantify the consistency of the data with the null hypothesis as a function of resonance mass for the benchmark models through the local p-value. The largest local significance in the singly W/Z-tagged sample is observed for the hypothesis of a  $q^* \rightarrow qW$  resonance of mass 1.5 TeV, and is equivalent to an excess of 1.8 standard deviations. The largest local significance in the doubly tagged event sample corresponds to an excess of 1.3 standard deviations for a  $G_{RS} \rightarrow WW$  resonance of mass 1.9 TeV. Using the  $G_{\text{bulk}} \rightarrow WW/ZZ$  model, where the LP and HP categories contribute in different proportions compared to the case for the  $G_{RS} \rightarrow WW$  model, yields no excess larger than 1 standard deviation. We estimate the impact of possible

statistical fluctuations over the entire region of  $m_{jj}$  values to transform the local significance of two standard deviations into an equivalent global significance of  $\approx 1$  standard deviation, after taking into account the possibility of upward fluctuations in all the mass bins of the search. The  $m_{jj}$  distributions are used to set upper limits on the product of the production cross sections and decay branching fractions for the benchmark models.

## 5 Systematic uncertainties

The largest contributions to systematic uncertainties are associated with the modelling of the signal, namely the determination of the W/Z-tagging efficiency, jet energy scale (JES), jet energy resolution (JER), and integrated luminosity.

The uncertainty in the efficiency for singly W/Z-tagged events is estimated using the  $\ell$ +jets control sample from  $t\bar{t}$  events described above. Uncertainties of 7.5% and 54% in the respective scale factors for HP and LP tagging include contributions from control-sample statistical uncertainties, and the uncertainties in the JES and JER for pruned jets. Since the scale factors are estimated only in the kinematic regime of the  $t\bar{t}$  sample, where the W decay products merge and the b quarks are reconstructed as separate jets, we use the simulation just to extrapolate to larger W/Z-jet  $p_T$ . The efficiency is therefore estimated as a function of  $p_T$  for two showering and hadronization models, using  $G_{\text{bulk}}$  samples generated with the JHUGEN event generator interfaced to PYTHIA and HERWIG++. The differences are respectively within 4% and 12% for HP and LP tagged jets, significantly smaller than the statistical uncertainties in the scale factors. Other systematic uncertainties in tagging efficiency are even smaller. Because of the rejection of charged particles not originating from the primary vertex, and the application of pruning, the dependence of the W/Z-tagging efficiency on pileup is weak, and the uncertainty in the modelling of the pileup distribution is  $< 1.5\%$ . These systematic contributions refer to a singly W/Z-tagged jet, and are applied to each of the two leading jets in doubly W/Z-tagged events.

The JES has an uncertainty of 1–2% [50, 60], and its  $p_T$  and  $\eta$  dependence is propagated to the reconstructed value of  $m_{jj}$ , yielding an uncertainty of 1%, regardless of the resonance mass. The impact of this uncertainty on the calculated limits is estimated by changing the dijet mass in the analysis within its uncertainty. The JER is known to a precision of 10%, and its non-Gaussian features observed in data are well described by the CMS simulation [50]. The effect of the JER uncertainty in the limits is also estimated by changing the reconstructed resonance width within its uncertainty. The integrated luminosity has an uncertainty of 2.6% [61], which is also taken into account in the analysis. The uncertainty related to the PDF used to model the signal acceptance is estimated from the eigenvectors of the CTEQ66 [37] and MRST2006 [62] sets of PDF. The envelope of the upward and downward variations of the estimated acceptance for the two sets is assigned as uncertainty and found to be 5% – 15% in the resonance mass range of interest. A summary of all systematic uncertainties is given in Table 1.

## 6 Results

The asymptotic approximation [63] of the LHC  $CL_s$  method [64, 65] is used to set upper limits on the cross sections for resonance production. The dominant sources of systematic uncertainties are treated as nuisance parameters associated with log-normal priors in those variables. For a given value of the signal cross section, the nuisance parameters are fixed to the values that maximize the likelihood, a method referred to as profiling. The dependence of the likelihood on parameters used to describe the background in Eq. (2) is removed in the same manner,

Table 1: Summary of systematic uncertainties. The column labelled “Relevant quantity” reflects whether an uncertainty is implemented as a dependence on resonance shape, efficiency for each  $W/Z$ -tagged jet in the event, or an absolute event yield. The labels HP and LP refer to high-purity and low-purity event categories, respectively.

Source	Relevant quantity	LP uncertainty (%)	HP uncertainty (%)
Jet energy scale	Resonance shape	1	1
Jet energy resolution	Resonance shape	10	10
$W$ -tagging	Efficiency (per jet)	7.5	54
Tagging $p_T$ -dependence	Efficiency (per jet)	$<4$	$<12$
Pileup	Efficiency (per jet)	$<1.5$	$<1.5$
Integrated luminosity	Yield (per event)	2.6	2.6
PDF	Yield (per event)	5–15	5–15

and no additional systematic uncertainty is therefore assigned to the parameterization of the background.

The HP and LP event categories are combined into a common likelihood, with the two uncertainties in the  $W/Z$ -tagging efficiencies considered to be anticorrelated between HP and LP tagging because of the exclusive selection on  $\tau_{21}$ , while the remaining systematic uncertainties in signal are taken as fully correlated. The variables describing the background uncertainties are treated as uncorrelated between the two categories. The LP category contributes to the sensitivity of the analysis, especially at large values of  $m_{jj}$ . The combined expected limits on the  $G_{RS} \rightarrow WW$  production cross sections are, respectively, a factor of 1.1 and 1.6 smaller at  $m_{jj} = 1.0$  TeV and 2.9 TeV than the limit obtained from the HP category alone.

Figures 7 and 8 show the upper limits on the production cross sections for singly and doubly  $W/Z$ -tagged events, computed at a 95% CL, with the predicted cross sections for the benchmark models overlaid for comparison. Table 2 shows the resulting exclusion ranges on resonant masses. Compared to the previous search in this channel at  $\sqrt{s} = 7$  TeV [4], the mass limits on  $q^* \rightarrow qW$  and  $q^* \rightarrow qZ$  are increased, respectively, by 0.8 and 0.7 TeV and for the first time mass limits are set on  $W' \rightarrow WZ$  and  $G_{RS} \rightarrow WW$  models. No mass limits are set on  $G_{RS} \rightarrow ZZ$ ,  $G_{\text{bulk}} \rightarrow WW$  and  $G_{\text{bulk}} \rightarrow ZZ$ , since the analysis is not sensitive to the small predicted cross sections.

The systematic uncertainties have minor impact on the limits. The largest contributions are 5%, 5%, and 3% from  $W/Z$ -tagging efficiency, JES, and JER, respectively. These contributions are quantified using the largest excursion in the observed exclusion limit on the  $G_{RS} \rightarrow WW$  production cross section, over the entire examined mass range.

Table 2: Summary of observed limits on resonance masses at 95% CL and their expected values, assuming a null hypothesis. The analysis is sensitive to resonances heavier than 1 TeV.

Process	Observed excluded mass limit (TeV)	Expected excluded mass limit (TeV)
$q^* \rightarrow qW$	3.2	3.0
$q^* \rightarrow qZ$	2.9	2.6
$W' \rightarrow WZ$	1.7	1.6
$G_{RS} \rightarrow WW$	1.2	1.3

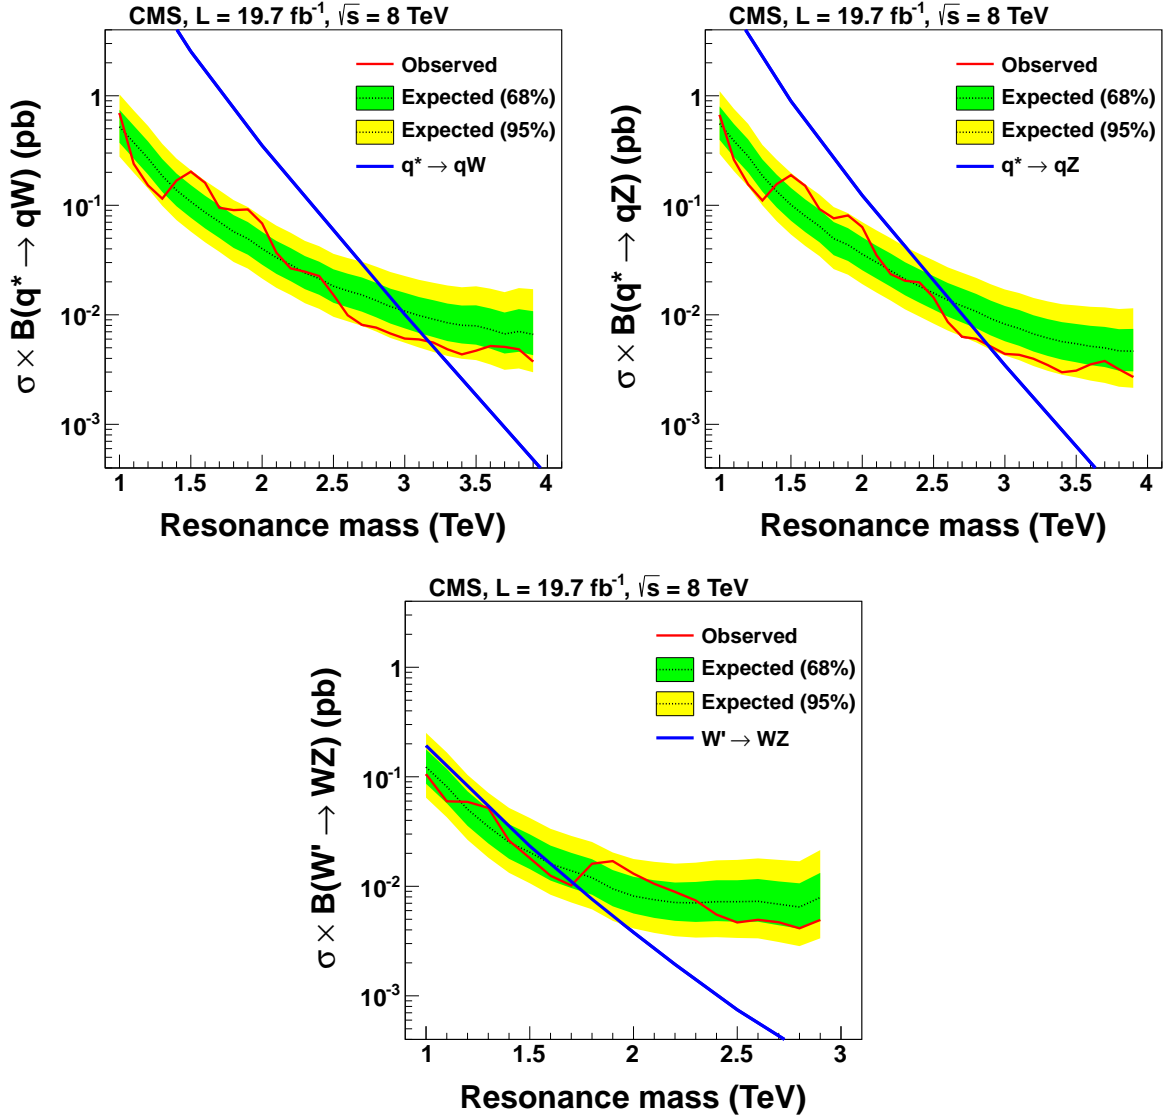


Figure 7: Expected and observed limits on the production cross section as a function of the resonance mass for (upper left)  $qW$  resonances, (upper right)  $qZ$  resonances, and (bottom)  $WZ$  resonances, compared to their predicted cross sections for the corresponding benchmark models.

## 7 Summary

An inclusive sample of multijet events corresponding to an integrated luminosity of  $19.7 \text{ fb}^{-1}$ , collected in  $pp$  collisions at  $\sqrt{s} = 8 \text{ TeV}$  with the CMS detector, is used to measure the  $W/Z$ -tagged dijet mass spectrum for the two leading jets, produced within the pseudorapidity range  $|\eta| < 2.5$  with a separation in pseudorapidity of  $|\Delta\eta| < 1.3$ . The generic multijet background is suppressed using jet-substructure tagging techniques that identify vector bosons decaying into  $\bar{q}q'$  pairs merged into a single jet. In particular, the invariant mass of pruned jets and the  $N$ -subjettiness ratio  $\tau_{21}$  of each jet are used to reduce the initially overwhelming multijet background. The remaining background is estimated through a fit to smooth analytic functions. With no evidence for a peak on top of the smoothly falling background, lower limits are set at the 95% confidence level on masses of excited quark resonances decaying into  $qW$  and  $qZ$  at 3.2 and 2.9 TeV, respectively. Randall–Sundrum gravitons  $G_{RS}$  decaying into  $WW$  are excluded

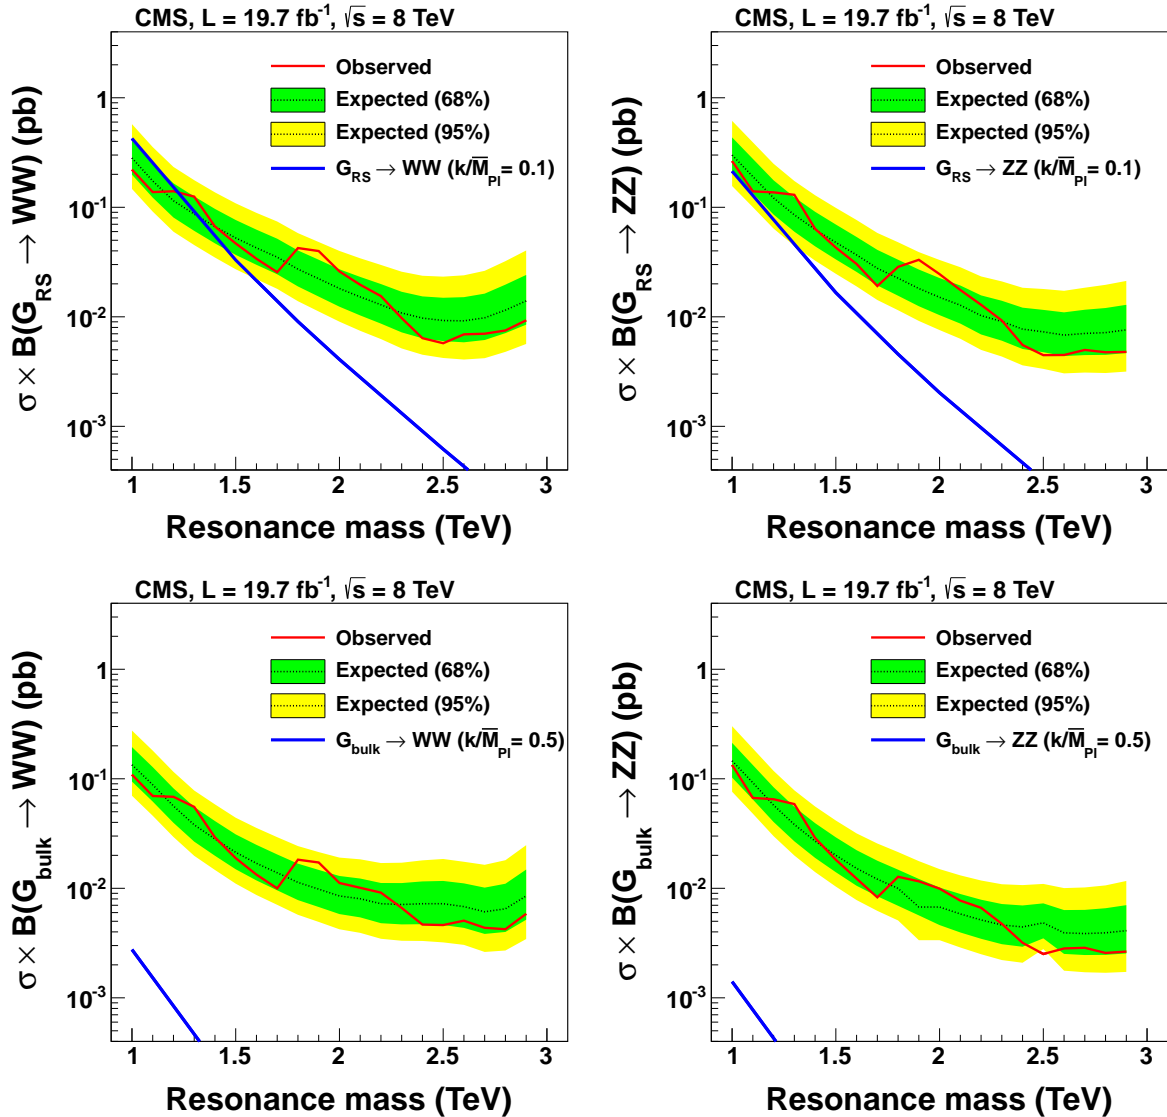


Figure 8: Expected and observed limits on the production cross section as a function of the resonance mass for (upper left)  $G_{RS} \rightarrow WW$  resonances, (upper right)  $G_{RS} \rightarrow ZZ$  resonances, (bottom left)  $G_{bulk} \rightarrow WW$  resonances, and (bottom right)  $G_{bulk} \rightarrow ZZ$  resonances, compared to the predicted cross sections.

up to 1.2 TeV, and  $W'$  bosons decaying into  $ZZ$  for masses less than 1.7 TeV. For the first time mass limits are set on  $W' \rightarrow WZ$  and  $G_{RS} \rightarrow WW$  in the all-jets final state. The mass limits on  $q^* \rightarrow qW$ ,  $q^* \rightarrow qZ$ ,  $W' \rightarrow WZ$ ,  $G_{RS} \rightarrow WW$  are the most stringent to date. A model with a “bulk” graviton  $G_{bulk}$  that decays into  $WW$  or  $ZZ$  bosons is also studied, but no mass limits could be set due to the small predicted cross sections.

## Acknowledgements

We congratulate our colleagues in the CERN accelerator departments for the excellent performance of the LHC and thank the technical and administrative staffs at CERN and at other CMS institutes for their contributions to the success of the CMS effort. In addition, we gratefully acknowledge the computing centres and personnel of the Worldwide LHC Computing Grid

for delivering so effectively the computing infrastructure essential to our analyses. Finally, we acknowledge the enduring support for the construction and operation of the LHC and the CMS detector provided by the following funding agencies: BMWFW and FWF (Austria); FNRS and FWO (Belgium); CNPq, CAPES, FAPERJ, and FAPESP (Brazil); MES (Bulgaria); CERN; CAS, MoST, and NSFC (China); COLCIENCIAS (Colombia); MSES and CSF (Croatia); RPF (Cyprus); MoER, ERC IUT and ERDF (Estonia); Academy of Finland, MEC, and HIP (Finland); CEA and CNRS/IN2P3 (France); BMBF, DFG, and HGF (Germany); GSRT (Greece); OTKA and NIH (Hungary); DAE and DST (India); IPM (Iran); SFI (Ireland); INFN (Italy); NRF and WCU (Republic of Korea); LAS (Lithuania); MOE and UM (Malaysia); CINVESTAV, CONACYT, SEP, and UASLP-FAI (Mexico); MBIE (New Zealand); PAEC (Pakistan); MSHE and NSC (Poland); FCT (Portugal); JINR (Dubna); MON, RosAtom, RAS and RFBR (Russia); MESTD (Serbia); SEIDI and CPAN (Spain); Swiss Funding Agencies (Switzerland); MST (Taipei); ThEPCenter, IPST, STAR and NSTDA (Thailand); TUBITAK and TAEK (Turkey); NASU and SFFR (Ukraine); STFC (United Kingdom); DOE and NSF (USA).

Individuals have received support from the Marie-Curie programme and the European Research Council and EPLANET (European Union); the Leventis Foundation; the A. P. Sloan Foundation; the Alexander von Humboldt Foundation; the Belgian Federal Science Policy Office; the Fonds pour la Formation à la Recherche dans l'Industrie et dans l'Agriculture (FRIA-Belgium); the Agentschap voor Innovatie door Wetenschap en Technologie (IWT-Belgium); the Ministry of Education, Youth and Sports (MEYS) of the Czech Republic; the Council of Science and Industrial Research, India; the Compagnia di San Paolo (Torino); the HOMING PLUS programme of Foundation for Polish Science, cofinanced by EU, Regional Development Fund; and the Thalís and Aristeia programmes cofinanced by EU-ESF and the Greek NSRF.

## References

- [1] M. Gouzevitch et al., "Scale-invariant resonance tagging in multijet events and new physics in Higgs pair production", *JHEP* **07** (2013) 148, doi:10.1007/JHEP07(2013)148, arXiv:1303.6636.
- [2] CMS Collaboration, "Study of jet substructure in pp collisions at 7 TeV in CMS", CMS Physics Analysis Summary CMS-PAS-JME-10-013, 2010.
- [3] CMS Collaboration, "Identifying hadronically decaying vector bosons merged into a single jet", CMS Physics Analysis Summary CMS-PAS-JME-13-006, 2013.
- [4] CMS Collaboration, "Search for heavy resonances in the W/Z-tagged dijet mass spectrum in pp collisions at 7 TeV", *Phys. Lett. B* **723** (2013) 280, doi:10.1016/j.physletb.2013.05.040, arXiv:1212.1910.
- [5] J. Thaler and K. Van Tilburg, "Identifying boosted objects with  $N$ -subjettiness", *JHEP* **03** (2011) 015, doi:10.1007/JHEP03(2011)015, arXiv:1011.2268.
- [6] U. Baur, I. Hinchliffe, and D. Zeppenfeld, "Excited quark production at hadron colliders", *Int. J. Mod. Phys. A* **2** (1987) 1285, doi:10.1142/S0217751X87000661.
- [7] U. Baur, M. Spira, and P. M. Zerwas, "Excited-quark and -lepton production at hadron colliders", *Phys. Rev. D* **42** (1990) 815, doi:10.1103/PhysRevD.42.815.
- [8] L. Randall and R. Sundrum, "A large mass hierarchy from a small extra dimension", *Phys. Rev. Lett.* **83** (1999) 3370, doi:10.1103/PhysRevLett.83.3370, arXiv:hep-ph/9905221.



- [9] L. Randall and R. Sundrum, "An alternative to compactification", *Phys. Rev. Lett.* **83** (1999) 4690, doi:10.1103/PhysRevLett.83.4690, arXiv:hep-th/9906064.
- [10] K. Agashe, H. Davoudiasl, G. Perez, and A. Soni, "Warped gravitons at the LHC and beyond", *Phys. Rev. D* **76** (2007) 036006, doi:10.1103/PhysRevD.76.036006, arXiv:hep-ph/0701186. [Erratum in preparation. Private communication with authors.].
- [11] O. Antipin, D. Atwood, and A. Soni, "Search for RS gravitons via  $W_L W_L$  decays", *Phys. Lett. B* **666** (2008) 155, doi:10.1016/j.physletb.2008.07.009, arXiv:0711.3175.
- [12] O. Antipin and A. Soni, "Towards establishing the spin of warped gravitons", *JHEP* **10** (2008) 018, doi:10.1088/1126-6708/2008/10/018, arXiv:0806.3427.
- [13] G. Altarelli, B. Mele, and M. Ruiz-Altaba, "Searching for new heavy vector bosons in  $p\bar{p}$  colliders", *Z. Phys. C* **45** (1989) 109, doi:10.1007/BF01556677. Erratum-ibid. **C 47** (1990) 676.
- [14] CMS Collaboration, "Search for narrow resonances using the dijet mass spectrum in pp collisions at  $\sqrt{s} = 8$  TeV", *Phys. Rev. D* **87** (2013) 114015, doi:10.1103/PhysRevD.87.114015, arXiv:1302.4794.
- [15] ATLAS Collaboration, "ATLAS search for new phenomena in dijet mass and angular distributions using pp collisions at  $\sqrt{s} = 7$  TeV", *JHEP* **01** (2013) 029, doi:10.1007/JHEP01(2013)029, arXiv:1210.1718.
- [16] R. M. Harris and K. Kousouris, "Searches for dijet resonances at hadron colliders", *Int. J. Mod. Phys. A* **26** (2011) 5005, doi:10.1142/S0217751X11054905, arXiv:1110.5302.
- [17] ATLAS Collaboration, "Search for new phenomena in photon+jet events collected in proton-proton collisions at  $\sqrt{s} = 8$  TeV with the ATLAS detector", *Phys. Lett. B* **728** (2014) 562, doi:10.1016/j.physletb.2013.12.029, arXiv:1309.3230.
- [18] CDF Collaboration, "Search for excited quarks in  $p\bar{p}$  collisions at  $\sqrt{s} = 1.8$  TeV", *Phys. Rev. Lett.* **72** (1994) 3004, doi:10.1103/PhysRevLett.72.3004.
- [19] D0 Collaboration, "Search for a heavy resonance decaying into a  $Z^+$  jet final state in  $p\bar{p}$  collisions at  $\sqrt{s} = 1.96$  TeV using the D0 detector", *Phys. Rev. D* **74** (2006) 011104, doi:10.1103/PhysRevD.74.011104, arXiv:hep-ex/0606018.
- [20] CMS Collaboration, "Search for anomalous production of highly boosted Z bosons decaying to dimuons in pp collisions at  $\sqrt{s} = 7$  TeV", *Phys. Lett. B* **722** (2013) 28, doi:10.1016/j.physletb.2013.03.037, arXiv:1210.0867.
- [21] CMS Collaboration, "Search for a narrow spin-2 resonance decaying to a pair of Z vector bosons in the semileptonic final state", *Phys. Lett. B* **718** (2013) 1208, doi:10.1016/j.physletb.2012.11.063, arXiv:1209.3807.
- [22] ATLAS Collaboration, "Search for resonant diboson production in the  $WW/WZ \rightarrow l\nu jj$  decay channels with the ATLAS detector at  $\sqrt{s} = 7$  TeV", *Phys. Rev. D* **87** (2013) 112006, doi:10.1103/PhysRevD.87.112006, arXiv:1305.0125.

- [23] ATLAS Collaboration, “Search for new particles decaying to ZZ using final states with leptons and jets with the ATLAS detector in  $\sqrt{s} = 7$  TeV proton-proton collisions”, *Phys. Lett. B* **712** (2012) 331, doi:10.1016/j.physletb.2012.05.020, arXiv:1203.0718.
- [24] CDF Collaboration, “Search for high-mass resonances decaying into ZZ in  $p\bar{p}$  collisions at  $\sqrt{s} = 1.96$  TeV”, *Phys. Rev. D* **85** (2012) 012008, doi:10.1103/PhysRevD.85.012008, arXiv:1111.3432.
- [25] A. C. A. de Oliveira, “Gravity particles from Warped Extra Dimensions, a review. Part I - KK Graviton”, (2014). arXiv:1404.0102.
- [26] CMS Collaboration, “Search for new physics in final states with a lepton and missing transverse energy in pp collisions at the LHC”, *Phys. Rev. D* **87** (2013) 072005, doi:10.1103/PhysRevD.87.072005, arXiv:1302.2812.
- [27] ATLAS Collaboration, “Search for a heavy gauge boson decaying to a charged lepton and a neutrino in  $1 \text{ fb}^{-1}$  of pp collisions at  $\sqrt{s} = 7$  TeV using the ATLAS detector”, *Phys. Lett. B* **705** (2011) 28, doi:10.1016/j.physletb.2011.09.093, arXiv:1108.1316.
- [28] CMS Collaboration, “Search for a  $W'$  or  $\rho_{\text{TC}}$  decaying to WZ in pp collisions at  $\sqrt{s} = 7$  TeV”, *Phys. Rev. Lett.* **109** (2012) 141801, doi:10.1103/PhysRevLett.109.141801, arXiv:1206.0433.
- [29] ATLAS Collaboration, “Search for resonant WZ production in the  $WZ \rightarrow \ell\nu\ell'\ell'$  channel in  $\sqrt{s} = 7$  TeV pp collisions with the ATLAS detector”, *Phys. Rev. D* **85** (2012) 112012, doi:10.1103/PhysRevD.85.112012, arXiv:1204.1648.
- [30] CMS Collaboration, “The CMS experiment at the CERN LHC”, *JINST* **3** (2008) S08004, doi:10.1088/1748-0221/3/08/S08004.
- [31] Y. Gao et al., “Spin determination of single-produced resonances at hadron colliders”, *Phys. Rev. D* **81** (2010) 075022, doi:10.1103/PhysRevD.81.075022, arXiv:1001.3396.
- [32] S. Bolognesi et al., “On the spin and parity of a single-produced resonance at the LHC”, *Phys. Rev. D* **86** (2012) 095031, doi:10.1103/PhysRevD.86.095031, arXiv:1208.4018.
- [33] T. Sjöstrand, S. Mrenna, and P. Skands, “PYTHIA 6.4 physics and manual”, *JHEP* **05** (2006) 026, doi:10.1088/1126-6708/2006/05/026, arXiv:hep-ph/0603175.
- [34] S. Gieseke et al., “Herwig++ 2.5 release note”, (2011). arXiv:1102.1672.
- [35] GEANT4 Collaboration, “GEANT4—a simulation toolkit”, *Nucl. Instrum. Meth. A* **506** (2003) 250, doi:10.1016/S0168-9002(03)01368-8.
- [36] R. Field, “Early LHC underlying event data - findings and surprises”, (2010). arXiv:1010.3558.
- [37] J. Pumplin et al., “New generation of parton distributions with uncertainties from global QCD analysis”, *JHEP* **07** (2002) 012, doi:10.1088/1126-6708/2002/07/012, arXiv:hep-ph/0201195.

- [38] A. D. Martin, R. G. Roberts, W. J. Stirling, and R. S. Thorne, “MRST2001: partons and  $\alpha_s$  from precise deep inelastic scattering and Tevatron jet data”, *Eur. Phys. J. C* **23** (2002) 73, doi:10.1007/s100520100842, arXiv:hep-ph/0110215.
- [39] P. Traczyk and G. Wrochna, “Search for Randall–Sundrum graviton excitations in the CMS experiment”, (2002). arXiv:hep-ex/0207061.
- [40] R. Gavin, Y. Li, F. Petriello, and S. Quackenbush, “FEWZ 2.0: A code for hadronic Z production at next-to-next-to-leading order”, *Comput. Phys. Commun.* **182** (2011) 2388, doi:10.1016/j.cpc.2011.06.008.
- [41] J. Alwall et al., “MadGraph 5: going beyond”, *JHEP* **06** (2011) 128, doi:10.1007/JHEP06(2011)128, arXiv:1106.0522.
- [42] CMS Collaboration, “Particle–flow event reconstruction in CMS and performance for jets, taus, and  $E_T^{\text{miss}}$ ”, CMS Physics Analysis Summary CMS-PAS-PFT-09-001, 2009.
- [43] CMS Collaboration, “Commissioning of the particle-flow event reconstruction with the first LHC collisions recorded in the CMS detector”, CMS Physics Analysis Summary CMS-PAS-PFT-10-011, 2010.
- [44] M. Wobisch and T. Wengler, “Hadronization corrections to jet cross sections in deep-inelastic scattering”, (1998). arXiv:hep-ph/9907280.
- [45] Y. L. Dokshitzer, G. D. Leder, S. Moretti, and B. R. Webber, “Better jet clustering algorithms”, *JHEP* **08** (1997) 001, doi:10.1088/1126-6708/1997/08/001, arXiv:hep-ph/9707323.
- [46] M. Cacciari and G. P. Salam, “Dispelling the  $N^3$  myth for the  $k_T$  jet-finder”, *Phys. Lett. B* **641** (2006) 57, doi:10.1016/j.physletb.2006.08.037, arXiv:hep-ph/0512210.
- [47] M. Cacciari, G. P. Salam, and G. Soyez, “FastJet user manual”, *Eur. Phys. J. C* **72** (2012) 1896, doi:10.1140/epjc/s10052-012-1896-2, arXiv:1111.6097.
- [48] M. Cacciari, G. P. Salam, and G. Soyez, “The catchment area of jets”, *JHEP* **04** (2008) 005, doi:10.1088/1126-6708/2008/04/005, arXiv:0802.1188.
- [49] M. Cacciari and G. P. Salam, “Pileup subtraction using jet areas”, *Phys. Lett. B* **659** (2008) 119, doi:10.1016/j.physletb.2007.09.077, arXiv:0707.1378.
- [50] CMS Collaboration, “Determination of jet energy calibration and transverse momentum resolution in CMS”, *JINST* **6** (2011) P11002, doi:10.1088/1748-0221/6/11/P11002, arXiv:1107.4277.
- [51] CMS Collaboration, “Search for resonances in the dijet mass spectrum from 7 TeV pp collisions at CMS”, *Phys. Lett. B* **704** (2011) 123, doi:10.1016/j.physletb.2011.09.015, arXiv:1107.4771.
- [52] S. D. Ellis, C. K. Vermilion, and J. R. Walsh, “Techniques for improved heavy particle searches with jet substructure”, *Phys. Rev. D* **80** (2009) 051501, doi:10.1103/PhysRevD.80.051501, arXiv:0903.5081.
- [53] S. D. Ellis, C. K. Vermilion, and J. R. Walsh, “Recombination algorithms and jet substructure: pruning as a tool for heavy particle searches”, *Phys. Rev. D* **81** (2010) 094023, doi:10.1103/PhysRevD.81.094023, arXiv:0912.0033.

- [54] CMS Collaboration, “A Cambridge-Aachen (C-A) based jet algorithm for boosted top-jet tagging”, CMS Physics Analysis Summary CMS-PAS-JME-09-001, 2009.
- [55] CMS Collaboration, “Studies of jet mass in dijet and W/Z+jet events”, *JHEP* **05** (2013) 090, doi:10.1007/JHEP05(2013)090, arXiv:1303.4811.
- [56] M. Cacciari, G. P. Salam, and G. Soyez, “The anti- $k_T$  jet clustering algorithm”, *JHEP* **04** (2008) 063, doi:10.1088/1126-6708/2008/04/063, arXiv:0802.1189.
- [57] J. Thaler and K. Van Tilburg, “Maximizing boosted top identification by minimizing  $N$ -subjettiness”, *JHEP* **02** (2012) 093, doi:10.1007/JHEP02(2012)093, arXiv:1108.2701.
- [58] I. W. Stewart, F. J. Tackmann, and W. J. Waalewijn, “ $N$ -Jettiness: an Inclusive Event Shape to Veto Jets”, *Phys. Rev. Lett.* **105** (2010) 092002, doi:10.1103/PhysRevLett.105.092002, arXiv:1004.2489.
- [59] R. G. Lomax and D. L. Hahs-Vaughn, “Statistical concepts: A second course”. Routledge Academic, 2007.
- [60] CMS Collaboration, “Status of the 8 TeV jet energy corrections and uncertainties based on 11 fb<sup>-1</sup> of data in CMS”, CMS Detector Performance Summary DP-2013-011, 2013.
- [61] CMS Collaboration, “CMS luminosity based on pixel cluster counting - Summer 2013 update”, CMS Physics Analysis Summary CMS-PAS-LUM-13-001, 2013.
- [62] A. D. Martin, W. J. Stirling, R. S. Thorne, and G. Watt, “Update of parton distributions at NNLO”, *Phys. Lett. B* **652** (2007) 292, doi:10.1016/j.physletb.2007.07.040, arXiv:0706.0459.
- [63] G. Cowan, K. Cranmer, E. Gross, and O. Vitells, “Asymptotic formulae for likelihood based tests of new physics”, *Eur. Phys. J. C* **71** (2011) 1554, doi:10.1140/epjc/s10052-011-1554-0, arXiv:1007.1727v2.
- [64] A. L. Read, “Presentation of search results: The  $CL_s$  technique”, *J. Phys. G* **28** (2002) 2693, doi:10.1088/0954-3899/28/10/313.
- [65] T. Junk, “Confidence level computation for combining searches with small statistics”, *Nucl. Instrum. Meth. A* **434** (1999) 435, doi:10.1016/S0168-9002(99)00498-2.

## A The CMS Collaboration

### Yerevan Physics Institute, Yerevan, Armenia

V. Khachatryan, A.M. Sirunyan, A. Tumasyan

### Institut für Hochenergiephysik der OeAW, Wien, Austria

W. Adam, T. Bergauer, M. Dragicevic, J. Erö, C. Fabjan<sup>1</sup>, M. Friedl, R. Frühwirth<sup>1</sup>, V.M. Ghete, C. Hartl, N. Hörmann, J. Hrubec, M. Jeitler<sup>1</sup>, W. Kiesenhofer, V. Knünz, M. Krammer<sup>1</sup>, I. Krätschmer, D. Liko, I. Mikulec, D. Rabady<sup>2</sup>, B. Rahbaran, H. Rohringer, R. Schöfbeck, J. Strauss, A. Taurok, W. Treberer-Treberspurg, W. Waltenberger, C.-E. Wulz<sup>1</sup>

### National Centre for Particle and High Energy Physics, Minsk, Belarus

V. Mossolov, N. Shumeiko, J. Suarez Gonzalez

### Universiteit Antwerpen, Antwerpen, Belgium

S. Alderweireldt, M. Bansal, S. Bansal, T. Cornelis, E.A. De Wolf, X. Janssen, A. Knutsson, S. Luyckx, S. Ochesanu, B. Roland, R. Rougny, M. Van De Klundert, H. Van Haevermaet, P. Van Mechelen, N. Van Remortel, A. Van Spilbeeck

### Vrije Universiteit Brussel, Brussel, Belgium

F. Blekman, S. Blyweert, J. D'Hondt, N. Daci, N. Heracleous, A. Kalogeropoulos, J. Keaveney, T.J. Kim, S. Lowette, M. Maes, A. Olbrechts, Q. Python, D. Strom, S. Tavernier, W. Van Doninck, P. Van Mulders, G.P. Van Onsem, I. Vilella

### Université Libre de Bruxelles, Bruxelles, Belgium

C. Caillol, B. Clerbaux, G. De Lentdecker, D. Dobur, L. Favart, A.P.R. Gay, A. Grebenyuk, A. Léonard, A. Mohammadi, L. Perniè<sup>2</sup>, T. Reis, T. Seva, L. Thomas, C. Vander Velde, P. Vanlaer, J. Wang

### Ghent University, Ghent, Belgium

V. Adler, K. Beernaert, L. Benucci, A. Cimmino, S. Costantini, S. Crucy, S. Dildick, A. Fagot, G. Garcia, B. Klein, J. Mccartin, A.A. Ocampo Rios, D. Ryckbosch, S. Salva Diblen, M. Sigamani, N. Strobbe, F. Thyssen, M. Tytgat, E. Yazgan, N. Zaganidis

### Université Catholique de Louvain, Louvain-la-Neuve, Belgium

S. Basegmez, C. Beluffi<sup>3</sup>, G. Bruno, R. Castello, A. Caudron, L. Ceard, G.G. Da Silveira, C. Delaere, T. du Pree, D. Favart, L. Forthomme, A. Giammanco<sup>4</sup>, J. Hollar, P. Jez, M. Komm, V. Lemaître, J. Liao, C. Nuttens, D. Pagano, A. Pin, K. Piotrkowski, A. Popov<sup>5</sup>, L. Quertenmont, M. Selvaggi, M. Vidal Marono, J.M. Vizan Garcia

### Université de Mons, Mons, Belgium

N. Bely, T. Caebergs, E. Daubie, G.H. Hammad

### Centro Brasileiro de Pesquisas Físicas, Rio de Janeiro, Brazil

G.A. Alves, M. Correa Martins Junior, T. Dos Reis Martins, M.E. Pol

### Universidade do Estado do Rio de Janeiro, Rio de Janeiro, Brazil

W.L. Aldá Júnior, W. Carvalho, J. Chinellato<sup>6</sup>, A. Custódio, E.M. Da Costa, D. De Jesus Damiao, C. De Oliveira Martins, S. Fonseca De Souza, H. Malbouisson, M. Malek, D. Matos Figueiredo, L. Mundim, H. Nogima, W.L. Prado Da Silva, J. Santaolalla, A. Santoro, A. Sznajder, E.J. Tonelli Manganote<sup>6</sup>, A. Vilela Pereira

### Universidade Estadual Paulista <sup>a</sup>, Universidade Federal do ABC <sup>b</sup>, São Paulo, Brazil

C.A. Bernardes<sup>b</sup>, F.A. Dias<sup>a,7</sup>, T.R. Fernandez Perez Tomei<sup>a</sup>, E.M. Gregores<sup>b</sup>, P.G. Mercadante<sup>b</sup>, S.F. Novaes<sup>a</sup>, Sandra S. Padula<sup>a</sup>

**Institute for Nuclear Research and Nuclear Energy, Sofia, Bulgaria**

A. Aleksandrov, V. Genchev<sup>2</sup>, P. Iaydjiev, A. Marinov, S. Piperov, M. Rodozov, G. Sultanov, M. Vutova

**University of Sofia, Sofia, Bulgaria**

A. Dimitrov, I. Glushkov, R. Hadjiiska, V. Kozhuharov, L. Litov, B. Pavlov, P. Petkov

**Institute of High Energy Physics, Beijing, China**

J.G. Bian, G.M. Chen, H.S. Chen, M. Chen, R. Du, C.H. Jiang, D. Liang, S. Liang, R. Plestina<sup>8</sup>, J. Tao, X. Wang, Z. Wang

**State Key Laboratory of Nuclear Physics and Technology, Peking University, Beijing, China**

C. Asawatangtrakuldee, Y. Ban, Y. Guo, Q. Li, W. Li, S. Liu, Y. Mao, S.J. Qian, D. Wang, L. Zhang, W. Zou

**Universidad de Los Andes, Bogota, Colombia**

C. Avila, L.F. Chaparro Sierra, C. Florez, J.P. Gomez, B. Gomez Moreno, J.C. Sanabria

**Technical University of Split, Split, Croatia**

N. Godinovic, D. Lelas, D. Polic, I. Puljak

**University of Split, Split, Croatia**

Z. Antunovic, M. Kovac

**Institute Rudjer Boskovic, Zagreb, Croatia**

V. Brigljevic, K. Kadija, J. Luetic, D. Mekterovic, L. Sudic

**University of Cyprus, Nicosia, Cyprus**

A. Attikis, G. Mavromanolakis, J. Mousa, C. Nicolaou, F. Ptochos, P.A. Razis

**Charles University, Prague, Czech Republic**

M. Bodlak, M. Finger, M. Finger Jr.

**Academy of Scientific Research and Technology of the Arab Republic of Egypt, Egyptian Network of High Energy Physics, Cairo, Egypt**

Y. Assran<sup>9</sup>, S. Elgammal<sup>10</sup>, M.A. Mahmoud<sup>11</sup>, A. Radi<sup>10,12</sup>

**National Institute of Chemical Physics and Biophysics, Tallinn, Estonia**

M. Kadastik, M. Murumaa, M. Raidal, A. Tiko

**Department of Physics, University of Helsinki, Helsinki, Finland**

P. Eerola, G. Fedi, M. Voutilainen

**Helsinki Institute of Physics, Helsinki, Finland**

J. Härkönen, V. Karimäki, R. Kinnunen, M.J. Kortelainen, T. Lampén, K. Lassila-Perini, S. Lehti, T. Lindén, P. Luukka, T. Mäenpää, T. Peltola, E. Tuominen, J. Tuominiemi, E. Tuovinen, L. Wendland

**Lappeenranta University of Technology, Lappeenranta, Finland**

T. Tuuva

**DSM/IRFU, CEA/Saclay, Gif-sur-Yvette, France**

M. Besancon, F. Couderc, M. Dejardin, D. Denegri, B. Fabbro, J.L. Faure, C. Favaro, F. Ferri, S. Ganjour, A. Givernaud, P. Gras, G. Hamel de Monchenault, P. Jarry, E. Locci, J. Malcles, A. Nayak, J. Rander, A. Rosowsky, M. Titov

**Laboratoire Leprince-Ringuet, Ecole Polytechnique, IN2P3-CNRS, Palaiseau, France**

S. Baffioni, F. Beaudette, P. Busson, C. Charlot, T. Dahms, M. Dalchenko, L. Dobrzynski, N. Filipovic, A. Florent, R. Granier de Cassagnac, L. Mastrolorenzo, P. Miné, C. Mironov, I.N. Naranjo, M. Nguyen, C. Ochando, P. Paganini, R. Salerno, J.B. Sauvan, Y. Sirois, C. Veelken, Y. Yilmaz, A. Zabi

**Institut Pluridisciplinaire Hubert Curien, Université de Strasbourg, Université de Haute Alsace Mulhouse, CNRS/IN2P3, Strasbourg, France**

J.-L. Agram<sup>13</sup>, J. Andrea, A. Aubin, D. Bloch, J.-M. Brom, E.C. Chabert, C. Collard, E. Conte<sup>13</sup>, J.-C. Fontaine<sup>13</sup>, D. Gelé, U. Goerlach, C. Goetzmann, A.-C. Le Bihan, P. Van Hove

**Centre de Calcul de l'Institut National de Physique Nucleaire et de Physique des Particules, CNRS/IN2P3, Villeurbanne, France**

S. Gadrat

**Université de Lyon, Université Claude Bernard Lyon 1, CNRS-IN2P3, Institut de Physique Nucléaire de Lyon, Villeurbanne, France**

S. Beauceron, N. Beaupere, G. Boudoul<sup>2</sup>, S. Brochet, C.A. Carrillo Montoya, A. Carvalho Antunes De Oliveira, J. Chasserat, R. Chierici, D. Contardo<sup>2</sup>, P. Depasse, H. El Mamouni, J. Fan, J. Fay, S. Gascon, M. Gouzevitch, B. Ille, T. Kurca, M. Lethuillier, L. Mirabito, S. Perries, J.D. Ruiz Alvarez, D. Sabes, L. Sgandurra, V. Sordini, M. Vander Donckt, P. Verdier, S. Viret, H. Xiao

**Institute of High Energy Physics and Informatization, Tbilisi State University, Tbilisi, Georgia**

Z. Tsamalaidze<sup>14</sup>

**RWTH Aachen University, I. Physikalisches Institut, Aachen, Germany**

C. Autermann, S. Beranek, M. Bontenackels, B. Calpas, M. Edelhoff, L. Feld, O. Hindrichs, K. Klein, A. Ostapchuk, A. Perieanu, F. Raupach, J. Sammet, S. Schael, D. Sprenger, H. Weber, B. Wittmer, V. Zhukov<sup>5</sup>

**RWTH Aachen University, III. Physikalisches Institut A, Aachen, Germany**

M. Ata, J. Caudron, E. Dietz-Laursonn, D. Duchardt, M. Erdmann, R. Fischer, A. Güth, T. Hebbeker, C. Heidemann, K. Hoepfner, D. Klingebiel, S. Knutzen, P. Kreuzer, M. Merschmeyer, A. Meyer, M. Olschewski, K. Padeken, P. Papacz, H. Reithler, S.A. Schmitz, L. Sonnenschein, D. Teyssier, S. Thüer, M. Weber

**RWTH Aachen University, III. Physikalisches Institut B, Aachen, Germany**

V. Cherepanov, Y. Erdogan, G. Flügge, H. Geenen, M. Geisler, W. Haj Ahmad, F. Hoehle, B. Kargoll, T. Kress, Y. Kuessel, J. Lingemann<sup>2</sup>, A. Nowack, I.M. Nugent, L. Perchalla, O. Pooth, A. Stahl

**Deutsches Elektronen-Synchrotron, Hamburg, Germany**

I. Asin, N. Bartosik, J. Behr, W. Behrenhoff, U. Behrens, A.J. Bell, M. Bergholz<sup>15</sup>, A. Bethani, K. Borras, A. Burgmeier, A. Cakir, L. Calligaris, A. Campbell, S. Choudhury, F. Costanza, C. Diez Pardos, S. Dooling, T. Dorland, G. Eckerlin, D. Eckstein, T. Eichhorn, G. Flucke, J. Garay Garcia, A. Geiser, P. Gunnellini, J. Hauk, G. Hellwig, M. Hempel, D. Horton, H. Jung, M. Kasemann, P. Katsas, J. Kieseler, C. Kleinwort, D. Krücker, W. Lange, J. Leonard, K. Lipka, A. Lobanov, W. Lohmann<sup>15</sup>, B. Lutz, R. Mankel, I. Marfin, I.-A. Melzer-Pellmann, A.B. Meyer, J. Mnich, A. Mussgiller, S. Naumann-Emme, O. Novgorodova, F. Nowak, E. Ntomari, H. Perrey, D. Pitzl, R. Placakyte, A. Raspereza, P.M. Ribeiro Cipriano, E. Ron, M.Ö. Sahin, J. Salfeld-Nebgen, P. Saxena, R. Schmidt<sup>15</sup>, T. Schoerner-Sadenius, M. Schröder, S. Spannagel, A.D.R. Vargas Trevino, R. Walsh, C. Wissing

**University of Hamburg, Hamburg, Germany**

M. Aldaya Martin, V. Blobel, M. Centis Vignali, J. Erfle, E. Garutti, K. Goebel, M. Görner, M. Gosselink, J. Haller, R.S. Höing, H. Kirschenmann, R. Klanner, R. Kogler, J. Lange, T. Lapsien, T. Lenz, I. Marchesini, J. Ott, T. Peiffer, N. Pietsch, D. Rathjens, C. Sander, H. Schettler, P. Schleper, E. Schlieckau, A. Schmidt, M. Seidel, J. Sibille<sup>16</sup>, V. Sola, H. Stadie, G. Steinbrück, D. Troendle, E. Usai, L. Vanelderen

**Institut für Experimentelle Kernphysik, Karlsruhe, Germany**

C. Barth, C. Baus, J. Berger, C. Böser, E. Butz, T. Chwalek, W. De Boer, A. Descroix, A. Dierlamm, M. Feindt, F. Hartmann<sup>2</sup>, T. Hauth<sup>2</sup>, U. Husemann, I. Katkov<sup>5</sup>, A. Kornmayer<sup>2</sup>, E. Kuznetsova, P. Lobelle Pardo, M.U. Mozer, Th. Müller, A. Nürnberg, G. Quast, K. Rabbertz, F. Ratnikov, S. Röcker, H.J. Simonis, F.M. Stober, R. Ulrich, J. Wagner-Kuhr, S. Wayand, T. Weiler, R. Wolf

**Institute of Nuclear and Particle Physics (INPP), NCSR Demokritos, Aghia Paraskevi, Greece**

G. Anagnostou, G. Daskalakis, T. Geralis, V.A. Giakoumopoulou, A. Kyriakis, D. Loukas, A. Markou, C. Markou, A. Psallidas, I. Topsis-Giotis

**University of Athens, Athens, Greece**

L. Gouskos, A. Panagiotou, N. Saoulidou, E. Stiliaris

**University of Ioánnina, Ioánnina, Greece**

X. Aslanoglou, I. Evangelou, G. Flouris, C. Foudas, P. Kokkas, N. Manthos, I. Papadopoulos, E. Paradas

**Wigner Research Centre for Physics, Budapest, Hungary**

G. Bencze, C. Hajdu, P. Hidas, D. Horvath<sup>17</sup>, F. Sikler, V. Veszpremi, G. Vesztergombi<sup>18</sup>, A.J. Zsigmond

**Institute of Nuclear Research ATOMKI, Debrecen, Hungary**

N. Beni, S. Czellar, J. Karancsi<sup>19</sup>, J. Molnar, J. Palinkas, Z. Szillasi

**University of Debrecen, Debrecen, Hungary**

P. Raics, Z.L. Trocsanyi, B. Ujvari

**National Institute of Science Education and Research, Bhubaneswar, India**

S.K. Swain

**Panjab University, Chandigarh, India**

S.B. Beri, V. Bhatnagar, N. Dhingra, R. Gupta, A.K. Kalsi, M. Kaur, M. Mittal, N. Nishu, J.B. Singh

**University of Delhi, Delhi, India**

Ashok Kumar, Arun Kumar, S. Ahuja, A. Bhardwaj, B.C. Choudhary, A. Kumar, S. Malhotra, M. Naimuddin, K. Ranjan, V. Sharma

**Saha Institute of Nuclear Physics, Kolkata, India**

S. Banerjee, S. Bhattacharya, K. Chatterjee, S. Dutta, B. Gomber, Sa. Jain, Sh. Jain, R. Khurana, A. Modak, S. Mukherjee, D. Roy, S. Sarkar, M. Sharan

**Bhabha Atomic Research Centre, Mumbai, India**

A. Abdulsalam, D. Dutta, S. Kailas, V. Kumar, A.K. Mohanty<sup>2</sup>, L.M. Pant, P. Shukla, A. Topkar

**Tata Institute of Fundamental Research - EHEP, Mumbai, India**

T. Aziz, R.M. Chatterjee, S. Ganguly, S. Ghosh, M. Guchait<sup>20</sup>, A. Gurtu<sup>21</sup>, G. Kole,



S. Kumar, M. Maity<sup>22</sup>, G. Majumder, K. Mazumdar, G.B. Mohanty, B. Parida, K. Sudhakar, N. Wickramage<sup>23</sup>

**Tata Institute of Fundamental Research - HECR, Mumbai, India**

S. Banerjee, R.K. Dewanjee, S. Dugad

**Institute for Research in Fundamental Sciences (IPM), Tehran, Iran**

H. Bakhshiansohi, H. Behnamian, S.M. Etesami<sup>24</sup>, A. Fahim<sup>25</sup>, R. Goldouzian, A. Jafari, M. Khakzad, M. Mohammadi Najafabadi, M. Naseri, S. Paktinat Mehdiabadi, B. Safarzadeh<sup>26</sup>, M. Zeinali

**University College Dublin, Dublin, Ireland**

M. Felcini, M. Grunewald

**INFN Sezione di Bari <sup>a</sup>, Università di Bari <sup>b</sup>, Politecnico di Bari <sup>c</sup>, Bari, Italy**

M. Abbrescia<sup>a,b</sup>, L. Barbone<sup>a,b</sup>, C. Calabria<sup>a,b</sup>, S.S. Chhibra<sup>a,b</sup>, A. Colaleo<sup>a</sup>, D. Creanza<sup>a,c</sup>, N. De Filippis<sup>a,c</sup>, M. De Palma<sup>a,b</sup>, L. Fiore<sup>a</sup>, G. Iaselli<sup>a,c</sup>, G. Maggi<sup>a,c</sup>, M. Maggi<sup>a</sup>, S. My<sup>a,c</sup>, S. Nuzzo<sup>a,b</sup>, A. Pompili<sup>a,b</sup>, G. Pugliese<sup>a,c</sup>, R. Radogna<sup>a,b,2</sup>, G. Selvaggi<sup>a,b</sup>, L. Silvestris<sup>a,2</sup>, G. Singh<sup>a,b</sup>, R. Venditti<sup>a,b</sup>, P. Verwilligen<sup>a</sup>, G. Zito<sup>a</sup>

**INFN Sezione di Bologna <sup>a</sup>, Università di Bologna <sup>b</sup>, Bologna, Italy**

G. Abbiendi<sup>a</sup>, A.C. Benvenuti<sup>a</sup>, D. Bonacorsi<sup>a,b</sup>, S. Braibant-Giacomelli<sup>a,b</sup>, L. Brigliadori<sup>a,b</sup>, R. Campanini<sup>a,b</sup>, P. Capiluppi<sup>a,b</sup>, A. Castro<sup>a,b</sup>, F.R. Cavallo<sup>a</sup>, G. Codispoti<sup>a,b</sup>, M. Cuffiani<sup>a,b</sup>, G.M. Dallavalle<sup>a</sup>, F. Fabbri<sup>a</sup>, A. Fanfani<sup>a,b</sup>, D. Fasanella<sup>a,b</sup>, P. Giacomelli<sup>a</sup>, C. Grandi<sup>a</sup>, L. Guiducci<sup>a,b</sup>, S. Marcellini<sup>a</sup>, G. Masetti<sup>a,2</sup>, A. Montanari<sup>a</sup>, F.L. Navarria<sup>a,b</sup>, A. Perrotta<sup>a</sup>, F. Primavera<sup>a,b</sup>, A.M. Rossi<sup>a,b</sup>, T. Rovelli<sup>a,b</sup>, G.P. Siroli<sup>a,b</sup>, N. Tosi<sup>a,b</sup>, R. Travaglini<sup>a,b</sup>

**INFN Sezione di Catania <sup>a</sup>, Università di Catania <sup>b</sup>, CSFNSM <sup>c</sup>, Catania, Italy**

S. Albergo<sup>a,b</sup>, G. Cappello<sup>a</sup>, M. Chiorboli<sup>a,b</sup>, S. Costa<sup>a,b</sup>, F. Giordano<sup>a,c,2</sup>, R. Potenza<sup>a,b</sup>, A. Tricoli<sup>a,b</sup>, C. Tuve<sup>a,b</sup>

**INFN Sezione di Firenze <sup>a</sup>, Università di Firenze <sup>b</sup>, Firenze, Italy**

G. Barbagli<sup>a</sup>, V. Ciulli<sup>a,b</sup>, C. Civinini<sup>a</sup>, R. D'Alessandro<sup>a,b</sup>, E. Focardi<sup>a,b</sup>, E. Gallo<sup>a</sup>, S. Gonzi<sup>a,b</sup>, V. Gori<sup>a,b,2</sup>, P. Lenzi<sup>a,b</sup>, M. Meschini<sup>a</sup>, S. Paoletti<sup>a</sup>, G. Sguazzoni<sup>a</sup>, A. Tropiano<sup>a,b</sup>

**INFN Laboratori Nazionali di Frascati, Frascati, Italy**

L. Benussi, S. Bianco, F. Fabbri, D. Piccolo

**INFN Sezione di Genova <sup>a</sup>, Università di Genova <sup>b</sup>, Genova, Italy**

F. Ferro<sup>a</sup>, M. Lo Vetere<sup>a,b</sup>, E. Robutti<sup>a</sup>, S. Tosi<sup>a,b</sup>

**INFN Sezione di Milano-Bicocca <sup>a</sup>, Università di Milano-Bicocca <sup>b</sup>, Milano, Italy**

M.E. Dinardo<sup>a,b</sup>, S. Fiorendi<sup>a,b,2</sup>, S. Gennai<sup>a,2</sup>, R. Gerosa<sup>2</sup>, A. Ghezzi<sup>a,b</sup>, P. Govoni<sup>a,b</sup>, M.T. Lucchini<sup>a,b,2</sup>, S. Malvezzi<sup>a</sup>, R.A. Manzoni<sup>a,b</sup>, A. Martelli<sup>a,b</sup>, B. Marzocchi, D. Menasce<sup>a</sup>, L. Moroni<sup>a</sup>, M. Paganoni<sup>a,b</sup>, D. Pedrini<sup>a</sup>, S. Ragazzi<sup>a,b</sup>, N. Redaelli<sup>a</sup>, T. Tabarelli de Fatis<sup>a,b</sup>

**INFN Sezione di Napoli <sup>a</sup>, Università di Napoli 'Federico II' <sup>b</sup>, Università della Basilicata (Potenza) <sup>c</sup>, Università G. Marconi (Roma) <sup>d</sup>, Napoli, Italy**

S. Buontempo<sup>a</sup>, N. Cavallo<sup>a,c</sup>, S. Di Guida<sup>a,d,2</sup>, F. Fabozzi<sup>a,c</sup>, A.O.M. Iorio<sup>a,b</sup>, L. Lista<sup>a</sup>, S. Meola<sup>a,d,2</sup>, M. Merola<sup>a</sup>, P. Paolucci<sup>a,2</sup>

**INFN Sezione di Padova <sup>a</sup>, Università di Padova <sup>b</sup>, Università di Trento (Trento) <sup>c</sup>, Padova, Italy**

P. Azzi<sup>a</sup>, N. Bacchetta<sup>a</sup>, D. Bisello<sup>a,b</sup>, A. Branca<sup>a,b</sup>, R. Carlin<sup>a,b</sup>, P. Checchia<sup>a</sup>, M. Dall'Osso<sup>a,b</sup>, T. Dorigo<sup>a</sup>, U. Dosselli<sup>a</sup>, M. Galanti<sup>a,b</sup>, F. Gasparini<sup>a,b</sup>, U. Gasparini<sup>a,b</sup>, P. Giubilato<sup>a,b</sup>

A. Gozzelino<sup>a</sup>, K. Kanishchev<sup>a,c</sup>, S. Lacaprara<sup>a</sup>, M. Margoni<sup>a,b</sup>, A.T. Meneguzzo<sup>a,b</sup>, J. Pazzini<sup>a,b</sup>, N. Pozzobon<sup>a,b</sup>, P. Ronchese<sup>a,b</sup>, F. Simonetto<sup>a,b</sup>, E. Torassa<sup>a</sup>, M. Tosi<sup>a,b</sup>, P. Zotto<sup>a,b</sup>, A. Zucchetta<sup>a,b</sup>, G. Zumerle<sup>a,b</sup>

**INFN Sezione di Pavia<sup>a</sup>, Università di Pavia<sup>b</sup>, Pavia, Italy**

M. Gabusi<sup>a,b</sup>, S.P. Ratti<sup>a,b</sup>, C. Riccardi<sup>a,b</sup>, P. Salvini<sup>a</sup>, P. Vitulo<sup>a,b</sup>

**INFN Sezione di Perugia<sup>a</sup>, Università di Perugia<sup>b</sup>, Perugia, Italy**

M. Biasini<sup>a,b</sup>, G.M. Bilei<sup>a</sup>, D. Ciangottini<sup>a,b</sup>, L. Fanò<sup>a,b</sup>, P. Lariccia<sup>a,b</sup>, G. Mantovani<sup>a,b</sup>, M. Menichelli<sup>a</sup>, F. Romeo<sup>a,b</sup>, A. Saha<sup>a</sup>, A. Santocchia<sup>a,b</sup>, A. Spiezia<sup>a,b,2</sup>

**INFN Sezione di Pisa<sup>a</sup>, Università di Pisa<sup>b</sup>, Scuola Normale Superiore di Pisa<sup>c</sup>, Pisa, Italy**

K. Androsov<sup>a,27</sup>, P. Azzurri<sup>a</sup>, G. Bagliesi<sup>a</sup>, J. Bernardini<sup>a</sup>, T. Boccali<sup>a</sup>, G. Broccolo<sup>a,c</sup>, R. Castaldi<sup>a</sup>, M.A. Ciocci<sup>a,27</sup>, R. Dell'Orso<sup>a</sup>, S. Donato<sup>a,c</sup>, F. Fiori<sup>a,c</sup>, L. Foà<sup>a,c</sup>, A. Giassi<sup>a</sup>, M.T. Grippo<sup>a,27</sup>, F. Ligabue<sup>a,c</sup>, T. Lomtadze<sup>a</sup>, L. Martini<sup>a,b</sup>, A. Messineo<sup>a,b</sup>, C.S. Moon<sup>a,28</sup>, F. Palla<sup>a,2</sup>, A. Rizzi<sup>a,b</sup>, A. Savoy-Navarro<sup>a,29</sup>, A.T. Serban<sup>a</sup>, P. Spagnolo<sup>a</sup>, P. Squillacioti<sup>a,27</sup>, R. Tenchini<sup>a</sup>, G. Tonelli<sup>a,b</sup>, A. Venturi<sup>a</sup>, P.G. Verdini<sup>a</sup>, C. Vernieri<sup>a,c,2</sup>

**INFN Sezione di Roma<sup>a</sup>, Università di Roma<sup>b</sup>, Roma, Italy**

L. Barone<sup>a,b</sup>, F. Cavallari<sup>a</sup>, D. Del Re<sup>a,b</sup>, M. Diemoz<sup>a</sup>, M. Grassi<sup>a,b</sup>, C. Jorda<sup>a</sup>, E. Longo<sup>a,b</sup>, F. Margaroli<sup>a,b</sup>, P. Meridiani<sup>a</sup>, F. Micheli<sup>a,b,2</sup>, S. Nourbakhsh<sup>a,b</sup>, G. Organtini<sup>a,b</sup>, R. Paramatti<sup>a</sup>, S. Rahatlou<sup>a,b</sup>, C. Rovelli<sup>a</sup>, F. Santanastasio<sup>a,b</sup>, L. Soffi<sup>a,b,2</sup>, P. Traczyk<sup>a,b</sup>

**INFN Sezione di Torino<sup>a</sup>, Università di Torino<sup>b</sup>, Università del Piemonte Orientale (Novara)<sup>c</sup>, Torino, Italy**

N. Amapane<sup>a,b</sup>, R. Arcidiacono<sup>a,c</sup>, S. Argiro<sup>a,b,2</sup>, M. Arneodo<sup>a,c</sup>, R. Bellan<sup>a,b</sup>, C. Biino<sup>a</sup>, N. Cartiglia<sup>a</sup>, S. Casasso<sup>a,b,2</sup>, M. Costa<sup>a,b</sup>, A. Degano<sup>a,b</sup>, N. Demaria<sup>a</sup>, L. Finco<sup>a,b</sup>, C. Mariotti<sup>a</sup>, S. Maselli<sup>a</sup>, E. Migliore<sup>a,b</sup>, V. Monaco<sup>a,b</sup>, M. Musich<sup>a</sup>, M.M. Obertino<sup>a,c,2</sup>, G. Ortona<sup>a,b</sup>, L. Pacher<sup>a,b</sup>, N. Pastrone<sup>a</sup>, M. Pelliccioni<sup>a</sup>, G.L. Pinna Angioni<sup>a,b</sup>, A. Potenza<sup>a,b</sup>, A. Romero<sup>a,b</sup>, M. Ruspa<sup>a,c</sup>, R. Sacchi<sup>a,b</sup>, A. Solano<sup>a,b</sup>, A. Staiano<sup>a</sup>, U. Tamponi<sup>a</sup>

**INFN Sezione di Trieste<sup>a</sup>, Università di Trieste<sup>b</sup>, Trieste, Italy**

S. Belforte<sup>a</sup>, V. Candelise<sup>a,b</sup>, M. Casarsa<sup>a</sup>, F. Cossutti<sup>a</sup>, G. Della Ricca<sup>a,b</sup>, B. Gobbo<sup>a</sup>, C. La Licata<sup>a,b</sup>, M. Marone<sup>a,b</sup>, D. Montanino<sup>a,b</sup>, A. Schizzi<sup>a,b,2</sup>, T. Umer<sup>a,b</sup>, A. Zanetti<sup>a</sup>

**Kangwon National University, Chunchon, Korea**

S. Chang, A. Kropivnitskaya, S.K. Nam

**Kyungpook National University, Daegu, Korea**

D.H. Kim, G.N. Kim, M.S. Kim, D.J. Kong, S. Lee, Y.D. Oh, H. Park, A. Sakharov, D.C. Son

**Chonnam National University, Institute for Universe and Elementary Particles, Kwangju, Korea**

J.Y. Kim, S. Song

**Korea University, Seoul, Korea**

S. Choi, D. Gyun, B. Hong, M. Jo, H. Kim, Y. Kim, B. Lee, K.S. Lee, S.K. Park, Y. Roh

**University of Seoul, Seoul, Korea**

M. Choi, J.H. Kim, I.C. Park, S. Park, G. Ryu, M.S. Ryu

**Sungkyunkwan University, Suwon, Korea**

Y. Choi, Y.K. Choi, J. Goh, E. Kwon, J. Lee, H. Seo, I. Yu

**Vilnius University, Vilnius, Lithuania**

A. Juodagalvis

**National Centre for Particle Physics, Universiti Malaya, Kuala Lumpur, Malaysia**

J.R. Komaragiri

**Centro de Investigacion y de Estudios Avanzados del IPN, Mexico City, Mexico**

H. Castilla-Valdez, E. De La Cruz-Burelo, I. Heredia-de La Cruz<sup>30</sup>, R. Lopez-Fernandez, A. Sanchez-Hernandez

**Universidad Iberoamericana, Mexico City, Mexico**

S. Carrillo Moreno, F. Vazquez Valencia

**Benemerita Universidad Autonoma de Puebla, Puebla, Mexico**

I. Pedraza, H.A. Salazar Ibarguen

**Universidad Autónoma de San Luis Potosí, San Luis Potosí, Mexico**

E. Casimiro Linares, A. Morelos Pineda

**University of Auckland, Auckland, New Zealand**

D. Krofcheck

**University of Canterbury, Christchurch, New Zealand**

P.H. Butler, S. Reucroft

**National Centre for Physics, Quaid-I-Azam University, Islamabad, Pakistan**

A. Ahmad, M. Ahmad, Q. Hassan, H.R. Hoorani, S. Khalid, W.A. Khan, T. Khurshid, M.A. Shah, M. Shoaib

**National Centre for Nuclear Research, Swierk, Poland**

H. Bialkowska, M. Bluj<sup>31</sup>, B. Boimska, T. Frueboes, M. Górski, M. Kazana, K. Nawrocki, K. Romanowska-Rybinska, M. Szleper, P. Zalewski

**Institute of Experimental Physics, Faculty of Physics, University of Warsaw, Warsaw, Poland**

G. Brona, K. Bunkowski, M. Cwiok, W. Dominik, K. Doroba, A. Kalinowski, M. Konecki, J. Krolikowski, M. Misiura, M. Olszewski, W. Wolszczak

**Laboratório de Instrumentação e Física Experimental de Partículas, Lisboa, Portugal**

P. Bargassa, C. Beirão Da Cruz E Silva, P. Faccioli, P.G. Ferreira Parracho, M. Gallinaro, F. Nguyen, J. Rodrigues Antunes, J. Seixas, J. Varela, P. Vischia

**Joint Institute for Nuclear Research, Dubna, Russia**

S. Afanasiev, P. Bunin, M. Gavrilenko, I. Golutvin, I. Gorbunov, A. Kamenev, V. Karjavin, V. Konoplyanikov, A. Lanev, A. Malakhov, V. Matveev<sup>32</sup>, P. Moiseenz, V. Palichik, V. Perelygin, S. Shmatov, N. Skatchkov, V. Smirnov, A. Zarubin

**Petersburg Nuclear Physics Institute, Gatchina (St. Petersburg), Russia**

V. Golovtsov, Y. Ivanov, V. Kim<sup>33</sup>, P. Levchenko, V. Murzin, V. Oreshkin, I. Smirnov, V. Sulimov, L. Uvarov, S. Vavilov, A. Vorobyev, An. Vorobyev

**Institute for Nuclear Research, Moscow, Russia**

Yu. Andreev, A. Dermenev, S. Gninenko, N. Golubev, M. Kirsanov, N. Krasnikov, A. Pashenkov, D. Tlisov, A. Toropin

**Institute for Theoretical and Experimental Physics, Moscow, Russia**

V. Epshteyn, V. Gavrilov, N. Lychkovskaya, V. Popov, G. Safronov, S. Semenov, A. Spiridonov, V. Stolin, E. Vlasov, A. Zhokin

**P.N. Lebedev Physical Institute, Moscow, Russia**

V. Andreev, M. Azarkin, I. Dremin, M. Kirakosyan, A. Leonidov, G. Mesyats, S.V. Rusakov, A. Vinogradov

**Skobeltsyn Institute of Nuclear Physics, Lomonosov Moscow State University, Moscow, Russia**

A. Belyaev, E. Boos, M. Dubinin<sup>7</sup>, L. Dudko, A. Ershov, A. Gribushin, V. Klyukhin, O. Kodolova, I. Lokhtin, S. Obraztsov, S. Petrushanko, V. Savrin, A. Snigirev

**State Research Center of Russian Federation, Institute for High Energy Physics, Protvino, Russia**

I. Azhgirey, I. Bayshev, S. Bitioukov, V. Kachanov, A. Kalinin, D. Konstantinov, V. Krychkin, V. Petrov, R. Ryutin, A. Sobol, L. Tourtchanovitch, S. Troshin, N. Tyurin, A. Uzunian, A. Volkov

**University of Belgrade, Faculty of Physics and Vinca Institute of Nuclear Sciences, Belgrade, Serbia**

P. Adzic<sup>34</sup>, M. Dordevic, M. Ekmedzic, J. Milosevic

**Centro de Investigaciones Energéticas Medioambientales y Tecnológicas (CIEMAT), Madrid, Spain**

J. Alcaraz Maestre, C. Battilana, E. Calvo, M. Cerrada, M. Chamizo Llatas<sup>2</sup>, N. Colino, B. De La Cruz, A. Delgado Peris, D. Domínguez Vázquez, A. Escalante Del Valle, C. Fernandez Bedoya, J.P. Fernández Ramos, J. Flix, M.C. Fouz, P. Garcia-Abia, O. Gonzalez Lopez, S. Goy Lopez, J.M. Hernandez, M.I. Josa, G. Merino, E. Navarro De Martino, A. Pérez-Calero Yzquierdo, J. Puerta Pelayo, A. Quintario Olmeda, I. Redondo, L. Romero, M.S. Soares

**Universidad Autónoma de Madrid, Madrid, Spain**

C. Albajar, J.F. de Trocóniz, M. Missiroli

**Universidad de Oviedo, Oviedo, Spain**

H. Brun, J. Cuevas, J. Fernandez Menendez, S. Folgueras, I. Gonzalez Caballero, L. Lloret Iglesias

**Instituto de Física de Cantabria (IFCA), CSIC-Universidad de Cantabria, Santander, Spain**

J.A. Brochero Cifuentes, I.J. Cabrillo, A. Calderon, J. Duarte Campderros, M. Fernandez, G. Gomez, A. Graziano, A. Lopez Virto, J. Marco, R. Marco, C. Martinez Rivero, F. Matorras, F.J. Munoz Sanchez, J. Piedra Gomez, T. Rodrigo, A.Y. Rodríguez-Marrero, A. Ruiz-Jimeno, L. Scodellaro, I. Vila, R. Vilar Cortabitarte

**CERN, European Organization for Nuclear Research, Geneva, Switzerland**

D. Abbaneo, E. Auffray, G. Auzinger, M. Bachtis, P. Baillon, A.H. Ball, D. Barney, A. Benaglia, J. Bendavid, L. Benhabib, J.F. Benitez, C. Bernet<sup>8</sup>, G. Bianchi, P. Bloch, A. Bocci, A. Bonato, O. Bondu, C. Botta, H. Breuker, T. Camporesi, G. Cerminara, T. Christiansen, S. Colafranceschi<sup>35</sup>, M. D'Alfonso, D. d'Enterria, A. Dabrowski, A. David, F. De Guio, A. De Roeck, S. De Visscher, M. Dobson, N. Dupont-Sagorin, A. Elliott-Peisert, J. Eugster, G. Franzoni, W. Funk, M. Giffels, D. Gigi, K. Gill, D. Giordano, M. Girone, F. Glege, R. Guida, S. Gundacker, M. Guthoff, J. Hammer, M. Hansen, P. Harris, J. Hegeman, V. Innocente, P. Janot, K. Kousouris, K. Krajczar, P. Lecoq, C. Lourenço, N. Magini, L. Malgeri, M. Mannelli, L. Masetti, F. Meijers, S. Mersi, E. Meschi, F. Moortgat, S. Morovic, M. Mulders, P. Musella, L. Orsini, L. Pape, E. Perez, L. Perrozzi, A. Petrilli, G. Petrucciani, A. Pfeiffer, M. Pierini, M. Pimiä, D. Piparo, M. Plagge, A. Racz, G. Rolandi<sup>36</sup>, M. Rovere, H. Sakulin, C. Schäfer, C. Schwick, S. Sekmen, A. Sharma, P. Siegrist, P. Silva, M. Simon, P. Sphicas<sup>37</sup>, D. Spiga, J. Steggemann, B. Stieger, M. Stoye, D. Treille, A. Tsiros, G.I. Veres<sup>18</sup>, J.R. Vlimant, N. Wardle, H.K. Wöhri, W.D. Zeuner

**Paul Scherrer Institut, Villigen, Switzerland**

W. Bertl, K. Deiters, W. Erdmann, R. Horisberger, Q. Ingram, H.C. Kaestli, S. König, D. Kotlinski, U. Langenegger, D. Renker, T. Rohe

**Institute for Particle Physics, ETH Zurich, Zurich, Switzerland**

F. Bachmair, L. Bäni, L. Bianchini, P. Bortignon, M.A. Buchmann, B. Casal, N. Chanon, A. Deisher, G. Dissertori, M. Dittmar, M. Donegà, M. Dünser, P. Eller, C. Grab, D. Hits, W. Lustermann, B. Mangano, A.C. Marini, P. Martinez Ruiz del Arbol, D. Meister, N. Mohr, C. Nägeli<sup>38</sup>, P. Nef, F. Nessi-Tedaldi, F. Pandolfi, F. Pauss, M. Peruzzi, M. Quittnat, L. Rebane, F.J. Ronga, M. Rossini, A. Starodumov<sup>39</sup>, M. Takahashi, K. Theofilatos, R. Wallny, H.A. Weber

**Universität Zürich, Zurich, Switzerland**

C. Amsler<sup>40</sup>, M.F. Canelli, V. Chiochia, A. De Cosa, A. Hinzmann, T. Hreus, M. Ivova Rikova, B. Kilminster, B. Millan Mejias, J. Ngadiuba, P. Robmann, H. Snoek, S. Taroni, M. Verzetti, Y. Yang

**National Central University, Chung-Li, Taiwan**

M. Cardaci, K.H. Chen, C. Ferro, C.M. Kuo, W. Lin, Y.J. Lu, R. Volpe, S.S. Yu

**National Taiwan University (NTU), Taipei, Taiwan**

P. Chang, Y.H. Chang, Y.W. Chang, Y. Chao, K.F. Chen, P.H. Chen, C. Dietz, U. Grundler, W.-S. Hou, K.Y. Kao, Y.J. Lei, Y.F. Liu, R.-S. Lu, D. Majumder, E. Petrakou, X. Shi, Y.M. Tzeng, R. Wilken

**Chulalongkorn University, Bangkok, Thailand**

B. Asavapibhop, N. Srimanobhas, N. Suwonjandee

**Cukurova University, Adana, Turkey**

A. Adiguzel, M.N. Bakirci<sup>41</sup>, S. Cerci<sup>42</sup>, C. Dozen, I. Dumanoglu, E. Eskut, S. Girgis, G. Gokbulut, E. Gurpinar, I. Hos, E.E. Kangal, A. Kayis Topaksu, G. Onengut<sup>43</sup>, K. Ozdemir, S. Ozturk<sup>41</sup>, A. Polatoz, K. Sogut<sup>44</sup>, D. Sunar Cerci<sup>42</sup>, B. Tali<sup>42</sup>, H. Topakli<sup>41</sup>, M. Vergili

**Middle East Technical University, Physics Department, Ankara, Turkey**

I.V. Akin, B. Bilin, S. Bilmis, H. Gamsizkan, G. Karapinar<sup>45</sup>, K. Ocalan, U.E. Surat, M. Yalvac, M. Zeyrek

**Bogazici University, Istanbul, Turkey**

E. Gülmez, B. Isildak<sup>46</sup>, M. Kaya<sup>47</sup>, O. Kaya<sup>47</sup>

**Istanbul Technical University, Istanbul, Turkey**

H. Bahtiyar<sup>48</sup>, E. Barlas, K. Cankocak, F.I. Vardarli, M. Yücel

**National Scientific Center, Kharkov Institute of Physics and Technology, Kharkov, Ukraine**

L. Levchuk, P. Sorokin

**University of Bristol, Bristol, United Kingdom**

J.J. Brooke, E. Clement, D. Cussans, H. Flacher, R. Frazier, J. Goldstein, M. Grimes, G.P. Heath, H.F. Heath, J. Jacob, L. Kreczko, C. Lucas, Z. Meng, D.M. Newbold<sup>49</sup>, S. Paramesvaran, A. Poll, S. Senkin, V.J. Smith, T. Williams

**Rutherford Appleton Laboratory, Didcot, United Kingdom**

K.W. Bell, A. Belyaev<sup>50</sup>, C. Brew, R.M. Brown, D.J.A. Cockerill, J.A. Coughlan, K. Harder, S. Harper, E. Olaiya, D. Petyt, C.H. Shepherd-Themistocleous, A. Thea, I.R. Tomalin, W.J. Womersley, S.D. Worm

**Imperial College, London, United Kingdom**

M. Baber, R. Bainbridge, O. Buchmuller, D. Burton, D. Colling, N. Cripps, M. Cutajar, P. Dauncey, G. Davies, M. Della Negra, P. Dunne, W. Ferguson, J. Fulcher, D. Futyan, A. Gilbert, G. Hall, G. Iles, M. Jarvis, G. Karapostoli, M. Kenzie, R. Lane, R. Lucas<sup>49</sup>, L. Lyons, A.-M. Magnan, S. Malik, J. Marrouche, B. Mathias, J. Nash, A. Nikitenko<sup>39</sup>, J. Pela, M. Pesaresi, K. Petridis, D.M. Raymond, S. Rogerson, A. Rose, C. Seez, P. Sharp<sup>†</sup>, A. Tapper, M. Vazquez Acosta, T. Virdee

**Brunel University, Uxbridge, United Kingdom**

J.E. Cole, P.R. Hobson, A. Khan, P. Kyberd, D. Leggat, D. Leslie, W. Martin, I.D. Reid, P. Symonds, L. Teodorescu, M. Turner

**Baylor University, Waco, USA**

J. Dittmann, K. Hatakeyama, A. Kasmi, H. Liu, T. Scarborough

**The University of Alabama, Tuscaloosa, USA**

O. Charaf, S.I. Cooper, C. Henderson, P. Rumerio

**Boston University, Boston, USA**

A. Avetisyan, T. Bose, C. Fantasia, A. Heister, P. Lawson, C. Richardson, J. Rohlf, D. Sperka, J. St. John, L. Sulak

**Brown University, Providence, USA**

J. Alimena, S. Bhattacharya, G. Christopher, D. Cutts, Z. Demiragli, A. Ferapontov, A. Garabedian, U. Heintz, S. Jabeen, G. Kukartsev, E. Laird, G. Landsberg, M. Luk, M. Narain, M. Segala, T. Sinthuprasith, T. Speer, J. Swanson

**University of California, Davis, Davis, USA**

R. Breedon, G. Breto, M. Calderon De La Barca Sanchez, S. Chauhan, M. Chertok, J. Conway, R. Conway, P.T. Cox, R. Erbacher, M. Gardner, W. Ko, R. Lander, T. Miceli, M. Mulhearn, D. Pellett, J. Pilot, F. Ricci-Tam, M. Searle, S. Shalhout, J. Smith, M. Squires, D. Stolp, M. Tripathi, S. Wilbur, R. Yohay

**University of California, Los Angeles, USA**

R. Cousins, P. Everaerts, C. Farrell, J. Hauser, M. Ignatenko, G. Rakness, E. Takasugi, V. Valuev, M. Weber

**University of California, Riverside, Riverside, USA**

J. Babb, R. Clare, J. Ellison, J.W. Gary, G. Hanson, J. Heilman, P. Jandir, E. Kennedy, F. Lacroix, H. Liu, O.R. Long, A. Luthra, M. Malberti, H. Nguyen, A. Shrinivas, J. Sturdy, S. Sumowidagdo, S. Wimpenny

**University of California, San Diego, La Jolla, USA**

W. Andrews, J.G. Branson, G.B. Cerati, S. Cittolin, R.T. D'Agnolo, D. Evans, A. Holzner, R. Kelley, M. Lebourgeois, J. Letts, I. Macneill, D. Olivito, S. Padhi, C. Palmer, M. Pieri, M. Sani, V. Sharma, S. Simon, E. Sudano, M. Tadel, Y. Tu, A. Vartak, F. Würthwein, A. Yagil, J. Yoo

**University of California, Santa Barbara, Santa Barbara, USA**

D. Barge, J. Bradmiller-Feld, C. Campagnari, T. Danielson, A. Dishaw, K. Flowers, M. Franco Sevilla, P. Geffert, C. George, F. Golf, J. Incandela, C. Justus, N. Mccoll, J. Richman, D. Stuart, W. To, C. West

**California Institute of Technology, Pasadena, USA**

A. Apresyan, A. Bornheim, J. Bunn, Y. Chen, E. Di Marco, J. Duarte, A. Mott, H.B. Newman, C. Pena, C. Rogan, M. Spiropulu, V. Timciuc, R. Wilkinson, S. Xie, R.Y. Zhu

**Carnegie Mellon University, Pittsburgh, USA**

V. Azzolini, A. Calamba, R. Carroll, T. Ferguson, Y. Iiyama, M. Paulini, J. Russ, H. Vogel, I. Vorobiev

**University of Colorado at Boulder, Boulder, USA**

J.P. Cumalat, B.R. Drell, W.T. Ford, A. Gaz, E. Luiggi Lopez, U. Nauenberg, J.G. Smith, K. Stenson, K.A. Ulmer, S.R. Wagner

**Cornell University, Ithaca, USA**

J. Alexander, A. Chatterjee, J. Chu, S. Dittmer, N. Eggert, W. Hopkins, B. Kreis, N. Mirman, G. Nicolas Kaufman, J.R. Patterson, A. Ryd, E. Salvati, L. Skinnari, W. Sun, W.D. Teo, J. Thom, J. Thompson, J. Tucker, Y. Weng, L. Winstrom, P. Wittich

**Fairfield University, Fairfield, USA**

D. Winn

**Fermi National Accelerator Laboratory, Batavia, USA**

S. Abdullin, M. Albrow, J. Anderson, G. Apollinari, L.A.T. Bauerdick, A. Beretvas, J. Berryhill, P.C. Bhat, K. Burkett, J.N. Butler, H.W.K. Cheung, F. Chlebana, S. Cihangir, V.D. Elvira, I. Fisk, J. Freeman, E. Gottschalk, L. Gray, D. Green, S. Grünendahl, O. Gutsche, J. Hanlon, D. Hare, R.M. Harris, J. Hirschauer, B. Hooberman, S. Jindariani, M. Johnson, U. Joshi, K. Kaadze, B. Klima, S. Kwan, J. Linacre, D. Lincoln, R. Lipton, T. Liu, J. Lykken, K. Maeshima, J.M. Marraffino, V.I. Martinez Outschoorn, S. Maruyama, D. Mason, P. McBride, K. Mishra, S. Mrenna, Y. Musienko<sup>32</sup>, S. Nahn, C. Newman-Holmes, V. O'Dell, O. Prokofyev, E. Sexton-Kennedy, S. Sharma, A. Soha, W.J. Spalding, L. Spiegel, L. Taylor, S. Tkaczyk, N.V. Tran, L. Uplegger, E.W. Vaandering, R. Vidal, A. Whitbeck, J. Whitmore, F. Yang

**University of Florida, Gainesville, USA**

D. Acosta, P. Avery, D. Bourilkov, M. Carver, T. Cheng, D. Curry, S. Das, M. De Gruttola, G.P. Di Giovanni, R.D. Field, M. Fisher, I.K. Furic, J. Hugon, J. Konigsberg, A. Korytov, T. Kypreos, J.F. Low, K. Matchev, P. Milenovic<sup>51</sup>, G. Mitselmakher, L. Muniz, A. Rinkevicius, L. Shchutska, N. Skhirtladze, M. Snowball, J. Yelton, M. Zakaria

**Florida International University, Miami, USA**

V. Gaultney, S. Hewamanage, S. Linn, P. Markowitz, G. Martinez, J.L. Rodriguez

**Florida State University, Tallahassee, USA**

T. Adams, A. Askew, J. Bochenek, B. Diamond, J. Haas, S. Hagopian, V. Hagopian, K.F. Johnson, H. Prosper, V. Veeraraghavan, M. Weinberg

**Florida Institute of Technology, Melbourne, USA**

M.M. Baarmand, M. Hohlmann, H. Kalakhety, F. Yumiceva

**University of Illinois at Chicago (UIC), Chicago, USA**

M.R. Adams, L. Apanasevich, V.E. Bazterra, D. Berry, R.R. Betts, I. Bucinskaite, R. Cavanaugh, O. Evdokimov, L. Gauthier, C.E. Gerber, D.J. Hofman, S. Khalatyan, P. Kurt, D.H. Moon, C. O'Brien, C. Silkworth, P. Turner, N. Varelas

**The University of Iowa, Iowa City, USA**

E.A. Albayrak<sup>48</sup>, B. Bilki<sup>52</sup>, W. Clarida, K. Dilsiz, F. Duru, M. Haytmyradov, J.-P. Merlo, H. Mermerkaya<sup>53</sup>, A. Mestvirishvili, A. Moeller, J. Nachtman, H. Ogul, Y. Onel, F. Ozok<sup>48</sup>, A. Penzo, R. Rahmat, S. Sen, P. Tan, E. Tiras, J. Wetzel, T. Yetkin<sup>54</sup>, K. Yi

**Johns Hopkins University, Baltimore, USA**

B.A. Barnett, B. Blumenfeld, S. Bolognesi, D. Fehling, A.V. Gritsan, P. Maksimovic, C. Martin, M. Swartz, Y. Xin

**The University of Kansas, Lawrence, USA**

P. Baringer, A. Bean, G. Benelli, C. Bruner, J. Gray, R.P. Kenny III, M. Murray, D. Noonan, S. Sanders, J. Sekaric, R. Stringer, Q. Wang, J.S. Wood

**Kansas State University, Manhattan, USA**

A.F. Barfuss, I. Chakaberia, A. Ivanov, S. Khalil, M. Makouski, Y. Maravin, L.K. Saini, S. Shrestha, I. Svintradze

**Lawrence Livermore National Laboratory, Livermore, USA**

J. Gronberg, D. Lange, F. Rebassoo, D. Wright

**University of Maryland, College Park, USA**

A. Baden, B. Calvert, S.C. Eno, J.A. Gomez, N.J. Hadley, R.G. Kellogg, T. Kolberg, Y. Lu, M. Marionneau, A.C. Mignerey, K. Pedro, A. Skuja, M.B. Tonjes, S.C. Tonwar

**Massachusetts Institute of Technology, Cambridge, USA**

A. Apyan, R. Barbieri, G. Bauer, W. Busza, I.A. Cali, M. Chan, L. Di Matteo, V. Dutta, G. Gomez Ceballos, M. Goncharov, D. Gulhan, M. Klute, Y.S. Lai, Y.-J. Lee, A. Levin, P.D. Luckey, T. Ma, C. Paus, D. Ralph, C. Roland, G. Roland, G.S.F. Stephans, F. Stöckli, K. Sumorok, D. Velicanu, J. Veverka, B. Wyslouch, M. Yang, M. Zanetti, V. Zhukova

**University of Minnesota, Minneapolis, USA**

B. Dahmes, A. De Benedetti, A. Gude, S.C. Kao, K. Klapoetke, Y. Kubota, J. Mans, N. Pastika, R. Rusack, A. Singovsky, N. Tambe, J. Turkewitz

**University of Mississippi, Oxford, USA**

J.G. Acosta, S. Oliveros

**University of Nebraska-Lincoln, Lincoln, USA**

E. Avdeeva, K. Bloom, S. Bose, D.R. Claes, A. Dominguez, R. Gonzalez Suarez, J. Keller, D. Knowlton, I. Kravchenko, J. Lazo-Flores, S. Malik, F. Meier, G.R. Snow

**State University of New York at Buffalo, Buffalo, USA**

J. Dolen, A. Godshalk, I. Iashvili, A. Kharchilava, A. Kumar, S. Rappoccio

**Northeastern University, Boston, USA**

G. Alverson, E. Barberis, D. Baumgartel, M. Chasco, J. Haley, A. Massironi, D.M. Morse, D. Nash, T. Orimoto, D. Trocino, D. Wood, J. Zhang

**Northwestern University, Evanston, USA**

K.A. Hahn, A. Kubik, N. Mucia, N. Odell, B. Pollack, A. Pozdnyakov, M. Schmitt, S. Stoynev, K. Sung, M. Velasco, S. Won

**University of Notre Dame, Notre Dame, USA**

A. Brinkerhoff, K.M. Chan, A. Drozdetskiy, M. Hildreth, C. Jessop, D.J. Karmgard, N. Kellams, K. Lannon, W. Luo, S. Lynch, N. Marinelli, T. Pearson, M. Planer, R. Ruchti, N. Valls, M. Wayne, M. Wolf, A. Woodard

**The Ohio State University, Columbus, USA**

L. Antonelli, J. Brinson, B. Bylsma, L.S. Durkin, S. Flowers, C. Hill, R. Hughes, K. Kotov, T.Y. Ling, D. Puigh, M. Rodenburg, G. Smith, C. Vuosalo, B.L. Winer, H. Wolfe, H.W. Wulsin



**Princeton University, Princeton, USA**

E. Berry, O. Driga, P. Elmer, P. Hebda, A. Hunt, S.A. Koay, P. Lujan, D. Marlow, T. Medvedeva, M. Mooney, J. Olsen, P. Piroué, X. Quan, H. Saka, D. Stickland<sup>2</sup>, C. Tully, J.S. Werner, S.C. Zenz, A. Zuranski

**University of Puerto Rico, Mayaguez, USA**

E. Brownson, H. Mendez, J.E. Ramirez Vargas

**Purdue University, West Lafayette, USA**

E. Alagoz, V.E. Barnes, D. Benedetti, G. Bolla, D. Bortoletto, M. De Mattia, A. Everett, Z. Hu, M.K. Jha, M. Jones, K. Jung, M. Kress, N. Leonardo, D. Lopes Pegna, V. Maroussov, P. Merkel, D.H. Miller, N. Neumeister, B.C. Radburn-Smith, I. Shipsey, D. Silvers, A. Svyatkovskiy, F. Wang, W. Xie, L. Xu, H.D. Yoo, J. Zablocki, Y. Zheng

**Purdue University Calumet, Hammond, USA**

N. Parashar, J. Stupak

**Rice University, Houston, USA**

A. Adair, B. Akgun, K.M. Ecklund, F.J.M. Geurts, W. Li, B. Michlin, B.P. Padley, R. Redjimi, J. Roberts, J. Zabel

**University of Rochester, Rochester, USA**

B. Betchart, A. Bodek, R. Covarelli, P. de Barbaro, R. Demina, Y. Eshaq, T. Ferbel, A. Garcia-Bellido, P. Goldenzweig, J. Han, A. Harel, A. Khukhunaishvili, D.C. Miner, G. Petrillo, D. Vishnevskiy

**The Rockefeller University, New York, USA**

R. Ciesielski, L. Demortier, K. Goulianos, C. Mesropian

**Rutgers, The State University of New Jersey, Piscataway, USA**

S. Arora, A. Barker, J.P. Chou, C. Contreras-Campana, E. Contreras-Campana, D. Duggan, D. Ferencek, Y. Gershtein, R. Gray, E. Halkiadakis, D. Hidas, A. Lath, S. Panwalkar, M. Park, R. Patel, V. Rekovic, S. Salur, S. Schnetzer, C. Seitz, S. Somalwar, R. Stone, S. Thomas, P. Thomassen, M. Walker

**University of Tennessee, Knoxville, USA**

K. Rose, S. Spanier, A. York

**Texas A&M University, College Station, USA**

O. Bouhali<sup>55</sup>, R. Eusebi, W. Flanagan, J. Gilmore, T. Kamon<sup>56</sup>, V. Khotilovich, V. Krutelyov, R. Montalvo, I. Osipenkov, Y. Pakhotin, A. Perloff, J. Roe, A. Rose, A. Safonov, T. Sakuma, I. Suarez, A. Tatarinov

**Texas Tech University, Lubbock, USA**

N. Akchurin, C. Cowden, J. Damgov, C. Dragoiu, P.R. Duderu, J. Faulkner, K. Kovitanggoon, S. Kunori, S.W. Lee, T. Libeiro, I. Volobouev

**Vanderbilt University, Nashville, USA**

E. Appelt, A.G. Delannoy, S. Greene, A. Gurrola, W. Johns, C. Maguire, Y. Mao, A. Melo, M. Sharma, P. Sheldon, B. Snook, S. Tuo, J. Velkovska

**University of Virginia, Charlottesville, USA**

M.W. Arenton, S. Boutle, B. Cox, B. Francis, J. Goodell, R. Hirosky, A. Ledovskoy, H. Li, C. Lin, C. Neu, J. Wood

**Wayne State University, Detroit, USA**

S. Gollapinni, R. Harr, P.E. Karchin, C. Kottachchi Kankanamge Don, P. Lamichhane

**University of Wisconsin, Madison, USA**

D.A. Belknap, D. Carlsmith, M. Cepeda, S. Dasu, S. Duric, E. Friis, R. Hall-Wilton, M. Herndon, A. Hervé, P. Klabbers, J. Klukas, A. Lanaro, C. Lazaridis, A. Levine, R. Loveless, A. Mohapatra, I. Ojalvo, T. Perry, G.A. Pierro, G. Polese, I. Ross, T. Sarangi, A. Savin, W.H. Smith, N. Woods

†: Deceased

- 1: Also at Vienna University of Technology, Vienna, Austria
- 2: Also at CERN, European Organization for Nuclear Research, Geneva, Switzerland
- 3: Also at Institut Pluridisciplinaire Hubert Curien, Université de Strasbourg, Université de Haute Alsace Mulhouse, CNRS/IN2P3, Strasbourg, France
- 4: Also at National Institute of Chemical Physics and Biophysics, Tallinn, Estonia
- 5: Also at Skobeltsyn Institute of Nuclear Physics, Lomonosov Moscow State University, Moscow, Russia
- 6: Also at Universidade Estadual de Campinas, Campinas, Brazil
- 7: Also at California Institute of Technology, Pasadena, USA
- 8: Also at Laboratoire Leprince-Ringuet, Ecole Polytechnique, IN2P3-CNRS, Palaiseau, France
- 9: Also at Suez University, Suez, Egypt
- 10: Also at British University in Egypt, Cairo, Egypt
- 11: Also at Fayoum University, El-Fayoum, Egypt
- 12: Now at Ain Shams University, Cairo, Egypt
- 13: Also at Université de Haute Alsace, Mulhouse, France
- 14: Also at Joint Institute for Nuclear Research, Dubna, Russia
- 15: Also at Brandenburg University of Technology, Cottbus, Germany
- 16: Also at The University of Kansas, Lawrence, USA
- 17: Also at Institute of Nuclear Research ATOMKI, Debrecen, Hungary
- 18: Also at Eötvös Loránd University, Budapest, Hungary
- 19: Also at University of Debrecen, Debrecen, Hungary
- 20: Also at Tata Institute of Fundamental Research - HECR, Mumbai, India
- 21: Now at King Abdulaziz University, Jeddah, Saudi Arabia
- 22: Also at University of Visva-Bharati, Santiniketan, India
- 23: Also at University of Ruhuna, Matara, Sri Lanka
- 24: Also at Isfahan University of Technology, Isfahan, Iran
- 25: Also at Sharif University of Technology, Tehran, Iran
- 26: Also at Plasma Physics Research Center, Science and Research Branch, Islamic Azad University, Tehran, Iran
- 27: Also at Università degli Studi di Siena, Siena, Italy
- 28: Also at Centre National de la Recherche Scientifique (CNRS) - IN2P3, Paris, France
- 29: Also at Purdue University, West Lafayette, USA
- 30: Also at Universidad Michoacana de San Nicolas de Hidalgo, Morelia, Mexico
- 31: Also at National Centre for Nuclear Research, Swierk, Poland
- 32: Also at Institute for Nuclear Research, Moscow, Russia
- 33: Also at St. Petersburg State Polytechnical University, St. Petersburg, Russia
- 34: Also at Faculty of Physics, University of Belgrade, Belgrade, Serbia
- 35: Also at Facoltà Ingegneria, Università di Roma, Roma, Italy
- 36: Also at Scuola Normale e Sezione dell'INFN, Pisa, Italy
- 37: Also at University of Athens, Athens, Greece
- 38: Also at Paul Scherrer Institut, Villigen, Switzerland

- 
- 39: Also at Institute for Theoretical and Experimental Physics, Moscow, Russia  
40: Also at Albert Einstein Center for Fundamental Physics, Bern, Switzerland  
41: Also at Gaziosmanpasa University, Tokat, Turkey  
42: Also at Adiyaman University, Adiyaman, Turkey  
43: Also at Cag University, Mersin, Turkey  
44: Also at Mersin University, Mersin, Turkey  
45: Also at Izmir Institute of Technology, Izmir, Turkey  
46: Also at Ozyegin University, Istanbul, Turkey  
47: Also at Kafkas University, Kars, Turkey  
48: Also at Mimar Sinan University, Istanbul, Istanbul, Turkey  
49: Also at Rutherford Appleton Laboratory, Didcot, United Kingdom  
50: Also at School of Physics and Astronomy, University of Southampton, Southampton, United Kingdom  
51: Also at University of Belgrade, Faculty of Physics and Vinca Institute of Nuclear Sciences, Belgrade, Serbia  
52: Also at Argonne National Laboratory, Argonne, USA  
53: Also at Erzincan University, Erzincan, Turkey  
54: Also at Yildiz Technical University, Istanbul, Turkey  
55: Also at Texas A&M University at Qatar, Doha, Qatar  
56: Also at Kyungpook National University, Daegu, Korea