

EUROPEAN ORGANISATION FOR NUCLEAR RESEARCH (CERN)

CERN-EP-2021-112
June 16, 2021

K_S^0 meson production in inelastic $p+p$ interactions at 158 GeV/c beam momentum measured by NA61/SHINE at the CERN SPS

The NA61/SHINE Collaboration

The production of K_S^0 mesons in inelastic $p+p$ collisions at beam momentum 158 GeV/c ($\sqrt{s_{NN}} = 17.3$ GeV) was measured with the NA61/SHINE spectrometer at the CERN Super Proton Synchrotron. Double-differential distributions were obtained in transverse momentum and rapidity. The mean multiplicity of K_S^0 was determined to be $0.162 \pm 0.001(stat.) \pm 0.015(sys.)$. The results on K_S^0 production are compared with model predictions (EPOS 1.99, SMASH 2.0, PHSD and UrQMD 3.4 models) as well as with published world data.

1 Introduction

Kaons contain strange or anti-strange valence quarks, which are both not present in the initial state of collisions between nucleons and nuclei. Thus kaon production implies the creation of a strange and anti-strange quark pair. Collisions between nuclei proceed via the formation of a rapidly expanding high energy density fireball [1]. At sufficiently high collision energy, the evolution of the fireball is expected to proceed via an intermediate partonic phase, the quark-gluon plasma (QGP). Thus, investigating these reactions will shed light on the differences between hadronic and partonic matter and the characteristics of the phase transition between them. The study of kaon production in $p+p$ collisions is important not only as a reference for possible modifications of strangeness production in nucleus-nucleus collisions [2] but also for understanding strangeness production in elementary interactions. It was predicted that the onset of deconfinement is located in the few GeV energy range (energy per nucleon pair $\sqrt{s_{NN}}$) [3]. In order to explore this region systematically NA61/SHINE studies observables indicative of the QGP by a two-dimensional scan in collision energy and nuclear mass number of the colliding nuclei.

This paper reports on the measurement of the production of K_S^0 mesons in inelastic proton-proton interactions at beam momentum of 158 GeV/c. The data were taken by the NA61/SHINE collaboration at CERN's SPS accelerator. The paper is organised as follows. In section 2, details of the NA61/SHINE detector system are presented. Section 3 is devoted to the description of the analysis method. The results are shown in section 4. In section 5, they are compared to published world data and model calculations. Section 6 closes the paper with a summary and outlook.

The following variables and definitions are used in this paper. The particle rapidity y is calculated in the proton-proton collision center of mass system (cms), $y = 0.5 \ln[(E + cp_L)/(E - cp_L)]$, where E and p_L are the particle energy and longitudinal momentum, respectively. The transverse component of the momentum is denoted as p_T . The momentum in the laboratory frame is denoted p_{lab} and the collision energy per nucleon pair in the centre of mass by $\sqrt{s_{NN}}$.

2 Experimental setup

The NA61/SHINE collaboration uses a large acceptance spectrometer located in the CERN North Area. The schematic layout of the NA61/SHINE detector during the $p+p$ 158 GeV/c data-taking is shown in Fig. 1. A detailed description of the full detector can be found in Ref. [4].

The main components of the spectrometer used in this analysis are four large volume Time Projection Chambers (TPC). Two of them, the vertex TPCs (VTPC-1 and VTPC-2), are located in the magnetic fields of two super-conducting dipole magnets with a maximum combined bending power of 9 Tm which corresponds to about 1.5 T and 1.1 T fields in the upstream and downstream magnets, respectively. Two large main TPCs (MTPC-L and MTPC-R) and two walls of pixel Time-of-Flight (ToF-L/R) detectors are positioned symmetrically to the beamline downstream of the magnets. A GAP-TPC (GTPC) is placed between VTPC-1 and VTPC-2 directly on the beamline. It closes the gap between the beam axis and the sensitive volumes of the other TPCs. The TPCs are filled with Ar and CO₂ gas mixtures. Particle identification in the TPCs is based on measurements of the specific energy loss (dE/dx) in the chamber gas.

Secondary beams of positively charged hadrons at 158 GeV/c are produced from 400 GeV/c proton beams extracted from the SPS accelerator. Particles of the secondary hadron beam are identified by

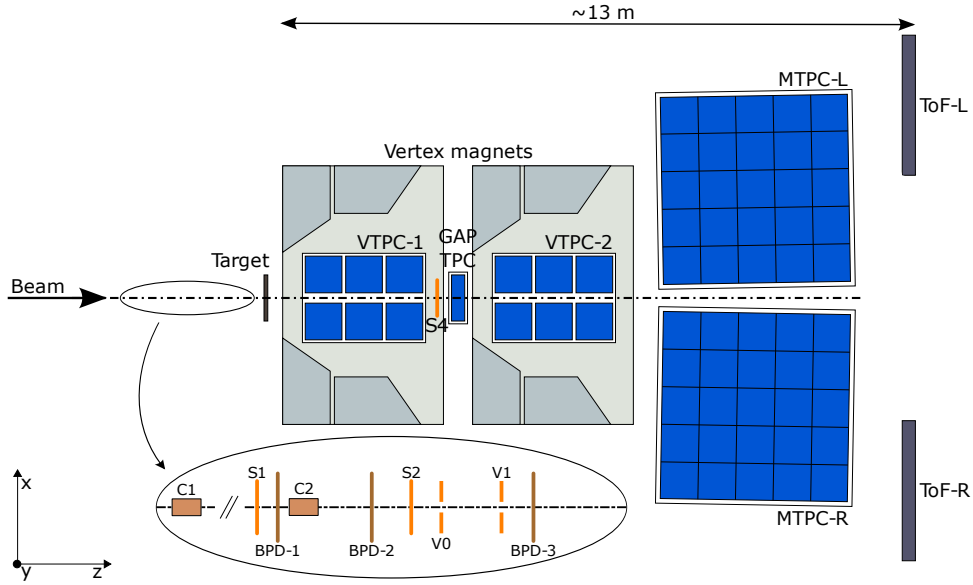


Figure 1: (Color online) The schematic layout of the NA61/SHINE experiment at the CERN SPS during $p+p$ 158 GeV/ c data taking (horizontal cut, not to scale). The beam and trigger detector configuration used for data taking in 2009 is shown in the inset (see Refs. [5, 6] for detailed description). The chosen coordinate system is drawn on the lower left: its origin lies in the middle of the VTPC-2, on the beam axis.

two Cherenkov counters, a CEDAR-N [7] and a threshold counter (THC). The CEDAR counter, using a coincidence of six out of the eight photomultipliers placed radially along the Cherenkov ring, provides identification of protons, while the THC, operated at a pressure lower than the proton threshold, is used in anti-coincidence in the trigger logic. A selection based on signals from the Cherenkov counters allowed one to identify beam protons with a purity of about 99%. A set of scintillation and Cherenkov counters and beam position detectors (BPDs) upstream of the spectrometer provide timing reference, identification, and position measurements of incoming beam particles. The trigger scintillation counter S4 placed downstream of the target has a diameter of 2 cm and is used to select events with collisions in the target area by the absence of a charged particle hit.

A cylindrical target vessel of 20.29 cm length and 3 cm diameter was situated upstream of the entrance window of VTPC-1 (centre of the target $z = -581$ cm in the NA61/SHINE coordinate system). The vessel was filled with liquid hydrogen corresponding to an interaction length of 2.8%. The ensemble of the vessel and liquid hydrogen constitute the "Liquid Hydrogen Target" (LHT). Data were taken with full and empty LHT.

Interactions in the target are selected with the trigger system by requiring an incoming beam proton and no signal from the S4 counter. This minimum bias trigger is based on the disappearance of the beam proton downstream of the target.

3 Analysis

3.1 Data set

In 2009, 2010 and 2011 the NA61/SHINE detector registered about 5.75×10^7 $p+p$ interactions at 158 GeV/c. For the analysis, the range of the z -position of the main vertex was selected to cover mostly the LHT (see Sec. 3.3) in order to maximize the number of good events and minimize the contamination by off-target interactions. Figure 2 shows the distributions of reconstructed vertex z positions in the target-inserted and the target-removed sample as red and blue histograms, respectively. The target-removed sample was normalised in the range $-450 < z < -300$ cm to the same number of reconstructed events as in the target-inserted sample. The normalised ratio of events in the range $-590 < z < -572$ cm is small at the level of 2.9%, and therefore no correction for non-target interactions was applied. In order to estimate the possible systematic biases related to the contamination by off-target interactions, the event selection window of the z -position of the main vertex was varied (see Sec. 3.8).

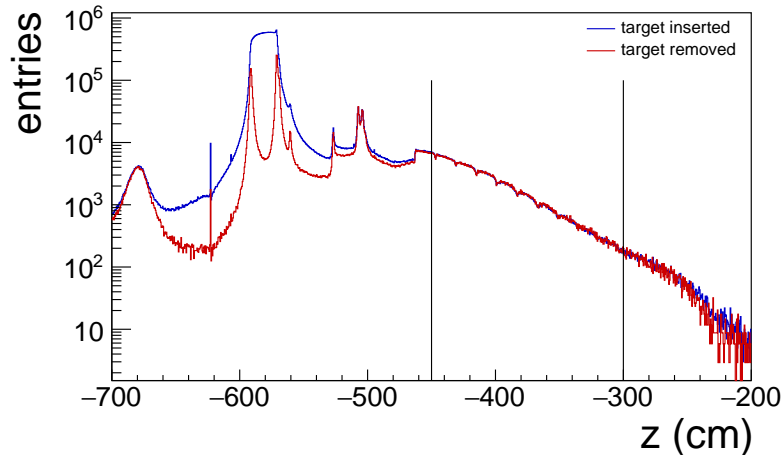


Figure 2: Distributions of the z -coordinate of the reconstructed vertex for events recorded with target full (blue histogram) and target empty (red histogram). Two vertical black lines at position -450 and -300 cm show the range which is used for histogram normalisation.

3.2 Analysis method

Details of the track and vertex reconstruction procedures can be found in Refs. [5, 6, 8]. In the following section, the criteria for the selection of events, of tracks and of the K_S^0 decay topology are enumerated. Then the simulation-based procedure will be described, which is used to quantify the losses due to reconstruction inefficiencies and the limited geometrical acceptance.

3.3 Event selection

The selection criteria for inelastic $p+p$ interactions are the following:

- (i) An interaction was accepted by the trigger logic (see Refs. [5, 6]).

- (ii) Beam particle trajectory measured in at least three planes out of four of BPD-1 and BPD-2 and in both planes of BPD-3.
- (iii) The primary interaction vertex fit converged.
- (iv) Z position of the interaction vertex (fitted using the beam trajectory and TPC tracks) not farther away than 9 cm from the center of the Liquid Hydrogen Target.

The final number of events that satisfy all the above selection criteria is 2.86×10^7 .

3.4 Track and topology selection

Neutral strange particles are detected and measured by means of their weak decays into a pair of charged particles. The K_S^0 decays into $\pi^+ + \pi^-$ with a branching ratio of 69.2% [9]. The decay particles form the so-called V^0 topology. K_S^0 decay candidates (V^0 s) are obtained by pairing all positively and negatively charged pions. The corresponding tracks are required to have a distance of closest approach between the two trajectories of less than 1 cm. The tracks of the decay pions and the V^0 topology are subject to the following additional selection criteria:

- (i) For each track, the minimum number of measured clusters in VTPC-1 and VTPC-2 was required to be 15.
- (ii) All pion tracks must have a measured specific energy loss (dE/dx) in the TPCs within $\pm 3\sigma$ around the nominal Bethe-Bloch value for charged pions. This selection criterion is applied only for experimental data, not for MC simulated data (see below).
- (iii) The orientation of the V^0 decay plane with respect to the magnetic field, quantified by $|\cos\Phi|$ (see Fig. 3), is required to lie in the ranges $|\cos\Phi| < 0.95$ for $-0.25 < y < 0.25$, $|\cos\Phi| < 0.9$ for $0.25 < y < 0.75$, $|\cos\Phi| < 0.8$ for $0.75 < y < 1.25$ and $|\cos\Phi| < 0.5$ for larger y (y is the (K_S^0) rapidity). This criterion removes V^0 s for which the determination of the momenta of the decay products and the decay vertex position suffer from large uncertainties.
- (iv) The distance $|\Delta z|$ between the primary production vertex and the K_S^0 decay vertex is required to lie in the rapidity dependent range $|\Delta z| > e^{3.1+0.42 \cdot y}$.
- (v) Spurious K_S^0 candidates are rejected by an elliptic cut on the impact parameters of the daughter tracks in x (b_x) and y (b_y) direction, $\left(\frac{b_x}{2}\right)^2 + b_y^2 < 0.25$ cm.

The quality of the aforementioned track and topology selection criteria is illustrated in Fig. 4. The population of K_S^0 decay candidates is shown as a function of the two Armenteros-Podolansky variables p_T^{Arm} and α^{Arm} [10] before (*left*) and after (*right*) all track and topology selection criteria. The quantity p_T^{Arm} is the transverse momentum of the decay particles with respect to the direction of motion of the V^0 candidate and $\alpha^{Arm} = (p_L^+ - p_L^-)/(p_L^+ + p_L^-)$, where p_L^+ and p_L^- are the longitudinal momenta of the positively and negatively charged V^0 daughter particles, respectively. The set of applied cuts significantly suppresses the contribution of background track pairs in the final sample of selected V^0 candidates, leaving the signal of the K_S^0 meson almost background free (see example plots in Fig. 5).

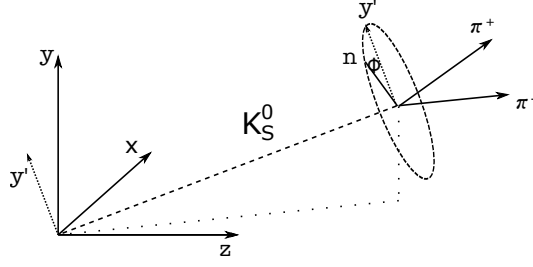


Figure 3: Definition of angle Φ used for V^0 selection. Φ is defined as the angle between the vectors y' , and n , where y' is the vector perpendicular to the momentum of the V^0 -particle which lies in the plane spanned by the y -axis and the V^0 -momentum vector, and n is a vector normal to the decay plane.

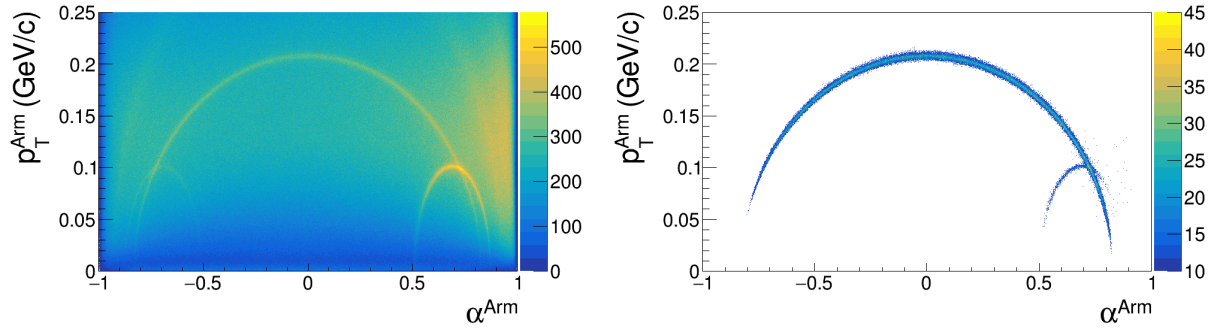


Figure 4: Armenteros-Podolanski plots for V^0 candidates without (*left*) and with all track and topology selection criteria (*right*).

3.5 K_S^0 yields

The double differential yield of K_S^0 was determined by studying the invariant mass distributions of the accepted pion pairs in bins of rapidity and transverse momentum (examples are presented in Fig. 5). True decays will appear as a peak over a smooth background. The K_S^0 yield was determined in each bin using a fit function that describes both the signal and the background. A Lorentzian function was used for the signal:

$$L(m) = A \frac{1}{\pi} \frac{\frac{1}{2}\Gamma}{(m - m_0)^2 + (\frac{1}{2}\Gamma)^2}, \quad (1)$$

where A is the normalization factor, Γ is the full width at the half maximum of the signal peak, and m_0 is the mass parameter. The background contribution is described by a polynomial function of 2^{nd} order. Figure 5 shows examples of $\pi^+\pi^-$ mass distributions after all V^0 selection cuts as the red histograms for real events (*left*) and for simulated events (*right*). Clearly, the background outside the K_S^0 peak is small. The width and mass of the K_S^0 peak are well reproduced by the simulation, thus indicating that the correction factors used for calculating the final bin-by-bin K_S^0 multiplicities are reliable.

The procedure of fitting the histograms proceeds in three steps. In the first step, the background outside the signal peak ($[0.475-0.525]$ GeV/c^2) is fitted with a polynomial of 2^{nd} order. This step is necessary

to obtain starting values for the parameters of the background function. In the next step, a fit of the full invariant mass spectrum is performed with the sum of the Lorentzian and the background functions. The initial parameter values for the background function are taken from the previous step, while the mass parameter is fixed to the PDG value of $m_0 = 0.497614(24)$ GeV/ c^2 [9] and the width was allowed to vary between 0.001 and 0.003 GeV/ c^2 . Finally, in the last step, all parameters were free, and the fitting region was [0.35-0.7] GeV/ c^2 . The fitted polynomial background function is shown by the blue curve, and the fitted Lorentzian signal function by the red curve in Fig. 5. In order to minimize the sensitivity of the K_S^0 yield to the integration window, the uncorrected number of K_S^0 was calculated by subtracting bin-by-bin the fitted background and summing the background-subtracted signal in the mass window $m_0 \pm 3\Gamma$ (dashed vertical lines), where m_0 is the fitted mass of the K_S^0 . The latter agrees with the PDG value within statistical uncertainties. Figure 5 shows that the simulation reproduces the central value of the K_S^0 mass distribution and somewhat underestimate its width. To calculate the signal from the simulation, the Γ parameter fitted to the simulation was used. Thus a possible bias due to differences between the data and simulation is reduced, see Sec. 3.8.

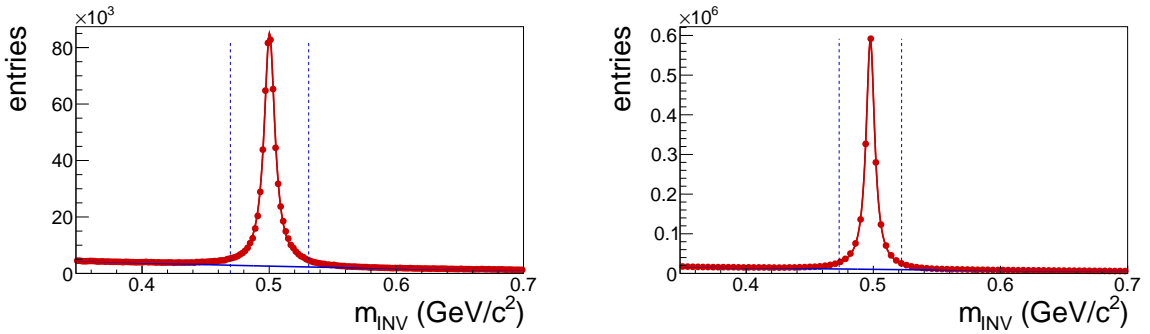


Figure 5: The invariant mass distribution of K_S^0 candidates for experimental data (*left*) and MC (*right*). The dashed vertical lines indicate the regions over which the K_S^0 signal was integrated. The signal data points are shown in red, the fitted background in blue and the total fit results in red. The uncertainties are smaller than symbol size and not visible on the plots.

Uncorrected bin-by-bin K_S^0 multiplicities and their statistical uncertainties are shown in Fig. 6 (*bottom*).

3.6 Correction factors

A detailed Monte Carlo simulation was performed to compute the correction for losses due to the trigger bias, geometrical acceptance, reconstruction efficiency, as well as the selection cuts applied in the analysis. The correction factors are based on 9.5×10^7 inelastic $p+p$ events at 158 GeV/ c produced by the EPOS 1.99 event generator [11, 12]. Particles in the generated events were tracked through the NA61/SHINE apparatus using the GEANT3 package [13]. The TPC response was simulated by dedicated software packages which take into account all known detector effects. The simulated events were reconstructed with the same software as used for real events and the same selection cuts were applied and dE/dx identification was replaced by matching of simulated and reconstructed tracks. The branching ratio of K_S^0 decays are taken into account in the GEANT3 software package. For each y and p_T bin, the correction factor

$c_{MC}(y, p_T)$ was calculated as:

$$c_{MC}(y, p_T) = \frac{n_{MC}^{gen}(y, p_T)}{N_{MC}^{gen}} \bigg/ \frac{n_{MC}^{acc}(y, p_T)}{N_{MC}^{acc}}, \quad (2)$$

where:

- $n_{MC}^{gen}(y, p_T)$ is the number of K_S^0 generated in a given (y, p_T) bin,
- $n_{MC}^{acc}(y, p_T)$ is the number of reconstructed K_S^0 in a given (y, p_T) bin. To derive this numbers the invariant mass distribution of the reconstructed π^+ and π^- track pairs that pass all selection requirements was formed. The number of reconstructed K_S^0 is then obtained by following the same extraction procedure as for real data, described in Sec. 3.5.
- N_{MC}^{gen} is the number of generated inelastic $p+p$ interactions (9.5×10^7),
- N_{MC}^{acc} is the number of accepted $p+p$ events (5.4×10^7).

The loss of the K_S^0 mesons due to the dE/dx cut is corrected with an additional factor:

$$c_{dE/dx} = \frac{1}{\epsilon^2} = 1.005, \quad (3)$$

where $\epsilon = 0.9973$ is the probability for the pions to be detected within $\pm 3\sigma$ around the nominal Bethe-Bloch value.

The double-differential yield of K_S^0 per inelastic event in bins of (y, p_T) is calculated as follows:

$$\frac{d^2n}{dy dp_T}(y, p_T) = \frac{c_{dE/dx} \cdot c_{MC}(y, p_T)}{\Delta y \Delta p_T} \cdot \frac{n_{K_S^0}(y, p_T)}{N_{events}}, \quad (4)$$

where:

- $c_{dE/dx}$, $c_{MC}(y, p_T)$ are the correction factors described above,
- Δy and Δp_T are the bin widths,
- $n_{K_S^0}(y, p_T)$ is the uncorrected number of K_S^0 , obtained by the signal extraction procedure described in Sec. 3.5,
- N_{events} is the number of events after cuts.

3.7 Statistical uncertainties

The statistical uncertainties of the corrected double-differential yields (see Eq. 4) receive contributions from the statistical uncertainty of the correction factors $c_{MC}(y, p_T)$ and the statistical uncertainty of the uncorrected number of K_S^0 ($\Delta N_{K_S^0}(y, p_T)$). The statistical uncertainty of the former receives two contributions, the first, α , caused by the loss of inelastic interactions due to the event selection and the second, β , connected with the loss of K_S^0 candidates due to the V^0 selection:

$$c_{MC}(y, p_T) = \frac{n_{MC}^{gen}(y, p_T)}{N_{MC}^{gen}} \bigg/ \frac{n_{MC}^{acc}(y, p_T)}{N_{MC}^{acc}} = \frac{N_{MC}^{acc}}{N_{MC}^{gen}} \bigg/ \frac{n_{MC}^{acc}(y, p_T)}{n_{MC}^{gen}(y, p_T)} = \frac{\alpha}{\beta(y, p_T)}, \quad (5)$$

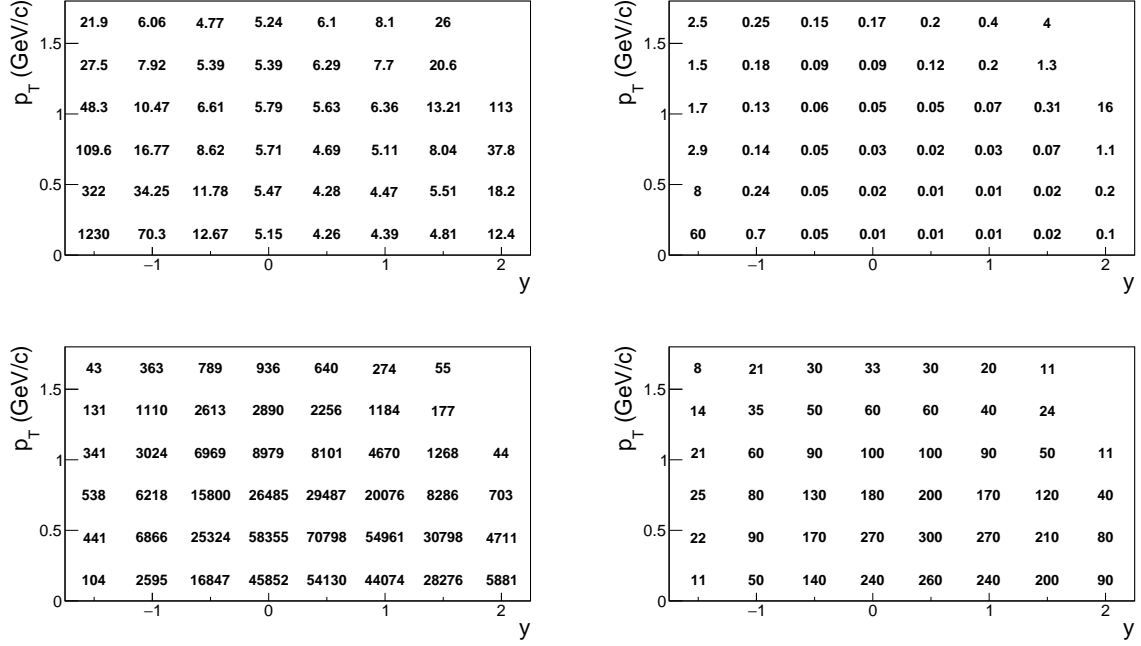


Figure 6: *Top*: Monte-Carlo correction factors (see Eq. 2) in each (y, p_T) bin (*left*) and corresponding statistical uncertainties (*right*). *Bottom*: uncorrected bin-by-bin multiplicities of K_S^0 (*left*) and statistical uncertainties (*right*).

The error of α is calculated assuming a binomial distribution:

$$\Delta\alpha = \sqrt{\frac{\alpha(1-\alpha)}{N_{MC}^{gen}}}, \quad (6)$$

The error of β is calculated according to formula:

$$\Delta\beta(y, p_T) = \sqrt{\left(\frac{\Delta n_{MC}^{acc}(y, p_T)}{n_{MC}^{gen}(y, p_T)}\right)^2 + \left(\frac{n_{MC}^{acc}(y, p_T) \cdot \Delta n_{MC}^{gen}(y, p_T)}{(n_{MC}^{gen}(y, p_T))^2}\right)^2}, \quad (7)$$

where $\Delta n_{MC}^{acc}(y, p_T)$ is the uncertainty of the fit, and $\Delta n_{MC}^{gen}(y, p_T) = \sqrt{n_{MC}^{gen}(y, p_T)}$. The equation for $\Delta c_{MC}(y, p_T)$ can be written as:

$$\Delta c_{MC}(y, p_T) = \sqrt{\left(\frac{\Delta\alpha}{\beta}\right)^2 + \left(-\frac{\alpha \cdot \Delta\beta}{\beta^2}\right)^2}, \quad (8)$$

The statistical uncertainties $\Delta n_{K_S^0}(y, p_T)$ of the corrected number of K_S^0 are:

$$\Delta \frac{d^2n}{dydp_T}(y, p_T) = \sqrt{\left(\frac{c_{dE/dx} \cdot c_{MC}(y, p_T)}{N_{events} \Delta y \Delta p_T}\right)^2 \Delta n_{K_S^0}^2(y, p_T) + \left(\frac{c_{dE/dx} \cdot n_{K_S^0}(y, p_T)}{N_{events} \Delta y \Delta p_T}\right)^2 \Delta c_{MC}^2(y, p_T)}. \quad (9)$$

3.8 Systematic uncertainties

Three possible sources of the systematic uncertainties related to event selection criteria, the track and V^0 selection criteria and the signal extraction procedure, are included.

The following effects were considered in the calculation of the systematic uncertainties:

- (i) The uncertainties related to event selection criteria were estimated by performing the analysis with the following changes:
 - Simulations were done with and without the S4 trigger condition. One half of the difference between these two results was taken as a contribution to the systematic uncertainty.
 - Vertex z position was changed from $-590 < z \text{ (cm)} < -572$ to $-588 < z \text{ (cm)} < -574$.
- (ii) The uncertainties related to track and V^0 selection criteria were estimated by performing the analysis with the following changes compared to the original values:
 - the minimum required number of clusters in both VTTPCs for K_S^0 decay products was changed from 15 to 10 and 20,
 - the standard dE/dx cut used for identification of K_S^0 decay products was changed from $\pm 3\sigma$ to $\pm 2.5\sigma$ and $\pm 3.5\sigma$ from nominal Bethe-Bloch value,
 - DCA cut for daughter tracks at the V^0 decay vertex was changed from 1 cm to 0.5 cm and 1.5 cm,
 - the impact parameter cut for the daughters tracks was reduced and increased by a factor of 2: $\left(\frac{b_x}{2}\right)^2 + (b_y)^2 < 0.125$ and $\left(\frac{b_x}{2}\right)^2 + (b_y)^2 < 0.375$,
 - the Δz cut was changed from $|\Delta z| < e^{3.1+0.42 \cdot y}$ to $|\Delta z| < e^{2.96+0.47 \cdot y}$ and $|\Delta z| < e^{3.24+0.38 \cdot y}$,
 - the $\cos\Phi$ cut was varied with respect to the nominal values. The range of cut values is listed in Table 1.
- (iii) The uncertainty due to the signal extraction procedure was estimated by:
 - changing the background fit function from a 2^{nd} order to a 3^{rd} order polynomial,
 - changing the invariant mass range over which the uncorrected number of K_S^0 was integrated from $m_0 \pm 3\Gamma$ to $\pm 2.5\Gamma$ and $\pm 3.5\Gamma$,
 - calculating the uncorrected number of K_S^0 as the sum of entries after background fit subtraction instead of the integral of the Lorentzian signal function,
 - changing the region of the fit from $[0.35-0.7] \text{ GeV}/c^2$ to $[0.4-0.65] \text{ GeV}/c^2$.

The maximum deviations are determined for every group of possible sources, which contribute to the systematic uncertainty. The systematic uncertainty was calculated as the square root of the sum of squares of the described possible biases assuming that they are uncorrelated. The uncertainties are estimated for each (y, p_T) bin separately.

Maximal $ \cos\Phi $ allowed				
y_{min}	y_{max}	original	new lower	new upper
-0.25	0.25	0.95	0.925	0.975
0.25	0.75	0.9	0.85	0.95
0.75	1.25	0.8	0.75	0.85
1.25	1.75	0.5	0.4	0.6

Table 1: Numerical values for $\cos\Phi$ cut used for systematic uncertainties calculation.

3.9 Mean lifetime measurements

The reliability of the K_S^0 reconstruction and of the correction procedure can be validated by studying the lifetime distribution of the analysed K_S^0 . The lifetime of each K_S^0 candidate was calculated from the V^0 path length and its velocity. The lifetime distributions corrected for experimental biases (Sec. 3.6) in all 7 rapidity bins were fitted by an exponential distribution to obtain proper lifetimes (see Fig. 7). The obtained ratio of the measured mean lifetime to the PDG [9] value $c\tau_{PDG} = 2.6844$ cm is shown in Fig. 8 as a function of rapidity. The ratios agree within uncertainties with the mean K_S^0 lifetime given in the PDG tables.

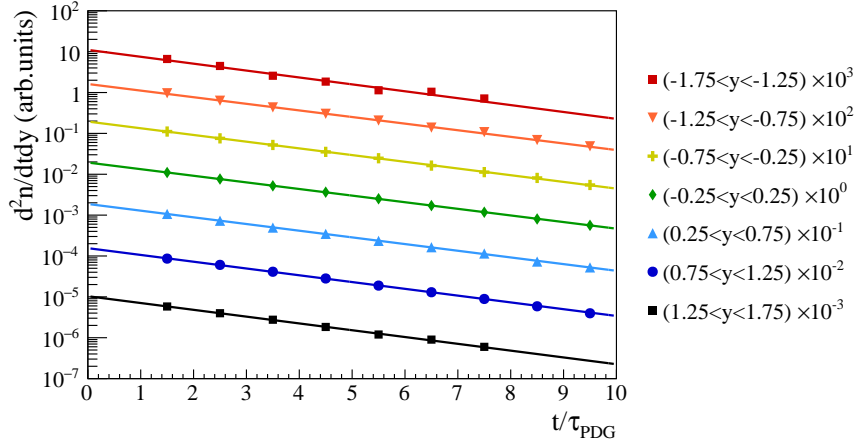


Figure 7: (Color online) Corrected lifetime distribution for K_S^0 mesons produced in inelastic $p+p$ interaction at 158 GeV/c. The curves show the result of the exponential fit function used to obtain the mean lifetime. Statistical uncertainties are smaller than marker size and not visible on the plot.

4 Results

This section presents the new NA61/SHINE results on inclusive K_S^0 meson spectra in inelastic $p+p$ interactions at beam momentum 158 GeV/c. The spectra refer to weakly decaying K_S^0 mesons produced in strong interaction processes and are corrected for experimental biases and the branching ratio.

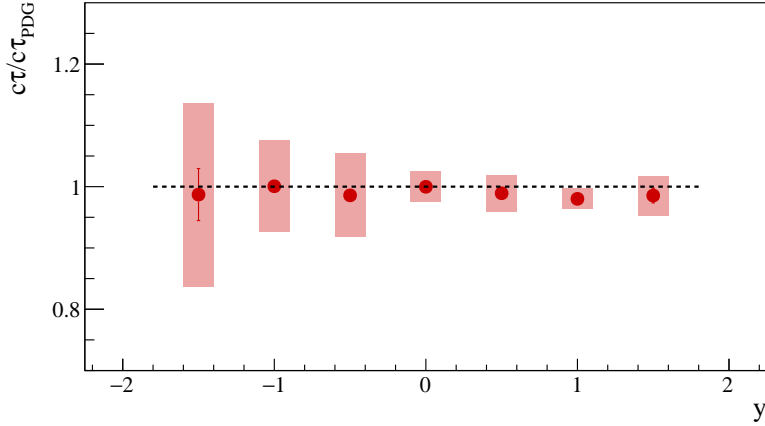


Figure 8: (Color online) Mean lifetime obtained from fits to the lifetime distributions of Fig. 7 with statistical (vertical bars) and systematic (shaded boxes) uncertainties versus the rapidity y .

4.1 Transverse momentum spectra

Double differential K_S^0 yields listed in Table 2 represent the main result of this paper. Yields are determined in 8 consecutive rapidity bins in the interval $-1.75 < y < 2.25$ and 6 transverse momentum bins in the interval $0.0 < p_T$ (GeV/ c) < 1.8 . The transverse momentum distributions are shown in Fig. 9.

p_T (GeV/ c)	y			
	(-1.75;-1.25)	(-1.25;-0.75)	(-0.75;-0.25)	(-0.25;0.25)
(0.0;0.3)	$30.1 \pm 3.5 \pm 5.0$	$43 \pm 1 \pm 6$	$50.3 \pm 0.5 \pm 5.0$	$55.7 \pm 0.3 \pm 4.0$
(0.3;0.6)	$33 \pm 2 \pm 10$	$55.4 \pm 0.8 \pm 4.0$	$70.3 \pm 0.6 \pm 5.0$	$75.2 \pm 0.4 \pm 4.0$
(0.6;0.9)	$13.9 \pm 0.8 \pm 4.0$	$24.6 \pm 0.4 \pm 1.5$	$32.1 \pm 0.3 \pm 1.4$	$35.6 \pm 0.3 \pm 1.6$
(0.9;1.2)	$3.9 \pm 0.3 \pm 0.6$	$7.4 \pm 0.2 \pm 0.5$	$10.8 \pm 0.2 \pm 0.6$	$12.2 \pm 0.2 \pm 0.6$
(1.2;1.5)	$0.8 \pm 0.1 \pm 0.3$	$2.07 \pm 0.08 \pm 0.35$	$3.32 \pm 0.09 \pm 0.16$	$3.7 \pm 0.1 \pm 0.2$
(1.5;1.8)	$0.22 \pm 0.05 \pm 0.06$	$0.52 \pm 0.04 \pm 0.04$	$0.89 \pm 0.04 \pm 0.04$	$1.15 \pm 0.05 \pm 0.07$
p_T (GeV/ c)	y			
	(0.25;0.75)	(0.75;1.25)	(1.25;1.75)	(1.75;2.25)
(0.0;0.3)	$54.4 \pm 0.3 \pm 3.0$	$45.6 \pm 0.3 \pm 2.2$	$32.0 \pm 0.3 \pm 1.8$	$17.2 \pm 0.3 \pm 1.0$
(0.3;0.6)	$71.4 \pm 0.4 \pm 3.3$	$57.9 \pm 0.3 \pm 2.5$	$39.9 \pm 0.3 \pm 1.8$	$20.2 \pm 0.4 \pm 1.0$
(0.6;0.9)	$32.6 \pm 0.3 \pm 1.4$	$24.2 \pm 0.2 \pm 1.1$	$15.7 \pm 0.3 \pm 0.8$	$6.3 \pm 0.4 \pm 1.0$
(0.9;1.2)	$10.7 \pm 0.2 \pm 0.7$	$7.0 \pm 0.2 \pm 0.5$	$3.9 \pm 0.2 \pm 0.5$	$1.2 \pm 0.3 \pm 0.7$
(1.2;1.5)	$3.34 \pm 0.10 \pm 0.23$	$2.14 \pm 0.09 \pm 0.20$	$0.86 \pm 0.13 \pm 0.20$	
(1.5;1.8)	$0.91 \pm 0.05 \pm 0.08$	$0.51 \pm 0.05 \pm 0.07$	$0.34 \pm 0.09 \pm 0.09$	

Table 2: Double differential K_S^0 yields in bins of (y, p_T) . The first uncertainty is statistical, while the second one is systematic.

The transverse momentum spectra can be described by an exponential function:

$$f(p_T) = A \cdot p_T \cdot \exp\left(-\frac{\sqrt{p_T^2 + m_0^2}}{T}\right), \quad (10)$$

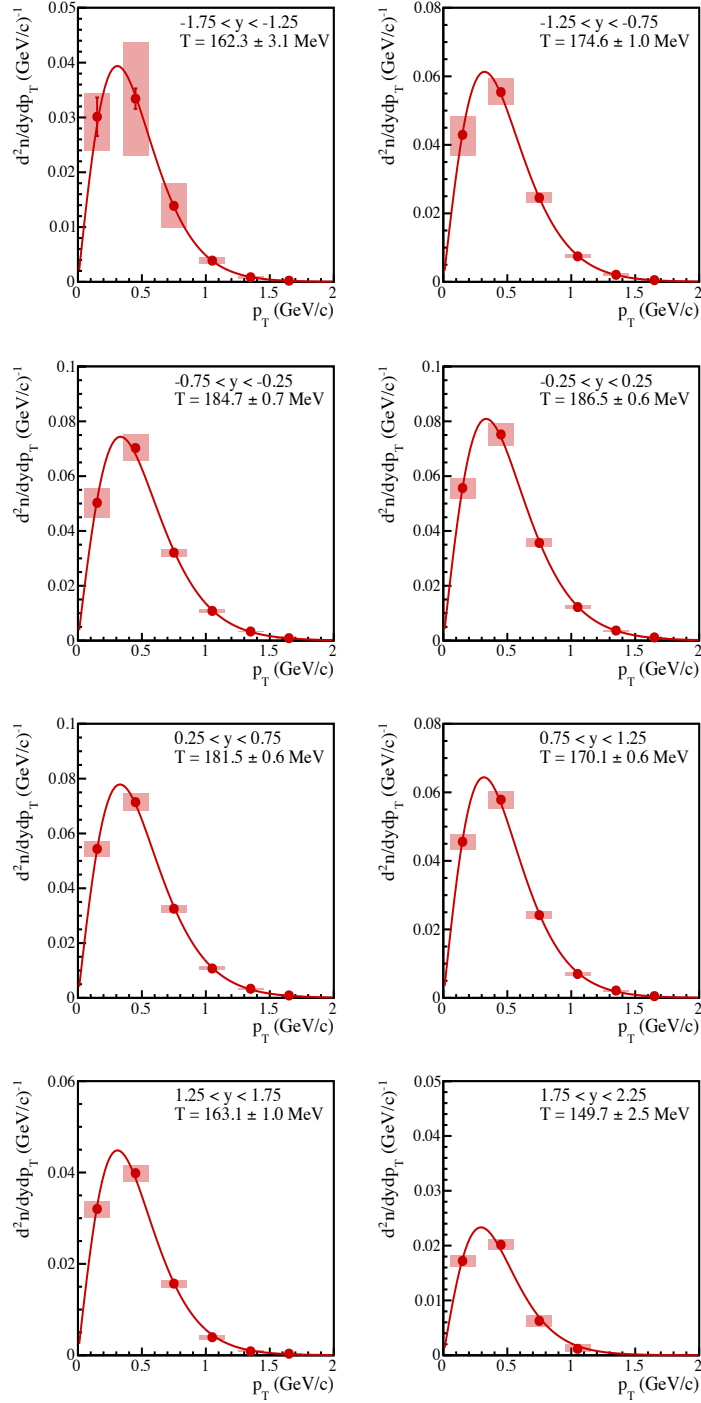


Figure 9: (Color online) Double-differential K_S^0 spectra in inelastic $p+p$ interaction at 158 GeV/c in bins of (y, p_T) as obtained from Eq. 4. Measured points are shown as red full circles. The solid red curve is obtained from a fit to the data points using the exponential function Eq. 10. Statistical uncertainties are indicated by vertical bars (for some points smaller than the symbol size). Red shaded boxes show systematic uncertainties. The numerical values of the data points are listed in Table 2.

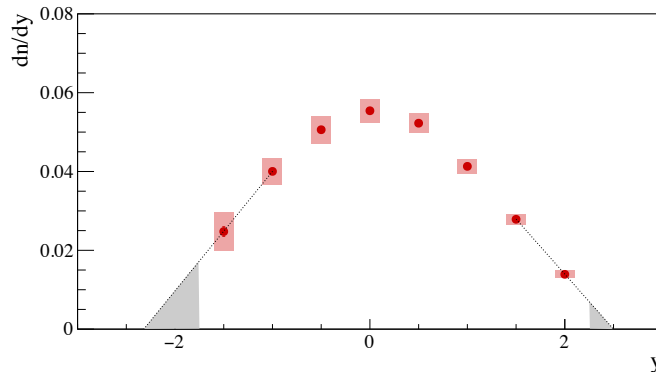


Figure 10: (Color online) Rapidity distribution dn/dy obtained by p_T -integration. Statistical uncertainties are shown by vertical bars (often smaller than the marker size), while a red shaded boxes indicates systematic uncertainties. The black dotted lines show the connection line between the last two points on both sides, and the grey areas are the contributions of the extrapolation to the mean multiplicity of K_S^0 mesons. The numerical data are listed in Table 3.

y	T (MeV)	$\frac{dn}{dy} \times 10^{-3}$	extrapolated fraction (%)
(-1.75;-1.25)	$162.3 \pm 3.1 \pm 7.0$	$24.8 \pm 1.2 \pm 4.9$	0.21
(-1.25;-0.75)	$174.6 \pm 1.0 \pm 2.4$	$40.0 \pm 0.4 \pm 3.4$	0.35
(-0.75;-0.25)	$184.7 \pm 0.7 \pm 3.4$	$50.6 \pm 0.3 \pm 3.5$	0.56
(-0.25;0.25)	$186.5 \pm 0.6 \pm 2.0$	$55.4 \pm 0.2 \pm 3.0$	0.58
(0.25;0.75)	$181.5 \pm 0.6 \pm 1.2$	$52.3 \pm 0.2 \pm 2.4$	0.47
(0.75;1.25)	$170.0 \pm 0.6 \pm 1.3$	$41.3 \pm 0.2 \pm 1.9$	0.31
(1.25;1.75)	$163.1 \pm 1.0 \pm 2.3$	$27.9 \pm 0.2 \pm 1.4$	0.23
(1.75;2.25)	$149.7 \pm 2.5 \pm 4.2$	$13.9 \pm 0.2 \pm 0.9$	3.33

Table 3: First column shows the rapidity range. In the second column the values of the inverse slope parameter are listed with its statistical and systematic uncertainties. The third column shows the numerical values of the p_T -integrated yields presented in Fig. 10 with statistical and systematic uncertainties. In the last column contribution to the dn/dy in % of the extrapolation to the unmeasured transverse momentum region.

where m_0 is the mass of the K_S^0 and T is the inverse slope parameter. Fits of Eq. 10 to the data points provide the values of T in each rapidity bin which are listed in Table 3 and in the legend of the panels in Fig. 9.

4.2 Rapidity distribution and mean multiplicity

Kaon yields in each rapidity bin were obtained from the corresponding measured transverse momentum distributions. The small fraction of K_S^0 at high p_T outside of the acceptance was determined using Eq. 10. The resulting $\frac{dn}{dy}$ spectrum of K_S^0 mesons produced in inelastic $p+p$ interactions at 158 GeV/c is plotted in Fig. 10.

The mean multiplicity of K_S^0 mesons was calculated as the sum of measured points in Fig. 10 and the integral below linear functions through the last two measured points on both sides representative for the unmeasured region (for rapidity $y < -1.75$ and $y > 2.25$). The statistical uncertainty of $\langle K_S^0 \rangle$ was

calculated as the square root of the sum of the squares of the statistical uncertainties of the contributing bins. The systematic uncertainty was calculated as the square root of squares of systematic uncertainty described in Sec. 3.8 and half of the extrapolated yield. To estimate the systematic uncertainty of the method used to determine the mean multiplicity of K_S^0 , the rapidity distribution was also fitted using a single Gaussian or two Gaussians symmetrically displaced from midrapidity. The deviations of the results of these fit from $\langle K_S^0 \rangle$ is included as a contribution to the final systematic uncertainty.

The numerical value of the total yield of $\langle K_S^0 \rangle$ is:

$$\langle K_S^0 \rangle = 0.162 \pm 0.001(stat.) \pm 0.015(sys.) \quad (11)$$

5 Comparison with published world data and model predictions

This section compares the new NA61/SHINE measurement of K_S^0 production in inelastic $p+p$ interactions at 158 GeV/c with publicly available world data as well as with predictions from microscopic and statistical models EPOS 1.99 [11, 12], UrQMD 3.4 [14, 15], SMASH 2.0 [16] and PHSD [17, 18].

The K_S^0 rapidity spectrum from NA61/SHINE is compared in Fig. 11 to the results from Brick *et al.* at 147 GeV/c [19] as well as with predictions obtained from K^+ and K^- yields published by NA61/SHINE for inelastic $p+p$ interactions at 158 GeV/c [20]. These predictions are based on valence-quark counting arguments [21] and lead to the formula $\frac{1}{4}(N_{K^+} + 3 \cdot N_{K^-})$. Such model was applied earlier for p+C interaction in [22] and for p+Be [23]. The measured K_S^0 yields are seen to agree with this prediction and with the measurement of Ref. [19] within statistical errors.

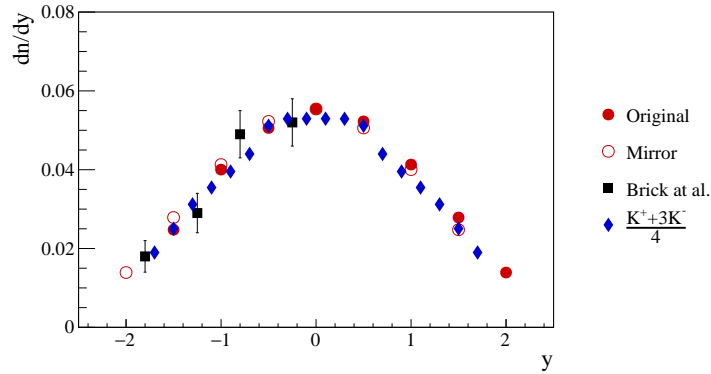


Figure 11: (Color online) Rapidity distribution dn/dy of K_S^0 mesons in inelastic $p+p$ interactions at 158 GeV/c. Full red-coloured circles correspond to the NA61/SHINE results, open circles are mirrored values, black squares represent results from Brick *et al.* at FNAL [19] and blue full diamonds show results obtained from the formula $\frac{1}{4}(N_{K^+} + 3 \cdot N_{K^-})$ using charged kaon yields recently measured by NA61/SHINE at the same beam momentum [20].

Figure 12 presents a comparison of the NA61/SHINE measurements with predictions of the EPOS 1.99, PHSD, SMASH 2.0 and UrQMD 3.4 models. Only EPOS 1.99 describes the experimental data fairly well. All other models overpredict the K_S^0 yield by 10 – 20%.

The mean multiplicity of K_S^0 mesons in $p+p$ collisions measured by NA61/SHINE at $\sqrt{s_{NN}} = 17.3$ GeV is compared in Fig. 13 with the world data in the range from 3 - 32 GeV [19, 24–39]. The measured values are seen to rise linearly with collision energy $\sqrt{s_{NN}}$.

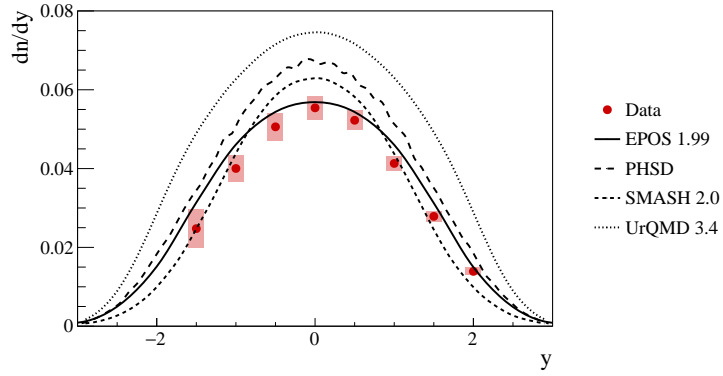


Figure 12: (Color online) Comparison of the results on the K_S^0 rapidity distribution with predictions of theoretical models. Coloured red circles show the new measurements of NA61/SHINE. The black curves show predictions of models: EPOS 1.99 (full), PHSD (long dashed), SMASH 2.0 (short dashed) and UrQMD 3.4 (dotted).

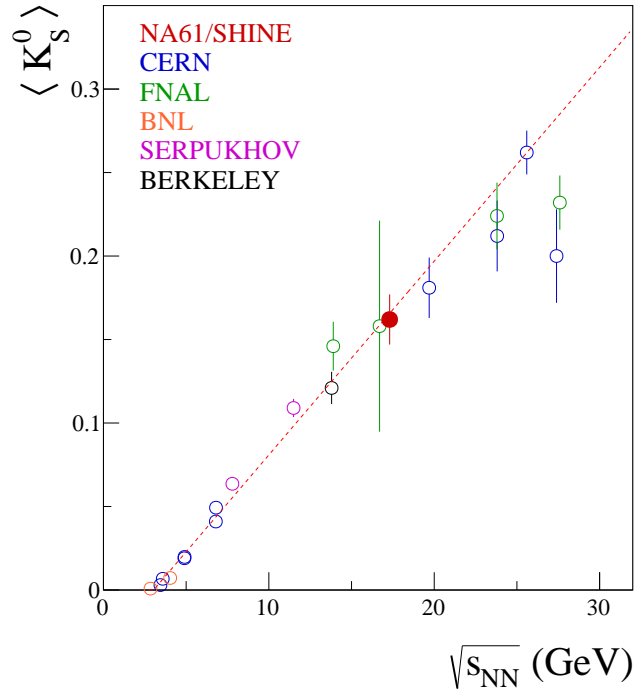


Figure 13: (Color online) Collision energy dependence of mean multiplicity of K_S^0 mesons produced in $p+p$ interactions. The full coloured red circle shows the measurement by NA61/SHINE presented with its systematic uncertainty. The results published by other experiments are presented with open circles coloured in blue (CERN), green (FNAL), orange (BNL), magenta (SERPUKHOV) and black (BERKELEY). The references for the plotted data points are given in the text.

6 Summary

This paper presents the new NA61/SHINE measurement of K_S^0 meson production via its $\pi^+\pi^-$ decay mode in inelastic $p+p$ collisions at beam momentum 158 GeV/c ($\sqrt{s_{NN}} = 17.3$ GeV). Spectra of transverse momentum (up to 1.8 GeV/c), as well as a distribution of rapidity (from -1.75 to 2.25), are presented. The mean multiplicity, obtained from the p_T -integrated and extrapolated rapidity distribution, is $(0.162 \pm 0.001 \pm 0.015)$, where the first uncertainty is statistical and the second systematic. The rapidity distribution is in agreement with results from other experiments at nearby beam momenta. The measured K_S^0 lifetime agrees within uncertainties with the PDG value and thus confirms the quality of the analysis. Results from model calculations deviate by up to 20% from the measurements. The EPOS 1.99 model provides the best predictions for the experimental data. The results presented in this paper expand our knowledge of K_S^0 production in proton-proton interactions, significantly improving with their high statistical precision the knowledge of strangeness production in elementary interactions.

Acknowledgements

We would like to thank the CERN EP, BE, HSE and EN Departments for the strong support of NA61/SHINE.

This work was supported by the Hungarian Scientific Research Fund (grant NKFIH 123842/123959), the Polish Ministry of Science and Higher Education (grants 667/N-CERN/2010/0, NN 202 48 4339 and NN 202 23 1837), the National Science Centre Poland (grants 2014/14/E/ST2/00018, 2014/15/B/ST2 /-02537 and 2015/18/M/ST2/00125, 2015/19/N/ST2 /01689, 2016/23/B/ST2/00692, DIR/WK/ 2016/2017/ 10-1, 2017/ 25/N/ ST2/ 02575, 2018/30/A/ST2/00226, 2018/31/G/ST2/03910, 2019/34/H/ST2/00585), the Russian Science Foundation, grant 16-12-10176 and 17-72-20045, the Russian Academy of Science and the Russian Foundation for Basic Research (grants 08-02-00018, 09-02-00664 and 12-02-91503-CERN), the Russian Foundation for Basic Research (RFBR) funding within the research project no. 18-02-40086, the Ministry of Science and Higher Education of the Russian Federation, Project "Fundamental properties of elementary particles and cosmology" No 0723-2020-0041, the European Union's Horizon 2020 research and innovation programme under grant agreement No. 871072, the Ministry of Education, Culture, Sports, Science and Technology, Japan, Grant-in-Aid for Scientific Research (grants 18071005, 19034011, 19740162, 20740160 and 20039012), the German Research Foundation DFG (grants GA 1480/8-1 and project 426579465), the Bulgarian Nuclear Regulatory Agency and the Joint Institute for Nuclear Research, Dubna (bilateral contract No. 4799-1-18/20), Bulgarian National Science Fund (grant DN08/11), Ministry of Education and Science of the Republic of Serbia (grant OI171002), Swiss Nationalfonds Foundation (grant 200020117913/1), ETH Research Grant TH-01 07-3 and the Fermi National Accelerator Laboratory (Fermilab), a U.S. Department of Energy, Office of Science, HEP User Facility managed by Fermi Research Alliance, LLC (FRA), acting under Contract No. DE-AC02-07CH11359 and the IN2P3-CNRS (France).

References

- [1] W. Florkowski, *Phenomenology of Ultra-Relativistic Heavy-Ion Collisions*. Singapore, World Scientific 416 p, 2010.

- [2] J. Rafelski and B. Muller *Phys. Rev. Lett.* **48** (1982) 1066. [Erratum: *Phys.Rev.Lett.* 56, 2334 (1986)].
- [3] M. Gazdzicki and M. I. Gorenstein *Acta Phys. Polon.* **B30** (1999) 2705, [arXiv:hep-ph/9803462](https://arxiv.org/abs/hep-ph/9803462) [[hep-ph](#)].
- [4] N. Abgrall *et al.*, [NA61 Collab.] *JINST* **9** (2014) P06005, [arXiv:1401.4699](https://arxiv.org/abs/1401.4699) [[physics.ins-det](#)].
- [5] N. Abgrall *et al.*, [NA61/SHINE Collab.] *Eur. Phys. J. C* **74** no. 3, (2014) 2794, [arXiv:1310.2417](https://arxiv.org/abs/1310.2417) [[hep-ex](#)].
- [6] A. Aduszkiewicz *et al.*, [NA61/SHINE Collab.] *Eur. Phys. J. C* **76** no. 11, (2016) 635, [arXiv:1510.00163](https://arxiv.org/abs/1510.00163) [[hep-ex](#)].
- [7] A. P. C. Bovet, R. Maleyran and M. Placidi *IEEE Transactions on Nuclear Science* **25** no. 1, (1978) 572–576.
- [8] A. Aduszkiewicz *et al.*, [NA61/SHINE Collab.] *Eur. Phys. J. C* **77** no. 2, (2017) 59, [arXiv:1610.00482](https://arxiv.org/abs/1610.00482) [[nucl-ex](#)].
- [9] M. Tanabashi *et al.*, [Particle Data Group Collab.] *Phys. Rev. D* **98** no. 3, (2018) 030001.
- [10] J. Podolanski and R. Armenteros *The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science* **45** no. 360, (1954) 13–30. <https://doi.org/10.1080/14786440108520416>.
- [11] K. Werner, F. M. Liu, and T. Pierog *Phys. Rev. C* **74** (2006) .
- [12] T. Pierog and K. Werner *Nucl. Phys. B Proc.* **196** (2009) 102–105.
- [13] R. Brun *et al.*, *GEANT: Detector Description and Simulation Tool; Oct 1994*. CERN, Geneva, 1993. <https://cds.cern.ch/record/1082634>. Long Writeup W5013.
- [14] S. A. Bass *et al.* *Prog. Part. Nucl. Phys.* **41** (1998) 255–369, [arXiv:nucl-th/9803035](https://arxiv.org/abs/nucl-th/9803035).
- [15] M. Bleicher *et al.* *J. Phys. G* **25** (1999) 1859–1896, [arXiv:hep-ph/9909407](https://arxiv.org/abs/hep-ph/9909407).
- [16] J. Mohs, S. Ryu, and H. Elfner *J. Phys. G* **47** no. 6, (2020) 065101, [arXiv:1909.05586](https://arxiv.org/abs/1909.05586) [[nucl-th](#)].
- [17] W. Cassing and E. L. Bratkovskaya *Phys. Rev. C* **78** (2008) 034919, [arXiv:0808.0022](https://arxiv.org/abs/0808.0022) [[hep-ph](#)].
- [18] W. Cassing and E. L. Bratkovskaya *Nucl. Phys. A* **831** (2009) 215–242, [arXiv:0907.5331](https://arxiv.org/abs/0907.5331) [[nucl-th](#)].
- [19] D. Brick *et al.* *Nucl. Phys. B* **164** (1980) .
- [20] A. Aduszkiewicz *et al.*, [NA61/SHINE Collab.] *Eur. Phys. J. C* **77** no. 10, (2017) 671, [arXiv:1705.02467](https://arxiv.org/abs/1705.02467) [[nucl-ex](#)].
- [21] N. Doble, L. Gatignon, and P. Grafstrom *CERN Preprint, CERN-SL-94-10-EA* (3, 1994) .
- [22] N. Abgrall *et al.*, [NA61/SHINE Collab.] *Eur. Phys. J. C* **76** no. 2, (2016) 84, [arXiv:1510.02703](https://arxiv.org/abs/1510.02703) [[hep-ex](#)].

- [23] M. Bonesini *et al.* *The European Physical Journal C* **1** (2001) .
- [24] R. I. Louttit *et al.* *Phys. Rev.* **123** (1961) 1465–1471.
- [25] G. Alexander *et al.* *Phys. Rev.* **154** (1967) 1284–1304.
- [26] R. L. Eisner *et al.* *Nuclear Physics B* **123** (1977) 361–381.
- [27] M. Firebaugh *et al.* *Phys. Rev.* **172** (1968) 1354–1369.
- [28] V. Blobel *et al.* *Nuclear Physics B* **69** (1974) 454–492.
- [29] H. Fesefeldt *et al.* *Nuclear Physics B* **147** (1979) 317–335.
- [30] M. Y. Bogolyubsky *et al.* *Sov. J. Nucl. Phys.* **50** (1989) 424.
- [31] V. Ammosov *et al.* *Nuclear Physics B* **115** (1976) 269–286.
- [32] M. Alston-Garnjost *et al.* *Phys. Rev. Lett.* **35** (Jul, 1975) 142–145.
- [33] J. W. Chapman *et al.* *Physics Letters B* **47** (1973) 465–468.
- [34] K. Jaeger *et al.* *Phys. Rev. D* **11** (May, 1975) 2405–2425.
- [35] A. Sheng *et al.* *Phys. Rev. D* **11** (Apr, 1975) 1733–1742.
- [36] F. LoPinto *et al.* *Phys. Rev. D* **22** (Aug, 1980) 573–581.
- [37] J. L. Bailly *et al.* *Zeitschrift für Physik C Particles and Fields* **35** (1987) 309–316.
- [38] R. D. Kass *et al.* *Phys. Rev. D* **20** (Aug, 1979) 605–614.
- [39] H. Kichimi *et al.* *Phys. Rev. D* **20** (Jul, 1979) 37–52.

The NA61/SHINE Collaboration

A. Acharya¹⁰, H. Adhikary¹⁰, K.K. Allison²⁶, N. Amin⁵, E.V. Andronov²², T. Antičić³, V. Babkin²⁰, M. Baszczyk¹⁴, S. Bhosale¹¹, A. Blondel⁴, M. Bogomilov², A. Brandin²¹, A. Bravar²⁴, W. Bryliński¹⁸, J. Brzychczyk¹³, M. Buryakov²⁰, O. Busygina¹⁹, A. Bzdak¹⁴, H. Cherif⁶, M. Čirković²³, M. Csanad^{7,8}, J. Cybowska¹⁸, T. Czopowicz^{10,18}, A. Damyanova²⁴, N. Davis¹¹, M. Deliyergiyev¹⁰, M. Deveaux⁶, A. Dmitriev²⁰, W. Dominik¹⁶, P. Dorosz¹⁴, J. Dumarchez⁴, R. Engel⁵, G.A. Feofilov²², L. Fields²⁵, Z. Fodor^{7,17}, A. Garibov¹, M. Gaździcki^{6,10}, O. Golosov²¹, V. Golovatyuk²⁰, M. Golubeva¹⁹, K. Grebieszko¹⁸, F. Guber¹⁹, A. Haesler²⁴, S.N. Igolkin²², S. Ilieva², A. Ivashkin¹⁹, S.R. Johnson²⁶, K. Kadija³, N. Kargin²¹, E. Kashirin²¹, M. Kiełbowicz¹¹, V.A. Kireyeu²⁰, V. Klochko⁶, V.I. Kolesnikov²⁰, D. Kolev², A. Korzenev²⁴, V.N. Kovalenko²², S. Kowalski¹⁵, M. Koziel⁶, B. Kozłowski¹⁸, A. Krasnoperov²⁰, W. Kucewicz¹⁴, M. Kuich¹⁶, A. Kurepin¹⁹, D. Larsen¹³, A. László⁷, T.V. Lazareva²², M. Lewicki¹⁷, K. Łojek¹³, V.V. Lyubushkin²⁰, M. Mačkowiak-Pawłowska¹⁸, Z. Majka¹³, B. Maksiak¹², A.I. Malakhov²⁰, A. Marcinek¹¹, A.D. Marino²⁶, K. Marton⁷, H.-J. Mathes⁵, T. Matulewicz¹⁶, V. Matveev²⁰, G.L. Melkumov²⁰, A.O. Merzlaya¹³, B. Messerly²⁷, Ł. Mik¹⁴, S. Morozov^{19,21}, Y. Nagai⁸, M. Naskręć¹⁷, V. Ozvenchuk¹¹, V. Paolone²⁷, O. Petukhov¹⁹, I. Pidhurskyi⁶, R. Płaneta¹³, P. Podlaski¹⁶, B.A. Popov^{20,4}, B. Porfy^{7,8}, M. Posiadła-Zezula¹⁶, D.S. Prokhorova²², D. Pszczel¹², S. Puławski¹⁵, J. Puzović²³, M. Ravonel²⁴, R. Renfordt⁶, D. Röhrich⁹, E. Rondio¹², B.T. Rumberger²⁶, M. Rumyantsev²⁰, A. Rustamov^{1,6}, M. Rybczynski¹⁰, A. Rybicki¹¹, S. Sadhu¹⁰, A. Sadovsky¹⁹, K. Schmidt¹⁵, I. Selyuzhenkov²¹, A.Yu. Seryakov²², P. Seyboth¹⁰, M. Słodkowski¹⁸, P. Staszal¹³, G. Stefanek¹⁰, J. Stepianiak¹², M. Strikhanov²¹, H. Ströbele⁶, T. Šušar³, A. Taranenko²¹, A. Tefelska¹⁸, D. Tefelski¹⁸, V. Tereshchenko²⁰, A. Toia⁶, R. Tsenov², L. Turko¹⁷, M. Unger⁵, D. Uzhva²², F.F. Valiev²², D. Veberič⁵, V.V. Vechernin²², A. Wickremasinghe^{27,25}, K. Wójcik¹⁵, O. Wyszynski¹⁰, A. Zaitsev²⁰, E.D. Zimmerman²⁶, and R. Zwaska²⁵

¹ National Nuclear Research Center, Baku, Azerbaijan

² Faculty of Physics, University of Sofia, Sofia, Bulgaria

³ Ruđer Bošković Institute, Zagreb, Croatia

⁴ LPNHE, University of Paris VI and VII, Paris, France

⁵ Karlsruhe Institute of Technology, Karlsruhe, Germany

⁶ University of Frankfurt, Frankfurt, Germany

⁷ Wigner Research Centre for Physics of the Hungarian Academy of Sciences, Budapest, Hungary

⁸ ELTE Institute of Physics, Eötvös Loránd University, Budapest, Hungary

⁹ University of Bergen, Bergen, Norway

¹⁰ Jan Kochanowski University in Kielce, Poland

¹¹ Institute of Nuclear Physics, Polish Academy of Sciences, Cracow, Poland

¹² National Centre for Nuclear Research, Warsaw, Poland

¹³ Jagiellonian University, Cracow, Poland

¹⁴ AGH - University of Science and Technology, Cracow, Poland

¹⁵ University of Silesia, Katowice, Poland

¹⁶ University of Warsaw, Warsaw, Poland

¹⁷ University of Wrocław, Wrocław, Poland

¹⁸ Warsaw University of Technology, Warsaw, Poland

¹⁹ Institute for Nuclear Research, Moscow, Russia

²⁰ Joint Institute for Nuclear Research, Dubna, Russia

²¹ National Research Nuclear University (Moscow Engineering Physics Institute), Moscow, Russia

²² St. Petersburg State University, St. Petersburg, Russia

- ²³ University of Belgrade, Belgrade, Serbia
- ²⁴ University of Geneva, Geneva, Switzerland
- ²⁵ Fermilab, Batavia, USA
- ²⁶ University of Colorado, Boulder, USA
- ²⁷ University of Pittsburgh, Pittsburgh, USA