

Report of the Topical Group on Particle Dark Matter for Snowmass  
2021

**Conveners:** Jodi Cooley<sup>1,2</sup>, Tongyan Lin<sup>3</sup>, W. Hugh Lippincott<sup>4</sup>, Tracy R. Slatyer<sup>5</sup>, Tien-Tien Yu<sup>6</sup>,  
**Contributors:** Daniel S. Akerib<sup>7</sup>, Tsuguo Aramaki<sup>8</sup>, Daniel Baxter<sup>9</sup>, Torsten Bringmann<sup>10</sup>, Ray Bunker<sup>11</sup>, Daniel  
 Carney<sup>12</sup>, Susana Cebrián<sup>13</sup>, Thomas Y. Chen<sup>14</sup>, Priscilla Cushman<sup>15</sup>, C.E. Dahl<sup>16</sup>, Rouven Essig<sup>17</sup>, Alden Fan<sup>7</sup>,  
 Richard Gaitskell<sup>18</sup>, Cristiano Galbiati<sup>19</sup>, Graciela B. Gelmini<sup>20</sup>, Graham K. Giovanetti<sup>21</sup>, Guillaume Giroux<sup>22</sup>,  
 Luca Grandi<sup>23</sup>, J. Patrick Harding<sup>24</sup>, Scott Haselschwardt<sup>12</sup>, Lauren Hsu<sup>9</sup>, Shunsaku Horiuchi<sup>25</sup>, Yonatan Kahn<sup>26</sup>,  
 Doojin Kim<sup>27</sup>, Geon-Bo Kim<sup>28</sup>, Scott Kravitz<sup>12</sup>, V. A. Kudryavtsev<sup>29</sup>, Noah Kurinsky<sup>7</sup>, Rafael F. Lang<sup>30</sup>, Rebecca  
 K. Leane<sup>7</sup>, Benjamin V. Lehmann<sup>31</sup>, Cecilia Levy<sup>32</sup>, Shengchao Li<sup>30</sup>, Ben Loer<sup>11</sup>, Aaron Manalaysay<sup>12</sup>, C. J.  
 Martoff<sup>33</sup>, Gopolang Mohlabeng<sup>34</sup>, M.E. Monzani<sup>7,35,36</sup>, Alexander St J. Murphy<sup>37</sup>, Russell Neilson<sup>38</sup>, Harry N.  
 Nelson<sup>5</sup>, Ciaran A. J. O'Hare<sup>39</sup>, K.J. Palladino<sup>40</sup>, Aditya Parikh<sup>41</sup>, Jong-Chul Park<sup>42</sup>, Kerstin Perez<sup>43,44</sup>, Stefano  
 Profumo<sup>31,45</sup>, Nirmal Raj<sup>46</sup>, Brandon M. Roach<sup>44</sup>, Tarek Saab<sup>47</sup>, María Luisa Sarsa<sup>13</sup>, Richard Schnee<sup>48</sup>, Sally  
 Shaw<sup>4</sup>, Seodong Shin<sup>49</sup>, Kuver Sinha<sup>50</sup>, Kelly Stifter<sup>9</sup>, Aritoki Suzuki<sup>12</sup>, M. Szydagis<sup>32</sup>, Tim M.P. Tait<sup>34</sup>,  
 Volodymyr Takhistov<sup>51,52</sup>, Yu-Dai Tsai<sup>34</sup>, S. E. Vahsen<sup>53</sup>, Edoardo Vitagliano<sup>20</sup>, Philip von Doetinchem<sup>53</sup>,  
 Gensheng Wang<sup>54</sup>, Shawn Westerdale<sup>55</sup>, David A. Williams<sup>31,44</sup>, Xin Xiang<sup>56</sup>, and Liang Yang<sup>3</sup>

<sup>1</sup>Department of Physics, Southern Methodist University, Dallas TX 75275, USA

<sup>2</sup>SNOLAB, Lively, ON P3Y 1N2, Canada

<sup>3</sup>Department of Physics, University of California, San Diego, CA 92093, USA

<sup>4</sup>Department of Physics, University of California, Santa Barbara, CA 93117, USA

<sup>5</sup>Center for Theoretical Physics, Massachusetts Institute of Technology, Cambridge, MA 02139, USA

<sup>6</sup>Department of Physics and Institute for Fundamental Science, University of Oregon, Eugene, OR 97403, USA

<sup>7</sup>SLAC National Accelerator Laboratory, Menlo Park, CA 94025, USA

<sup>8</sup>Department of Physics, Northeastern University, Boston, MA 02115, USA

<sup>9</sup>Fermi National Accelerator Laboratory, Batavia, IL 60510, USA

<sup>10</sup>Department of Physics, University of Oslo, N-0316 Oslo, Norway

<sup>11</sup>Pacific Northwest National Laboratory, Richland, Washington 99352, USA

<sup>12</sup>Physics Division, Lawrence Berkeley National Laboratory, Berkeley, CA 94720, USA

<sup>13</sup>Centro de Astropartículas y Física de Altas Energías (CAPA), Universidad de Zaragoza, 50009 Zaragoza, Spain

<sup>14</sup>Fu Foundation School of Engineering and Applied Science, Columbia University, New York, NY 10027, USA

<sup>15</sup>School of Physics and Astronomy, University of Minnesota, Minneapolis, MN 55455, USA

<sup>16</sup>Department of Physics and Astronomy, Northwestern University, Evanston, Illinois 60208, USA

<sup>17</sup>C.N. Yang Institute for Theoretical Physics, Stony Brook University, Stony Brook, NY 11794, USA

<sup>18</sup>Department of Physics, Brown University, Providence, RI 02912, USA

<sup>19</sup>Physics Department, Princeton University, Princeton, NJ 08544 USA

<sup>20</sup>Department of Physics and Astronomy, University of California Los Angeles, Los Angeles, CA 90095, USA

<sup>21</sup>Physics Department, Williams College, Williamstown, MA 01267, USA

<sup>22</sup>Department of Physics, Queen's University, Kingston, K7L 3N6, Canada

<sup>23</sup>Department of Physics, The University of Chicago, Chicago, IL 60637, USA

<sup>24</sup>Physics Division, Los Alamos National Laboratory, Los Alamos, NM, USA

<sup>25</sup>Center for Neutrino Physics, Department of Physics, Virginia Tech, Blacksburg, VA 24061, USA

<sup>26</sup>Department of Physics, University of Illinois Urbana-Champaign, Urbana, IL 61801, USA

<sup>27</sup>Mitchell Institute for Fundamental Physics and Astronomy, Department of Physics and Astronomy, Texas A&M University, College Station, TX 77843, USA

<sup>28</sup>Lawrence Livermore National Laboratory, Livermore, CA 94550, USA

<sup>29</sup>Department of Physics and Astronomy, University of Sheffield, Sheffield, S3 7RH, United Kingdom

<sup>30</sup>Department of Physics and Astronomy, Purdue University, West Lafayette, IN 47907, USA

<sup>31</sup>Department of Physics, University of California Santa Cruz, Santa Cruz, CA 95064, USA

<sup>32</sup>Department of Physics, University at Albany SUNY, Albany NY 12222, USA

<sup>33</sup>Department of Physics, Temple University, Philadelphia, PA 19122, USA

<sup>34</sup>Department of Physics and Astronomy, University of California, Irvine, CA 92697, USA

<sup>35</sup>Kavli Institute for Particle Astrophysics and Cosmology, Stanford University, Stanford CA, USA

<sup>36</sup>Vatican Observatory, Castel Gandolfo, V-00120, Vatican City State

<sup>37</sup>School of Physics and Astronomy, University of Edinburgh, Edinburgh, UK

<sup>38</sup>Department of Physics, Drexel University, Philadelphia PA 19072, USA

<sup>39</sup>School of Physics, The University of Sydney and ARC Centre of Excellence for Dark Matter Particle Physics, NSW 2006, Australia

<sup>40</sup>Department of Physics, University of Oxford, Denys Wilkinson Building, Keble Road, Oxford, UK, OX1 3RH

<sup>41</sup>Department of Physics, Harvard University, Cambridge, MA 02138, USA

<sup>42</sup>Department of Physics and IQS, Chungnam National University, Daejeon 34134, Republic of Korea

<sup>43</sup>Department of Physics, Columbia University, New York, NY 10027, USA

<sup>44</sup>Department of Physics, Massachusetts Institute of Technology, Cambridge, MA 02139, USA

<sup>45</sup>Santa Cruz Institute for Particle Physics, University of California, Santa Cruz, CA 95064, USA

<sup>46</sup>TRIUMF, 4004 Wesbrook Mall, Vancouver BC V6T 2A3, Canada

<sup>47</sup>Department of Physics, University of Florida, Gainesville, FL 32611, USA

<sup>48</sup>South Dakota School of Mines & Technology, Rapid City, SD 57701, USA

<sup>49</sup>Department of Physics, Jeonbuk National University, Jeonju, Jeonbuk 54896, Republic of Korea

<sup>50</sup>Department of Physics and Astronomy, University of Oklahoma, Norman, OK 73019, USA

<sup>51</sup>Kavli Institute for the Physics and Mathematics of the Universe (WPI), UTIAS

<sup>52</sup>University of Tokyo, Kashiwa, Chiba 277-8583, Japan

<sup>53</sup>Department of Physics and Astronomy, University of Hawai'i, Honolulu, HI 96822, USA

<sup>54</sup>High Energy Physics Division, Argonne National Laboratory, Lemont, IL 60439, USA

<sup>55</sup>Department of Physics and Astronomy, University of California, Riverside, California 92521, USA

<sup>56</sup>Brookhaven National Laboratory, Upton, NY, USA

# 1 Executive Summary

One of the most important scientific goals of the next decade is to reveal the nature of dark matter (DM). To accomplish this goal, we must **delve deep**, to cover high priority targets including weakly-interacting massive particles (WIMPs), and **search wide**, to explore as much motivated DM parameter space as possible. A diverse, continuous portfolio of experiments at large, medium, and small scales that includes both direct and indirect detection techniques maximizes the probability of discovering particle DM. Detailed calibrations and modeling of signal and background processes are required to make a convincing discovery. In the event that a candidate particle is found through different means, for example at a particle collider, the program described in this report is also essential to show that it is consistent with the actual cosmological DM. The US has a leading role in both direct and indirect detection dark matter experiments – to maintain this leading role, it is imperative to continue funding major experiments and support a robust R&D program.

## *Dark Matter exists*

We have strong astronomical and cosmological evidence across many scales, ranging from velocities of stars in ultra-faint galaxies to the Cosmic Microwave Background, indicating that >80% of the matter in our Universe consists of non-baryonic matter known as “Dark Matter”. The steady collection of this evidence over the last eight decades suggests that DM consists of one or more new particles not contained within the Standard Model (SM) of Particle Physics. From these observations, we can set some basic requirements on DM. The dominant part of DM must be stable with a lifetime much longer than the age of the Universe, it must form cosmological structures consistent with observations, and it must be produced in the early Universe. From these requirements, we can infer some of the general properties of DM. The formation of consistent cosmological structures sets a limit on the strength of DM interactions, both with the SM and with itself. DM production in the early Universe may occur through a wide range of channels, but many of these require additional non-gravitational interactions in some form.

## *Particle dark matter is theoretically well-motivated*

There is a wealth of scenarios for DM that are consistent with these observations and requirements. The range of experimentally allowed DM candidates spans masses from  $m_\chi \sim 10^{-21}$  eV, which is the lightest mass that is still consistent with galactic structure, to that of macroscopic objects which can be several hundreds of solar masses. This report focuses on DM candidates with masses in the eV to 100 TeV range, with a subset of candidates extending out to the Planck scale ( $m_\chi \sim M_{\text{Pl}} = 10^{19}$  GeV). In this mass range, DM candidates are best described by a particle picture and we denote these candidates as **particle dark matter**. Theoretical paradigms for particle DM that remain highly-motivated include those of WIMPs, asymmetric DM, and hidden sectors which span the entirety of the mass range. For a given cosmological history of the DM, these paradigms can be quite predictive, giving rise to specific DM mass scales and interactions.

## *“Delve Deep and Search Wide”: A diverse portfolio maximizes the probability of discovery*

To understand the *particle* nature of DM, we must employ multiple experimental techniques spanning the entire range of the High-Energy Physics (HEP) program, including both direct and indirect detection techniques. Moderate- and large-scale experiments will allow us to delve deep into high priority target scenarios

such as WIMPs, whereas a well-chosen ensemble of small-scale experiments provides versatility and the ability to test an expanded range of models. R&D towards improved detector technologies are fundamental and crucial to a comprehensive exploration of the dark sector. Direct detection experiments, particularly the next generation of WIMP searches, will require continued investment in underground facilities.

Importantly, both direct and indirect detection, and other Cosmic Frontier probes, are the only way to connect an observed DM candidate with its astrophysical environment. Indirect detection probes time and distance scales that dwarf those probed by any terrestrial detector, allowing for unique sensitivity to certain properties of DM. For example, if the DM is not absolutely stable, its decay lifetime is longer than the age of the universe and so is likely to be measurable only by indirect methods. Direct detection experiments are adaptable, and can respond readily to signals or hints or the lack thereof to mitigate systematic backgrounds or redirect to new parameter space. Furthermore, direct detection experiments can be, and often are, adjusted, upgraded, fixed, or moved to confirm or disprove any observation of DM that may arise.

Crucially, DM is a major science driver across *all* of the experimental frontiers of particle physics: Cosmic, Energy, Rare and Precision, and Neutrino, as well as the cross-cutting Accelerator, Instrumentation, Underground, and Theory Frontiers. As the search for DM transcends frontier boundaries, a unified and complementary strategy is needed to maximize discovery, as described in [1].

### ***Understanding how signals and backgrounds manifest in an experiment is essential to making a detection***

Precise and accurate modeling of both signal and background, informed by calibration and propagated via simulation, is essential to confirm and validate any current or future potential DM signal. For indirect detection experiments, it is necessary to have an improved understanding of a range of astrophysical backgrounds and processes, including as one example cosmic ray production and propagation. For direct detection experiments, future advances will require an improved understanding of threshold effects, radiogenic backgrounds, dark noise, the ways DM interacts in various materials, and the optical and atomic properties of materials.

## **2 Introduction**

This report is primarily based on community input on big questions in the search for particle DM, summarized in eight solicited Snowmass white papers. These papers focused, respectively, on the following topics:

- **WP1** – Dark matter direct detection to the neutrino fog [2]
- **WP2** – The landscape of low-threshold dark matter direct detection in the next decade [3]
- **WP3** – Calibrations and backgrounds for dark matter direct detection [4]
- **WP4** – Modeling, statistics, simulations, and computing needs for direct dark matter detection [5]
- **WP5** – The landscape of cosmic-ray and high-energy photon probes of particle dark matter [6]
- **WP6** – Puzzling excesses in dark matter searches and how to resolve them [7]
- **WP7** – Synergies between dark matter searches and multiwavelength/multimessenger astrophysics [8]
- **WP8** – Ultraheavy particle dark matter [9]

Over twenty other white papers were submitted to CF1 (in many cases cross-listed with other working groups) and can be found via the Snowmass website: <https://snowmass21.org/submissions/cf> – we also reference them where appropriate below.

## Dark matter is a fundamental mystery of high energy physics

We have strong astronomical and cosmological evidence across many scales, ranging from the velocities of stars in ultra-faint galaxies to the Cosmic Microwave Background, which indicates that  $> 80\%$  of the matter in our Universe consists of non-baryonic matter known as “dark matter” [10]. The steady collection of this evidence over the last century strongly indicates that DM is a new particle not contained within the Standard Model of Particle Physics, that the dominant part of DM must be stable with a lifetime much longer than the age of the Universe, and that the DM was produced in the early Universe. This last feature may provide a clue to non-gravitational interactions of the DM. Furthermore, the DM must form cosmological structures consistent with observations, which in turn sets a limit on the strength of the DM interactions with the SM and with itself.

Understanding the nature of DM is a top priority within the HEP community. In 2014, the Particle Physics Project Prioritization Panel (P5) identified the search for DM as one of the five priority science drivers for the HEP Program [11]. “Dark matter” was the most common phrase among the Letters of Interest submitted by the entire HEP community in the run up to Snowmass 2022 [12]. Dark matter is a fundamental mystery of high energy physics.

## There is a wide range of viable particle DM candidates

There are many theoretically motivated DM candidates capable of explaining the astrophysical evidence for DM, which span mass ranges from the lightest masses that are still consistent with galactic structure ( $m_\chi \sim 10^{-21}$  eV) to macroscopic objects that can be several hundreds of solar masses [13]. This report focuses on particle DM candidates with masses from the eV range to the Planck scale ( $m_\chi \sim M_{\text{Pl}} = 10^{19}$  GeV). In this mass range, DM candidates are best described by a particle picture and we denote these candidates as **particle DM**.<sup>1</sup>

The eV- $M_{\text{Pl}}$  range of particle DM candidates can be further sub-divided into three categories:

- $1 \text{ eV} \lesssim m_\chi \lesssim 1 \text{ GeV}$ : “Light” DM
- $1 \text{ GeV} \lesssim m_\chi \lesssim 100 \text{ TeV}$ : “Heavy” DM
- $m_\chi \gtrsim 100 \text{ TeV}$ : “Ultra-Heavy” DM (UHDM)

The most well-known DM candidates in this mass range are the weakly-interacting massive particles (WIMPs) which have masses between 1 GeV to 100 TeV, interact weakly with the SM, and fall into the “heavy” DM category [10]. Such candidates are strongly motivated in particle physics, frequently appear in supersymmetric (SUSY) models designed to address the gauge hierarchy problem<sup>2</sup>, and are a high-priority target for particle DM searches. WIMPs are also appealing on cosmological grounds as they lead to the correct relic density of DM through either mechanisms of thermal freeze-out (“WIMP miracle”) [14, 15] or through a connection of the DM asymmetry to the baryon-antibaryon asymmetry (“asymmetric DM”) [16]. The latter mechanism naturally accommodates DM candidates with masses around a few GeV but this range can be extended to both lower and higher masses. Although not yet observed despite the advances in sensitivity made by accelerator and cosmic DM searches over the past decade, WIMPs remain a well-motivated DM candidate providing a rich suite of accessible targets for next generation experiments.

There are many classes of models for UHDM candidates, including WIMPzillas, strangelets, and Q-balls [9, 13, 17]. Non-thermal UHDM candidates, known as WIMPzillas, are a generic phenomenon of inflationary cosmology [18, 19], whereas  $Q$ -balls (*e.g.* [20]) provide a candidate that explains both baryogenesis and DM, with a potential connection to inflation. Nuggets of quarks formed in first-order phase transitions result in strangelets that are viable DM candidates [21].

In the last decade, the DM community has realized that DM may be just one particle of many that comprise a “hidden sector” that contains its own matter and force particles. Importantly, a hidden sector

---

<sup>1</sup>For DM masses above an eV, the occupation number of particles within a volume of radius equal to the de Broglie wavelength is around unity or smaller ( $n_\chi \lambda_{\text{dB}}^3 \ll 1$ ). For mass-scales well below an eV, the occupation number is much higher and DM is better described by a wave picture ( $n_\chi \lambda_{\text{dB}}^3 \gg 1$ ). This latter category of DM candidates, which contains the QCD axion, is covered by the topical working group on Wave-Like Dark Matter (CF2).

<sup>2</sup>The large discrepancy between the electroweak scales of  $\mathcal{O}(100 \text{ GeV})$  and  $M_{\text{Pl}}$  is known as the gauge hierarchy problem. The resolution of this problem remains one of the outstanding issues of particle physics.

with typical mass scales of a few tens of GeV or lower must be only feebly coupled to the SM. One can systematically write down the renormalizable couplings between a hidden sector and the SM, which define **portals** that lead to distinct and predictive interactions between DM and the SM [22–29]. As such, models of hidden sector DM contain rich phenomenology to search for the DM, the mediator, and interactions within a hidden sector itself. DM candidates that live in a hidden sector can span the entire range of particle DM masses but are especially of interest for candidates of “light” DM. The observation of non-zero neutrino masses motivates the existence of right-handed or sterile neutrinos. For certain ranges of masses and interaction strengths, these neutrinos are also candidates for DM with masses ranging from the Tremaine-Gunn bound of a few hundred eV to tens of keV [30–32]. These BSM neutrinos provide another class of motivated and predictive “light” DM candidates.

### Diversity of project scales maximizes our probability of discovering DM

As we see, there are several theoretically motivated avenues for DM candidates that lead to strikingly different observational signatures. The strong observational evidence which supports the existence of DM is all a result of the gravitational influence of DM on visible matter. To understand the *particle* nature of DM, we must also understand its non-gravitational interactions, which requires probes of all potential DM interactions: with photons, electrons, neutrinos, and quarks, or with other unknown particles that live within a hidden sector.

As such, uncovering the particle nature of DM requires a multi-pronged search strategy to thoroughly study all its potential non-gravitational interactions including: the interaction of DM with targets in a detector (**direct detection**); through the detection of SM particles that result from decays or annihilations of DM (**indirect detection**); through the production of DM in colliders or accelerators; and through the effects of DM-SM interactions on astrophysical systems. Within direct detection, experimental signatures include *scintillation photons*, *ionization electrons*, and *phonons*. For indirect detection, the experimental signatures include *photons*, *cosmic-rays*, and *neutrinos* at energy scales from keV-ZeV. In addition to these two classes of DM probes, there are cosmic and accelerator/collider probes. Discussion of these additional probes can be found in the reports of topical groups working on cosmic probes of DM (CF3) and fundamental physics more broadly (CF7), DM at colliders (EF10), and dark sector studies at high intensities (RF6).

The P5 recommendations of 2014 included increased funding of the then-proposed generation of direct detection experiments (sometimes called “Generation 2” or “G2”), support for one or more next generation experiments, maintaining a program at smaller scale to support new ideas and developments, and possible investment in the Cherenkov Telescope Array (CTA) experiment. The G2 experiments are now in operation or near the end of construction, but unfortunately there has been no movement in the US towards a next generation program. In 2018, the Basic Research Needs Dark Matter New Initiatives program (DMNI) [33] led to the development of several promising direct detection ideas; this process was very valuable to the community and provides a useful model for supporting smaller projects of all kinds going forward. Unfortunately, the current DMNI experiments also await the next stage of funding to proceed to the project phase.

Today, the field of particle DM is still growing rapidly, generating promising ideas to probe DM in all of its possible variations. A diverse, continuous portfolio of experiments that includes both direct and indirect detection techniques at multiple scales maximizes the probability of discovering particle DM. Detailed calibrations and modeling of signal and background processes, as well as independent experimental confirmation of a putative signal, are required to make a convincing discovery. The US has a leading role in both direct and indirect detection DM experiments, and it is imperative to support next generation DM programs and maintain a robust R&D program to develop technologies that enable this pursuit.

The remainder of this report will summarize the status and prospects for observing particle DM for the two categories of indirect and direct detection.

## 3 Indirect Detection

### 3.1 Introduction

Indirect probes of particle DM are generally those that search for the signatures of DM interactions throughout the cosmos, in contrast to direct probes which search for DM interactions within a detector volume. The primary program of *indirect detection* is to search for “cosmic messengers” produced directly by DM interactions, in particular via annihilation or decay of the DM. Indirect detection searches have traditionally relied on photon and cosmic ray messengers due to their relative ease of detection. However, the rise of neutrino observatories as well as the detection of gravitational waves have augmented the family of messengers to include neutrinos and gravitational waves, *e.g.* [34]. There are also powerful cosmic probes of DM using “natural laboratories”, where astrophysical objects are affected by the presence and/or interactions of DM, which can have important commonalities with “cosmic messenger” searches; we discuss some aspects of these searches briefly, while ceding a more in-depth discussion to papers from the dedicated topical group on Cosmic Probes of Dark Matter, *e.g.* [35].

Indirect detection probes time and distance scales that dwarf those probed by any terrestrial detector, allowing for unique sensitivity to certain properties of DM; for example, if the DM is not absolutely stable, its decay lifetime is longer than the age of the universe and so is likely to be measurable only by indirect methods.

Typically annihilation and decay of DM produce signals with characteristic energy scales set by the DM mass, although there are also frequently secondary signals at much lower energies (*e.g.* arising from synchrotron and bremsstrahlung from electrons and positrons [36], or pair production from very-high-energy photons [37–41]); this allows indirect searches to probe DM at much higher masses than their nominal energy scales. There are existing (and proposed new) technologies for measuring cosmic messengers over an enormous range of energy scales, from sub-eV to ZeV, providing sensitivity to a correspondingly wide range of DM masses. Especially for higher DM masses, where abundant energy is available to produce the full range of Standard Model particles, indirect signals are generically expected to be multi-messenger and multi-scale [9]. As a result, a broad program of multi-messenger and multi-wavelength probes both maximizes sensitivity and allows powerful internal consistency checks on a putative signal, which are often quite model-independent.

At the same time, indirect searches frequently encounter large systematic uncertainties and backgrounds surrounding the DM and its environment. A confirmed detection of a DM signal will likely require robust characterization of emission unrelated to DM, so that the signal of interest may shine through. Multiwavelength and multimessenger observations and analysis offer the promise of helping identify, quantify, and remove these backgrounds to DM searches. In particular, there are currently a number of detected excesses above currently-understood backgrounds; understanding the origin of these excesses could provide important insights into backgrounds or even reveal a DM signal.

### 3.2 Science targets for indirect detection

As discussed in Sec. 2, it is convenient to subdivide particle DM candidates by their mass into “light” (sub-GeV), “heavy” or “electroweak scale” (GeV–100 TeV), and “ultra-heavy” ( $\gg 100$  TeV). WIMPs, falling in the “heavy” range, are perhaps the longest-studied candidate, and can be probed synergistically by indirect, direct, and collider searches. In this mass range, one widely-used benchmark for indirect detection is the thermal freeze-out mechanism, where the annihilation rate of DM in the early universe controls its late-time abundance.

Under assumptions of a standard cosmological history, this classic scenario requires a nearly mass-independent annihilation cross section of  $2 - 5 \times 10^{-26}$  cm<sup>3</sup>/s [42, 43] for self-conjugate dark matter annihilating through a 2-body process with a cross section that is close to velocity-independent in the non-relativistic limit.<sup>3</sup> If the cross section does not evolve with time, then this mechanism has no free parameters and directly predicts an annihilation cross section that can be observed today.

<sup>3</sup>The required cross-section is approximately doubled if the dark matter and anti-matter are separate particles with equal abundances.

In principle, this is a simple and viable way of generating the observed relic abundance for DM masses as light as 1 MeV or as heavy as 100 TeV, without modifying the cosmological history; at lower masses, some additional ingredients are typically needed to avoid disruption of Big Bang nucleosynthesis, which occurs at MeV-scale temperatures, *e.g.* [44]. At masses above 100 TeV, unitarity sets largely model-independent upper limits on the annihilation cross section during freezeout, leading to a prediction that thermal relic DM should overclose the universe, *e.g.* [45, 46]. Current constraints typically exclude this thermal relic cross section, for annihilation into any Standard Model final states except neutrinos, for DM masses below 10-100 GeV, *e.g.* [47].

There are many variations on this scenario (a more in-depth discussion of the theoretical possibilities may be found in [13]). A simple modification is that the DM may be asymmetric, with less anti-DM than DM; in this case, or more generally if the annihilation requires the presence of a partner particle that is depleted in the late universe, that asymmetry may cut off annihilation at late times and strongly suppress indirect signals. The cross section may be suppressed at low velocities, or may require more than two particles in the initial state, both of which suppress indirect detection signals compared to the freeze-out epoch (characterized by much higher density and temperature). These modifications open up thermal relic parameter space in the “light DM” mass range. At higher masses, modifications to the assumed cosmological history can greatly modify the permissible parameter space, extending the upper mass bound to  $10^{10}$  GeV or higher; examples of such modifications include an epoch of early matter domination, a phase transition involving the DM, and/or dilution of the DM by the decays of other particles, *e.g.* [48–60]. Furthermore, independent of its mass scale, the DM need never achieve thermal equilibrium with the Standard Model – thermal freeze-out is a classic benchmark with broad applicability, but far from the only possibility.

In the “light” sub-GeV mass range, another well-motivated target is the keV-scale sterile neutrino. Constraints from production in the early universe [61, 62], structure formation [63], and X-ray telescopes [64–71] have narrowed the viable parameter space in the simplest models to a small region [6].

Beyond these benchmarks, non-thermal production scenarios include freeze-in, out-of-equilibrium decay of a heavy field, phase transitions, gravitational particle production, and decay of black holes to Planck-scale relics (see [6, 9, 13] for a more in-depth discussion of these scenarios and further references). Taken together, these scenarios can accommodate particle DM candidates across the full mass range we consider, and can allow for striking indirect signatures; while annihilation signatures are suppressed at high masses, there can still be detectable multimessenger and multiwavelength signals from decays. At mass scales below those we consider, in the wave-like regime, observations of cosmic messengers and natural laboratories can also place powerful bounds on interconversions between visible particles and very light non-thermal DM; we will not discuss such bounds further in this report, but mention them as an example of synergy.

### 3.3 The path toward dark matter discovery with indirect detection

#### 3.3.1 Improving discovery potential for particle dark matter across its full mass range

Indirect searches for DM span a vast range of target regions, energy scales, and messengers. Observations of galaxy clusters, dwarf galaxies, the Andromeda galaxy, the Magellanic clouds, the Sun, diffuse emission and possible DM clumps in the Milky Way, the extragalactic background light, and the Milky Way Galactic Center, have all been used to set limits on the interactions of DM (see [6, 7] for further discussion and references), and future instruments will allow us to improve the sensitivity of these probes. At low energies, the strongest current limits from classic indirect detection typically arise from cosmic-ray and gamma-ray searches, but neutrino bounds can take over for decaying DM at masses above 10 TeV [9, 72, 73].

Celestial bodies, as natural laboratories, may in some circumstances play an important role in mediating the signals of DM interactions – *e.g.* via annihilation of DM captured in the Sun, by the heating of neutron stars from DM scattering, or by accumulation of DM leading to low-mass black hole formation. Some such signals will be visible to standard indirect searches, but others will require dedicated analyses – *e.g.* recent or proposed infrared telescopes such as the James Webb Space Telescope (JWST), the Thirty Meter Telescope (TMT) and the Extremely Large Telescope (ELT) can search for cold neutron stars [74], and gravitational wave experiments could detect or exclude a black hole population formed by dark-matter-induced collapse [75].

*Given the wide range of plausible DM scenarios, it is important to continue a broad program of indirect searches with sensitivity to different energy scales and cosmic messengers.* Beyond individual observations,

combining and cross-correlating searches can improve sensitivity and our ability to reject complex backgrounds. In addition, we strongly encourage experimental collaborations to display the full extent of their inferred limits along the DM mass axis; as discussed above, secondary particle production means that measurements at a given energy scale can often be sensitive to much higher DM masses, and often these limits are artificially cut off as part of the analysis.

Within this broad framework, if we focus on cosmic messenger searches with gamma rays and charged cosmic rays (with neutrino searches being discussed in Neutrino Frontier reports, *e.g.* [76]), specific directions being pursued by proposed instruments include:

- Testing the thermal relic cross section across its full mass range (in the standard cosmological history), from MeV – 100 TeV.
- Improving sensitivity to MeV-GeV gamma-rays, where there is currently a sensitivity gap compared to lower- or higher-energy photons, and the potential to explore wide swaths of currently unconstrained parameter space.
- Improving sensitivity in the X-ray band, especially to monochromatic line signals via improved energy resolution; near-future experiments may achieve sufficient resolution to resolve Doppler broadening from the velocity of DM in the Milky Way halo.
- Developing methods that can detect low-energy (non-relativistic) antimatter cosmic rays. A confirmed detection of low-energy antideuterons or antihelium would be transformative, as these channels are thought to be essentially background-free. Future experiments for antinuclei searches are needed to measure down to the actual astrophysical spectrum due to primary CR interactions with the ISM.
- Improving the characterization of key backgrounds and systematic uncertainties in a range of searches, both generally and as a step to resolving the origins of various currently-unexplained excesses.

### 3.3.2 Enabling discovery with complementary measurements and modeling

For most possible indirect signals of DM interactions, an accurate understanding of relevant astrophysical processes and backgrounds is *essential* for reliably translating observations into constraints on – or a discovery of – DM physics. There are only a handful of plausible signals that are believed to be effectively background-free; examples include gamma-ray spectral lines and production of low-energy antideuterons. Exploring these channels is necessary, but other searches may have higher sensitivity if backgrounds can be controlled. Table 1 outlines some categories of backgrounds for the specific case of gamma-ray searches.

Consequently, there is an extensive class of measurements which are important for enabling future indirect probes of DM physics, even if they do not involve directly measuring cosmic messengers from DM interactions. We describe some of these below.

	Galactic diffuse emission	Unresolved Sources	Instrumental Systematics
MeV DM	•	•	
GeV DM @GC	•	•	
GeV DM @M31	•	•	
GeV DM @dSphs			•
GeV DM @clusters		•	
Heavy DM		•	•

Table 1: Summary of DM searches with gamma rays and the main categories of backgrounds. Bullet points illustrate the main relevant backgrounds; other backgrounds can still be relevant under specific conditions. Here, heavy DM refers to DM above the electroweak scale. Reproduced from Ref. [6].



## Cosmic ray production, composition, and propagation

*This section draws extensively on discussions in WP5, WP6, and WP7 [6–8].*

Charged cosmic rays can arise either as cosmic messengers of DM physics or through a myriad of energetic processes in our Galaxy and beyond. Understanding how these particles are produced and then propagate from their sources to Earth is a key ingredient in both signal and background modeling for charged-particle searches. Furthermore, because the cosmic rays can produce photons and neutrinos as they interact with the interstellar gas and radiation, their behavior is also a key input for searches in these channels. In cases where the DM itself, or a particle produced by its decays, carries a tiny electric charge, magnetic fields could modify the distribution of DM and/or its signals. It is challenging to measure the magnetic field in dark structures (such as dwarf spheroidal galaxies or the external regions of spiral galaxies and clusters), but great progress is expected in the coming years due to next-generation radio telescopes, such as the Square Kilometer Array (SKA) [77].

Ongoing cosmic-ray observations of multiple species, including unstable species, can help constrain propagation, *e.g.* [78–85]. Improvements in modeling and simulation of the sources of cosmic rays, with careful study of uncertainties related both to production and propagation, would be valuable in this regard. Another direction for improvement is the full understanding of the experimental uncertainties in cosmic-ray measurements and their correlations, particularly from the AMS-02 experiment, which may require collaboration between the experimental and theoretical communities.

For positrons, in particular, recent observations of TeV gamma-ray halos around pulsars suggest that these are a major source of high-energy positrons [86, 87]. Future observations of these halos from ground-based gamma-ray experiments such as the High Altitude Water Cherenkov Experiment (HAWC), the Large High Altitude Air Shower Observatory (LHAASO) and CTA will have the capacity to probe the injection spectrum of these positrons and the size of the low diffusion bubble present around sources. More generally, multiwavelength observations of the Galaxy in photons will continue to help constrain cosmic-ray populations via their secondary emission, and to search for the sources of cosmic rays.

The production cross sections for photons and antiparticles in cosmic ray collisions with the gas still have large uncertainties in many cases. In particular, very few direct measurements exist for antiproton production from protons interacting with heavier nuclei, and there are substantial uncertainties in the cross sections for positron production in the GeV–TeV range, via  $p + p \rightarrow e^+ + X$  and  $p + \text{He} \rightarrow e^+ + X$ .

These uncertainties both impact predictions for backgrounds, and potentially bias the inference of cosmic ray propagation parameters from measurements of the cosmic-ray spectra at Earth. Furthermore, to the extent that the models entering into these cross sections are also used to predict antiparticle signatures from DM annihilation or decay, data that allows refinement of the models will directly impact predictions of DM signals. In particular, the yield of antideuterons and antihelium depends on the details of hadronization and coalescence once quarks are produced, either in purely Standard Model collisions or in hypothetical DM interactions.

This is an area where considerable improvement is possible in the near future. Measurements from fixed-target accelerator experiments, covering a range of energies, with the capacity to detect antiproton, antideuteron and antihelium nuclei, will be of great benefit to achieve reduced cross-sectional uncertainties. Measurements of relevant cross sections have been performed and/or proposed at both current experiments such as NA61/SHINE [88], ALICE [89] and LHCb [90], and at AMBER [91] (the next-generation successor of the CERN SPS COMPASS experiment); details may be found in [6].

## The Galactic diffuse photon emission

*This section draws extensively on discussions in WP6 and WP7 [7, 8].*

As Earth is embedded within the Milky Way Galaxy, essentially all photon-based indirect DM searches require some model for the Galactic foregrounds. These foregrounds can depend on the distribution of gas, cosmic rays, and radiation throughout the Milky Way, the turbulent and regular components of the Galactic magnetic field, and large-scale structures such as the Fermi Bubbles.

To quote from [8], “*the single most important challenge in generating accurate Galactic diffuse emission models remains obtaining accurate distributions of input ingredients, e.g., cosmic-ray sources, magnetic fields, and target gas densities*”. Refs. [7, 8] discuss a number of avenues to improve the current situation, including:

- Use of multiwavelength and multimessenger data, such as new maps of the interstellar dust, new constraints on the interstellar radiation field as a function of frequency, and improved measurements of the magnetic field from upcoming radio telescopes,
- Development of improved tracers for components of the interstellar gas, particularly molecular hydrogen,
- Improved modeling techniques, in particular avoiding unnecessary simplifying assumptions, accounting for non-steady-state behavior, incorporating insights from simulations, and performing careful error propagation to allow for marginalization over systematic uncertainties.

In addition to improving the input ingredients, sideband analyses, such as studies of MeV gamma-rays in cases where the dominant signal is expected in the GeV band, can be powerful in informing data-driven models of the backgrounds. In particular, better modeling the MeV-band diffuse emission in the inner Galaxy could test scenarios for excess emission both at higher energies (the “GeV excess”) and lower energies (excess 511 keV emission).

In modeling the diffuse emission, it will likely be necessary to go beyond simplifying assumptions of cylindrical symmetry and conduct anisotropic, three-dimensional modeling of the diffuse emission. Promising initial work [92, 93] remains impeded by computational challenges, and modeling and computational strides are urgently required to reduce the systematic Galactic diffuse emission uncertainties.

### The dark matter density distribution

All indirect probes of DM interactions depend on some model of the density for DM in the target region. There are substantial theoretical and observational uncertainties in these density profiles, even in the case where DM is assumed to be collisionless; these uncertainties are amplified if the DM has substantial interactions with DM or other particles.

Ref. [8] discusses a number of efforts underway on the theory/analysis side to improve reconstruction of DM density profiles from stellar data, minimizing unwarranted simplifying assumptions. Correctly modeling baryonic physics and the associated uncertainties is also a major ongoing challenge for cutting-edge hydrodynamical simulations.

On the observational side, searches for new dwarf galaxies with the Vera Rubin Observatory have the potential to identify promising new targets for indirect detection, and Gaia stellar data can be used to constrain the DM distribution of the Milky Way (albeit with large uncertainties especially toward the Galactic Center) [7, 94].

### Other complementary measurements and analyses

Measurements of the intergalactic photon background at a range of energies can be sensitive to DM interactions, but the dominant flux is astrophysical; measurements that constrain the properties of other extragalactic contributions to this background light allow for improved DM searches. Similarly, a better understanding of the sources of diffuse neutrino flux could strengthen neutrino constraints on very heavy DM, and a better understanding of the composition of ultra-high-energy cosmic rays could shed light on their origin and any possible new physics contributions. Particles produced in collisions of cosmic rays with the atmosphere also provide a search channel for a range of DM models. At lower energies, neutrinos serve as a background for *direct* detection; paleodetectors, which are discussed in Sec. 4.3.1, could potentially probe the neutrino flux as a function of time.

Pulsars generate both cosmic rays and gamma rays and can have energy distributions that resemble those expected from annihilation/decay processes, thus providing challenging backgrounds for a range of DM indirect searches. Searches for pulsars at radio and X-ray wavelengths have a long history, and upcoming telescopes will improve the sensitivity of such searches significantly, in particular offering the possibility of detection of a population of pulsars in the Galactic bulge that would be a background for Galactic Center searches [95, 96]. Recent studies of TeV halos around nearby pulsars suggest that TeV gamma-ray observations may also be able to meaningfully constrain pulsar populations [97, 98]. In the future, 3rd generation ground-based gravitational wave telescopes have the potential to detect pulsar populations in the Galactic bulge via their contribution to the Galactic stochastic gravitational wave background [99]. More

realistic simulation-based studies of population synthesis and dynamical evolution (including stellar binary interactions, pulsar kicks, and mixed formation scenarios) would be helpful to reduce the theory uncertainties on the expected spatial morphology and luminosity function of any population of millisecond pulsars in the inner Galaxy.

Black holes could serve as DM candidates themselves, or as celestial laboratories for DM searches. These possibilities are discussed in dedicated Snowmass White Papers [35, 100], so we will only mention them briefly here. Gravitational wave searches can probe the population of black hole mergers and thus constrain the primordial black hole abundance, in particular by exploiting information on the spin, eccentricities, and mass spectrum (see Ref. [8] and references therein). Measurements of the stochastic gravitational wave background could also constrain a high-redshift contribution from primordial black holes, or their formation mechanism [101–103]. For primordial black hole searches, astrophysical black holes act as a background, and thus studies of the formation, evolution and signatures of astrophysical black holes may have implications for DM searches. Primordial black hole DM could also lead to implosion of neutron stars [104], and thus improved observations of the neutron star population could provide relevant constraints.

### General theory and analysis needs

Applying this rich ensemble of multiwavelength and multimessenger observations to elicit information about DM physics will require dedicated efforts with regard to theory, modeling, and computation.

To quote from [8], “*The ongoing development of open-source tools and the definition of standards that facilitate the sharing of data will be crucial to fully exploit the synergies between different wavelengths and astrophysical messengers*”. There are already some packages and frameworks of this type, such as Gammapy and the Multi-Mission Maximum Likelihood (3ML) framework [105], which could serve as a basis for future work in this direction.

The characterization of spatial structure at different scales, including the detection of point sources and separation of point sources from diffuse emission, is a generic problem in a number of indirect searches. A number of analysis techniques have been developed to handle the regime where one cannot characterize individual sources but must instead study the population as a whole. Such strategies include study of the angular power spectrum [106–110], probabilistic cataloguing [111, 112], pixel count statistics with non-Poissonian template fitting [113–117] and the Compound Poisson Generator framework [118], use of trained neural networks and likelihood-free inference [119–122], wavelet decomposition of images to identify structures at different scales [123–126], and cross-correlations between related datasets, *e.g.* [127–133]. Cross-correlation in particular may benefit from simultaneous progress in expanding several related datasets; for example, the Vera C. Rubin Observatory will increase sky coverage of existing lensing maps by some factor  $\sim 10$  or more, improving the prospects for correlations between gamma-ray signals and lensing maps [8]. Many of these methods are at a relatively early stage and will benefit from further development.

For ultraheavy DM, a detailed understanding of propagation effects can become important even for photons, as sufficiently high-energy photons can pair produce on the intergalactic radiation field. Furthermore, for DM masses far above the weak scale, standard event generators (such as `Pythia` [134–136]) become insufficient to model the production of stable particles from decays of the initial unstable decay/annihilation products. Some theoretical work has already been done on this front [137], but further work will be required to ensure the availability of accurate and precise predictions for how heavy DM should appear in our telescopes.

### 3.3.3 Paths to resolving current puzzling excesses

*This section draws heavily on the conclusions of WP6 [7].*

Many tantalizing excesses have been reported across DM indirect detection experiments. These excesses may or may not hold clues to DM physics, but – in that they are currently unresolved – they signal areas where our understanding of background and/or signal uncertainties requires improvement in order to either confirm or exclude a DM interpretation. Here we discuss how the advances discussed above would provide a path toward resolving the origin of these excesses.

### **Galactic Center excess in GeV-scale gamma rays**

A GeV-scale excess at the heart of our Galaxy has been detected in gamma rays by the Fermi Large Area Telescope (Fermi-LAT), with high statistical significance. Leading explanations are either weak-scale annihilating DM, or a new population of gamma-ray emitting pulsars. The key barrier to understanding the nature of the excess is obtaining an accurate model for the Galactic diffuse gamma-ray foreground – this component makes up the bulk of the gamma rays in the region, but is not well understood. The measurements and theory advances discussed above to improve our understanding of cosmic-ray propagation, Galactic diffuse gamma rays, and multiwavelength/multimessenger pulsar searches provide a path toward resolving the origins of this excess. In the event that the excess does signal new DM physics, improving sensitivity for searches for counterpart signals will also be essential in confirming the detection.

### **Excess in GeV-scale antiprotons**

An excess of GeV cosmic-ray antiprotons in the Alpha Magnetic Spectrometer (AMS-02) observations has been identified. Interpreted as a signal of DM annihilation, this excess requires similar mass, cross section and annihilation channels to those required to explain the Galactic Center excess. To establish the robustness of this excess, the underlying correlations of the AMS-02 systematic errors are needed. The observation of antideuteron or antihelium nuclei would be an unambiguous signal of new physics. Antiproton and antinuclei DM searches will benefit from future production cross section measurements from inelastic hadronic collisions at low center-of-mass energies, and from further reduction of the astrophysical cosmic-ray propagation modeling uncertainties.

### **Excess in TeV-scale positrons**

Observations of a rising positron fraction at high energies (tens-hundreds of GeV) have sparked considerable interest over the past fifteen years due to their potential DM explanations. However, high-energy gamma-ray observations over the last few years have produced significant evidence that astrophysical  $e^+e^-$  acceleration by a population of high-energy pulsars is the most likely explanation for the excess positron flux observed at Earth. In closing this mystery, these TeV halos have added new questions, as their morphology indicates that the simple picture of isotropic and homogeneous particle diffusion throughout the Milky Way is violated on moderate scales. Understanding this new phenomenon may play an important role in DM indirect detection searches over the next decade, using both positrons as well as cosmic-ray and gamma-ray probes.

### **Excess in 511 keV gamma rays**

The 511 keV line from the decay of non-relativistic positronium coming from the Galactic center has been observed for over 40 years. In particular, the spectrometer on the International Gamma-Ray Astrophysics Laboratory (INTEGRAL/SPI) has measured a nearly spherical morphology for the signal. Various non-conventional DM scenarios have been proposed to explain the excess, which can be complementarily tested in accelerators and astrophysical observations. More detailed understanding of the morphology of the signal is crucial in identifying the origin of the excess.

### **Excess in 3.5 keV X-rays**

The 3.5 keV line is an anomaly detected in the X-ray band that has been interpreted as a possible hint of decaying DM. First observed in the datasets of High Throughput X-ray Spectroscopy Mission X-ray Multi-Mirror Mission (XMM-Newton) and Chandra in 2014, the anomaly exhibited several properties expected of DM, although possible astrophysical explanations such as charge exchange or a potassium emission line were also discussed. Challenges to the simplest DM interpretations have arisen from non-observations, particularly from the halo of the Milky Way. Future instruments in the X-ray band should have sufficiently improved sensitivity to the signal to largely resolve the debate; in particular, upcoming instruments with excellent energy resolution may be able to resolve the line width expected under the DM hypothesis.

Experiment	Final state	Threshold/sensitivity	Field of view	Location
Current experiments				
Fermi	Photons	10 MeV – $10^3$ GeV	Wide	Space
HESS	Photons	30 GeV - 100 TeV	Targeted	Namibia
VERITAS	Photons	85 GeV - > 30 TeV	Targeted	USA
MAGIC	Photons	30 GeV - 100 TeV	Targeted	Spain
HAWC	Photons	300 GeV - >100 TeV	Wide	Mexico
LHAASO (partial)	Photons	10 TeV - 10 PeV	Wide	China
KASCADE	Photons	100 TeV - 10 PeV	Wide	Germany
KASCADE-Grande	Photons	10 - 100 PeV	Wide	Italy
Pierre Auger Observatory	Photons	1 EeV - 1 ZeV	Wide	Argentina
Telescope Array	Photons	1 - 100 EeV	Wide	USA
IceCube	Neutrinos	100 TeV - 100 EeV	Wide	Antarctica
ANITA	Neutrinos	EeV - ZeV	Wide	Antarctica
Pierre Auger Observatory	Photons & Neutrinos	1 EeV - 1 ZeV	Wide	Argentina
Future experiments				
CTA	Photons	20 GeV - 300 TeV	Targeted	Chile & Spain
SWG0	Photons	100 GeV - 1 PeV	Wide	South America
IceCube-Gen2	Neutrinos	10 TeV - 100 EeV	Wide	Antarctica
LHAASO (full)	Photons	100 GeV - 10 PeV	Wide	China
KM3NeT	Neutrinos	100 GeV - 10 PeV	Wide	Mediterranean Sea
AugerPrime	Photons & Neutrinos	1 EeV - 1 ZeV	Wide	Argentina
POEMMA	Neutrinos	20 PeV - 100 EeV	Wide	Space

Table 2: A non-exhaustive list of current and future indirect detection experiments sensitive to ultraheavy DM. See Refs. [140–148]. Based on table from Ref. [9].

### 3.4 Experiments, Facilities, and New Technologies

Figures 1 and 2 outline current and proposed missions probing DM indirect signals with cosmic rays and gamma rays, while Table 2 provides a summary of photon and neutrino experiments sensitive to ultra-heavy DM. Details of the proposed cosmic-ray and gamma-ray probes and their relevance for indirect detection can be found in [6]; we provide a brief outline of some key goals of these instruments and how they relate to the needed measurements discussed above. The full multimessenger observational program, and its relevance for probes of fundamental physics including but not limited to DM, is discussed in the CF7 white papers [138, 139].

#### 3.4.1 Improving sensitivity to dark matter signals in high-energy gamma rays: the thermal relic benchmark and beyond

At high energies, the space-based Fermi-LAT and ground-based atmospheric and water Cherenkov telescopes have set stringent limits on DM annihilation and decay, including probing the ( $s$ -wave) thermal relic cross section across a range of annihilation channels for DM masses as high as tens to hundreds of GeV. Current imaging atmospheric Cherenkov telescopes (IACTs) include VERITAS, HESS, and MAGIC; these instruments operate by measuring Cherenkov light produced in the atmosphere due to showers initiated by astrophysical  $\gamma$ -rays and charged cosmic rays. Water Cherenkov detectors, including HAWC and LHAASO, use water tanks to detect charged particles generated by high-energy  $\gamma$ -ray or cosmic-ray interactions in the atmosphere. These approaches are complementary: the water Cherenkov detectors have much wider fields of view, allowing for all-sky searches, transient searches, and stringent constraints on extended and nearby sources, while IACTs achieve higher instantaneous sensitivity by virtue of lower energy thresholds, improved angular resolution, and better identification of the primary particle type. At energies below  $\sim 100$  GeV, these approaches lose effective area and space-based probes are required; the current flagship instrument for indirect DM searches in the 1 – 100 GeV range is the Fermi-LAT, which has full-sky coverage and operates

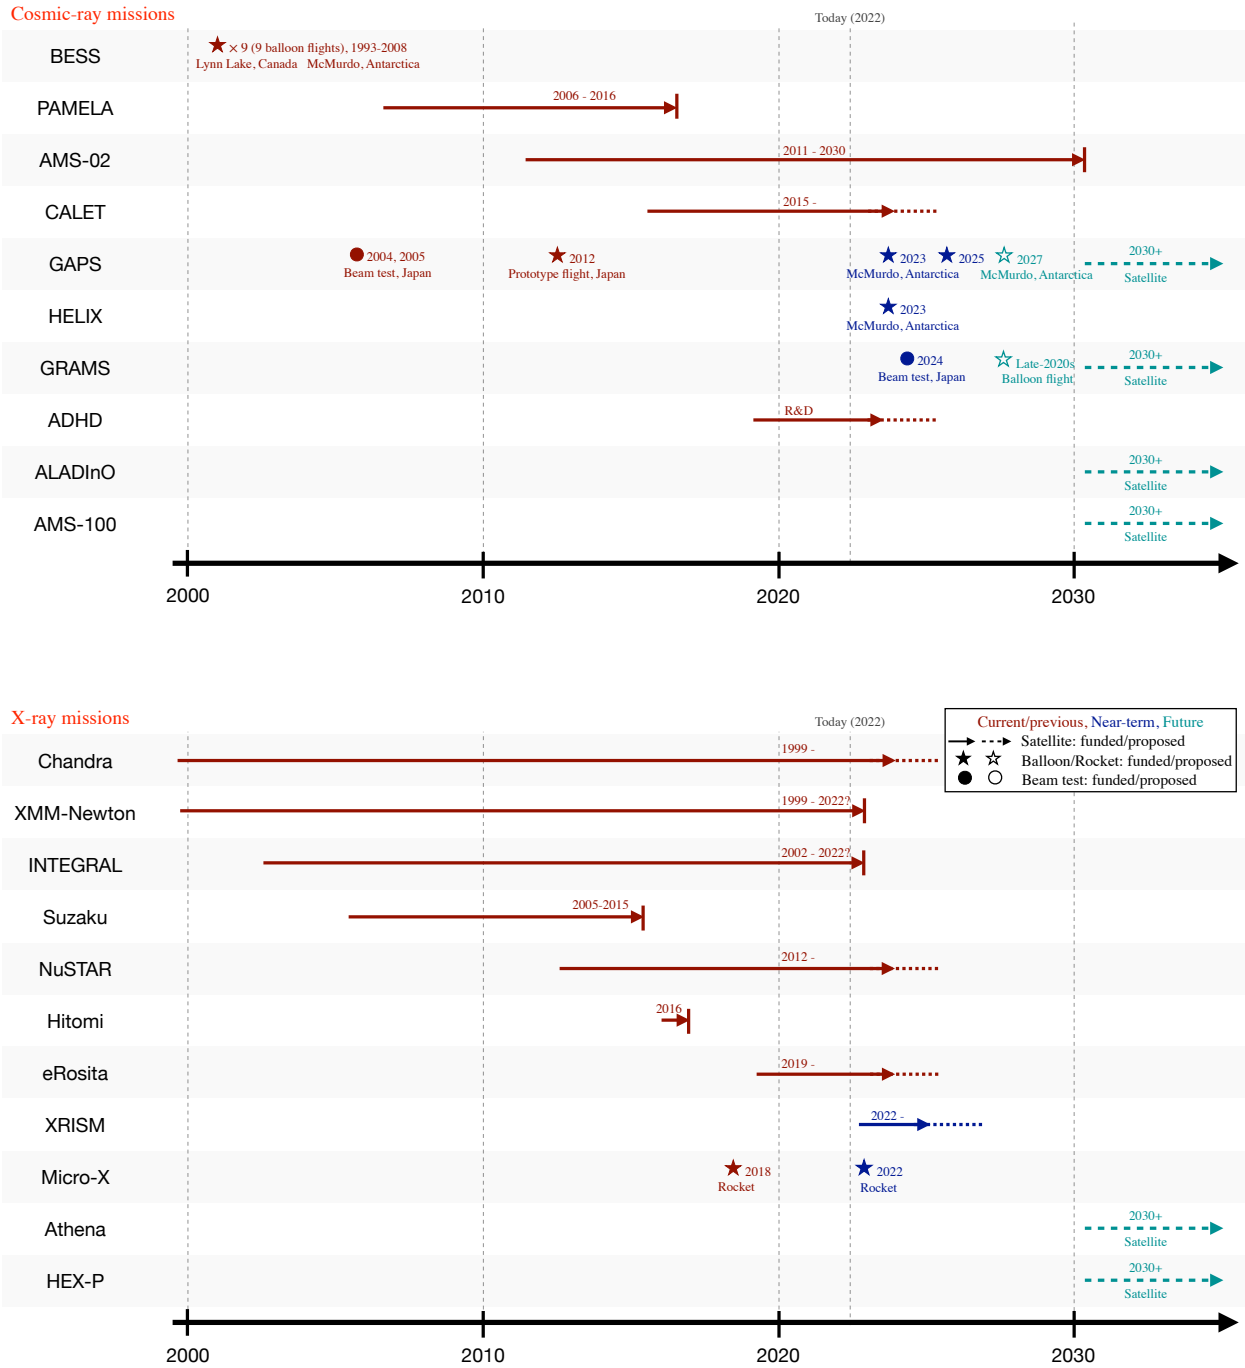


Figure 1: Overview of current, upcoming and proposed missions for cosmic rays (upper panel) and X-rays (lower panel). Current/previous, near-term, and further future missions are marked in red, dark blue and teal respectively. Solid lines/symbols indicate funded experiments while dashed lines or empty symbols indicated proposed experiments. Lines indicate satellite or ground-based missions, stars indicate individual balloon flights, and circles indicate beam tests. Reproduced from Ref. [6].

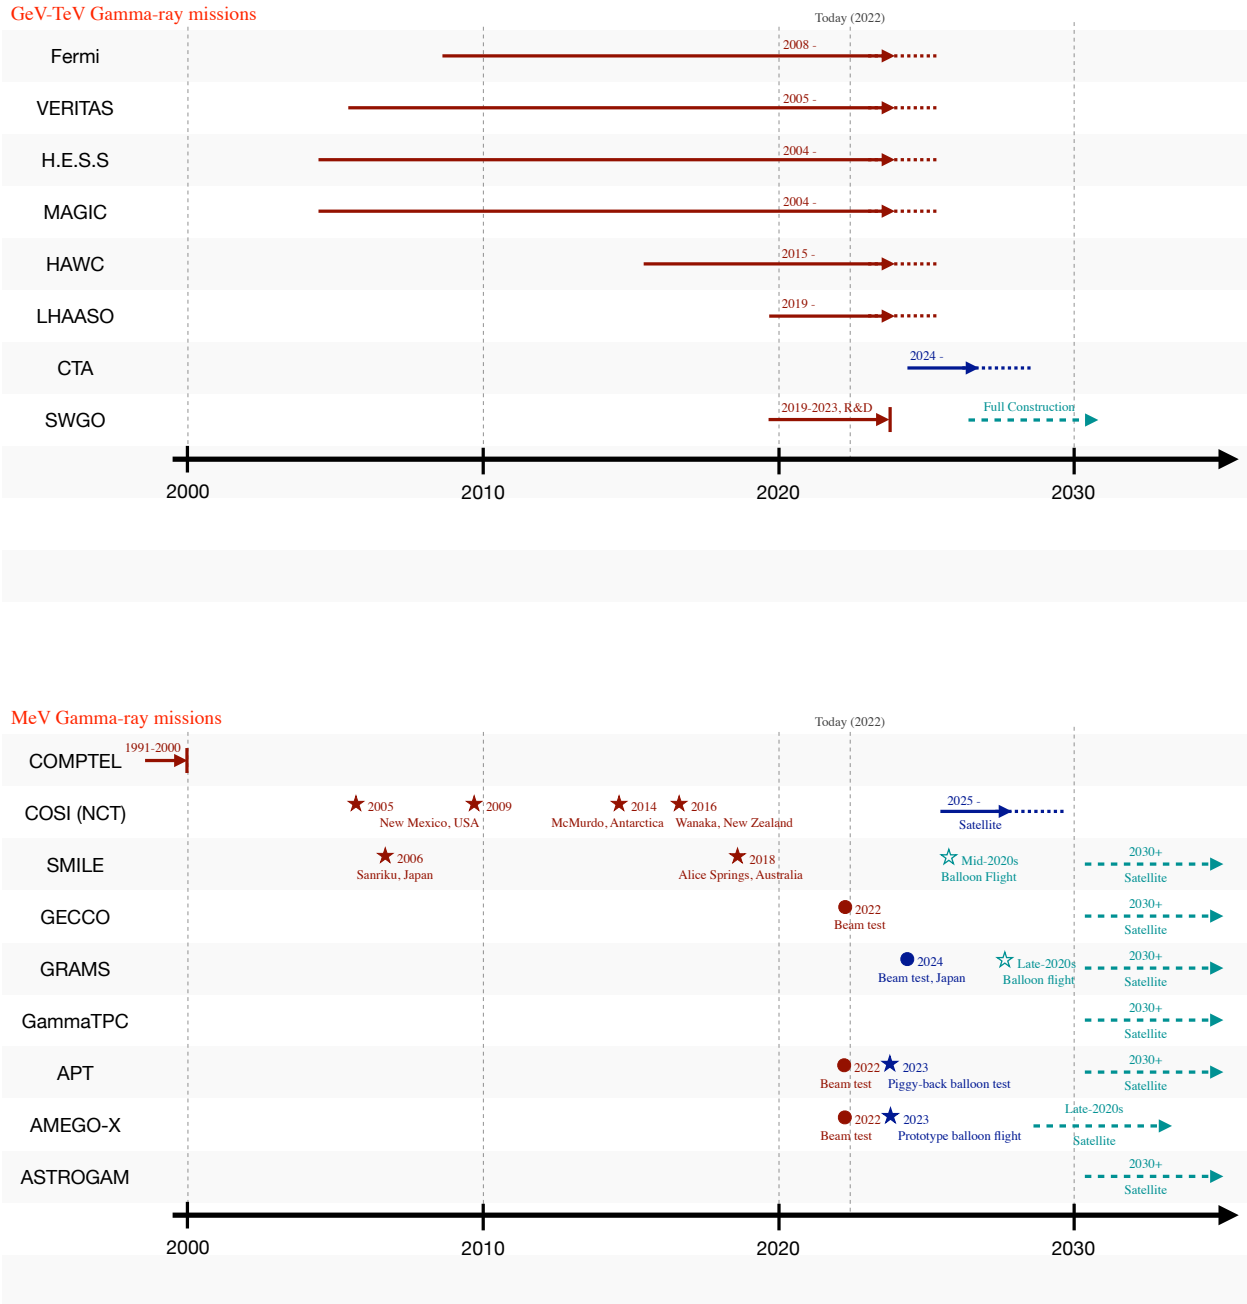


Figure 2: Overview of current, upcoming and proposed missions for gamma-rays in the GeV-TeV+ band (upper panel) and MeV band (lower panel). Current/previous, near-term, and further future missions are marked in red, dark blue and teal respectively. Solid lines/symbols indicate funded experiments while dashed lines or empty symbols indicated proposed experiments. Lines indicate satellite or ground-based missions, stars indicate individual balloon flights, and circles indicate beam tests. Reproduced from Ref. [6]

via pair conversion of incident gamma rays in tracker layers.

At 100 GeV and higher energies, the key upcoming and proposed experiments are CTA and the Southern Wide-Field Gamma-Ray Observatory (SWG0), which will use IACT and water Cherenkov technology respectively.

With installations in both the Northern and Southern Hemispheres (Spain and Chile), CTA aims to improve sensitivity by a factor between five and twenty (depending on the energy) compared to current generation IACTs, for gamma-ray energies between 20 GeV and 300 TeV. CTA expects to probe the thermal annihilation cross section for DM masses in the range  $\sim 0.2\text{--}20$  TeV, complementing existing constraints from Fermi-LAT at lower energies; extensive studies of CTA’s potential for DM searches have been performed by the CTA Consortium [149, 150]. In addition to testing the thermal relic benchmark (and setting broader constraints on annihilation and decay) via gamma-ray observations, CTA can constrain the cosmic ray electron-positron spectrum up to hundreds of TeV [149, 151], and can conduct complementary observations of TeV halos around nearby pulsar wind nebulae. As discussed above, a better understanding of pulsars at all energy scales would be valuable for resolving current excesses and for background modeling in general.

The reach of these searches with CTA may benefit from further developments in telescope technology; for example, an international consortium of CTA members, led by the U.S., has developed and prototyped a novel medium-sized telescope design for CTA, called the Schwarzschild-Couder Telescope (SCT) [152–154], to both augment the telescope count and improve the angular resolution of the instrument, allowing for improved background rejection. Currently funding has been identified and committed to building an “Alpha Configuration” of CTA during 2022–2027; while exceeding the capabilities of any of the existing IACT arrays, this configuration would have (for funding reasons) fewer telescopes than initially envisioned for CTA. However, adding  $\sim 10$  SCTs to this configuration in the south would enhance CTA’s capabilities for DM searches in the Galactic Center region to at least the level originally anticipated (and employed in the studies mentioned above).

SWG0 is planned to be located in the Southern Hemisphere, and to have sensitivity exceeding that of HAWC by a factor of  $\sim 10$ . The Southern Hemisphere location is advantageous for observations of the Galactic Center and the central dense region of the Milky Way’s DM halo; both HAWC and LHAASO are Northern Hemisphere installations. The ability to observe the Galactic Center will enable SWG0 to search for DM signals 2–3 orders of magnitude fainter than HAWC. With its large field of view, SWG0 can conduct a wide range of DM searches. In particular, the Rubin Observatory [155] will survey the Southern Hemisphere sky with unprecedented sensitivity and is expected to find hundreds of new dwarf spheroidals [156]; all-sky data from SWG0 will allow immediate follow-up of newly-discovered dwarf galaxies. SWG0 observations of the Galactic halo and the Galactic center have been forecast to probe the thermal relic cross section for masses up to tens of TeV for most possible final states [157].

SWG0 will also expand sensitivity to ultra-heavy decaying DM; at present, for the example annihilation channel of DM annihilating to  $b$  quarks (which should be broadly similar to other channels involving hadronization) Fermi-LAT and HAWC can probe lifetimes as long as  $\mathcal{O}(10^{27\text{--}28})$  s for masses up to  $\mathcal{O}(10^6\text{--}10^7)$  GeV; SWG0 will probe lifetimes in the  $10^{28\text{--}30}$  s range for DM masses as high as  $10^8$  GeV [9]. As indicated in Table 2, LHAASO and planned neutrino experiments (IceCube-Gen2, KM3NeT, POEMMA) will also provide sensitivity to ultraheavy DM in the coming years.

At somewhat lower energies, the Advanced Particle–astrophysics Telescope (APT) [158] is a concept for a future space-based successor instrument to the Fermi-LAT, with a nearly all-sky field-of-view and the sensitivity to probe thermal relic dark matter up to the TeV scale. The ADAPT (Antarctic Demonstrator for APT) suborbital mission was recently funded by NASA and is planned for a 2025 Antarctic flight. APT would aim to improve on the sensitivity of Fermi-LAT by a factor of  $\sim 10$  in the 100 MeV–TeV energy range while also performing dramatically better in the 10–100 MeV band where the Fermi-LAT loses sensitivity.

Fig. 3 shows the sensitivity of current, near-future, and far-future searches for DM annihilation to representative channels  $b\bar{b}$  ( $W^+W^-$ ) for DM masses below (above) 100 GeV, assuming an Einasto profile for the Galactic halo [159]. The near-future band takes into account the enhanced sensitivity of the Fermi-LAT in the event of the discovery of additional dwarfs with LSST [160], as well as forecasts from CTA [150] and SWG0 [157], and has the capacity to probe thermal relic DM up to the  $\mathcal{O}(100)$  TeV DM mass range where unitarity begins to exclude thermal freezeout as the mechanism fixing the DM relic density in a standard cosmology (the details of the exact unitarity-based mass bound are dependent on *e.g.* the role played by bound states, whether the DM is self-conjugate, and whether it is composite [46]). The far-future band



assumes successful operation of APT improving on the Fermi-LAT sensitivity by a factor of 10, as well as a SWGO successor experiment with  $\text{km}^2$  area, and would offer sensitivity to the thermal target even in the event of a flattened density profile for the Galactic halo.

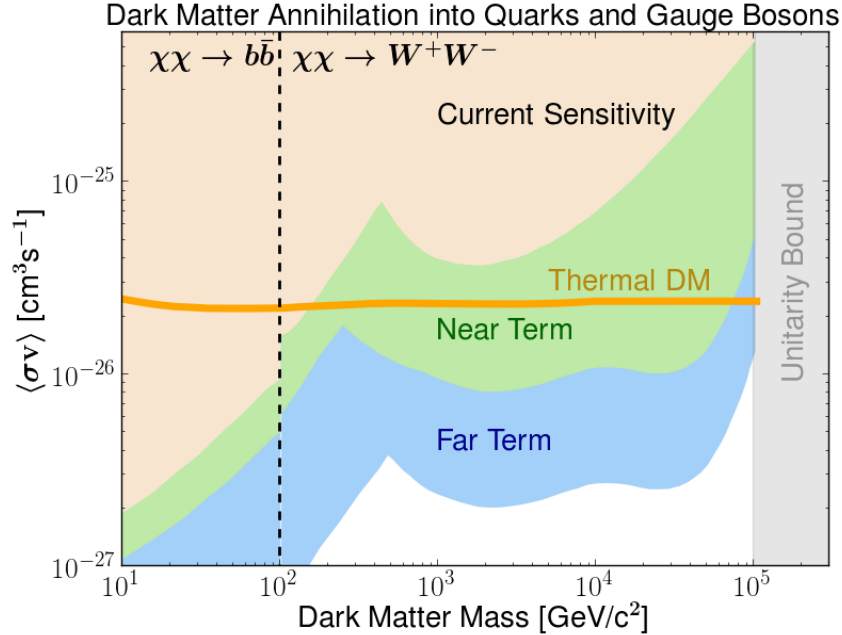


Figure 3: Current and expected sensitivity to  $s$ -wave DM annihilation to quarks and gauge bosons, achieved by space-based and ground-based high-energy gamma-ray experiments, for both current (beige) and future (green, blue) searches. Cross section values are extracted from Refs. [150, 157, 160–162], as well as far-future sensitivities as described above.

### 3.4.2 Improving sensitivity to dark matter signals in the MeV band: closing the MeV gap

The last major experiment in the MeV-100 MeV gamma-ray band was NASA’s Imaging Compton Telescope (COMPTEL), which operated from 1991-2000. COMPTEL relied on measuring energy deposition from gamma rays Compton scattering in the detector, and measured a range of Galactic and extragalactic sources of gamma-ray emission. X-ray and soft gamma-ray telescopes have since probed the sub-MeV energy range with greater sensitivity, and the Fermi-LAT performs well at energies of 100 MeV and higher, leaving a “sensitivity gap” in this energy range. As discussed in Sec. 3.3.2, closing this gap is important for enabling data-driven studies of backgrounds at both lower and higher energies, as well as providing greater sensitivity to light DM in the MeV-GeV mass range.

In the near term, the Compton Spectrometer and Imager (COSI) has a planned launch date in 2025, and will survey the gamma-ray sky at energies of 0.2-5 MeV [163] with a large field of view and excellent energy resolution. COSI will significantly improve current constraints on decaying or annihilating light DM; for annihilation directly to monochromatic photons in the Galactic Center, its (five sigma discovery) reach in annihilation cross section can be estimated as  $3.5 \times 10^{-35} \text{ cm}^3/\text{s}$ ,  $1.4 \times 10^{-34} \text{ cm}^3/\text{s}$ , and  $1.3 \times 10^{-33} \text{ cm}^3/\text{s}$ , for DM masses 0.3 MeV, 1 MeV, and 3 MeV, respectively [6].

Proposed future experiments in this energy range include the Sub-MeV  $\gamma$ -ray Imaging Loaded-on balloon Experiment (SMILE) [164–167], Galactic Explorer with a Coded Aperture Mask Compton Telescope (GECCO) [168], Gamma-ray and AntiMatter Survey (GRAMS) [169], Gamma Time Projection Chamber (GammaTPC), APT (as discussed above), All-sky Medium Energy Gamma-ray Observatory eXplorer (AMEGO-X) [170], and enhanced ASTROGAM (e-ASTROGAM) [171]. These proposed instruments explore a range of new technologies for gamma-ray detection; details may be found in Ref. [6], but as one example,

SMILE, GRAMS and GammaTPC rely on gaseous or liquid time projection chambers (TPCs), with synergy with significant developments in recent years on liquid noble TPCs for DM and neutrino physics. GECCO is based on a novel CdZnTe imaging calorimeter with a deployable coded aperture mask. AMEGO-X would employ a silicon pixel tracker, CsI calorimeter, and plastic anticoincidence detector to track both Compton interactions and  $e^\pm$  pair production; e-ASTROGAM would similarly rely on a silicon tracker combined with a calorimeter, resulting in a sensitivity one to two orders of magnitude better than that of COMPTEL.

All these mission concepts would improve on existing experiments via a combination of energy resolution, angular resolution, and effective area. For example, the GECCO experiment expects to achieve sub-percent energy resolution and arcminute angular resolution under some circumstances, compared to a  $1 - 2^\circ$  angular resolution and 9% energy resolution for COMPTEL [172]. Most of these instruments are focused on energies around 0.1-10 MeV, but the APT would retain adequate energy reconstruction up to TeV energies as discussed above, and AMEGO-X will probe energies from 25 keV–1 GeV.

As a result of these improvements, these missions would significantly improve on current sensitivity from indirect searches to annihilation and decay of DM in this mass range, especially for photon-rich final states (including production of neutral pions, as well as annihilation/decay to  $\gamma + X$ ) [6, 173]. There are existing stringent limits from the cosmic microwave background (CMB) for  $s$ -wave annihilation [174], but present-day indirect-detection experiments offer unique sensitivity to  $p$ -wave annihilation that is strongly suppressed due to low DM velocities during the CMB epoch, as well as decaying DM (e.g. [6, 175]). Models of light thermal DM with  $p$ -wave annihilation are frequently favored benchmarks for terrestrial experiments, and future indirect-detection experiments in the MeV band could potentially reach thermal relics annihilating dominantly through  $p$ -wave processes [173].

### 3.4.3 Improving sensitivity to dark matter signals in X-rays

Observations performed with the current generation of X-ray instruments provide the leading direct experimental constraints on sterile neutrino decay over the complete keV-mass range, where sterile neutrinos could constitute DM [176], and leading limits on axion-like particles for masses  $< 10^{-11}$  eV. These experiments include Chandra [177], XMM-Newton [178], INTEGRAL [179], Suzaku [180], and the Nuclear Spectroscopic Telescope Array (NuSTAR) [181, 182]. The sterile neutrino bounds are highly complementary with limits on warm dark matter from cosmic probes [183], as discussed in Ref. [6].

Upcoming experiments offer the promise of improved sensitivity and energy resolution; the latter factor is especially important for identifying monochromatic line signals and distinguishing them from possible backgrounds, and should allow an observational resolution of the claimed 3.5 keV line excess. In particular, energy resolution at the  $10^{-3}$  level should permit a measurement of the Doppler broadening associated with the velocity of DM particles in our Galaxy.

In the near term, the Extended ROentgen Survey with an Imaging Telescope Array (eROSITA) [184], which launched in 2019, will provide enhanced sensitivity to weak X-ray lines and spectral distortions due to ultralight axions interconverting with photons. In the next few years, X-ray Imaging and Spectroscopy Mission (XRISM) [185, 186] and Micro-X [187] will target fine energy resolutions of 7 eV and 3 eV respectively, in the 0.5-10 keV energy range.

In the longer term, the next-generation X-ray observatory Athena [188], selected by the European Space Agency, is scheduled to launch in the early 2030s and will carry two X-ray instruments, one optimized for a large field of view and the other for excellent energy resolution (2.5 eV). The latter instrument will have an effective area exceeding that of XRISM by at least an order of magnitude at 1 keV. HEX-P [189] is a proposed next-generation X-ray observatory that would also target a launch date in the early 2030s, and would complement Athena’s low-energy reach at high energies (2–200 keV). With 40 times the sensitivity of any previous mission in the 10–80 keV band, and  $>100$  times the sensitivity of any previous mission in the 80–200 keV band, HEX-P would have unprecedented sensitivity to secondary photon signals from  $\sim 1$ –100s MeV particle dark matter decaying or annihilating into  $e^+e^-$ ,  $\mu^+\mu^-$ , or pions.

### 3.4.4 Improving sensitivity to dark matter signals in cosmic rays

There is a long history of DM searches in charged cosmic rays, by experiments including the Balloon-borne Experiment with Superconducting Spectrometer (BESS), Payload for Antimatter Matter Exploration and Light-nuclei Astrophysics (PAMELA), AMS-02, Calorimetric Electron Telescope (CALET), and Dark

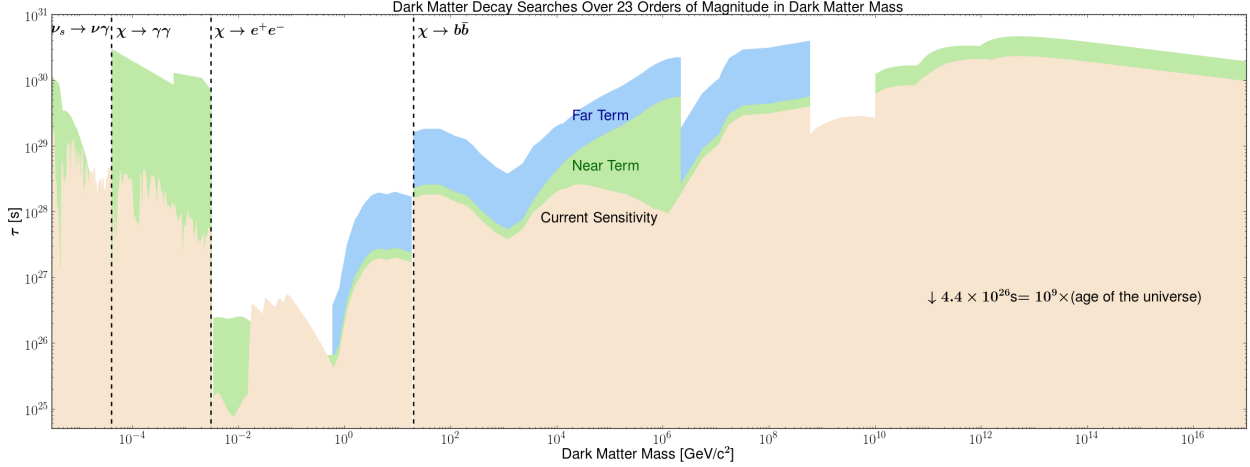


Figure 4: Current and expected sensitivity to DM decay, achieved by cosmic-ray and gamma-ray experiments, for both current (beige) and future (green, blue) searches. Over 23 orders of magnitude in DM mass can be searched, from sterile neutrino decays at keV energies to DM decaying to gamma rays (40 keV–MeV), electrons and positrons (MeV–10 GeV), and bottom quarks ( $>10$  GeV). Lifetime values are based on results in Refs. [71, 72, 157, 158, 163, 170, 194–207]. Note that the sharp edges of the curves at most masses are due limited mass ranges of published dark matter results, rather than being from instrumental thresholds.

Matter Particle Explorer (DAMPE). Measurements of matter and antimatter cosmic ray spectra by these instruments have constrained cosmic-ray propagation in our Galaxy, set strong limits on DM annihilation and decay, and in some cases revealed surprising features (some of which are discussed in Sec. 3.3.3).

In the near-term future, the High Energy Light Isotope Experiment (HELIX) [190] instrument is preparing for its first flight as a high-altitude balloon payload. The primary goal of HELIX is to measure the ratio of Beryllium-10 to Beryllium-9 ratio in the energy range of about 1–10 GeV/ $n$ , which will provide a measurement of the diffusion time of cosmic rays in our Galaxy and hence provide important constraints on cosmic-ray propagation.

Longer term, there are proposals for two next-generation magnetic spectrometers with significantly increased acceptance when compared to AMS-02: the Antimatter Large Acceptance Detector In Orbit (ALADInO) [191, 192] and A Magnetic Spectrometer (AMS-100) [193]. These detectors could significantly improve on particle-antiparticle separation and on existing measurements of cosmic rays and gamma rays.

Fig. 4 shows current and forecast limits on the DM decay lifetime from observations of charged cosmic rays and gamma rays. These measurements allow us to probe DM lifetimes  $\sim 9$  orders of magnitude longer than the age of the universe over an enormous range of DM masses, from the keV scale to the Planck scale, demonstrating both the wide reach and unique capabilities of indirect detection experiments. The enhanced sensitivity of future experiments to decays will in general also be reflected in enhanced sensitivity to annihilation.

### 3.4.5 Low-energy antinuclei as a background-free discovery channel

As yet, there has been no confirmed detection of low-energy antideuterons or antihelium (although there are some tentative possible antihelium events observed by AMS-02), and the expected background for these channels is essentially zero. A detection of such low-energy antinuclei would be transformative.

The General Antiparticle Spectrometer (GAPS) experiment [208] is the first dedicated experiment to search for low-energy ( $< 0.25$  GeV/ $n$ ) cosmic-ray antinuclei; it is currently preparing for its first Antarctic long-duration balloon flight. The initial program consists of three flights and the GAPS collaboration is planning a future upgraded payload to increase sensitivity by a factor of 5. GAPS will provide the first precision antiproton spectrum measurement at energies below 0.25 GeV/ $n$ , and provide sensitivity to antideuterons that is about two orders of magnitude better than the current BESS limits, while also having competitive sensitivity to antihelium.

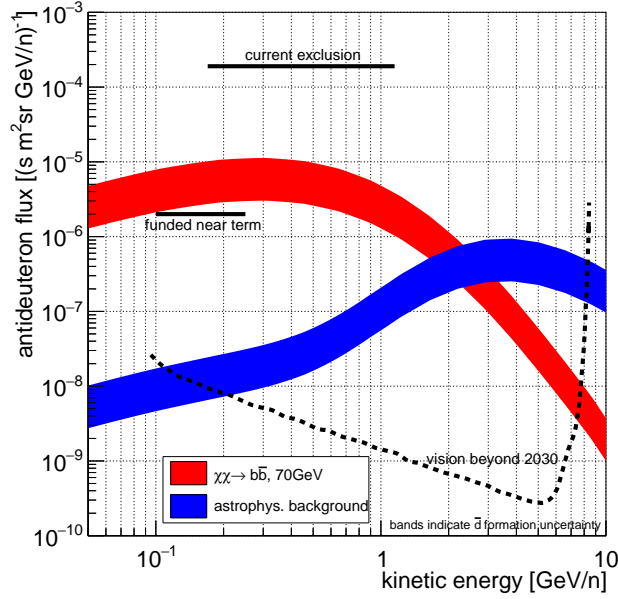


Figure 5: Antideuteron flux from a generic dark matter particle with a mass of 70 GeV annihilating into  $b\bar{b}$  compared to the astrophysical background flux prediction, which is orders of magnitude smaller. See Ref. [6] for more details.

The GRAMS experiment, in addition to targeting MeV-band gamma rays as discussed above, would provide a next-generation antideuteron search using liquid argon TPC technology. GRAMS would have sensitivity to DM models that could explain the Fermi Galactic Center excess and the AMS-02 antiproton excess [169], as discussed in Sec. 3.3.3.

A significant motivation for ALADInO and AMS-100 is to measure the antideuteron spectrum at energies below  $\sim 10$  GeV, and to probe antihelium in light of the possible antihelium events observed by AMS-02. New detection techniques may also enable new opportunities for future antideuteron searches. The proposed AntiDeuteron Helium Detector (ADHD) could provide a novel particle identification approach exploiting the delayed annihilation of antinuclei in helium, which might be used standalone or as a subdetector with traditional techniques.

Fig. 5 shows the flux sensitivity of current and upcoming experiments to antideuterons. Searches for anti-nuclei, including antideuterons, have been identified as a vital new signature of DM annihilation or decay, essentially free of astrophysical background [209]. A first-time detection of low-energy cosmic antideuterons would be an unambiguous signal of new physics, complementing collider, direct, and indirect DM searches [210, 211].

## 4 Direct Detection

### 4.1 Introduction

Direct probes of DM are those that search for signatures of local galactic DM particle interactions in terrestrial targets. These signatures are relatively model independent, relying on low momentum transfers and largely agnostic to the details of the interaction. Traditionally, the signature of choice in this type of detector has been nuclear recoils – an elastic collision between the DM particle and a target nucleus. However, in recent years direct detection searches have expanded to include signatures of inelastic scattering and interactions with electrons. The typical DM signal is a recoil rate that exceeds the detector-internal background. An annual rate and energy modulation or a daily directional modulation can provide further confirmation. Because of their agnosticism, many direct detection techniques are capable of searching simultaneously for multiple potential signatures of DM scattering (*e.g.* DM-nucleon and DM-electron scattering, or thermal

DM vs. asymmetric DM) and over a wide range of masses.

The technique of direct detection can probe well motivated DM particle candidates in the meV - 100 TeV mass scale range. Discovering a new particle using the technique of direct detection in an underground experiment would constitute evidence that such a particle constitutes all or at least part of the DM. In addition, in many theoretical models direct detection provides the *only* near-term opportunity for its detection. Examples of these scenarios include models in which DM particle couples feebly to ordinary matter through a light or massless mediator, and models where interactions between sub-keV bosonic DM and the SM are already strongly constrained to avoid an anomalously large stellar cooling rate [3].

Importantly, direct detection experiments are adaptable, and can respond readily to signals or hints or the lack thereof to mitigate systematic backgrounds or redirect to new parameter space. Furthermore, direct detection experiments can be, and often are, adjusted, upgraded, fixed, or moved to confirm or disprove any observation of DM that may arise.

## 4.2 Science targets for direct detection

We will continue to use the categorization of DM candidates as defined in Sec. 2: “light” (sub-GeV), “heavy” or “electroweak scale” (GeV–100 TeV), and “ultra-heavy” ( $\gg 100$  TeV). The most well-studied DM candidates are in the “heavy” category; this class of models, which includes WIMPs, gives rise to highly-predictive scattering cross-sections and thus lead to clear benchmark targets for direct detection experiments. Examples of these models span a wide range from SUSY models such as the Next-to-Minimal Supersymmetric Models (NMSSM) [212, 213] and the Phenomenological Minimal Supersymmetric Models (pMSSM) [214], to extensions of the SM which add *e.g.* multiple scalar doublets [215, 216], electroweak Majorana triplets [217], right-handed neutrinos (RHN) [218], or pseudo-Goldstone bosons [219]. Despite the tremendous progress in direct detection experiments, there are still motivated regions of parameter space left unexplored for many of these models [2]. The spin-structure of the DM-nucleon interactions lead to a splitting of the scattering cross-section into Spin-Independent (SI) and Spin-Dependent (SD) scattering. Even for the most predictive models, the relevant DM parameter space is determined by the cosmology during the epoch in which the DM relic abundance was produced. Lack of exact knowledge of the cosmological history of DM compels us to cast a wide net in our DM searches, motivating a diverse experimental program spanning multiple scales and techniques.

There is an ensemble of theoretically-motivated “ultra-heavy” DM (UHDM) candidates, which lead to striking signatures in direct detection experiments due to their mass scales. Non-thermal UHDM candidates, known as WIMPzillas, are a generic phenomenon of inflationary cosmology [18, 19], whereas  $Q$ -balls (*e.g.* [20]) provide a candidate that explains both baryogenesis and DM, with a potential connection to inflation. Nuggets of quarks formed in first-order phase transitions result in strangelets that are viable DM candidates [21]. These DM candidates are best probed through their interactions with nucleons, using large detectors. Current and proposed detection techniques range from repurposing current large-volume liquid noble detectors to specialized impedance-matched mechanical sensors [9].

“Light” DM candidates which were in thermal equilibrium with the SM in the early universe inevitably lead to the notion of a hidden sector in which the DM interaction with the visible sector is mediated through a “portal” [25, 27]. Some of the most predictive of these models involve number-changing self-interactions of the DM, examples of which are the “Elastically Decoupling Relic” (ELDER) [220, 221], the “Strongly-Interacting Massive Particle” (SIMP) [222, 223], and DM from exponential growth [224]. One can also relax the requirement of thermal equilibrium in the early universe, and instead, populate the relic abundance through “freeze-in” [225]. Models of freeze-in require extraordinarily small couplings between the DM and the visible sector. Despite this, the presence of an ultralight mediator ( $m_{\text{med}} \ll \text{keV}$ ) leads to a large enhancement of the direct-detection cross section at low momentum transfers. Importantly, such a model cannot be tested by accelerator-based probes; direct detection and cosmological probes provide the only possibility to test the freeze-in benchmark model. Probes for sub-GeV DM are sensitive to the DM coupling to both electrons and nucleons, which provide an important handle for model discrimination.

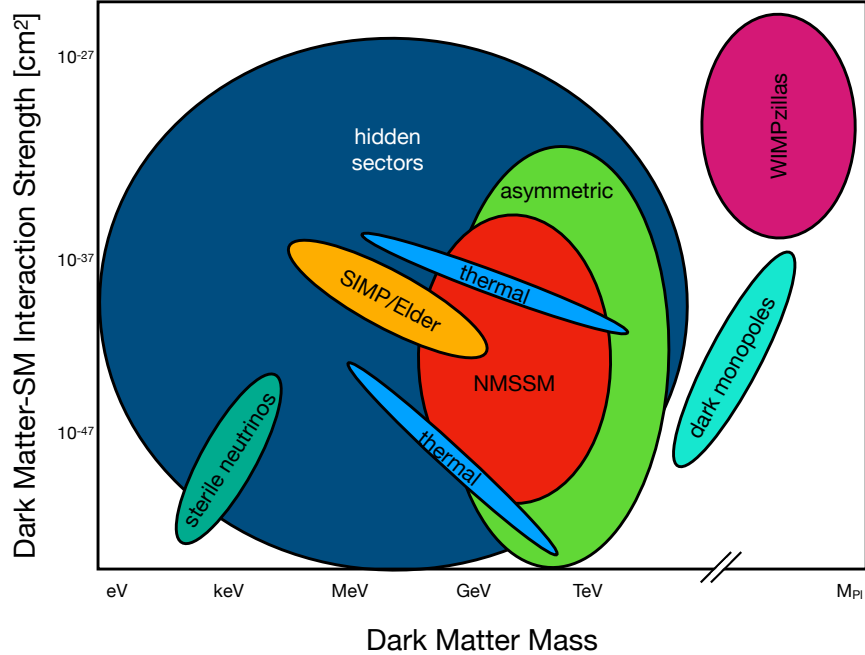


Figure 6: Cartoon figure of the model space for direct detection. Included are candidates of thermal dark matter, supersymmetry, asymmetric dark matter [16], SIMP/Elder [220–223], dark monopoles [226], WIMPzillas [18], and hidden sector dark matter [25]. Note that the interaction cross-section can be for either scattering with nucleons or electrons, depending on the specific model.

### 4.3 The path toward DM discovery with direct detection

Many candidates in the “heavy” range will not be tested by the suite of current generation experiments that are under construction or operating. The next suite of experiments should have an order of magnitude larger exposure and be able to significantly enhance our capabilities to probe much of this high-priority parameter space. This future suite should probe models with spin-dependent interactions and others beyond the usual coherent DM-nucleus interactions. In addition, we cannot afford to eliminate support for successful DM search programs with unique sensitivity. Similarly, many candidates in the “light” range will not be tested with the current suite of “small scale projects”. Continued investment to scale up in mass and/or reduce and understand low-energy backgrounds in programs to search for particle DM is thus crucial.

The benchmark for future generation experiments is to search for heavy DM candidates in the parameter space that reaches to the neutrino “fog”, the expected background from the coherent elastic neutrino-nucleus scattering ( $\text{CE}\nu\text{NS}$ ) of solar and atmospheric neutrinos, or that advances sensitivity by an order of magnitude beyond the reach of current generation experiments in spaces where the fog remains many orders of magnitude distant, such as spin-dependent interactions. For light mass DM candidates the goal over the next decade is to probe DM scattering down to 1 MeV and DM absorption down to 1 eV.

#### 4.3.1 Enabling Discovery with Complementary Probes

The three categories of particle DM, as well as models within each category, give rise to distinct DM-SM interactions and experimental signatures in direct detection setups. Discovering particle DM requires a multi-faceted approach involving detectors that can measure different aspects of DM-SM interactions, as well as provide information about the DM distribution in our galactic halo.

Heavy DM candidates, such as WIMPs, are traditionally probed via their interactions with **nucleons** in the target material. Spin-independent interactions benefit from targets with high atomic mass due to the coherent  $A^2$  enhancement of the scattering rate. On the other hand, spin-dependent interactions require

a net spin of the nucleus, and hence an unpaired nucleon. At the same time, lighter DM candidates are most effectively probed by targets with lower  $A$ , where higher energy recoils are kinematically allowed and compensate for the lower DM kinetic energy. The current status and future prospects for spin-independent and spin-dependent interactions are illustrated in Figs. 7 and 8, respectively.

In comparison, the direct detection of light DM was first probed through interactions with **electrons** through DM-electron scattering as a result of the kinematic matching of the DM and electron mass (bosonic candidates were also detected through absorption) [3]. These interactions can be detected via ionization, scintillation, or phonon signatures depending on the experimental set-up. In addition, light DM can also be probed via DM-nucleon scattering through either a bremsstrahlung process [227] or what is known as the “Migdal effect” [228]; both of these rely on detecting secondary photons or electrons that are a consequence of the primary DM-nucleon interaction. One of the benchmark models for light DM candidates is a dark photon mediated sub-GeV DM candidate. In this scenario, the DM will interact with **both** electrons and charged nucleons. In contrast, a leptophilic mediator will lead solely to DM-electron interactions while a leptophobic mediator will only have DM-nucleon interactions. Thus, it is imperative to calculate both DM-electron and DM-nucleon scattering rates, comparisons of which will provide further handles on the underlying DM model governing the interactions. For DM candidates below the MeV mass scale, DM interactions with collective modes in the material such as **phonons** are key to discovery due to the low energy-thresholds. The landscape of sub-GeV DM direct detection, including current constraints and future projections, is illustrated in Fig. 9. Notably, for sufficiently large nuclear scattering cross sections even (very) light DM particles can be robustly probed by conventional direct detection experiments [229], because cosmic rays inevitably up-scatter a sub-population of such particles to relativistic energies (thus allowing for sufficiently high recoil energies).

UHDM faces a unique challenge in that the flux of DM is quite low,  $\Phi \simeq 0.85 \text{ events}/(\text{m}^2\text{yr}) \times (M_{\text{P1}}/m_\chi)$ . However, the signatures of UHDM are striking. The kinematics of UHDM are relatively unaffected by the scattering with nuclei in the target material and the UHDM effectively travels undeflected through the detector. As a result, the UHDM may scatter on multiple nuclei as it crosses the detector, leaving behind a track that traces the DM velocity vector [230]. UHDM can also be probed via indirect detection through neutrino observatories. Fig. 10 displays the complementarity of UHDM direct detection probes.

For all classes of models, the scattering rate, and therefore sensitivity of the detector, scales with the detector exposure, (fiducial target mass)  $\times$  (exposure time). One way to increase the exposure is by increasing the fiducial mass of the target. However, another option is to increase the exposure time, *e.g.* proposed searches using paleodetectors [231–233] have exposure times of order 100 Myr. Interestingly, the multiple scatter signatures of UHDM imply that the *area* of the detector is the most relevant factor rather than the *volume* of the detector [9].

As DM detectors increase in sensitivity, they begin to probe the “neutrino fog” (described in Sec. 4.3.2) and strategies to distinguish between neutrino and DM signatures become necessary. Some mitigation strategies include the use of annual modulation of the DM rate [234] and directional detectors (see *e.g.* review found in [235]). Even more tantalizing, directional detectors have the potential to map out the DM substructure in our galaxy.

### 4.3.2 Navigating the Neutrino Fog

*This section draws heavily from WP1, Section 2 [2]*

As direct DM searches accumulate ever larger exposures in pursuit of testing smaller interaction cross sections, the expected background from the coherent elastic neutrino-nucleus scattering (CE $\nu$ NS) of solar and atmospheric neutrinos increases. For DM masses  $\gtrsim 1 \text{ GeV}/c^2$ , the relevant neutrino fluxes are those from  $^8\text{B}$  solar neutrinos, atmospheric neutrinos, and the diffuse supernova neutrino background (DSNB). The CE $\nu$ NS event rate from each of these is subject to a systematic uncertainty which manifests from the uncertainty on the flux of each neutrino species. In addition, the nuclear recoil energy spectra of these events closely resembles that of the sought after DM signal.

The effect of these backgrounds – particularly because of their associated systematic uncertainties and spectral shapes – will be to reduce the DM sensitivity achievable as the experimental exposure grows. This fact led to the creation of the colloquially known “neutrino floor”: a boundary in the cross section versus DM matter mass plane below which a DM discovery becomes extremely challenging without further constraints on

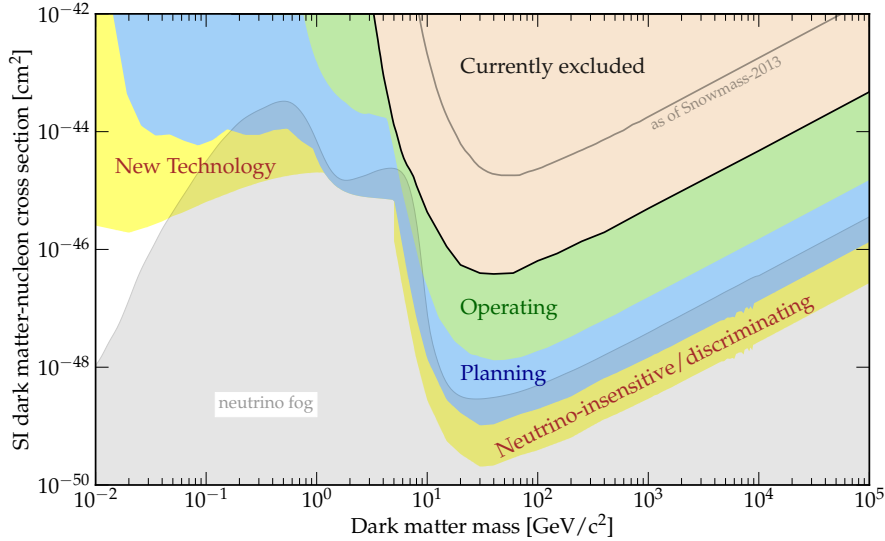


Figure 7: Combined Spin-independent dark-matter nucleon scattering cross section space. Currently 90% c.l. constraints are shown in shaded beige [240–255] (data points taken from [239]) while the reach of currently operating experiments are shown in green (LZ, XENONnT, PandaX-4T, SuperCDMS SNOLAB, SBC). The limits from 2013 are shown as a gray line [256]. Future experiments are shown in blue (SuperCDMS, DarkSide-LowMass, SBC, 1000 ton-year liquid xenon, ARGO) and yellow (Snowball and Planned  $\times 5$ ). The neutrino fog for a xenon target is presented in gray as described in Sec. 4.3.2. Plot reproduced from Ref. [2].

the neutrino backgrounds. The precise location of this boundary has evolved over the last decade [236–239], and more recent studies [238, 239] have emphasized a crucial point: that astrophysical neutrino backgrounds do not impose a hard limit on physics reach; rather, the effect is more gradual than a single boundary depicts. To reinforce this concept within the community, we now adopt the term **neutrino fog** to describe the region of DM cross sections where neutrino backgrounds begin to inhibit the progress of direct detection searches.

The neutrino fog is quantified by the index  $n$ , defined as the gradient of a hypothetical experiment’s median cross section for  $3\sigma$  discovery with respect to the exposure:

$$n = - \left( \frac{d \log \sigma}{d \log MT} \right)^{-1} \quad (1)$$

This index quantifies the diminishing return-on-investment in increasing exposure when limited by neutrinos. Specifically, if an experiment has achieved some cross-section sensitivity, further reducing the sensitivity by a factor of  $x$  requires increasing the exposure by at least  $x^n$ . *e.g.*, at  $n = 2$ , reducing the cross section reach by a further factor of 10 requires increasing the exposure by a factor of at least 100.

In Figure 7, the neutrino fog is shown for the index  $n = 2$ , which marks the transition from statistically- to systematically-limited. A critical feature of the neutrino fog is that it will move to lower cross section if uncertainties in the neutrino fluxes are reduced, opening up new space for continuing searches. Therefore, all future detectors entering into the neutrino fog would benefit from improved atmospheric neutrino background modeling, which currently dominates the uncertainty on the experimental sensitivity.

### 4.3.3 Tools to resolve signals from backgrounds

*This section draws heavily on WP3 [4].*

The next generation of direct detection DM experiments will require more precise modeling of signal and background rates. This goes hand-in-hand with calibration measurements of detector responses to nuclear



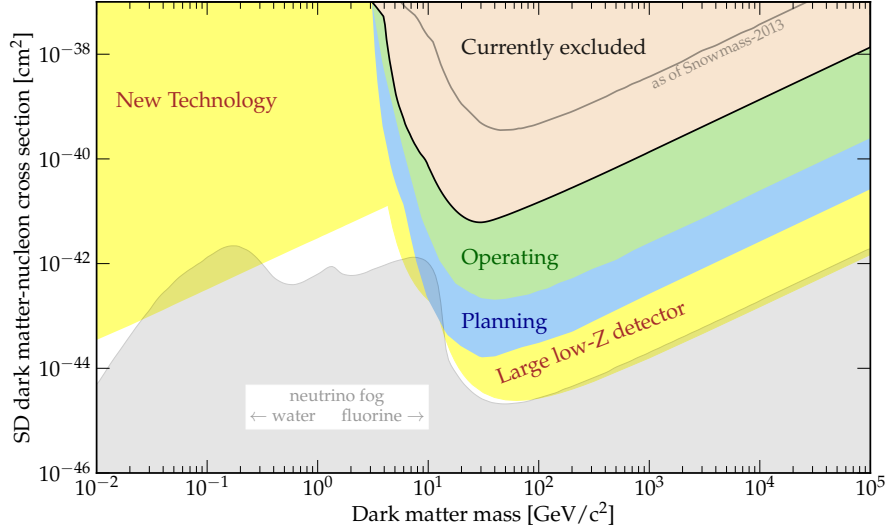


Figure 8: Combined Spin-dependent dark-matter nucleon scattering cross section space for scattering with neutrons or protons. Currently 90% c.l. constraints are shown in shaded beige [243, 257–267] (data points taken from [239]) while the reach of currently operating experiments are shown in green (LZ, XENONnT). The limits from 2013 are shown as a gray line [256]. Future experiments are shown in blue (PICO-500, 1000 ton year Xenon) and yellow (Snowball, PICO-100 ton). The neutrino fog for a water or fluorine target is presented in gray, as described in Sec. 4.3.2. Plot reproduced from Ref. [2].

and electronic recoils for a wider range of targets and at lower energy scales, including inelastic and atomic effects and coherent excitations.

- Optical and atomic material-property measurements are needed, including atomic de-excitation cascades, electronic energy levels, and energy-loss functions, both for modeling detector response and for simulating transport of low-energy particles. Similarly, improved models and simulations of detectable-quanta production and propagation are needed.
- Calibration measurements are needed of detector responses to electronic and nuclear recoils, for a wider range of targets and at lower energies (eV–keV scale and in the “UV-gap” of solid-state detectors), including measurements of inelastic and atomic effects (*e.g.* the Migdal effect) and coherent excitations, both using established techniques and with new ones
- Measurements to decrease neutrino uncertainties are needed, including nuclear-reaction and direct-neutrino measurements that improve simulation-driven flux model.
- Nuclear reaction measurements— $(\alpha, n)$ ,  $(n, \gamma)$ ,  $(n, n)$ ,  $(\nu, x)$ , etc.—are needed to improve particle transport codes, background simulations, and material activation calculations, and to validate and improve models/evaluations used in these codes; exclusive cross-section measurements are particularly needed to model correlated ejectiles, and codes should provide a full treatment of uncertainties.
- Increased collaboration with the nuclear, atomic, condensed matter, and cosmic-ray physics communities is recommended to improve detector response and background models.
- In situ measurements of backgrounds are valuable for validating and improving models in various codes, especially for neutrons and muons and material activation measurements, both on surface and underground. Likewise, uncertainties on model predictions for these backgrounds need to be quantified by model codes, informed by this validation.

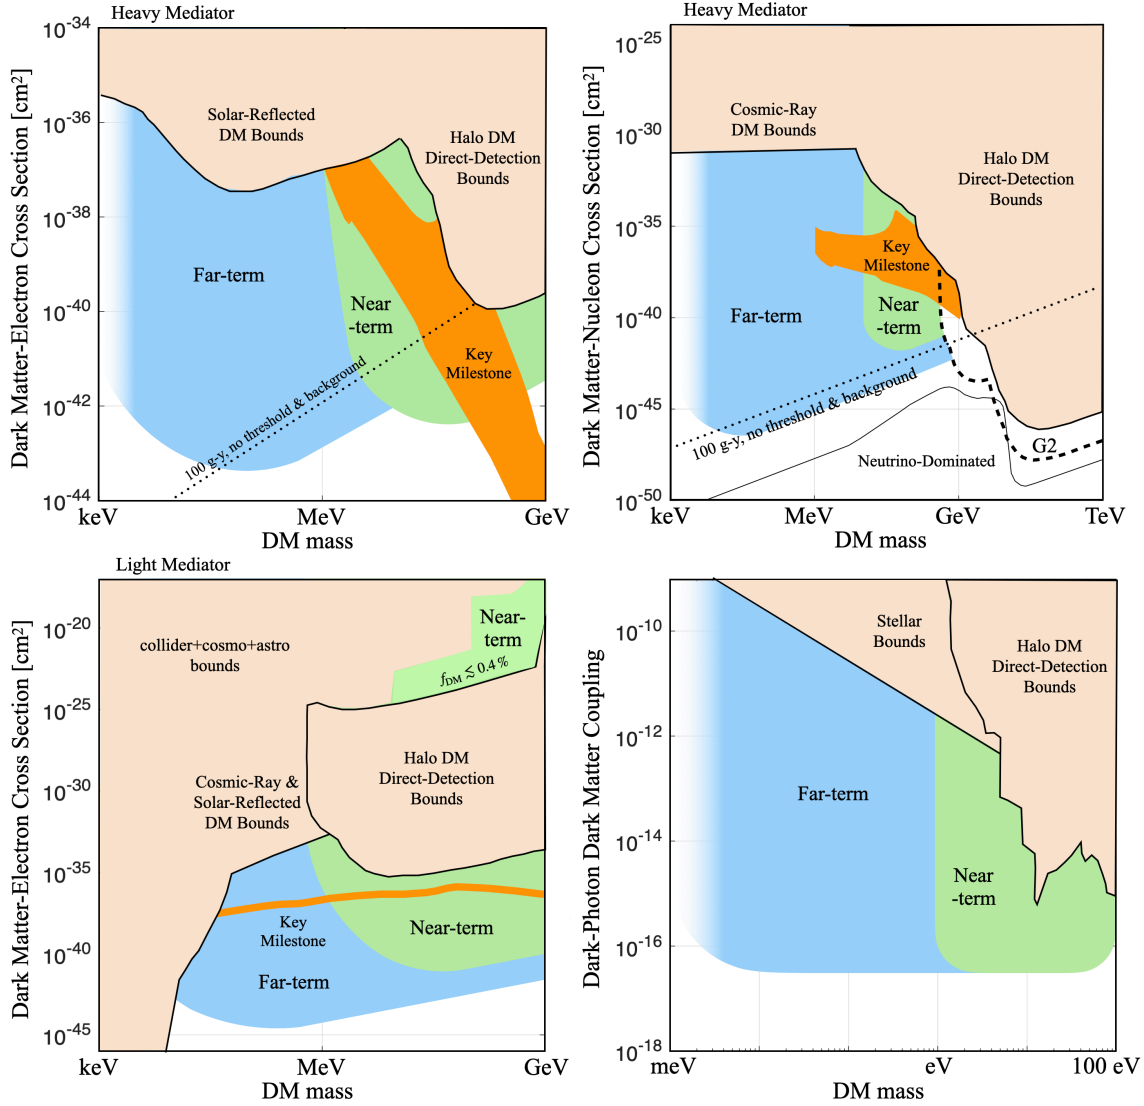


Figure 9: Figures are from Ref. [3] and updated from BRN report [33]. Current 90% c.l. constraints are shown in beige. Approximate regions in parameter space that can be explored in the next  $\sim 5$  years (“near-term”, green) and on longer timescales (“far-term”, blue). Orange regions labelled “Key Milestone” represent concrete dark-matter benchmark models and are the same as in the BRN report [33]. Along the dotted line DM would produce about three events in an exposure of 100 gram-year, assuming scattering off electrons in a hypothetical target material with zero threshold.

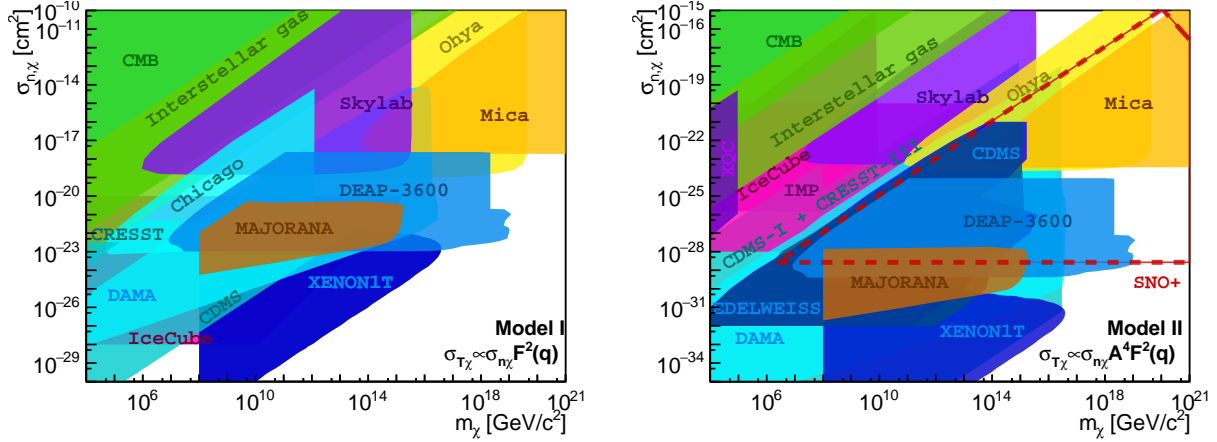


Figure 10: Current and projected experimental regions of ultraheavy parameter space excluded by cosmological/astrophysical constraints (green), direct detection DM detectors (blue), neutrino experiments (red/orange), space-based experiments (purple), and terrestrial track-based observations (yellow). Both models considered here assume different relations for the cross section scaling from a single nucleon to a nucleus with mass number  $A$ . In the left plot, we assume no scaling with  $A$ ; in the right plot, we assume the cross section scales like  $A^4$  (e.g., with two powers coming from nuclear coherence, and two from kinematic factors). Limits are shown from DEAP-3600 [268], DAMA [269, 270], interstellar gas clouds [271, 272], a recast of CRESST and CDMS-I [273], a recast of CDMS and EDELWEISS [274, 275], a detector in U. Chicago [276], a XENON1T single-scatter analysis [277], tracks in the Skylab and Ohya plastic etch detectors [270], in ancient mica [278], the MAJORANA demonstrator [277], IceCube with 22 strings [279], XQC [280], CMB measurements [281, 282], and IMP [283]. Also shown is the future reach of the liquid scintillator detector SNO+ as estimated in [230, 284]. Reproduced from Ref. [9].

- Improved material cleaning and screening procedures are needed for dust, radon progeny, cosmogenically activated radioisotopes, and other bulk radioisotopes. New procedures are needed to avoid such contamination, and improved ex situ models of residual background levels are needed.
- Additional R&D is needed to model, measure, and mitigate near-threshold backgrounds, such as from secondary emission processes.
- Same-location, multi-method radioassay facilities are needed to simplify measurements of decay chains and reduce systematic errors, alongside greater precision across techniques and increased assay throughput/sensitivity. Also, development of software infrastructure to track large-scale assay programs across the community is needed.
- Measurements of the ionization topology of nuclear recoils can be performed with recoil imaging directional detectors [285]. This will provide improved validation of nuclear recoil simulation tools such as SRIM, and first experimental confirmation of the neutral Migdal effect [235, 286].
- Finally, investment in underground infrastructure and detector technology (e.g. vetoes) will be needed to mitigate backgrounds such as from radon, dust, cosmogenic activation, and neutrons.

#### 4.3.4 Simulations and Computing to enable particle dark matter detection

This section draws heavily on WP4 [5].

Simulations are an essential component of modern physics experiments to translate between abstract physics models and a real implementation of a detector. They are vital at every stage of the detector life-cycle, starting with the initial design phase, all the way to final data analysis. In some cases, the associated costs to support computing and code development may represent a large fraction of the experiment’s budget. Therefore, it is essential to have an efficient, well-maintained, well-understood and thoroughly validated

simulation infrastructure. A full-chain simulation infrastructure includes both event generators and detector simulation frameworks. Therefore, the direct detection DM community has a clear need for the following:

- Increased support for development of simulations (*e.g.* FLUKA, Geant4, MCNP, NEST, G4CMP), both for software codes and models. This includes support and training within the community, and increased opportunities for cross-collaboration communication in order to reduce duplication and maximize return on investment.

Current DM experiments are approaching data volumes of order 1 PB/year [287]. This is not an unusual scale for HEP, however it presents a significant challenge in the direct detection community, which until recently has not prioritized the development of a scalable computing infrastructure in support of its scientific ambition. Moreover, a fragmentation of funding sources and a climate of competition between experiments, have hindered the opportunities for cooperation and tool sharing in the computing and software domain, leading to unnecessary duplication of efforts across the field. Key strategic goals to ensure success for the experiments of the next decade include:

- Lower the barrier of entry to national supercomputing facilities, by providing common tools and shared engineering. Solicit community input on architecture evolution, while providing access to specialized resources, such as GPU and TPU clusters.
- Support scalable software infrastructure tools across HEP, avoiding duplication of effort. These tools run the gamut of data management and archiving, event processing, reconstruction and analysis, software management, validation and distribution.
- Enhance industry collaborations on machine learning techniques and provide access to external experts. Foster community-wide efforts to understand uncertainties and physical interpretation of machine learning results.

#### 4.3.5 Resolving excesses and making a discovery

*This section draws heavily on WP6 [7].*

As with indirect detection, excesses have also been reported and disputed within the direct detection community. A strength of direct detection is that experiments can be replicated or altered in response to such excesses. While not a trivial exercise, replication is an option of last resort to fully confirm or rule out any potential signal for dark matter. We take some recent examples as case studies. The DArk MATter/Large sodium Iodide Bulk for RAre processes (DAMA/LIBRA) collaboration operates 250 kg ultra-low background NaI scintillators as dark matter detectors at the Gran Sasso National Laboratory (LNGS), Italy. It has consistently reported an excess of modulating low energy events between 2-6 keV<sub>ee</sub> region as the annual modulation signal of dark matter [288], consistent with expected modulation signal from dark matter particle interactions. The collaboration claims that no systematics or side reaction can mimic the annual modulation signal [289]. The DAMA/LIBRA claimed dark matter signal is controversial because other direct detection experiments with different target materials (Xe, Si, Ge) have failed to observe the signal based on standard WIMP models. To fully resolve this dilemma, independent experiments with the same target material (NaI(Tl)) as DAMA have been carried out or are proposed [290–298]. In particular, the COSINE-100 collaboration and the Annual modulation with NaI Scintillators (ANAIS) collaboration have made good progress on probing the DAMA signal with the same target material. ANAIS-112 has refuted the DAMA/LIBRA positive modulation with almost  $3\sigma$  sensitivity in a model independent way with three years of data, and is expected to surpass  $4\sigma$  sensitivity after completing six years of data taking (along with 2023 data), while COSINE-100 has excluded WIMPs as responsible of the DAMA/LIBRA signal in many scenarios. The two experiments have initiated discussions to conduct a combined analysis to search for annual modulation signals, and a new experiment SABRE [299, 300], with installations in both northern and southern hemispheres, is preparing to run in several years.

Another path for resolving the nature of the excess (or any similar future excess) is by examining the directionality of the signal. Unlike the annual rate and energy modulation, the sidereal-daily directional modulation (equivalent to a dipole in galactic coordinates), is expected to be immune against time-dependent backgrounds originating in the laboratory. Observing this directional signal would therefore provide a robust

confirmation that a tentative excess is real and of galactic origin, but improved detector capabilities are required (see Section 4.4.4 [235]).

More recently, a low-energy electronic recoil (ER) excess below 7 keV and most prominent between 2–3 keV was observed in the XENON1T dark matter experiment in 2020 [301]. With a significance of  $\sim 3.5\sigma$ , this excess could have been a statistical fluctuation, a hint of a new background process, or a hint of new physics. In this case, the natural progression of direct detection enabled the successor experiment, XENONnT, to directly test this signal. With just a few months of data, XENONnT was able to rule out this signal, attributing the previous result to an unmodeled background [302]. The LZ experiment will also have complementary sensitivity in the near future.

Several solid state experiments have also seen excesses at low-energies, which has led to the EXCESS series of workshops [303]. These workshops are a community-wide effort which finds competing experiments, using different solid state technologies, collaborating together to characterize and resolve the excesses. These efforts may lead to shared technologies and combined R&D efforts, which are crucial for further progress in DM research.

## 4.4 Experiments and R&D

*This section draws heavily on WP1 and WP2 [2, 3], as well as [238].*

Direct detection experiments can be broadly classified based on the DM mass range they are particularly targeting or based on the technology used in the experiment, although many do cross boundaries in both categories. These experiments tend to follow a consistent life cycle - an early, demonstration phase where sensitivity is proven followed by a scaling phase where the technology is optimized and the target mass is increased to improve sensitivity. New backgrounds are often discovered with each new iteration, as old backgrounds are understood and mitigated.

Until  $\sim 2010$ , most direct detection efforts focused on the “traditional” WIMP mass range of  $\gtrsim 1$  GeV; the current generation experiments, which are the modern successors to those experiments, are well into the scaling phase, featuring mature technologies with large target masses. The goal of these current collaborations is to continue scaling up to even larger targets to push the sensitivity down to the neutrino fog. In the last decade, a compelling case for light DM particles has been made from a theoretical standpoint and new techniques have been developed to match. These experiments that target light mass DM tend to be much smaller in scale with a focus on achieving very low energy thresholds, and they are now proving that they can have excellent sensitivity to previously unexplored regions of DM parameter space. The understanding of new backgrounds that have shown up at the lowest energy thresholds in these detectors is only now beginning for these detectors which are not fully in the scaling phase. Table A provides a tabular overview of the field of direct detection. Ref. [2] provides an excellent summary of the direct detection efforts aimed at DM masses  $\gtrsim 1$  GeV, and Ref. [3] does the same for DM masses  $\lesssim 1$  GeV. We will only briefly re-summarize those reviews here and suggest the reader refer to the full length reports and references therein for more information.

The rough categorization of direct detection techniques presented below is not intended to be exclusive. In addition, many of the techniques discussed span multiple categories. Solving the mystery of dark matter will take all the ingenuity that physicists can bring to bear, and supporting new ideas is a key component of a successful program.

### 4.4.1 Dark Matter Candidates with Mass Greater Than 10 GeV

For experiments seeking to probe down to the neutrino fog, it is helpful to further subdivide the DM mass space into  $< 1$ -10 GeV and greater than 10 GeV. The latter category includes the canonical WIMP, and represents the most explored region of DM phase space by direct detection experiments. In this region, liquid xenon (LXe), liquid argon (LAr), and freon-based bubble chambers are the dominant technologies.

#### Noble Element Detectors

Figure 11 summarizes the impressive achievements of the LXe-time projection chamber (TPC) technology over the last two decades, with the LZ experiment presently holding the most stringent constraints for WIMP masses above  $9 \text{ GeV}/c^2$  (with PandaX-4T above  $0.1 \text{ GeV}/c^2$  if the Migdal effect is assumed) [254, 304, 321,

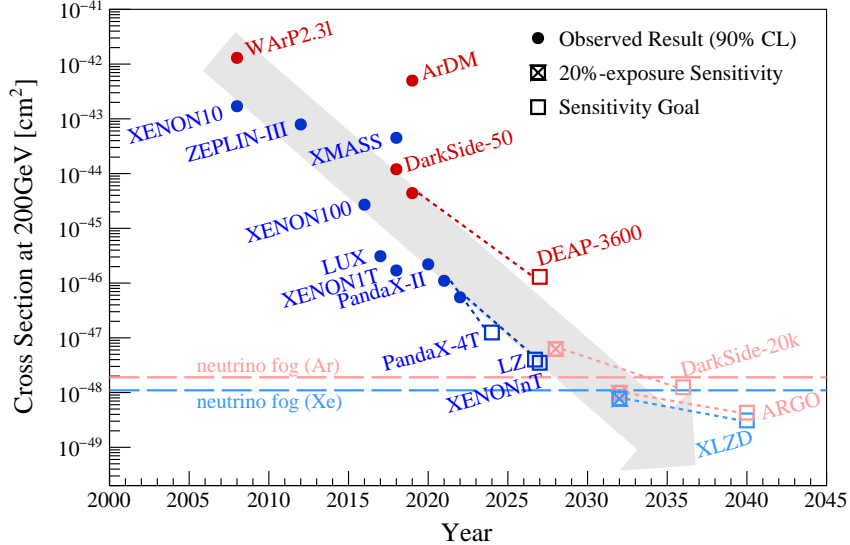


Figure 11: Figure adapted from [304]. Improvement in sensitivity to spin independent WIMP-nucleon coupling for a DM mass of  $200 \text{ GeV}/c^2$  achieved by LXe (blue) and LAr (red) experiments of increasing target masses with sensitivities (squares) and the best achieved limits (filled circles), for both past (dark color) and future (light color). Open squares correspond to the sensitivity at the goal exposure while the crossed squares correspond to the sensitivity at 20% of goal exposure. Cross section values and background rates are extracted from Ref. [213, 246, 254, 305–320].

322]. All three multi-tonne LXe-TPCs – LZ, XENONnT, and PandaX-4T – are now operating with a target sensitivity of about  $1\text{--}2 \times 10^{-48} \text{ cm}^2$  (see Fig. 11).

The DARWIN collaboration [323] has already started in Europe an intense R&D program for a 40–80 tonne Xe target. Given their current leadership roles and expertise, the US teams in both XENONnT and LZ (about 50% of the community) are well-positioned to contribute significantly to this next-generation effort. In 2021, scientists from the LZ and XENON/DARWIN collaborations joined in what is now known as the XLZD consortium [324] towards jointly building and operating this next-generation xenon-based experiment. There would be substantial opportunity cost in delaying the US engagement. The sensitivity for an exposure of 1 ktonne-year delivering a  $3\sigma$  DM particle discovery [304] is illustrated in Fig. 7. The strategy to approach such an exposure will be informed by outcomes from the current projects, complemented by a well-defined set of R&D activities that should take place concurrently. Community support for a next generation xenon-based experiment is very broad. A 600-author white paper outlining the physics reach of such an experiment was recently published [304]. In China, PandaX-4T is expected to continue operations until 2025 and then to be incrementally upgraded into a multi-ten-ton experiment with a nominal fiducial target of 30 ton.

The large detector scale and low background, combined with many advantageous properties of xenon properties as target, enable a rich science portfolio that extends beyond WIMPs, transforming such a detector into a cost-effective, broad, low-background astroparticle physics observatory. Given the significant reach of multi-ten-tonne scale xenon detectors and the relatively inelastic market for procuring xenon in these quantities, R&D is needed to support purpose-built and/or alternative procurement and refining capabilities. Reducing uncertainty regarding the time and cost to acquire xenon addresses a critical risk to advancing this well-proven leading technology.

An unambiguous positive direct detection of DM will require exceptionally strong evidence of a signal. The dual-phase TPC with underground argon (UAr) is a powerful emerging technology that potentially remains free of all backgrounds except for CEvNS at the largest detector scales. More than 400 scientists from over 60 institutions, including scientists from the ArDM, DarkSide-50, DEAP-3600, MiniCLEAN, and XENON collaborations, formed the multinational Global Argon Dark Matter Collaboration (GADMC). The

GADMC, which has significant US involvement, is committed to pursuing the search for DM using an UAr target with the DarkSide-20k (DS-20k) and Argo experiments. DS-20k will build upon the successful elements of DarkSide-50 and DEAP-3600, including the use of UAr, which DarkSide-50 showed to have an  $^{39}\text{Ar}$  concentration at least 1400 times smaller than atmospheric argon [318, 325, 326], and a radiopure acrylic structure, which is a technology pioneered by the DEAP-3600 experiment [327, 328]. The TPC is designed to take advantage of the uniquely powerful properties of liquid argon, including excellent chemical purity [329, 330] and demonstrated electron recoil (ER) background discrimination power of better than  $10^8$  [331]. In addition, DEAP-3600 has demonstrated the lowest radon contamination for any large noble liquid detector to date, at 0.15 uBq/kg [330].

Unique among all DM and  $0\nu\beta\beta$  experiments, the GADMC will produce its own low-radioactivity UAr target ( $^{40}\text{Ar}$ , with  $^{39}\text{Ar}$  and  $^{42}\text{Ar}$  strongly suppressed). The UAr is extracted in the US and further chemically purified in Italy. The GADMC will produce several hundred tonnes of UAr without dependencies on uncertain/unstable international sources. In the same spirit, the GADMC developed its own Si-based photosensors (SiPMs) and constructed a special facility at LNGS, NOA, hosted in a radon-suppressed clean room, for the packaging of SiPMs into large-scale (several tens of  $m^2$ ) planes of radio-pure, cryogenic photodetectors. These developments set the stage for Argo, a planned DM and neutrino observatory, which will reach deeply into the neutrino fog, as shown in Figure 7.

Work is underway to explore the feasibility of a low background kTon-scale liquid argon time projection chamber in the context of the Deep Underground Neutrino Experiment (DUNE). The DUNE program consists of modules, and though the designs for the first two modules have been selected, the third and fourth (the ‘modules of opportunity’) remain to be determined. A recent community effort [332] explored the option of making one of these a dedicated low background module, with possible sensitivity to high mass WIMPs [333]. The primary research and development challenges for this detector design are associated with the large scale, representing a further order of magnitude from the Argo concept.

### Phase change detectors

Bubble chambers present a scalable, background-discriminating technology for DM detection with the unique capability to operate with a broad variety of target materials, requiring only that the target be a fluid with a vapor pressure. The PICO Collaboration uses freon-filled bubble chambers for nuclear recoil detection in targets with high spin-dependent and low spin-independent cross-sections. With field-leading electron recoil rejection ( $O(1)$  in  $10^{10}$  ER events misidentified as nuclear recoils [334]), PICO detectors at SNOLAB have reached exposures of  $\sim 3$  ton-days [335], including a zero-background (observed) ton-day exposure at 3.3-keV threshold [252]. The PICO-500 experiment, funded by the Canada Foundation for Innovation, is projected to reach a spin-dependent WIMP-proton sensitivity at the  $10^{-42}$   $\text{cm}^2$  level, still four-orders-of-magnitude *above* the  $\text{C}_3\text{F}_8$  neutrino fog. A freon bubble chamber large enough to reach atmospheric neutrino sensitivity will require the development of a completely new detector “inner vessel,” i.e. the vessel containing the superheated liquid target, as no facilities exist to construct silica jars larger than those made for PICO-500, and the alpha activity of synthetic silica is too large for next generation chambers anyway. A surface radioactivity of less than 5 nBq/ $\text{cm}^2$  is required to construct a 50-ton detector sensitive to an atmospheric neutrino event within 5 years, a level of radiopurity that has been demonstrated in the large surfaces of Kamland-ZEN [336].

#### 4.4.2 Dark Matter Candidates with Mass 1 - 10 GeV

##### Charge and Phonon Detectors

The Super Cryogenic Dark Matter Search (SuperCDMS) SNOLAB experiment is a current DM experiment, which is commissioning its solid-state detectors 2 km underground in the SNOLAB facility in Sudbury, Canada. The SuperCDMS detectors are optimized to operate in either a High Voltage (HV) mode or an interleaved Z-dependent Ionization and Phonon (iZIP) mode. The combination of these two modes allows searches at very low threshold (HV) or with excellent background rejection (iZIP) [337]. SuperCDMS SNOLAB expects to have sensitivity to NR masses between 0.5-5 GeV to within a decade of the neutrino fog, and to electron scattering of MeV-scale DM and/or absorption of eV-scale dark photons and/or axion-like particles (ALPs). The current generation experiment expects to be background limited by cosmogenically

activated isotopes,  $^3\text{H}$  and  $^{32}\text{Si}$ ,  $^{210}\text{Pb}$ , and dark counts. SuperCDMS has established paths to upgrade the experiment, with provisions for several scenarios, including a positive detection by another current generation experiment. The SuperCDMS collaboration is undertaking a multi-stage program to improve detector performance, as described in [338].

### Phase Change Detectors

A second technology in the 1-10 GeV mass range is the Scintillating Bubble Chamber (SBC), using liquid-noble bubble chambers to extend the nuclear/electron recoil discrimination capability of freon-filled chambers to the sub-keV thresholds needed to reach the spin-independent neutrino fog at 1 GeV. Noble liquids can be superheated to a far greater degree than molecular fluids, showing sensitivity to sub-keV nuclear recoils while remaining completely insensitive to electron-recoil backgrounds [339]. The combination of scalability, low threshold, and background discrimination *at low threshold* gives the noble-liquid bubble chamber unique capability to explore the neutrino fog in the 1–10 GeV WIMP mass range. The Canada Foundation for Innovation has funded the construction of a 10-kg device for SBC’s first DM search [340, 341]. A 100-eV threshold LAr experiment at the scale of PICO-500 (1-ton-year exposure) will be sufficient to explore the neutrino fog to  $n = 2$  at 1-GeV WIMP mass.

A pure liquid can also be placed into a meta-stable state below the freezing point. A particle interaction can then create a nucleation site, and the resulting freezing creates a signature increase in temperature and dielectric constant. This technique is similarly insensitive to electron recoil backgrounds, providing a path into the coherent neutrino scattering fog. A super-cooled liquid detector should intrinsically possess lower-energy thresholds than needed for ionization [342] and super-cooled water could achieve keV-scale energy thresholds. Dedicated measurements are needed to demonstrate these energy thresholds and fully characterize electron recoil discrimination capabilities of a super-cooled detector at these energies.

In the next section, we discuss experiments that are sensitive to sub-GeV DM candidates. Note that these experiments are not exclusively sensitive to sub-GeV DM and can also probe DM candidates in the 1-10 GeV mass range.

### 4.4.3 sub-GeV Dark Matter Candidates

#### Noble Element Detectors

To search for sub-GeV DM, detectors must achieve much lower energy thresholds than in the traditional mass range. For experiments with thresholds of  $\sim 20$  eV or higher, the noble liquid detectors described in the previous section are again an attractive technology, particularly by focusing exclusively on the ionization channel in which individual electrons can be detected with high efficiency. Achieving such thresholds comes with drawbacks, including the loss of discrimination between ERs and NRs, loss of time resolution, and a class of pathological single- and few-electron backgrounds that dominate the lowest energy bins [343–345]. Still, this class of detector has the lowest demonstrated background rate per unit target mass, even in S2-only mode, allowing the most stringent DM cross-section limits to date over a wide range of DM masses and interaction models.

If current and future generations of TPCs can combine the benefits of a mature, scalable technology with the low-energy sensitivity gained through improvements described in [3] and references therein, they will be capable of competitive sensitivity to a wide variety of existing low-mass models. The sensitivity of noble liquid detectors can also be extended by doping the target medium. At low concentrations, additives with low ionization energies can increase the scintillation and ionization yield by allowing energy that would otherwise be lost as heat to translate into additional ionization and excitation. At higher concentrations, additives with low- $A$  nuclei can serve as targets with stronger kinematic couplings to light DM particles, and additives with odd- $A$  nuclei offer sensitivity to spin-dependent interactions. Experimental efforts such as DarkSide-LowMass [346] and LBECA [347] are currently underway to develop low-threshold noble liquid TPCs optimized for the unique challenges of S2-only analyses.

Alternatively, the NEWS-G collaboration searches for sub-GeV mass particles using spherical proportional counters (SPCs) filled with light gases, including neon, methane, and helium [348]. Similar to their liquid counterparts, SPCs must continue to lower background rates as they scale to larger mass.



Superfluid liquid helium is also a promising medium for detection of very low energy excitations when combined with new forms of readout and will be discussed below [349–351].

### Charge Detectors

Charge detectors have seen substantial improvements over the last several years, resulting in significantly reduced energy thresholds. Solid-state charge detectors, including charge-coupled devices (CCDs) and semiconductor crystals, can now efficiently detect single ionized electrons with the potential to push nuclear recoil sensitivity down to DM masses near 1 MeV, approximately an order of magnitude lower in mass than noble liquid detectors. These detectors must contend with a similar set of background issues, most notably internal radiological backgrounds, external gamma-rays, and dark currents, and methods for minimizing these will become increasingly critical as these detectors scale in target mass.

CCDs have low noise, a small bandgap, and can be assembled within a low-background package, making them excellent targets in which to detect single charges produced by DM interactions. The DAMIC experiment has deployed an array of Si CCDs, achieving competitive sensitivity for GeV-scale WIMPs [352]. CCD detector performance can be further improved by performing repeated, non-destructive readout of charges from a single pixel, a technology known as skipper-CCDs [353]. These skipper-CCDs have significantly reduced readout noise of  $0.068 e^-$  rms/pix, allowing for precise charge counting of single electrons. The first effort utilizing these skipper-CCDs for DM searches is the Sub-Electron-Noise Skipper-CCD Experimental Instrument (SENSEI) experiment, which has reported sensitivity down to the expected  $\sim 1$  MeV and whose goal is to deploy about 100-g of skipper-CCDs at SNOLAB [354–356]. The DARK MATTER IN CCDs (DAMIC-M) collaboration will also employ skipper-CCDs, aiming for a 1 kg target mass [357]. Looking ahead, the SENSEI and DAMIC-M collaborations have joined to propose Oscura [358], a 10 kg skipper-CCD experiment that will have significant physics reach for both DM with masses  $\gtrsim 1$  MeV scattering off electrons and DM with masses  $\gtrsim 1$  eV being absorbed by electrons. Due to the ability to clearly resolve single electrons, the energy detection threshold is already at its fundamental limit. Instead, the ultimate sensitivity of these experiments will be limited by overall exposure, as well as a detailed understanding of low-energy physics phenomena and detector effects.

### Phonon Detectors

As described above, the SuperCDMS collaboration is deploying phonon detectors and they, along with similar efforts by EDELWEISS [359] and CRESST [360], are moving towards even lower thresholds, based on thermal and athermal phonon readout. Most experiments are on the cusp of achieving sub-eV resolution, with detectors optimized to trigger below 20 eV. Ref. [303] gives a recent overview of DM searches with eV-scale energy resolutions based on R&D detectors from CRESST, EDELWEISS, SuperCDMS, and MINER.

SuperCDMS has developed 10 g [361] and 1 g [362] Si detectors with 3 eV resolution, and demonstrated 10 eV thresholds with offline triggering algorithms [362], based on W-TES athermal phonon sensors. Both have placed limits on DM models that extend into the eV-scale energy range [363, 364] in NR and ER channels, though resolutions are still more than an order of magnitude from the 0.5 eV target for probing NR DM down to the ionization limit. Additional R&D has demonstrated noise performance equivalent to 200 meV resolution [365], close to 1 eV thresholds. Si is well-matched to DM-electron scattering down to DM masses of 2 MeV, and is competitive for elastic NR searches with other light elements such as sapphire ( $\text{Al}_2\text{O}_3$ ) and  $\text{CaWO}_4$ . SuperCDMS is planning near-term tests with 1 g detectors similar to the Si HVeV with comparable baseline resolution at the eV scale [338].

CRESST, in collaboration with the  $\nu$ CLEUS coherent neutrino program, has achieved 19 eV thresholds in  $\text{Al}_2\text{O}_3$  (sapphire) [366] and 30 eV in  $\text{CaWO}_4$  (calcium tungstate) [360] crystals, respectively, and is engaged in R&D to pursue lower thresholds with smaller detectors for next-generation particle detectors. The CRESST-III result [360] sets the best current constraints down to  $\sim 200$  MeV on sub-GeV DM scattering elastically off nuclei.

Semiconducting crystals read out by TES-based phonon sensors have recently demonstrated to have single electron resolution in silicon by the SuperCDMS (Si HVeV) and EDELWEISS (Ge) collaborations, showing RMS noise equivalent to 0.03 [362] and 0.53 [359] electron-holes pairs, respectively. As the band gaps in Si and Ge are similar, these experiments demonstrate similar reach for DM–electron scattering and absorption processes as skipper-CCD experiments. Several experiments have near-term plans to expand

to using novel substrates for phonon detection, which allows for sensitivity to *sub-MeV* DM candidates due to the low energy-thresholds. SPICE, part of the TESSERACT program, is building on TES-based phonon sensor work in conjunction with SuperCDMS and MINER to expand to SiO<sub>2</sub> (quartz) and sapphire substrates [367], which have good cross-section reach in comparison to other polar crystals as well as strong directionality [368]. Diamond and silicon carbide are also useful as substrates for single charge detection [369–371]. CRESST has demonstrated a diamond detector with 70 eV resolution [372] on a CVD substrate, and is also planning near-term R&D to achieve sub-GeV reach in diamond. While these materials have higher band gaps, which limit the mass reach of ionization-based searches to  $\geq 5$  MeV, they also ensure deeper impurity traps, making detectors made from these materials less susceptible to absorption of infrared photons, which are known to cause excess charge backgrounds. Their high dielectric strength will allow kV-scale voltage biases, which translates to charge resolution of better than  $10^{-3}$  e<sup>-</sup>. Work on phonon-mediated charge readout as well as direct single-charge readout have been proposed. More details are discussed in [338, 373]. A further alternative is the use of hydrogen-rich crystals coupled to TES readout to search for very low energy H-recoils from dark matter interactions [374].

While NTDs and TES-based sensors have dominated phonon-readout for the last decade, new superconducting technologies are poised to broaden options of phonon readout, including Kinetic Inductance Detectors (KIDs) and Magnetic Microcalorimeters (MMCs). KIDs are superconducting thin-film absorbers constructed as an LC resonator in which the breaking of Cooper pairs changes their surface impedance — an effect that can be measured and related to the initial deposition energy via an RF tone. Current energy resolutions of <20 eV have been demonstrated, with a roadmap down to the eV-scale [375]. MMCs use thin metallic-magnetic films deposited on the surface of semiconducting or scintillating crystals for fast collection and sensing of athermal phonons with timescales on the order of microseconds, which enables phonon-pulse shape discrimination to reduce low energy backgrounds from electron-recoils in NR searches [376]. Near-term advances to optimize for energy resolution are anticipated to achieve O(eV) energy thresholds, and tests are planned for sapphire and diamond, specifically targeting sub-GeV DM searches.

In addition to sensors designed to measure excitations to internal bulk phonon modes, a complementary approach is to monitor the center-of-mass motion of a composite object [377]. Optical or electrical readout of such mechanical sensors, in either the classical or quantum regime, offers a novel approach to detecting particle dark matter on a wide range of mass scales, including both heavy [378] and light [379] candidates. These sensors are naturally directionally dependent because they monitor changes to three-momentum of the mechanical system, and can reach energy thresholds well below the eV scale [379].

A complementary approach is to employ quantum detectors being developed for Quantum Information Science (QIS), such as those based on superconducting charge qubit circuitry, as extremely low-energy (meV) phonon-sensitive threshold-detectors. Detection of dark matter would take place by way of phonons produced in a substrate breaking a Cooper pair, leading to quasiparticle tunneling into the sensors (alternatively photons in a cavity can be measured non-destructively as a shift in the resonator frequency spectrum, as for the case of dark photon/axion DM [380]). This presence of excess quasiparticles can be measured by multiple strategies, including monitoring changes to qubit decoherence time for weakly charge-sensitive qubits [381] or shifts in frequency when coupled to a readout resonator as is the case for Quantum Capacitance Detectors [382]. These type of sensors present an interesting possibility, especially when paired with higher threshold phonon sensors, of developing a novel, multiplexed low-threshold device.

## Single Photon Detectors

A particularly fruitful area of collaboration between HEP, astrophysics, and photonics has been in the domain of single photon counting. In the optical and NIR regime, many of the technologies discussed here are closely tied to developments aimed at survey science. This synergy has also motivated the use of other optical imaging technologies not only as secondary readout, but as the primary DM scattering target as well. The requirement for high fill factor and quantum efficiency for future UVOIR focal planes will naturally make many technologies suitable for DM detection provided the dark counts can be effectively minimized.

One example of this synergy is the use of superconducting nanowire single-photon detectors (SNSPDs) directly as the active target to probe DM that scatters off electrons in the SNSPDs and bosonic DM that is absorbed in the SNSPDs [383, 384]. Using different materials, energy thresholds of 0.8 eV and 0.25 eV have been demonstrated, which would extend the mass reach of of DM detectors beyond the current  $\sim 1$  MeV

limits, and may be reduced further through subsequent R&D. A benefit of this approach is that for larger energy deposits, above the eV-scale, these devices may also have sensitivity to directionality, opening a new window on background discrimination. As noted above, a key challenge to overcome as this technology matures will be fabricating them at a scale that is useful for DM experiments. Existing experiments rely on established WSi nanowire technology for DM detection at optical and near-IR wavelengths.

### Scintillating Detectors

Many crystals scintillate at optical to UV wavelengths, and a number of crystal scintillators have been proposed as DM detection targets. The majority of these have not been demonstrated with low backgrounds at the single photon level or with photon efficiency adequate to detect single scintillation events. For example, CRESST has used scintillation from calcium tungstate crystals for ER/NR discrimination, but the low light yield from events at low energy precludes the use of this detection mode below 100 eV [366]. Thus, materials which primarily scintillate as a means of energy relaxation are needed, both to allow them to be used as primary detectors and to ensure high single photon detection efficiency correlates to thresholds at the scintillation photon energy.

Organic scintillators are promising targets for sub-GeV DM detection with electron scattering [385, 386]. Aromatic organic compounds are naturally anisotropic due to planar carbon rings, with the lowest-energy electronic wavefunctions well-approximated by linear combinations of  $2p_z$  orbitals. The typical energy of the lowest excited state is a few eV, comparable to the 1 eV bandgap of silicon detectors. Such detectors have strong synergy with the skipper-CCD program, because a large-mass organic scintillator target can be coupled to a few CCDs with appropriate light focusing; the energy of the scintillation photon lies between the 1- and 2-electron bins, providing some protection against dark rate backgrounds.

The TESSERACT project mentioned above builds a program around coupling TES-based phonon detectors to novel detector materials, including scintillators like superfluid helium, gallium arsenide and sapphire. HeRALD (Helium Roton Apparatus for Light Dark Matter) is part of the TESSERACT program and proposes to instrument a vessel of superfluid  $^4\text{He}$  for scintillation, triplet excimer, phonon, and roton detection [349, 350], such that the ratios of signals may be used for discrimination. The TESs can be used to detect scintillation photons and the quenching of triplet excimers. Alternatively, ionizing the ejected atom and then accelerating them with an electric field, the ejected ions can be calorimetrically detected by the release of the heat of adsorption, providing access to meV scale energy depositions.

Crystal scintillators have also been identified as excellent target materials for probing DM-electron interactions, with gallium arsenide (GaAs) perhaps being the most promising [387, 388]. TESSERACT is developing GaAs as their primary target for electromagnetically-interacting DM due to the fact that it has a bandgap at 1.42 eV, giving it a similar intrinsic reach to Si, and has the added benefits of intrinsic radio-purity and the capability to grow it commercially in large crystals. The phonon detectors will then be sensitive to the 1.33 eV scintillation photons produced by interactions in the crystal, while coincident detection of phonon signals enables discrimination of electronic recoil signals from nuclear recoil and heat-only backgrounds. GaAs also seems to have little to no afterglow [389, 390].

#### 4.4.4 Directional Detection

Because of our motion through a roughly stationary galactic halo, signals of DM interacting in an Earth-bound experiment are expected to be directional in a highly characteristic way. This smoking-gun signature should underlie the signal of whichever DM candidate is eventually discovered – the only problem is that, at present, very few direct detection experiments are designed with the ability to measure it. A large-scale recoil imaging detector not only provides an opportunity to discover direct evidence for DM interactions, but also represents a way to conclusively confirm the nature of a detected signal as truly that of DM [285]. A corollary to this statement is that directional detection presents the optimal way to subtract known sources of background that could mimic such a signal such as the neutrino fog. Directional detection can be achieved either by imaging the nuclear recoil trajectory directly, or by inferring the direction from a proxy variable.

The most mature technique in this area is a low-density gas TPC, capable of direct recoil imaging, and a central goal of the CYGNUS collaboration is working towards a competitive large-scale gas TPC for a directional DM search. To realize directional DM discovery into the neutrino fog there are a few critical performance benchmarks that must be attained. The most important of these are (1) angular resolution

better than  $30^\circ$ , (2) correct head/tail recognition at a probability better than 75%, (3) electron backgrounds rejected by a factor of  $O(10^5)$ , and (4) all of those limits achieved down at sub-10-keV<sub>r</sub> energies and in as high-density a gas as possible. These goals appear feasible already down to nuclear recoil energies of 8 keV<sub>r</sub> in 1 atmosphere of 755:5 He:SF<sub>6</sub> [391], by exploiting negative ion drift, and limiting the maximum drift length in a 10 m<sup>3</sup> CYGNUS TPC module to around 50 cm. In the short term, CYGNUS is building 1 m<sup>3</sup> prototypes in order to optimize the configuration of such a 10 m<sup>3</sup> module. Scaling up such an experiment to the 1000 m<sup>3</sup> scale needed to probe into the neutrino fog is a daunting task, but could be possible with several common modules inside common shielding. Lastly, as described in [392], recoil imaging crosscuts through multiple frontiers in HEP.

Other approaches to directional detection include anisotropic light yield in crystals, and anisotropic ionization detection due to columnar recombination in liquid or gas. These have been demonstrated at energies higher than those relevant for DM searches, but new approaches involving magnetic fields and liquid above the normal boiling point are being investigated to reach dark matter recoil energies [393].

## 5 Summary and Conclusions

Particle DM is well-motivated and encompasses a wealth of scenarios that can explain the observed properties of DM, with characteristic mass scales from 1 eV to the Planck scale. Cosmic Frontier searches for particle DM uniquely allow the observation of DM in its astrophysical environment, ensuring that detection of a new particle can be connected to the DM puzzle. We have outlined an ensemble of upcoming and proposed direct and indirect searches for DM that will significantly improve our sensitivity to DM signals across a broad range of scenarios. Advances in calibration, modeling, and theoretical understanding of signals, backgrounds, and uncertainties, will be essential to take advantage of such improvements and permit a convincing discovery. A diverse and multi-scale experimental program, combined with support for complementary measurements, analyses, and R&D, offers the clearest path toward a convincing detection of particle DM.

## A Tables of active, planned and concept Direct Detection experiments

Name	Technology	Target	Active Mass	Experiment Location	Start Ops	End Ops
<b>Currently Running or Under Construction</b>						
LZ	TPC	LXe	7,000 kg	SURF	2021	2026
PandaX-4T	TPC	LXe	4,000 kg	CJPL	2021	2025
XENONnT	TPC	LXe	7,000 kg	LGNS	2021	2025
DEAP-3600	Scintillator	LAr	3,300 kg	SNOLAB	2016	2025
Darkside-20k	TPC	LAr	50 t	LNGS	2027	2035
DAMA/LIBRA	Scintillator	NaI	250 kg	LNGS	2003	
ANAIS-112	Scintillator	NaI	112 kg	Canfranc	2017	2022
SABRE PoP	Scintillator	NaI	5 kg	LNGS	2021	2022
COSINE-200	Scintillator	NaI	200 kg	YangYang	2022	2025
CDEX-10	Ionization (77K)	Ge	10 kg	CJPL	2016	
EDELWEISS III (High Field)	Cryo Ionization / HV	Ge	33 g	LSM	2019	
SuperCDMS CUTE	Cryo Ionization / HV	Ge/Si	5 kg/1 kg	SNOLAB	2020	2022
SuperCDMS SNOLAB	Cryo Ionization / HV	Ge/Si	11 kg/3 kg	SNOLAB	2023	2028
CRESST-III (HW Tests)	Bolometer Scintillation	CaWO <sub>4</sub>		LNGS	2020	
PICO-40	Bubble Chamber	C <sub>3</sub> F <sub>8</sub>	35 kg	SNOLAB	2020	
NEWS-G	Gas Drift	CH <sub>4</sub>		SNOLAB	2020	2025
DAMIC-M prototype	CCD Skipper	Si	18 g	LSM	2022	2023
DAMIC-M	CCD Skipper	Si	1 kg	LSM	2024	2025
SENSEI	CCD Skipper	Si	2 g	Fermilab	2019	2020
SENSEI	CCD Skipper	Si	100 g	SNOLAB	2021	2023

Name	Technology	Target	Active Mass	Experiment Location	Start Ops	End Ops
<b>Planned</b>						
SABRE (North)	Scintillator	NaI	50 kg	LNGS	2022	2027
SABRE (South)	Scintillator	NaI	50 kg	SUPL	2022	2027
COSINE-200 South Pole	Scintillator	NaI	200 kg	South Pole	2023	
COSINUS	Bolometer Scintillator	NaI		LNGS	2023	
Darwin / XLZD (US LXe G3)	TPC	LXe	50,000 kg	undetermined	2028	2033
ARGO	TPC or Scintillator	LAr	300 t	SNOLAB	2030	2035
CDEX-100 / 1T	Ionization (77K)	Ge	100-1000 kg	CJPL	202X	
PICO-500	Bubble Chamber	C3F8	430 kg	SNOLAB	2021	
<b>Concept or R&amp;D</b>						
Oscura	CCD Skipper	Si	10 kg Si	SNOLAB	2025	2028
SBC	Bubble Chamber	LAr	1 t	SNOLAB	2028	
SNOWBALL	Supercooled Liquid H2O					
DarkSide-LowMass	TPC	LAr	1.5 t			
ALETHEIA	TPC	He		China Inst. At. Energy		
TESSERACT	Cryo TES	LHe, SiO <sub>2</sub> , Al <sub>2</sub> O <sub>3</sub> , GaAs		undetermined	2026	
CYGN0	Gas Directional	He + CF <sub>4</sub>	0.5 - 1 kg	LNGS	2024	
CYGNUS	Gas Directional	He + SF <sub>6</sub> /CF <sub>4</sub>		Multiple sites		
Windchime	Accelerometer array			Multiple sites		
MAGNETO- $\chi$	Cryogenic MMC	Diamond, Sapphire, etc.				

## References

- [1] Caterina Doglioni et al. “Snowmass2021 Dark Matter Complementarity”. In: *2022 Snowmass Summer Study*. 2022.
- [2] D. S. Akerib et al. “Snowmass2021 Cosmic Frontier Dark Matter Direct Detection to the Neutrino Fog”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.08084 [hep-ex].
- [3] Rouven Essig, Graham K. Giovanetti, Noah Kurinsky, Dan McKinsey, Karthik Ramanathan, Kelly Stifter, and Tien-Tien Yu. “Snowmass2021 Cosmic Frontier: The landscape of low-threshold dark

- matter direct detection in the next decade”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.08297 [hep-ph].
- [4] Daniel Baxter et al. “Snowmass2021 Cosmic Frontier White Paper: Calibrations and backgrounds for dark matter direct detection”. In: (Mar. 2022). arXiv: 2203.07623 [hep-ex].
- [5] Yonatan Kahn et al. “Snowmass2021 Cosmic Frontier: Modeling, statistics, simulations, and computing needs for direct dark matter detection”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.07700 [hep-ex].
- [6] Tsuguo Aramaki et al. “Snowmass2021 Cosmic Frontier: The landscape of cosmic-ray and high-energy photon probes of particle dark matter”. In: (Mar. 2022). arXiv: 2203.06894 [hep-ex].
- [7] Rebecca K. Leane et al. “Snowmass2021 Cosmic Frontier White Paper: Puzzling Excesses in Dark Matter Searches and How to Resolve Them”. In: (Mar. 2022). arXiv: 2203.06859 [hep-ph].
- [8] Shin’ichiro Ando et al. “Snowmass2021 Cosmic Frontier: Synergies between dark matter searches and multiwavelength/multimessenger astrophysics”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.06781 [hep-ph].
- [9] Daniel Carney et al. “Snowmass2021 Cosmic Frontier White Paper: Ultraheavy particle dark matter”. In: (Mar. 2022). arXiv: 2203.06508 [hep-ph].
- [10] Gianfranco Bertone and Dan Hooper. “History of dark matter”. In: *Rev. Mod. Phys.* 90.4 (2018), p. 045002. DOI: 10.1103/RevModPhys.90.045002. arXiv: 1605.04909 [astro-ph.CO].
- [11] Steve Ritz et al. “Building for Discovery: Strategic Plan for U.S. Particle Physics in the Global Context”. In: (May 2014).
- [12] *Snowmass LOIs*. <https://gordonwatts.github.io/snowmass-loi-words/wordcloud.html>. Accessed: 2022-05-31.
- [13] Pouya Asadi et al. “Early-Universe Model Building”. In: (Mar. 2022). arXiv: 2203.06680 [hep-ph].
- [14] Gerard Jungman, Marc Kamionkowski, and Kim Griest. “Supersymmetric Dark Matter”. In: *Phys. Rept.* 267 (1996), pp. 195–373. DOI: 10.1016/0370-1573(95)00058-5. arXiv: hep-ph/9506380.
- [15] Gianfranco Bertone, Dan Hooper, and Joseph Silk. “Particle Dark Matter: Evidence, Candidates and Constraints”. In: *Phys. Rept.* 405 (2005), pp. 279–390. DOI: 10.1016/j.physrep.2004.08.031. arXiv: hep-ph/0404175 [hep-ph].
- [16] David E. Kaplan, Markus A. Luty, and Kathryn M. Zurek. “Asymmetric Dark Matter”. In: *Phys.Rev.* D79 (2009), p. 115016. DOI: 10.1103/PhysRevD.79.115016. arXiv: 0901.4117 [hep-ph].
- [17] Claire Guépin, Roberto Aloisio, Luis A. Anchordoqui, Austin Cummings, John F. Krizmanic, Angela V. Olinto, Mary Hall Reno, and Tonia M. Venters. “Probing the properties of superheavy dark matter annihilating or decaying into neutrinos with ultra-high energy neutrino experiments”. In: *PoS ICRC2021* (2021), p. 551. DOI: 10.22323/1.395.0551. arXiv: 2112.04801 [hep-ph].
- [18] Daniel J. H. Chung, Edward W. Kolb, and Antonio Riotto. “Superheavy dark matter”. In: *Physical Review D* 59 (1999), p. 023501. DOI: 10.1103/PhysRevD.59.023501. arXiv: hep-ph/9802238 [hep-ph].
- [19] Edward W. Kolb, Daniel J. H. Chung, and Antonio Riotto. “WIMPzillas!” In: *Trends in theoretical physics II. Proceedings, 2nd La Plata Meeting, Buenos Aires, Argentina, November 29-December 4, 1998*. 1998, pp. 91–105. arXiv: hep-ph/9810361 [hep-ph]. URL: [http://lss.fnal.gov/cgi-bin/find\\_paper.pl?conf-98-325](http://lss.fnal.gov/cgi-bin/find_paper.pl?conf-98-325).
- [20] Michael Dine and Alexander Kusenko. “The Origin of the matter - antimatter asymmetry”. In: *Reviews of Modern Physics* 76 (2003), p. 1. DOI: 10.1103/RevModPhys.76.1. arXiv: hep-ph/0303065 [hep-ph].
- [21] Eric Carlson and Stefano Profumo. “When Dark Matter interacts with Cosmic Rays or Interstellar Matter: A Morphological Study”. In: *Physical Review D* 92.6 (2015), p. 063003. DOI: 10.1103/PhysRevD.92.063003. arXiv: 1504.04782 [astro-ph.HE].

- [22] *Fundamental Physics at the Intensity Frontier*. 2012. DOI: 10.2172/1042577. arXiv: 1205.2671 [hep-ex]. URL: <http://lss.fnal.gov/archive/preprint/fermilab-conf-12-879-ppd.shtml>.
- [23] Rouven Essig et al. “Working Group Report: New Light Weakly Coupled Particles”. In: *Proceedings, 2013 Community Summer Study on the Future of U.S. Particle Physics: Snowmass on the Mississippi (CsS<sup>2</sup>013): Minneapolis, Mn, Usa, July 29-August 6, 2013*. 2013. arXiv: 1311.0029 [hep-ph]. URL: <http://www.slac.stanford.edu/econf/C1307292/docs/IntensityFrontier/NewLight-17.pdf>.
- [24] Jim Alexander et al. “Dark Sectors 2016 Workshop: Community Report”. In: 2016. arXiv: 1608.08632 [hep-ph]. URL: <http://lss.fnal.gov/archive/2016/conf/fermilab-conf-16-421.pdf>.
- [25] Marco Battaglieri et al. “US Cosmic Visions: New Ideas in Dark Matter 2017: Community Report”. In: *U.S. Cosmic Visions: New Ideas in Dark Matter College Park, MD, USA, March 23-25, 2017*. July 2017. arXiv: 1707.04591 [hep-ph]. URL: <http://lss.fnal.gov/archive/2017/conf/fermilab-conf-17-282-ae-ppd-t.pdf>.
- [26] Joerg Jaeckel and Andreas Ringwald. “The Low-Energy Frontier of Particle Physics”. In: *Ann. Rev. Nucl. Part. Sci.* 60 (2010), pp. 405–437. DOI: 10.1146/annurev.nucl.012809.104433. arXiv: 1002.0329 [hep-ph].
- [27] Rouven Essig, Yonatan Kahn, Simon Knapen, Andreas Ringwald, and Natalia Toro. “Snowmass2021 Theory Frontier: Theory Meets the Lab”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.10089 [hep-ph].
- [28] Mohamed Zaazoua, Loan Truong, Kétévi A. Assamagan, and Farida Fassi. “Higgs portal vector dark matter interpretation: review of Effective Field Theory approach and ultraviolet complete models”. In: (July 2021). DOI: 10.31526/1hep.2022.270. arXiv: 2107.01252 [hep-ph].
- [29] Amin Aboubrahim, Wan-Zhe Feng, Pran Nath, and Zhu-Yao Wang. “Hidden sectors and a multi-temperature universe”. In: *2022 Snowmass Summer Study*. June 2021. arXiv: 2106.06494 [hep-ph].
- [30] Scott Dodelson and Lawrence M. Widrow. “Sterile-neutrinos as dark matter”. In: *Phys. Rev. Lett.* 72 (1994), pp. 17–20. DOI: 10.1103/PhysRevLett.72.17. arXiv: hep-ph/9303287.
- [31] K. N. Abazajian et al. *Light Sterile Neutrinos: A White Paper*. arXiv:1204.5379 [hep-ph]. Apr. 2012. arXiv: 1204.5379 [hep-ph].
- [32] Kevork N. Abazajian. “Sterile neutrinos in cosmology”. In: *Phys. Rept.* 711-712 (2017), pp. 1–28. DOI: 10.1016/j.physrep.2017.10.003. arXiv: 1705.01837 [hep-ph].
- [33] Department of Energy. “Basic Research Needs for Dark Matter Small Projects New Initiatives”. In: 2018. URL: [https://science.osti.gov/-/media/hep/pdf/Reports/Dark\\_Matter\\_New\\_Initiatives\\_rpt.pdf](https://science.osti.gov/-/media/hep/pdf/Reports/Dark_Matter_New_Initiatives_rpt.pdf).
- [34] Emanuele Berti, Vitor Cardoso, Zoltán Haiman, Daniel E. Holz, Emil Mottola, Suvodip Mukherjee, Bangalore Sathyaprakash, Xavier Siemens, and Nicolás Yunes. “Snowmass2021 Cosmic Frontier White Paper: Fundamental Physics and Beyond the Standard Model”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.06240 [hep-ph].
- [35] Emanuele Berti et al. “Dark Matter In Extreme Astrophysical Environments”. In: (Mar. 2022). arXiv: 2203.07984 [hep-ph].
- [36] Stefano Profumo and Piero Ullio. “Multi-Wavelength Searches for Particle Dark Matter”. In: (Jan. 2010). arXiv: 1001.4086 [astro-ph.HE].
- [37] Carlos Blanco. “ $\gamma$ -cascade: a simple program to compute cosmological gamma-ray propagation”. In: *JCAP* 01 (2019), p. 013. DOI: 10.1088/1475-7516/2019/01/013. arXiv: 1804.00005 [astro-ph.HE].
- [38] Christopher Heiter, Daniel Kuempel, David Walz, and Martin Erdmann. “Production and propagation of ultra-high energy photons using CRPropa 3”. In: *Astropart. Phys.* 102 (2018), pp. 39–50. DOI: 10.1016/j.astropartphys.2018.05.003. arXiv: 1710.11406 [astro-ph.IM].
- [39] Rafael Alves Batista, Andrej Dundovic, Martin Erdmann, Karl-Heinz Kampert, Daniel Kuempel, Gero Müller, Guenter Sigl, Arjen van Vliet, David Walz, and Tobias Winchen. “CRPropa 3 - a Public Astrophysical Simulation Framework for Propagating Extraterrestrial Ultra-High Energy Particles”. In: *JCAP* 05 (2016), p. 038. DOI: 10.1088/1475-7516/2016/05/038. arXiv: 1603.07142 [astro-ph.IM].



- [40] Kohta Murase, Ranjan Laha, Shin'ichiro Ando, and Markus Ahlers. "Testing the Dark Matter Scenario for PeV Neutrinos Observed in IceCube". In: (2015). arXiv: 1503.04663 [hep-ph].
- [41] Carlos Blanco and Dan Hooper. "Constraints on Decaying Dark Matter from the Isotropic Gamma-Ray Background". In: *JCAP* 03 (2019), p. 019. DOI: 10.1088/1475-7516/2019/03/019. arXiv: 1811.05988 [astro-ph.HE].
- [42] Paolo Gondolo and Graciela Gelmini. "Cosmic abundances of stable particles: Improved analysis". In: *Nucl. Phys. B* 360 (1991), pp. 145–179. DOI: 10.1016/0550-3213(91)90438-4.
- [43] Gary Steigman, Basudeb Dasgupta, and John F. Beacom. "Precise Relic WIMP Abundance and its Impact on Searches for Dark Matter Annihilation". In: *Phys. Rev. D* 86 (2012), p. 023506. DOI: 10.1103/PhysRevD.86.023506. arXiv: 1204.3622 [hep-ph].
- [44] Nashwan Sabti, James Alvey, Miguel Escudero, Malcolm Fairbairn, and Diego Blas. "Refined Bounds on MeV-scale Thermal Dark Sectors from BBN and the CMB". In: *JCAP* 01 (2020), p. 004. DOI: 10.1088/1475-7516/2020/01/004. arXiv: 1910.01649 [hep-ph].
- [45] Kim Griest and Marc Kamionkowski. "Unitarity Limits on the Mass and Radius of Dark Matter Particles". In: *Physical Review Letters* 64 (1990), p. 615. DOI: 10.1103/PhysRevLett.64.615.
- [46] Juri Smirnov and John F. Beacom. "TeV-Scale Thermal WIMPs: Unitarity and its Consequences". In: *Phys. Rev. D* 100.4 (2019), p. 043029. DOI: 10.1103/PhysRevD.100.043029. arXiv: 1904.11503 [hep-ph].
- [47] Rebecca K. Leane, Tracy R. Slatyer, John F. Beacom, and Kenny C. Y. Ng. "GeV-scale thermal WIMPs: Not even slightly ruled out". In: *Phys. Rev. D* 98.2 (2018), p. 023016. DOI: 10.1103/PhysRevD.98.023016. arXiv: 1805.10305 [hep-ph].
- [48] Graciela Gelmini, Paolo Gondolo, Adrian Soldatenko, and Carlos E. Yaguna. "The Effect of a late decaying scalar on the neutralino relic density". In: *Phys. Rev. D* 74 (2006), p. 083514. DOI: 10.1103/PhysRevD.74.083514. arXiv: hep-ph/0605016.
- [49] Graciela B. Gelmini and Paolo Gondolo. "Neutralino with the right cold dark matter abundance in (almost) any supersymmetric model". In: *Phys. Rev. D* 74 (2006), p. 023510. DOI: 10.1103/PhysRevD.74.023510. arXiv: hep-ph/0602230.
- [50] Saleh Hamdan and James Unwin. "Dark Matter Freeze-out During Matter Domination". In: *Mod. Phys. Lett. A* 33.29 (2018), p. 1850181. DOI: 10.1142/S021773231850181X. arXiv: 1710.03758 [hep-ph].
- [51] Jessica N. Howard, Seyda Ipek, Tim M. P. Tait, and Jessica Turner. "Dark matter freeze-out during  $SU(2)_L$  confinement". In: *JHEP* 02 (2022), p. 047. DOI: 10.1007/JHEP02(2022)047. arXiv: 2112.09152 [hep-ph].
- [52] Keith R. Dienes, Lucien Heurtier, Fei Huang, Doojin Kim, Tim M. P. Tait, and Brooks Thomas. "Stasis in an expanding universe: A recipe for stable mixed-component cosmological eras". In: *Phys. Rev. D* 105.2 (2022), p. 023530. DOI: 10.1103/PhysRevD.105.023530. arXiv: 2111.04753 [astro-ph.CO].
- [53] Dillon Berger, Seyda Ipek, Tim M. P. Tait, and Michael Waterbury. "Dark Matter Freeze Out during an Early Cosmological Period of QCD Confinement". In: *JHEP* 07 (2020), p. 192. DOI: 10.1007/JHEP07(2020)192. arXiv: 2004.06727 [hep-ph].
- [54] Joseph Bramante and James Unwin. "Superheavy Thermal Dark Matter and Primordial Asymmetries". In: *JHEP* 02 (2017), p. 119. DOI: 10.1007/JHEP02(2017)119. arXiv: 1701.05859 [hep-ph].
- [55] Marco Cirelli, Yann Gouttenoire, Kalliopi Petraki, and Filippo Sala. "Homeopathic Dark Matter, or how diluted heavy substances produce high energy cosmic rays". In: *JCAP* 02 (2019), p. 014. DOI: 10.1088/1475-7516/2019/02/014. arXiv: 1811.03608 [hep-ph].
- [56] Disha Bhatia and Satyanarayan Mukhopadhyay. "Unitarity limits on thermal dark matter in (non-)standard cosmologies". In: *JHEP* 03 (2021), p. 133. DOI: 10.1007/JHEP03(2021)133. arXiv: 2010.09762 [hep-ph].

- [57] Asher Berlin, Dan Hooper, and Gordan Krnjaic. “Thermal Dark Matter From A Highly Decoupled Sector”. In: *Phys. Rev. D* 94.9 (2016), p. 095019. DOI: 10.1103/PhysRevD.94.095019. arXiv: 1609.02555 [hep-ph].
- [58] Asher Berlin, Dan Hooper, and Gordan Krnjaic. “PeV-Scale Dark Matter as a Thermal Relic of a Decoupled Sector”. In: *Phys. Lett. B* 760 (2016), pp. 106–111. DOI: 10.1016/j.physletb.2016.06.037. arXiv: 1602.08490 [hep-ph].
- [59] Lucien Heurtier and Fei Huang. “Inflaton portal to a highly decoupled EeV dark matter particle”. In: *Phys. Rev. D* 100.4 (2019), p. 043507. DOI: 10.1103/PhysRevD.100.043507. arXiv: 1905.05191 [hep-ph].
- [60] Hooman Davoudiasl and Gopolang Mohlabeng. “Getting a THUMP from a WIMP”. In: *JHEP* 04 (2020), p. 177. DOI: 10.1007/JHEP04(2020)177. arXiv: 1912.05572 [hep-ph].
- [61] T. Venumadhav, F.-Y. Cyr-Racine, K. N. Abazajian, and C. M. Hirata. “Sterile Neutrino Dark Matter: Weak Interactions in the Strong Coupling Epoch”. In: *Physical Review D* 94.4 (2016), p. 043515. DOI: 10.1103/PhysRevD.94.043515. arXiv: 1507.06655 [astro-ph.CO].
- [62] M. Laine and M. Shaposhnikov. “Sterile Neutrino Dark Matter as a Consequence of  $\nu$ MSM-Induced Lepton Asymmetry”. In: *Journal of Cosmology and Astroparticle Physics* 806 (2008), p. 031. DOI: 10.1088/1475-7516/2008/06/031. arXiv: 0804.4543 [hep-ph].
- [63] J. F. Cherry and S. Horiuchi. “Closing in on Resonantly Produced Sterile Neutrino Dark Matter”. In: *Physical Review D* 95.8 (2017), p. 083015. DOI: 10.1103/PhysRevD.95.083015. arXiv: 1701.07874 [hep-ph].
- [64] O. Ruchayskiy, A. Boyarsky, D. Iakubovskiy, E. Bulbul, D. Eckert, J. Franse, D. Malyshev, M. Markevitch, and A. Neronov. “Searching for Decaying Dark Matter in Deep XMM–Newton Observation of the Draco Dwarf Spheroidal”. In: *Monthly Notices of the Royal Astronomical Society* 460.2 (2016), p. 1390. DOI: 10.1093/mnras/stw1026. arXiv: 1512.07217 [astro-ph.HE].
- [65] D. Malyshev, A. Neronov, and D. Eckert. “Constraints on 3.55 keV Line Emission from Stacked Observations of Dwarf Spheroidal Galaxies”. In: *Physical Review D* 90 (2014), p. 103506. DOI: 10.1103/PhysRevD.90.103506. arXiv: 1408.3531 [astro-ph.HE].
- [66] T. Tamura, R. Iizuka, Y. Maeda, K. Mitsuda, and N. Y. Yamasaki. “An X-Ray Spectroscopic Search for Dark Matter in the Perseus Cluster with Suzaku”. In: *Publications of the Astronomical Society of Japan* 67 (2015), p. 23. DOI: 10.1093/pasj/psu156. arXiv: 1412.1869 [astro-ph.HE].
- [67] K. Perez, K. C. Y. Ng, J. F. Beacom, C. Hersh, S. Horiuchi, and R. Krivonos. “Almost Closing the  $\nu$ MSM Sterile Neutrino Dark Matter Window with NuSTAR”. In: *Physical Review D* 95.12 (2017), p. 123002. DOI: 10.1103/PhysRevD.95.123002. arXiv: 1609.00667 [astro-ph.HE].
- [68] K. C. Y. Ng, B. M. Roach, K. Perez, J. F. Beacom, S. Horiuchi, R. Krivonos, and D. R. Wik. “New Constraints on Sterile Neutrino Dark Matter from NuSTAR M31 Observations”. In: *Physical Review D* 99 (8 Apr. 2019), p. 083005. DOI: 10.1103/PhysRevD.99.083005. arXiv: 1901.01262 [astro-ph.HE]. URL: <https://link.aps.org/doi/10.1103/PhysRevD.99.083005>.
- [69] B. M. Roach, K. C. Y. Ng, K. Perez, J. F. Beacom, S. Horiuchi, R. Krivonos, and D. R. Wik. “NuSTAR Tests of Sterile-Neutrino Dark Matter: New Galactic Bulge Observations and Combined Impact”. In: *Physical Review D* 101.10 (2020), p. 103011. DOI: 10.1103/PhysRevD.101.103011. arXiv: 1908.09037 [astro-ph.HE].
- [70] K. C. Y. Ng, S. Horiuchi, J. M. Gaskins, M. Smith, and R. Preece. “Improved Limits on Sterile Neutrino Dark Matter using Full-Sky Fermi Gamma-Ray Burst Monitor Data”. In: *Physical Review D* 92.4 (2015), p. 043503. DOI: 10.1103/PhysRevD.92.043503. arXiv: 1504.04027 [astro-ph.CO].
- [71] A. Boyarsky, D. Malyshev, A. Neronov, and O. Ruchayskiy. “Constraining Dark Matter Properties with SPI”. In: *Monthly Notices of the Royal Astronomical Society* 387 (2008), p. 1345. DOI: 10.1111/j.1365-2966.2008.13003.x. arXiv: 0710.4922 [astro-ph].
- [72] M. G. Aartsen et al. “Search for neutrinos from decaying dark matter with IceCube”. In: *Eur. Phys. J. C* 78.10 (2018), p. 831. DOI: 10.1140/epjc/s10052-018-6273-3. arXiv: 1804.03848 [astro-ph.HE].

- [73] Carlos A. Argüelles and Hrvoje Dujmovic. “Searches for Connections Between Dark Matter and Neutrinos with the IceCube High-Energy Starting Event Sample”. In: *PoS ICRC2019* (2020), p. 839. DOI: 10.22323/1.358.0839. arXiv: 1907.11193 [hep-ph].
- [74] Masha Baryakhtar, Joseph Bramante, Shirley Weishi Li, Tim Linden, and Nirmal Raj. “Dark Kinetic Heating of Neutron Stars and An Infrared Window On WIMPs, SIMPs, and Pure Higgsinos”. In: *Phys. Rev. Lett.* 119.13 (2017), p. 131801. DOI: 10.1103/PhysRevLett.119.131801. arXiv: 1704.01577 [hep-ph].
- [75] Basudeb Dasgupta, Ranjan Laha, and Anupam Ray. “Low Mass Black Holes from Dark Core Collapse”. In: *Phys. Rev. Lett.* 126.14 (2021), p. 141105. DOI: 10.1103/PhysRevLett.126.141105. arXiv: 2009.01825 [astro-ph.HE].
- [76] J. Berger et al. “Snowmass 2021 White Paper: Cosmogenic Dark Matter and Exotic Particle Searches in Neutrino Experiments”. In: (July 2022). arXiv: 2207.02882 [hep-ph].
- [77] George Heald et al. “Magnetism Science with the Square Kilometre Array”. In: *Galaxies* 8.3 (2020), p. 53. DOI: 10.3390/galaxies8030053. arXiv: 2006.03172 [astro-ph.GA].
- [78] V. S. Berezinskii, S. V. Bulanov, V. A. Dogiel, and V. S. Ptuskin. *Astrophysics of cosmic rays*. 1990.
- [79] Andrew W. Strong, Igor V. Moskalenko, and Vladimir S. Ptuskin. “Cosmic-Ray Propagation and Interactions in the Galaxy”. In: *Annual Review of Nuclear and Particle Science* 57.1 (Nov. 2007), pp. 285–327. DOI: 10.1146/annurev.nucl.57.090506.123011. arXiv: astro-ph/0701517 [astro-ph].
- [80] M. J. Boschini et al. “Solution of Heliospheric Propagation: Unveiling the Local Interstellar Spectra of Cosmic-ray Species”. In: *The Astrophysical Journal* 840.2, 115 (May 2017), p. 115. DOI: 10.3847/1538-4357/aa6e4f. arXiv: 1704.06337 [astro-ph.HE].
- [81] Annika Reinert and Martin Wolfgang Winkler. “A Precision Search for WIMPs with Charged Cosmic Rays”. In: *Journal of Cosmology and Astroparticle Physics* 1801.01 (2018), p. 055. DOI: 10.1088/1475-7516/2018/01/055. arXiv: 1712.00002 [astro-ph.HE].
- [82] M. J. Boschini et al. “HelMod in the Works: From Direct Observations to the Local Interstellar Spectrum of Cosmic-Ray Electrons”. In: *The Astrophysical Journal* 854.2, 94 (Feb. 2018), p. 94. DOI: 10.3847/1538-4357/aaa75e. arXiv: 1801.04059 [astro-ph.HE].
- [83] M. J. Boschini et al. “Deciphering the Local Interstellar Spectra of Primary Cosmic-Ray Species with HELMOD”. In: *The Astrophysical Journal* 858.1, 61 (May 2018), p. 61. DOI: 10.3847/1538-4357/aabc54. arXiv: 1804.06956 [astro-ph.HE].
- [84] Mathieu Boudaud, Yoann Génolini, Laurent Derome, Julien Lavalle, David Maurin, Pierre Salati, and Pasquale D. Serpico. “AMS-02 antiprotons’ consistency with a secondary astrophysical origin”. In: *Physical Review Research* 2.2 (Apr. 2020). ISSN: 2643-1564. DOI: 10.1103/physrevresearch.2.023022. URL: <http://dx.doi.org/10.1103/PhysRevResearch.2.023022>.
- [85] M. J. Boschini et al. “Deciphering the Local Interstellar Spectra of Secondary Nuclei with the Galprop/Helmod Framework and a Hint for Primary Lithium in Cosmic Rays”. In: *The Astrophysical Journal* 889.2 (Feb. 2020), p. 167. DOI: 10.3847/1538-4357/ab64f1. eprint: 1911.03108. URL: <https://doi.org/10.3847/1538-4357/ab64f1>.
- [86] A. U. Abeysekara et al. “Extended gamma-ray sources around pulsars constrain the origin of the positron flux at Earth”. In: *Science* 358.6365 (2017), pp. 911–914. DOI: 10.1126/science.aan4880. arXiv: 1711.06223 [astro-ph.HE].
- [87] F. Aharonian et al. “Extended Very-High-Energy Gamma-Ray Emission Surrounding PSR J0622+3749 Observed by LHAASO-KM2A”. In: *Phys. Rev. Lett.* 126.24 (2021), p. 241103. DOI: 10.1103/PhysRevLett.126.241103. arXiv: 2106.09396 [astro-ph.HE].
- [88] A. Aduszkiewicz et al. “Measurements of  $\pi^\pm$ ,  $K^\pm$ ,  $p$  and  $\bar{p}$  spectra in proton-proton interactions at 20, 31, 40, 80 and 158 GeV/c with the NA61/SHINE spectrometer at the CERN SPS”. In: *European Physical Journal C* 77.10 (2017), p. 671. DOI: 10.1140/epjc/s10052-017-5260-4. arXiv: 1705.02467 [nucl-ex].

- [89] Shreyasi Acharya et al. “Measurement of the low-energy antideuteron inelastic cross section”. In: *Physical Review Letters* 125.16 (2020), p. 162001. DOI: 10.1103/PhysRevLett.125.162001. arXiv: 2005.11122 [nucl-ex].
- [90] Roel Aaij et al. “Measurement of Antiproton Production in pHe Collisions at  $\sqrt{s_{NN}} = 110$  GeV”. In: *Physical Review Letters* 121.22 (2018), p. 222001. DOI: 10.1103/PhysRevLett.121.222001. arXiv: 1808.06127 [hep-ex].
- [91] B. Adams et al. “Letter of Intent: A New QCD facility at the M2 beam line of the CERN SPS (COMPASS++/AMBER)”. In: (2018). arXiv: 1808.00848 [hep-ex].
- [92] T. A. Porter, G. Johannesson, and I. V. Moskalenko. “High-energy Gamma Rays from the Milky Way: Three-dimensional Spatial Models for the Cosmic-Ray and Radiation Field Densities in the Interstellar Medium”. In: *The Astrophysical Journal* 846.1 (Aug. 2017), p. 67. ISSN: 1538-4357. DOI: 10.3847/1538-4357/aa844d. URL: <http://dx.doi.org/10.3847/1538-4357/aa844d>.
- [93] Gulaugur Johannesson, Troy A. Porter, and Igor V. Moskalenko. “The Three-Dimensional Spatial Distribution of Interstellar Gas in the Milky Way: Implications for Cosmic Rays and High-Energy Gamma-Ray Emissions”. In: *The Astrophysical Journal* 856.1 (2018), p. 45. DOI: 10.3847/1538-4357/aab26e. arXiv: 1802.08646 [astro-ph.HE].
- [94] Marius Cautun, Alejandro Benítez-Llambay, Alis J Deason, Carlos S Frenk, Azadeh Fattahi, Facundo A Gómez, Robert J J Grand, Kyle A Oman, Julio F Navarro, and Christine M Simpson. “The milky way total mass profile as inferred from Gaia DR2”. In: *Monthly Notices of the Royal Astronomical Society* 494.3 (Apr. 2020), pp. 4291–4313. ISSN: 1365-2966. DOI: 10.1093/mnras/staa1017. URL: <http://dx.doi.org/10.1093/mnras/staa1017>.
- [95] Francesca Calore, Mattia Di Mauro, Fiorenza Donato, Jason W. T. Hessels, and Christoph Weniger. “Radio detection prospects for a bulge population of millisecond pulsars as suggested by Fermi LAT observations of the inner Galaxy”. In: *Astrophys. J.* 827.2 (2016), p. 143. DOI: 10.3847/0004-637X/827/2/143. arXiv: 1512.06825 [astro-ph.HE].
- [96] Joanna Berteaud, Francesca Calore, Maica Clavel, Pasquale Dario Serpico, Guillaume Dubus, and Pierre-Olivier Petrucci. “Galactic bulge millisecond pulsars shining in x rays: A  $\gamma$ -ray perspective”. In: *Phys. Rev. D* 104.4 (2021), p. 043007. DOI: 10.1103/PhysRevD.104.043007. arXiv: 2012.03580 [astro-ph.HE].
- [97] Deheng Song, Oscar Macias, and Shunsaku Horiuchi. “Inverse Compton emission from millisecond pulsars in the Galactic bulge”. In: *Phys. Rev. D* 99.12 (2019), p. 123020. DOI: 10.1103/PhysRevD.99.123020. arXiv: 1901.07025 [astro-ph.HE].
- [98] Oscar Macias, Harm van Leijen, Deheng Song, Shin’ichiro Ando, Shunsaku Horiuchi, and Roland M. Crocker. “Cherenkov Telescope Array sensitivity to the putative millisecond pulsar population responsible for the Galactic center excess”. In: *Mon. Not. Roy. Astron. Soc.* 506 (2021), pp. 1741–1760. DOI: 10.1093/mnras/stab1450. arXiv: 2102.05648 [astro-ph.HE].
- [99] Francesca Calore, Tania Regimbau, and Pasquale Dario Serpico. “Probing the Fermi-LAT GeV excess with gravitational waves”. In: *Phys. Rev. Lett.* 122.8 (2019), p. 081103. DOI: 10.1103/PhysRevLett.122.081103. arXiv: 1812.05094 [astro-ph.HE].
- [100] Simeon Bird et al. “Snowmass2021 Cosmic Frontier White Paper: Primordial Black Hole Dark Matter”. In: (Mar. 2022). arXiv: 2203.08967 [hep-ph].
- [101] Vuk Mandic, Simeon Bird, and Ilias Cholis. “Stochastic Gravitational-Wave Background due to Primordial Binary Black Hole Mergers”. In: *Phys. Rev. Lett.* 117.20 (2016), p. 201102. DOI: 10.1103/PhysRevLett.117.201102. arXiv: 1608.06699 [astro-ph.CO].
- [102] Tomohiro Nakama, Joseph Silk, and Marc Kamionkowski. “Stochastic gravitational waves associated with the formation of primordial black holes”. In: *Phys. Rev. D* 95.4 (2017), p. 043511. DOI: 10.1103/PhysRevD.95.043511. arXiv: 1612.06264 [astro-ph.CO].
- [103] Nicola Bartolo et al. “Science with the space-based interferometer LISA. IV: Probing inflation with gravitational waves”. In: *JCAP* 12 (2016), p. 026. DOI: 10.1088/1475-7516/2016/12/026. arXiv: 1610.06481 [astro-ph.CO].

- [104] George M. Fuller, Alexander Kusenko, and Volodymyr Takhistov. “Primordial Black Holes and  $r$ -Process Nucleosynthesis”. In: *Phys. Rev. Lett.* 119.6 (2017), p. 061101. DOI: 10.1103/PhysRevLett.119.061101. arXiv: 1704.01129 [astro-ph.HE].
- [105] Giacomo Vianello, Robert J. Lauer, Patrick Young, Luigi Tibaldo, James M. Burgess, Hugo Ayala, Patrick Harding, Michelle Hui, Nicola Omodei, and Hao Zhou. “The Multi-Mission Maximum Likelihood framework (3ML)”. In: July 2015. arXiv: 1507.08343 [astro-ph.HE].
- [106] Shin’ichiro Ando and Eiichiro Komatsu. “Anisotropy of the cosmic gamma-ray background from dark matter annihilation”. In: *Phys. Rev. D* 73 (2006), p. 023521. DOI: 10.1103/PhysRevD.73.023521. arXiv: astro-ph/0512217.
- [107] Shin’ichiro Ando, Eiichiro Komatsu, Takuro Narumoto, and Tomonori Totani. “Dark matter annihilation or unresolved astrophysical sources? Anisotropy probe of the origin of cosmic gamma-ray background”. In: *Phys. Rev. D* 75 (2007), p. 063519. DOI: 10.1103/PhysRevD.75.063519. arXiv: astro-ph/0612467.
- [108] M. Ackermann et al. “Anisotropies in the diffuse gamma-ray background measured by the Fermi LAT”. In: *Phys. Rev. D* 85 (2012), p. 083007. DOI: 10.1103/PhysRevD.85.083007. arXiv: 1202.2856 [astro-ph.HE].
- [109] Mattia Fornasa et al. “Angular power spectrum of the diffuse gamma-ray emission as measured by the Fermi Large Area Telescope and constraints on its dark matter interpretation”. In: *Phys. Rev. D* 94.12 (2016), p. 123005. DOI: 10.1103/PhysRevD.94.123005. arXiv: 1608.07289 [astro-ph.HE].
- [110] M. Ackermann et al. “Unresolved Gamma-Ray Sky through its Angular Power Spectrum”. In: *Phys. Rev. Lett.* 121.24 (2018), p. 241101. DOI: 10.1103/PhysRevLett.121.241101. arXiv: 1812.02079 [astro-ph.HE].
- [111] Stephen K. N. Portillo, Benjamin C. G. Lee, Tansu Daylan, and Douglas P. Finkbeiner. “Improved Point-source Detection in Crowded Fields Using Probabilistic Cataloging”. In: *The Astronomical Journal* 154.4 (Sept. 2017), p. 132. DOI: 10.3847/1538-3881/aa8565. URL: <https://doi.org/10.3847/2F1538-3881/2Faa8565>.
- [112] Richard M. Feder, Stephen K. N. Portillo, Tansu Daylan, and Douglas Finkbeiner. “Multiband Probabilistic Cataloging: A Joint Fitting Approach to Point-source Detection and Deblending”. In: *The Astronomical Journal* 159.4 (Mar. 2020), p. 163. DOI: 10.3847/1538-3881/ab74cf. URL: <https://doi.org/10.3847/2F1538-3881/2Fab74cf>.
- [113] Dmitry Malyshev and David W. Hogg. “Statistics of gamma-ray point sources below the Fermi detection limit”. In: *Astrophys. J.* 738 (2011), p. 181. DOI: 10.1088/0004-637X/738/2/181. arXiv: 1104.0010 [astro-ph.CO].
- [114] Samuel K. Lee, Mariangela Lisanti, and Benjamin R. Safdi. “Distinguishing Dark Matter from Unresolved Point Sources in the Inner Galaxy with Photon Statistics”. In: *JCAP* 05 (2015), p. 056. DOI: 10.1088/1475-7516/2015/05/056. arXiv: 1412.6099 [astro-ph.CO].
- [115] Samuel K. Lee, Mariangela Lisanti, Benjamin R. Safdi, Tracy R. Slatyer, and Wei Xue. “Evidence for Unresolved  $\gamma$ -Ray Point Sources in the Inner Galaxy”. In: *Phys. Rev. Lett.* 116.5 (2016), p. 051103. DOI: 10.1103/PhysRevLett.116.051103. arXiv: 1506.05124 [astro-ph.HE].
- [116] Siddharth Mishra-Sharma, Nicholas L. Rodd, and Benjamin R. Safdi. “NPTFit: A code package for Non-Poissonian Template Fitting”. In: *Astron. J.* 153.6 (2017), p. 253. DOI: 10.3847/1538-3881/aa6d5f. arXiv: 1612.03173 [astro-ph.HE].
- [117] M. G. Aartsen et al. “A Search for Neutrino Point-source Populations in 7 yr of IceCube Data with Neutrino-count Statistics”. In: *Astrophys. J.* 893.2 (2020), p. 102. DOI: 10.3847/1538-4357/ab7af9. arXiv: 1909.08623 [astro-ph.HE].
- [118] Gabriel H. Collin, Nicholas L. Rodd, Tyler Erjavec, and Kerstin Perez. “A Compound Poisson Generator approach to Point-Source Inference in Astrophysics”. In: (Apr. 2021). arXiv: 2104.04529 [astro-ph.IM].

- [119] Sascha Caron, Germán A. Gómez-Vargas, Luc Hendriks, and Roberto Ruiz de Austri. “Analyzing  $\gamma$ -rays of the Galactic Center with Deep Learning”. In: *JCAP* 05 (2018), p. 058. DOI: 10.1088/1475-7516/2018/05/058. arXiv: 1708.06706 [astro-ph.HE].
- [120] Florian List, Nicholas L. Rodd, Geraint F. Lewis, and Ishaan Bhat. “The GCE in a New Light: Disentangling the  $\gamma$ -ray Sky with Bayesian Graph Convolutional Neural Networks”. In: (June 2020). arXiv: 2006.12504 [astro-ph.HE].
- [121] Florian List, Nicholas L. Rodd, and Geraint F. Lewis. “Extracting the Galactic Center excess’ source-count distribution with neural nets”. In: *Phys. Rev. D* 104.12 (2021), p. 123022. DOI: 10.1103/PhysRevD.104.123022. arXiv: 2107.09070 [astro-ph.HE].
- [122] Siddharth Mishra-Sharma and Kyle Cranmer. “A neural simulation-based inference approach for characterizing the Galactic Center  $\gamma$ -ray excess”. In: (Oct. 2021). arXiv: 2110.06931 [astro-ph.HE].
- [123] I. Daubechies. “Ten lectures on wavelets”. In: (Jan. 1992).
- [124] J. L. Starck and F. Murtaugh. “Astronomical Image and Data Analysis.” In: (2006).
- [125] Richard Bartels, Suraj Krishnamurthy, and Christoph Weniger. “Strong support for the millisecond pulsar origin of the Galactic center GeV excess”. In: *Physical Review Letters* 116.5 (2016), p. 051102. DOI: 10.1103/PhysRevLett.116.051102. arXiv: 1506.05104 [astro-ph.HE].
- [126] Yi-Ming Zhong, Samuel D. McDermott, Ilias Cholis, and Patrick J. Fox. “Testing the Sensitivity of the Galactic Center Excess to the Point Source Mask”. In: *Physical Review Letters* 124.23 (2020), p. 231103. DOI: 10.1103/PhysRevLett.124.231103. arXiv: 1911.12369 [astro-ph.HE].
- [127] Shin’ichiro Ando, Aurélien Benoit-Lévy, and Eiichiro Komatsu. “Mapping dark matter in the gamma-ray sky with galaxy catalogs”. In: *Phys. Rev. D* 90.2 (2014), p. 023514. DOI: 10.1103/PhysRevD.90.023514. arXiv: 1312.4403 [astro-ph.CO].
- [128] Shin’ichiro Ando. “Power spectrum tomography of dark matter annihilation with local galaxy distribution”. In: *JCAP* 10 (2014), p. 061. DOI: 10.1088/1475-7516/2014/10/061. arXiv: 1407.8502 [astro-ph.CO].
- [129] Stefano Camera, Mattia Fornasa, Nicolao Fornengo, and Marco Regis. “A Novel Approach in the Weakly Interacting Massive Particle Quest: Cross-correlation of Gamma-Ray Anisotropies and Cosmic Shear”. In: *Astrophys. J. Lett.* 771 (2013), p. L5. DOI: 10.1088/2041-8205/771/1/L5. arXiv: 1212.5018 [astro-ph.CO].
- [130] Stefano Camera, Mattia Fornasa, Nicolao Fornengo, and Marco Regis. “Tomographic-spectral approach for dark matter detection in the cross-correlation between cosmic shear and diffuse  $\gamma$ -ray emission”. In: *JCAP* 06 (2015), p. 029. DOI: 10.1088/1475-7516/2015/06/029. arXiv: 1411.4651 [astro-ph.CO].
- [131] Alessandro Cuoco, Jun-Qing Xia, Marco Regis, Enzo Branchini, Nicolao Fornengo, and Matteo Viel. “Dark Matter Searches in the Gamma-ray Extragalactic Background via Cross-correlations With Galaxy Catalogs”. In: *Astrophys. J. Suppl.* 221.2 (2015), p. 29. DOI: 10.1088/0067-0049/221/2/29. arXiv: 1506.01030 [astro-ph.HE].
- [132] Alessandro Cuoco, Maciej Bilicki, Jun-Qing Xia, and Enzo Branchini. “Tomographic imaging of the Fermi-LAT gamma-ray sky through cross-correlations: A wider and deeper look”. In: *Astrophys. J. Suppl.* 232 (2017), p. 10. DOI: 10.3847/1538-4365/aa8553. arXiv: 1709.01940 [astro-ph.HE].
- [133] S. Ammazzalorso et al. “Detection of Cross-Correlation between Gravitational Lensing and  $\gamma$  Rays”. In: *Phys. Rev. Lett.* 124.10 (2020), p. 101102. DOI: 10.1103/PhysRevLett.124.101102. arXiv: 1907.13484 [astro-ph.CO].
- [134] Torbjorn Sjöstrand, Stephen Mrenna, and Peter Z. Skands. “PYTHIA 6.4 Physics and Manual”. In: *Journal of High Energy Physics* 0605 (2006), p. 026. DOI: 10.1088/1126-6708/2006/05/026. arXiv: hep-ph/0603175 [hep-ph].
- [135] Torbjorn Sjostrand, Stephen Mrenna, and Peter Z. Skands. “A Brief Introduction to PYTHIA 8.1”. In: *Computer Physics Communications* 178 (2008), pp. 852–867. DOI: 10.1016/j.cpc.2008.01.036. arXiv: 0710.3820 [hep-ph].

- [136] Torbjörn Sjöstrand, Stefan Ask, Jesper R. Christiansen, Richard Corke, Nishita Desai, Philip Ilten, Stephen Mrenna, Stefan Prestel, Christine O. Rasmussen, and Peter Z. Skands. “An introduction to PYTHIA 8.2”. In: *Comput. Phys. Commun.* 191 (2015), pp. 159–177. DOI: 10.1016/j.cpc.2015.01.024. arXiv: 1410.3012 [hep-ph].
- [137] Christian W. Bauer, Nicholas L. Rodd, and Bryan R. Webber. “Dark matter spectra from the electroweak to the Planck scale”. In: *JHEP* 06 (2021), p. 121. DOI: 10.1007/JHEP06(2021)121. arXiv: 2007.15001 [hep-ph].
- [138] K. Engel et al. “The Future of Gamma-Ray Experiments in the MeV-EeV Range”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.07360 [astro-ph.HE].
- [139] Kristi Engel, Tiffany Lewis, Marco Stein Muzio, and Tonia M. Venters. “Advancing the Landscape of Multimessenger Science in the Next Decade”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.10074 [astro-ph.HE].
- [140] Koji Ishiwata, Oscar Macias, Shin’ichiro Ando, and Makoto Arimoto. “Probing heavy dark matter decays with multi-messenger astrophysical data”. In: *JCAP* 01 (2020), p. 003. DOI: 10.1088/1475-7516/2020/01/003. arXiv: 1907.11671 [astro-ph.HE].
- [141] W. D. Apel et al. “KASCADE-Grande Limits on the Isotropic Diffuse Gamma-Ray Flux between 100 TeV and 1 EeV”. In: *Astrophys. J.* 848.1 (2017), p. 1. DOI: 10.3847/1538-4357/aa8bb7. arXiv: 1710.02889 [astro-ph.HE].
- [142] *The Pierre Auger Observatory: Contributions to the 34th International Cosmic Ray Conference (ICRC 2015)*. Sept. 2015. arXiv: 1509.03732 [astro-ph.HE].
- [143] Alexander Aab et al. “Search for photons with energies above  $10^{18}$  eV using the hybrid detector of the Pierre Auger Observatory”. In: *JCAP* 04 (2017). [Erratum: *JCAP* 09, E02 (2020)], p. 009. DOI: 10.1088/1475-7516/2017/04/009. arXiv: 1612.01517 [astro-ph.HE].
- [144] R. U. Abbasi et al. “Constraints on the diffuse photon flux with energies above  $10^{18}$  eV using the surface detector of the Telescope Array experiment”. In: *Astropart. Phys.* 110 (2019), pp. 8–14. DOI: 10.1016/j.astropartphys.2019.03.003. arXiv: 1811.03920 [astro-ph.HE].
- [145] M. G. Aartsen et al. “Constraints on Ultrahigh-Energy Cosmic-Ray Sources from a Search for Neutrinos above 10 PeV with IceCube”. In: *Phys. Rev. Lett.* 117.24 (2016). [Erratum: *Phys.Rev.Lett.* 119, 259902 (2017)], p. 241101. DOI: 10.1103/PhysRevLett.117.241101. arXiv: 1607.05886 [astro-ph.HE].
- [146] Claudio Kopper. “Observation of Astrophysical Neutrinos in Six Years of IceCube Data”. In: *PoS ICRC2017* (2018), p. 981. DOI: 10.22323/1.301.0981.
- [147] P. W. Gorham et al. “Constraints on the ultrahigh-energy cosmic neutrino flux from the fourth flight of ANITA”. In: *Phys. Rev. D* 99.12 (2019), p. 122001. DOI: 10.1103/PhysRevD.99.122001. arXiv: 1902.04005 [astro-ph.HE].
- [148] Darko Veberic, ed. *The Pierre Auger Observatory: Contributions to the 35th International Cosmic Ray Conference (ICRC 2017)*. Aug. 2017. arXiv: 1708.06592 [astro-ph.HE].
- [149] Cherenkov Telescope Array Consortium et al. *Science with the Cherenkov Telescope Array*. 2019. DOI: 10.1142/10986.
- [150] A. Acharyya et al. “Sensitivity of the Cherenkov Telescope Array to a dark matter signal from the Galactic centre”. In: *Journal of Cosmology and Astroparticle Physics* 01 (2021), p. 057. DOI: 10.1088/1475-7516/2021/01/057. arXiv: 2007.16129 [astro-ph.HE].
- [151] Robert Daniel Parsons. “Towards a measurement of the cosmic ray electron spectrum at the highest energies, using the next-generation Cherenkov Array CTA”. PhD thesis. University of Leeds, 2011. URL: <https://ethos.bl.uk/OrderDetails.do?uin=uk.bl.ethos.588755>.
- [152] V. Vassiliev, S. Fegan, and P. Brousseau. “Wide field aplanatic two-mirror telescopes for ground-based  $\gamma$ -ray astronomy”. In: *Astroparticle Physics* 28.1 (Sept. 2007), pp. 10–27. DOI: 10.1016/j.astropartphys.2007.04.002. arXiv: astro-ph/0612718 [astro-ph].

- [153] V. V. Vassiliev and S. J. Fegan. “Schwarzschild-Couder two-mirror telescope for ground-based  $\gamma$ -ray astronomy”. In: *International Cosmic Ray Conference*. Vol. 3. International Cosmic Ray Conference. Jan. 2008, pp. 1445–1448. arXiv: 0708.2741 [astro-ph].
- [154] C. B. Adams et al. “Detection of the Crab Nebula with the 9.7 m prototype Schwarzschild-Couder telescope”. In: *Astroparticle Physics* 128 (2021), p. 102562. DOI: 10.1016/j.astropartphys.2021.102562. arXiv: 2012.08448 [astro-ph.IM].
- [155] David Alonso et al. “The LSST Dark Energy Science Collaboration (DESC) Science Requirements Document”. In: (Sept. 2018). arXiv: 1809.01669 [astro-ph.CO].
- [156] Jonathan R. Hargis, Beth Willman, and Annika H. G. Peter. “Too Many, Too Few, or Just Right? The Predicted Number and Distribution of Milky Way Dwarf Galaxies”. In: *The Astrophysical Journal* 795.1 (2014), p. L13. DOI: 10.1088/2041-8205/795/1/L13. arXiv: 1407.4470 [astro-ph.GA].
- [157] Aion Viana, Harm Schoorlemmer, Andrea Albert, Vitor de Souza, J. Patrick Harding, and Jim Hinton. “Searching for Dark Matter in the Galactic Halo with a Wide Field of View TeV Gamma-ray Observatory in the Southern Hemisphere”. In: *Journal of Cosmology and Astroparticle Physics* 12 (2019), p. 061. DOI: 10.1088/1475-7516/2019/12/061. arXiv: 1906.03353 [astro-ph.HE].
- [158] JH Buckley, L Bergström, WR Binns, J Buhler, Wenlei Chen, S Cherry, D Hooper, J Mitchell, G De Nolfo, S Al Nussirat, et al. “Astro2020 APC White Paper: The Advanced Particle-astrophysics Telescope (APT)”. In: ().
- [159] J Einasto. “Influence of the atmospheric and instrumental dispersion on the brightness distribution in a galaxy”. In: *Trudy Inst. Astrofiz. Alma-Ata* 51, 87 (1965).
- [160] A. Albert et al. “Searching for Dark Matter Annihilation in Recently Discovered Milky Way Satellites with Fermi-LAT”. In: *The Astrophysical Journal* 834.2 (2017), p. 110. DOI: 10.3847/1538-4357/834/2/110. arXiv: 1611.03184 [astro-ph.HE].
- [161] Louise Oakes et al. “Combined Dark Matter searches towards dwarf spheroidal galaxies with *Fermi*-LAT, HAWC, HESS, MAGIC and VERITAS”. In: *PoS ICRC2019* (2021), p. 012. DOI: 10.22323/1.358.0012. arXiv: 1909.06310 [astro-ph.HE].
- [162] H. Abdalla et al. “Search for dark matter annihilation signals in the H.E.S.S. Inner Galaxy Survey”. In: (July 2022). arXiv: 2207.10471 [astro-ph.HE].
- [163] John A. Tomsick. “The Compton Spectrometer and Imager Project for MeV Astronomy”. In: *PoS ICRC2021* (2021), p. 652. DOI: 10.22323/1.395.0652. arXiv: 2109.10403 [astro-ph.IM].
- [164] Atsushi Takada et al. “First observation of MeV gamma-ray universe with true imaging spectroscopy using the Electron-Tracking Compton Telescope aboard SMILE-2+”. In: (2021). arXiv: 2107.00180 [astro-ph.HE].
- [165] Toru Tanimori et al. “MeV Gamma-ray imaging spectroscopic observation for Galactic Centre and Cosmic Background MeV gammas by SMILE-2+ Balloon Experiment”. In: *Journal of Physics: Conference Series*. Vol. 1468. 1. IOP Publishing. 2020, p. 012046.
- [166] Kenji Hamaguchi et al. “A Space-based All-sky MeV gamma-ray Survey with the Electron Tracking Compton Camera”. In: (2019). arXiv: 1907.06658 [astro-ph.IM].
- [167] A Takada, T Tanimori, Y Mizumura, T Takemura, K Yoshikawa, Y Nakamura, M Abe, H Kubo, S Kurosawa, K Miuchi, et al. “SMILE-3: sky survey in MeV gamma-ray using the electron-tracking Compton telescope loaded on balloons”. In: *Space Telescopes and Instrumentation 2020: Ultraviolet to Gamma Ray*. Vol. 11444. SPIE. 2020, pp. 1017–1022.
- [168] Alexander Moiseev, Stefano Profumo, and Adam Coogan. “Snowmass2021-Letter of Interest Searching for Dark Matter and New Physics with GECCO”. In: ().
- [169] Tsuguo Aramaki, Per Hansson Adrian, Georgia Karagiorgi, and Hirokazu Odaka. “Dual MeV Gamma-Ray and Dark Matter Observatory - GRAMS Project”. In: *Astroparticle Physics* 114 (2020), pp. 107–114. DOI: 10.1016/j.astropartphys.2019.07.002. arXiv: 1901.03430 [astro-ph.HE].
- [170] Henrike Fleischhack. “AMEGO-X: MeV gamma-ray Astronomy in the Multi-messenger Era”. In: *PoS ICRC2021* (2021), p. 649. DOI: 10.22323/1.395.0649. arXiv: 2108.02860 [astro-ph.IM].



- [171] M. Tavani et al. “Science with e-ASTROGAM: A space mission for MeV–GeV gamma-ray astrophysics”. In: *JHEAp* 19 (2018). Ed. by A. De Angelis, V. Tatischeff, I. A. Grenier, J. McEnery, and M. Mallamaci, pp. 1–106. DOI: 10.1016/j.jheap.2018.07.001. arXiv: 1711.01265 [astro-ph.HE].
- [172] V. Schoenfelder et al. “Instrument Description and Performance of the Imaging Gamma-Ray Telescope COMPTEL aboard the Compton Gamma-Ray Observatory”. In: *Astrophysical Journal Supplement* 86 (June 1993), p. 657. DOI: 10.1086/191794.
- [173] Adam Coogan, Logan Morrison, and Stefano Profumo. “Precision gamma-ray constraints for sub-GeV dark matter models”. In: *JCAP* 08 (2021), p. 044. DOI: 10.1088/1475-7516/2021/08/044. arXiv: 2104.06168 [hep-ph].
- [174] N. Aghanim et al. “Planck 2018 results. VI. Cosmological parameters”. In: *Astron. Astrophys.* 641 (2020). [Erratum: *Astron. Astrophys.* 652, C4 (2021)], A6. DOI: 10.1051/0004-6361/201833910. arXiv: 1807.06209 [astro-ph.CO].
- [175] Marco Cirelli, Nicolao Fornengo, Bradley J. Kavanagh, and Elena Pinetti. “Integral X-ray constraints on sub-GeV Dark Matter”. In: *Physical Review D* 103.6 (2021), p. 063022. DOI: 10.1103/PhysRevD.103.063022. arXiv: 2007.11493 [hep-ph].
- [176] Scott Dodelson and Lawrence M. Widrow. “Sterile neutrinos as dark matter”. In: *Physical Review Letters* 72 (1 Jan. 1994), pp. 17–20. DOI: 10.1103/PhysRevLett.72.17. arXiv: hep-ph/9303287 [hep-ph]. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.72.17>.
- [177] Martin C. Weisskopf, Harvey D. Tananbaum, Leon P. Van Speybroeck, and Stephen L. O’Dell. “Chandra X-ray Observatory (CXO): overview”. In: *X-Ray Optics, Instruments, and Missions III*. Ed. by Joachim E. Truemper and Bernd Aschenbach. Vol. 4012. Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series. July 2000, pp. 2–16. DOI: 10.1117/12.391545. arXiv: astro-ph/0004127 [astro-ph].
- [178] F. Jansen et al. “XMM-Newton observatory. I. The spacecraft and operations”. In: *Astronomy & Astrophysics* 365 (Jan. 2001), pp. L1–L6. DOI: 10.1051/0004-6361:20000036.
- [179] Erik Kuulkers et al. “INTEGRAL reloaded: Spacecraft, instruments and ground system”. In: *New Astronomy Reviews* 93 (2021), p. 101629. ISSN: 1387-6473. DOI: <https://doi.org/10.1016/j.newar.2021.101629>. URL: <https://www.sciencedirect.com/science/article/pii/S1387647321000166>.
- [180] Kazuhisa Mitsuda et al. “The X-Ray Observatory Suzaku”. In: *Publications of the Astronomical Society of Japan* 59 (Jan. 2007), S1–S7. DOI: 10.1093/pasj/59.sp1.S1.
- [181] F. A. Harrison et al. “The Nuclear Spectroscopic Telescope Array (NuSTAR) High-Energy X-Ray Mission”. In: *The Astrophysical Journal* 770 (2013), p. 103. DOI: 10.1088/0004-637X/770/2/103. arXiv: 1301.7307 [astro-ph.IM].
- [182] K. K. Madsen et al. “Calibration of the NuSTAR High Energy Focusing X-Ray Telescope”. In: *The Astrophysical Journal Supplement* 220.1 (2015), p. 8. DOI: 10.1088/0067-0049/220/1/8. arXiv: 1504.01672 [astro-ph.IM].
- [183] Keith Bechtol et al. “Snowmass2021 Cosmic Frontier White Paper: Dark Matter Physics from Halo Measurements”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.07354 [hep-ph].
- [184] R. Sunyaev et al. “SRG X-ray orbital observatory. Its telescopes and first scientific results”. In: *Astronomy & Astrophysics* 656, A132 (Dec. 2021), A132. DOI: 10.1051/0004-6361/202141179. arXiv: 2104.13267 [astro-ph.HE].
- [185] Makoto Tashiro et al. “Status of x-ray imaging and spectroscopy mission (XRISM)”. In: *Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series*. Vol. 11444. Society of Photo-Optical Instrumentation Engineers (SPIE) Conference Series. Dec. 2020, 1144422, p. 1144422. DOI: 10.1117/12.2565812.
- [186] XRISM Science Team. “Science with the X-ray Imaging and Spectroscopy Mission (XRISM)”. In: *arXiv e-prints*, arXiv:2003.04962 (Mar. 2020), arXiv:2003.04962. arXiv: 2003.04962 [astro-ph.HE].

- [187] J. S. Adams et al. “Micro-X Sounding Rocket: Transitioning from First Flight to a Dark Matter Configuration”. In: *Journal of Low Temperature Physics* 199.3-4 (Jan. 2020), pp. 1072–1081. DOI: 10.1007/s10909-019-02307-2. arXiv: 1908.09010 [astro-ph.IM].
- [188] Kirpal Nandra et al. “The Hot and Energetic Universe: A White Paper presenting the science theme motivating the Athena+ mission”. In: *arXiv e-prints*, arXiv:1306.2307 (June 2013), arXiv:1306.2307. arXiv: 1306.2307 [astro-ph.HE].
- [189] Kristin Madsen et al. “HEX-P: The High-Energy X-ray Probe”. In: *Bulletin of the AAS* 51.7 (Sept. 2019). <https://baas.aas.org/pub/2020n7i166>.
- [190] P. Allison et al. “Cosmic-ray isotope measurements with HELIX”. English (US). In: *Proceedings of Science* 358 (2019). Publisher Copyright: © Copyright owned by the author(s) under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License (CC BY-NC-ND 4.0).; 36th International Cosmic Ray Conference, ICRC 2019 ; Conference date: 24-07-2019 Through 01-08-2019. ISSN: 1824-8039.
- [191] R. Battiston et al. “High precision particle astrophysics as a new window on the universe with an Antimatter Large Acceptance Detector In Orbit (ALADInO)”. In: *Exper. Astron.* 51.5 (2021). [Erratum: *Exper.Astron.* 51, 1331–1332 (2021)], pp. 1299–1330. DOI: 10.1007/s10686-021-09771-3.
- [192] Oscar Adriani et al. “Design of an Antimatter Large Acceptance Detector In Orbit (ALADInO)”. In: *Instruments* 6.2 (2022). ISSN: 2410-390X. DOI: 10.3390/instruments6020019. URL: <https://www.mdpi.com/2410-390X/6/2/19>.
- [193] S. Schael et al. “AMS-100: The next generation magnetic spectrometer in space - An international science platform for physics and astrophysics at Lagrange point 2”. In: *Nuclear Instruments and Methods in Physics Research A* 944, 162561 (Nov. 2019), p. 162561. DOI: 10.1016/j.nima.2019.162561. arXiv: 1907.04168 [astro-ph.IM].
- [194] A. Neronov and D. Malyshev. “Toward a full test of the  $\nu$ MSM sterile neutrino dark matter model with Athena”. In: *Phys. Rev. D* 93.6 (2016), p. 063518. DOI: 10.1103/PhysRevD.93.063518. arXiv: 1509.02758 [astro-ph.HE].
- [195] B. M. Roach, S. Rosslund, K. C. Y. Ng, K. Perez, J. F. Beacom, B. W. Grefenstette, S. Horiuchi, R. Krivonos, and D. R. Wik. “Long-Exposure NuSTAR Constraints on Decaying Dark Matter in the Galactic Halo”. In: (July 2022). arXiv: 2207.04572 [astro-ph.HE].
- [196] J. W. Foster, M. Kongsore, C. Dessert, Y. Park, N. L. Rodd, K. Cranmer, and B. R. Safdi. “Deep Search for Decaying Dark Matter with XMM-Newton Blank-Sky Observations”. In: *Physical Review Letters* 127.5 (2021), p. 051101. DOI: 10.1103/PhysRevLett.127.051101. arXiv: 2102.02207 [astro-ph.CO].
- [197] S. Horiuchi, P. J. Humphrey, J. Onorbe, K. N. Abazajian, M. Kaplinghat, and S. Garrison-Kimmel. “Sterile Neutrino Dark Matter Bounds from Galaxies of the Local Group”. In: *Physical Review D* 89.2 (2014), p. 025017. DOI: 10.1103/PhysRevD.89.025017. arXiv: 1311.0282 [astro-ph.CO].
- [198] Ariane Dekker, Ebo Peerbooms, Fabian Zimmer, Kenny C. Y. Ng, and Shin’ichiro Ando. “Searches for sterile neutrinos and axionlike particles from the Galactic halo with eROSITA”. In: *Physical Review D* 104.2, 023021 (July 2021), p. 023021. DOI: 10.1103/PhysRevD.104.023021. arXiv: 2103.13241 [astro-ph.HE].
- [199] V. V. Barinov, R. A. Burenin, D. S. Gorbunov, and R. A. Krivonos. “Towards testing sterile neutrino dark matter with the Spectrum-Roentgen-Gamma mission”. In: *Physical Review D* 103.6, 063512 (Mar. 2021), p. 063512. DOI: 10.1103/PhysRevD.103.063512. arXiv: 2007.07969 [astro-ph.CO].
- [200] Richard Bartels, Daniele Gaggero, and Christoph Weniger. “Prospects for indirect dark matter searches with MeV photons”. In: *JCAP* 05 (2017), p. 001. DOI: 10.1088/1475-7516/2017/05/001. arXiv: 1703.02546 [astro-ph.HE].
- [201] Ranjan Laha, Julian B. Muñoz, and Tracy R. Slatyer. “INTEGRAL constraints on primordial black holes and particle dark matter”. In: *Phys. Rev. D* 101.12 (2020), p. 123514. DOI: 10.1103/PhysRevD.101.123514. arXiv: 2004.00627 [astro-ph.CO].

- [202] Mathieu Boudaud, Julien Lavalle, and Pierre Salati. “Novel cosmic-ray electron and positron constraints on MeV dark matter particles”. In: *Phys. Rev. Lett.* 119.2 (2017), p. 021103. DOI: 10.1103/PhysRevLett.119.021103. arXiv: 1612.07698 [astro-ph.HE].
- [203] Timothy Cohen, Kohta Murase, Nicholas L. Rodd, Benjamin R. Safdi, and Yotam Soreq. “ $\gamma$  -ray Constraints on Decaying Dark Matter and Implications for IceCube”. In: *Phys. Rev. Lett.* 119.2 (2017), p. 021102. DOI: 10.1103/PhysRevLett.119.021102. arXiv: 1612.05638 [hep-ph].
- [204] Hongwan Liu, Wenzer Qin, Gregory W. Ridgway, and Tracy R. Slatyer. “Lyman- $\alpha$  constraints on cosmic heating from dark matter annihilation and decay”. In: *Phys. Rev. D* 104.4 (2021), p. 043514. DOI: 10.1103/PhysRevD.104.043514. arXiv: 2008.01084 [astro-ph.CO].
- [205] A. U. Abeysekara et al. “A Search for Dark Matter in the Galactic Halo with HAWC”. In: *JCAP* 02 (2018), p. 049. DOI: 10.1088/1475-7516/2018/02/049. arXiv: 1710.10288 [astro-ph.HE].
- [206] Luis A. Anchordoqui et al. “Hunting super-heavy dark matter with ultra-high energy photons”. In: *Astropart. Phys.* 132 (2021), p. 102614. DOI: 10.1016/j.astropartphys.2021.102614. arXiv: 2105.12895 [hep-ph].
- [207] Marco Chianese, Damiano F. G. Fiorillo, Rasmi Hajjar, Gennaro Miele, and Ninetta Saviano. “Constraints on heavy decaying dark matter with current gamma-ray measurements”. In: *JCAP* 11 (2021), p. 035. DOI: 10.1088/1475-7516/2021/11/035. arXiv: 2108.01678 [hep-ph].
- [208] T. Aramaki, C. J. Hailey, S. E. Boggs, P. von Doetinchem, H. Fuke, S. I. Mognet, R. A. Ong, K. Perez, and J. Zweerink. “Antideuteron sensitivity for the GAPS experiment”. In: *Astroparticle Physics* 74 (Feb. 2016), pp. 6–13. DOI: 10.1016/j.astropartphys.2015.09.001. arXiv: 1506.02513 [astro-ph.HE].
- [209] Adam Coogan and Stefano Profumo. “Origin of the tentative AMS antihelium events”. In: *Physical Review D* 96.8 (2017), p. 083020. DOI: 10.1103/PhysRevD.96.083020. arXiv: 1705.09664 [astro-ph.HE].
- [210] T. Aramaki et al. “Review of the theoretical and experimental status of dark matter identification with cosmic-ray antideuterons”. In: *Physics Reports*. 618 (2016), pp. 1–37. DOI: 10.1016/j.physrep.2016.01.002. arXiv: 1505.07785 [hep-ph].
- [211] P. von Doetinchem et al. “Cosmic-ray antinuclei as messengers of new physics: status and outlook for the new decade”. In: *Journal of Cosmology and Astroparticle Physics* 08 (2020), p. 035. DOI: 10.1088/1475-7516/2020/08/035. arXiv: 2002.04163 [astro-ph.HE].
- [212] Daniel E. Lopez-Fogliani, Andres D. Perez, and Roberto Ruiz de Austri. “Dark matter candidates in the NMSSM with RH neutrino superfields”. In: *JCAP* 04 (2021), p. 067. DOI: 10.1088/1475-7516/2021/04/067. arXiv: 2102.08986 [hep-ph].
- [213] Qihong Wang et al. “Results of dark matter search using the full PandaX-II exposure”. In: *Chinese Physics C* 44.12 (Dec. 2020), p. 125001. DOI: 10.1088/1674-1137/abb658. URL: <https://doi.org/10.1088/1674-1137/abb658>.
- [214] Melissa Van Beekveld, Wim Beenakker, Marrit Schutten, and Jeremy De Wit. “Dark matter, fine-tuning and  $(g-2)_\mu$  in the pMSSM”. In: *SciPost Phys.* 11.3 (2021), p. 049. DOI: 10.21468/SciPostPhys.11.3.049. arXiv: 2104.03245 [hep-ph].
- [215] M. E. Cabrera, J. A. Casas, A. Delgado, and S. Robles. “Generalized Blind Spots for Dark Matter Direct Detection in the 2HDM”. In: *JHEP* 02 (2020), p. 166. DOI: 10.1007/JHEP02(2020)166. arXiv: 1912.01758 [hep-ph].
- [216] Abhi Mukherjee, Saurabh Niyogi, and Sujoy Poddar. “Revisiting the gluino mass limits in the pMSSM in the light of the latest LHC data and Dark Matter constraints”. In: (Jan. 2022). arXiv: 2201.02531 [hep-ph].
- [217] Chien-Yi Chen, Richard J. Hill, Mikhail P. Solon, and Alexander M. Wijangco. “Power Corrections to the Universal Heavy WIMP-Nucleon Cross Section”. In: *Phys. Lett. B* 781 (2018), pp. 473–479. DOI: 10.1016/j.physletb.2018.04.021. arXiv: 1801.08551 [hep-ph].

- [218] A. Boyarsky, M. Drewes, T. Lasserre, S. Mertens, and O. Ruchayskiy. “Sterile neutrino Dark Matter”. In: *Prog. Part. Nucl. Phys.* 104 (2019), pp. 1–45. DOI: 10.1016/j.pnpnp.2018.07.004. arXiv: 1807.07938 [hep-ph].
- [219] Tommi Alanne, Nico Benincasa, Matti Heikinheimo, Kristjan Kannike, Venus Keus, Niko Koivunen, and Kimmo Tuominen. “Pseudo-Goldstone dark matter: gravitational waves and direct-detection blind spots”. In: *JHEP* 10 (2020), p. 080. DOI: 10.1007/JHEP10(2020)080. arXiv: 2008.09605 [hep-ph].
- [220] Eric Kuflik, Maxim Perelstein, Nicolas Rey-Le Lorier, and Yu-Dai Tsai. “Elastically Decoupling Dark Matter”. In: *Phys. Rev. Lett.* 116.22 (2016), p. 221302. DOI: 10.1103/PhysRevLett.116.221302. arXiv: 1512.04545 [hep-ph].
- [221] Eric Kuflik, Maxim Perelstein, Nicolas Rey-Le Lorier, and Yu-Dai Tsai. “Phenomenology of ELDER Dark Matter”. In: *JHEP* 08 (2017), p. 078. DOI: 10.1007/JHEP08(2017)078. arXiv: 1706.05381 [hep-ph].
- [222] Yonit Hochberg, Eric Kuflik, Tomer Volansky, and Jay G. Wacker. “Mechanism for Thermal Relic Dark Matter of Strongly Interacting Massive Particles”. In: *Phys. Rev. Lett.* 113 (2014), p. 171301. DOI: 10.1103/PhysRevLett.113.171301. arXiv: 1402.5143 [hep-ph].
- [223] Yonit Hochberg, Eric Kuflik, Hitoshi Murayama, Tomer Volansky, and Jay G. Wacker. “Model for Thermal Relic Dark Matter of Strongly Interacting Massive Particles”. In: *Phys. Rev. Lett.* 115.2 (2015), p. 021301. DOI: 10.1103/PhysRevLett.115.021301. arXiv: 1411.3727 [hep-ph].
- [224] Torsten Bringmann, Paul Frederik Depta, Marco Hufnagel, Joshua T. Ruderman, and Kai Schmidt-Hoberg. “Dark Matter from Exponential Growth”. In: *Phys. Rev. Lett.* 127.19 (2021), p. 191802. DOI: 10.1103/PhysRevLett.127.191802. arXiv: 2103.16572 [hep-ph].
- [225] Lawrence J. Hall, Karsten Jedamzik, John March-Russell, and Stephen M. West. “Freeze-In Production of Fimp Dark Matter”. In: *JHEP* 1003 (2010), p. 080. DOI: 10.1007/JHEP03(2010)080. arXiv: 0911.1120 [hep-ph].
- [226] Yang Bai, Mrunal Korwar, and Nicholas Orlofsky. “Electroweak-Symmetric Dark Monopoles from Preheating”. In: *JHEP* 07 (2020), p. 167. DOI: 10.1007/JHEP07(2020)167. arXiv: 2005.00503 [hep-ph].
- [227] Chris Kouvaris and Josef Pradler. “Probing Sub-GeV Dark Matter with Conventional Detectors”. In: *Phys. Rev. Lett.* 118.3 (2017), p. 031803. DOI: 10.1103/PhysRevLett.118.031803. arXiv: 1607.01789 [hep-ph].
- [228] Masahiro Ibe, Wakutaka Nakano, Yutaro Shoji, and Kazumine Suzuki. “Migdal Effect in Dark Matter Direct Detection Experiments”. In: *JHEP* 03 (2018), p. 194. DOI: 10.1007/JHEP03(2018)194. arXiv: 1707.07258 [hep-ph].
- [229] Torsten Bringmann and Maxim Pospelov. “Novel Direct Detection Constraints on Light Dark Matter”. In: *Phys. Rev. Lett.* 122.17 (2019), p. 171801. DOI: 10.1103/PhysRevLett.122.171801. arXiv: 1810.10543 [hep-ph].
- [230] Joseph Bramante, Jason Kumar, and Nirmal Raj. “Dark matter astrometry at underground detectors with multiscatter events”. In: *Phys. Rev. D* 100.12 (2019), p. 123016. DOI: 10.1103/PhysRevD.100.123016. arXiv: 1910.05380 [hep-ph].
- [231] Sebastian Baum, Andrzej K. Drukier, Katherine Freese, Maciej Górski, and Patrick Stengel. “Searching for Dark Matter with Paleo-Detectors”. In: *Phys. Lett. B* 803 (2020), p. 135325. DOI: 10.1016/j.physletb.2020.135325. arXiv: 1806.05991 [astro-ph.CO].
- [232] Andrzej K. Drukier, Sebastian Baum, Katherine Freese, Maciej Górski, and Patrick Stengel. “Paleo-detectors: Searching for Dark Matter with Ancient Minerals”. In: *Phys. Rev. D* 99.4 (2019), p. 043014. DOI: 10.1103/PhysRevD.99.043014. arXiv: 1811.06844 [astro-ph.CO].
- [233] Thomas D. P. Edwards, Bradley J. Kavanagh, Christoph Weniger, Sebastian Baum, Andrzej K. Drukier, Katherine Freese, Maciej Górski, and Patrick Stengel. “Digging for dark matter: Spectral analysis and discovery potential of paleo-detectors”. In: *Phys. Rev. D* 99.4 (2019), p. 043541. DOI: 10.1103/PhysRevD.99.043541. arXiv: 1811.10549 [hep-ph].

- [234] A. K. Drukier, Katherine Freese, and D. N. Spergel. “Detecting Cold Dark Matter Candidates”. In: *Phys. Rev. D* 33 (1986), pp. 3495–3508. DOI: 10.1103/PhysRevD.33.3495.
- [235] Sven E. Vahsen, Ciaran A. J. O’Hare, and Dinesh Loomba. “Directional Recoil Detection”. In: *Ann. Rev. Nucl. Part. Sci.* 71 (2021), pp. 189–224. DOI: 10.1146/annurev-nucl-020821-035016. arXiv: 2102.04596 [physics.ins-det].
- [236] J. Billard, L. Strigari, and E. Figueroa-Feliciano. “Implication of Neutrino Backgrounds on the Reach of Next Generation Dark Matter Direct Detection Experiments”. In: *Phys. Rev. D* 89.2 (2014), p. 023524. DOI: 10.1103/PhysRevD.89.023524. arXiv: 1307.5458 [hep-ph].
- [237] Graciela B. Gelmini, Volodymyr Takhistov, and Samuel J. Witte. “Casting a Wide Signal Net with Future Direct Dark Matter Detection Experiments”. In: *JCAP* 07 (2018). [Erratum: *JCAP* 02, E02 (2019)], p. 009. DOI: 10.1088/1475-7516/2018/07/009. arXiv: 1804.01638 [hep-ph].
- [238] Ciaran A. J. O’Hare. “Can we overcome the neutrino floor at high masses?”. In: *Phys. Rev. D* 102.6 (2020), p. 063024. DOI: 10.1103/PhysRevD.102.063024. arXiv: 2002.07499 [astro-ph.CO].
- [239] Ciaran A. J. O’Hare. “New Definition of the Neutrino Floor for Direct Dark Matter Searches”. In: *Phys. Rev. Lett.* 127.25 (2021), p. 251802. DOI: 10.1103/PhysRevLett.127.251802. arXiv: 2109.03116 [hep-ph].
- [240] E. Aprile et al. “Search for Coherent Elastic Scattering of Solar  $^8\text{B}$  Neutrinos in the XENON1T Dark Matter Experiment”. In: *Phys. Rev. Lett.* 126 (2021), p. 091301. DOI: 10.1103/PhysRevLett.126.091301. arXiv: 2012.02846 [hep-ex].
- [241] R. Agnese et al. “Search for Low-Mass Dark Matter with CDMSlite Using a Profile Likelihood Fit”. In: *Phys. Rev. D* 99.6 (2019), p. 062001. DOI: 10.1103/PhysRevD.99.062001. arXiv: 1808.09098 [astro-ph.CO].
- [242] Govinda Adhikari et al. “An experiment to search for dark-matter interactions using sodium iodide detectors”. In: *Nature* 564.7734 (2018). [Erratum: *Nature* 566, E2 (2019)], pp. 83–86. DOI: 10.1038/s41586-018-0739-1. arXiv: 1906.01791 [astro-ph.IM].
- [243] A. H. Abdelhameed et al. “First results from the CRESST-III low-mass dark matter program”. In: *Phys. Rev. D* 100.10 (2019), p. 102002. DOI: 10.1103/PhysRevD.100.102002. arXiv: 1904.00498 [astro-ph.CO].
- [244] R. Bernabei et al. “First model independent results from DAMA/LIBRA-phase2”. In: *Universe* 4.11 (2018). Ed. by Yakir Aharonov, David Blaschke, Larissa Bravina, Sonia Kabana, and Victoria Volkova, p. 116. DOI: 10.3390/universe4110116.
- [245] P. Agnes et al. “Low-Mass Dark Matter Search with the DarkSide-50 Experiment”. In: *Phys. Rev. Lett.* 121.8 (2018), p. 081307. DOI: 10.1103/PhysRevLett.121.081307. arXiv: 1802.06994 [astro-ph.HE].
- [246] R. Ajaj et al. “Search for dark matter with a 231-day exposure of liquid argon using DEAP-3600 at SNOLAB”. In: *Phys. Rev. D* 100.2 (2019), p. 022004. DOI: 10.1103/PhysRevD.100.022004. arXiv: 1902.04048 [astro-ph.CO].
- [247] L. Hehn et al. “Improved EDELWEISS-III sensitivity for low-mass WIMPs using a profile likelihood approach”. In: *Eur. Phys. J. C* 76.10 (2016), p. 548. DOI: 10.1140/epjc/s10052-016-4388-y. arXiv: 1607.03367 [astro-ph.CO].
- [248] D. S. Akerib et al. “Results from a search for dark matter in the complete LUX exposure”. In: *Phys. Rev. Lett.* 118.2 (2017), p. 021303. DOI: 10.1103/PhysRevLett.118.021303. arXiv: 1608.07648 [astro-ph.CO].
- [249] Q. Arnaud et al. “First results from the NEWS-G direct dark matter search experiment at the LSM”. In: *Astropart. Phys.* 97 (2018), pp. 54–62. DOI: 10.1016/j.astropartphys.2017.10.009. arXiv: 1706.04934 [astro-ph.IM].
- [250] Xiangyi Cui et al. “Dark Matter Results From 54-Ton-Day Exposure of PandaX-II Experiment”. In: *Phys. Rev. Lett.* 119.18 (2017), p. 181302. DOI: 10.1103/PhysRevLett.119.181302. arXiv: 1708.06917 [astro-ph.CO].

- [251] C. Amole et al. “Improved dark matter search results from PICO-2L Run 2”. In: *Phys. Rev. D* 93.6 (2016), p. 061101. DOI: 10.1103/PhysRevD.93.061101. arXiv: 1601.03729 [astro-ph.CO].
- [252] C. Amole et al. “Dark Matter Search Results from the PICO-60 C<sub>3</sub>F<sub>8</sub> Bubble Chamber”. In: *Phys. Rev. Lett.* 118.25 (2017), p. 251301. DOI: 10.1103/PhysRevLett.118.251301. arXiv: 1702.07666 [astro-ph.CO].
- [253] E. Aprile et al. “Search for Light Dark Matter Interactions Enhanced by the Migdal Effect or Bremsstrahlung in XENON1T”. In: *Phys. Rev. Lett.* 123.24 (2019), p. 241803. DOI: 10.1103/PhysRevLett.123.241803. arXiv: 1907.12771 [hep-ex].
- [254] Yue Meng et al. “Dark Matter Search Results from the PandaX-4T Commissioning Run”. In: *Phys. Rev. Lett.* 127.26 (2021), p. 261802. DOI: 10.1103/PhysRevLett.127.261802. arXiv: 2107.13438 [hep-ex].
- [255] J. Aalbers et al. “First Dark Matter Search Results from the LUX-ZEPLIN (LZ) Experiment”. In: (July 2022). arXiv: 2207.03764 [hep-ex].
- [256] P. Cushman et al. “Working Group Report: WIMP Dark Matter Direct Detection”. In: *Community Summer Study 2013: Snowmass on the Mississippi (CSS2013) Minneapolis, MN, USA, July 29-August 6, 2013*. 2013. arXiv: 1310.8327 [hep-ex]. URL: <http://arxiv.org/pdf/1310.8327.pdf>.
- [257] E. Behnke et al. “First Dark Matter Search Results from a 4-kg CF<sub>3</sub>I Bubble Chamber Operated in a Deep Underground Site”. In: *Phys. Rev. D* 86.5 (2012). [Erratum: *Phys. Rev. D* 90, no. 7, 079902 (2014)], p. 052001. DOI: 10.1103/PhysRevD.86.052001, 10.1103/PhysRevD.90.079902. arXiv: 1204.3094 [astro-ph.CO].
- [258] K. W. Kim et al. “Limits on Interactions between Weakly Interacting Massive Particles and Nucleons Obtained with NaI(Tl) crystal Detectors”. In: *JHEP* 03 (2019), p. 194. DOI: 10.1007/JHEP03(2019)194. arXiv: 1806.06499 [hep-ex].
- [259] S. Archambault et al. “Constraints on Low-Mass WIMP Interactions on <sup>19</sup>F from PICASSO”. In: *Phys. Lett. B* 711 (2012), pp. 153–161. DOI: 10.1016/j.physletb.2012.03.078. arXiv: 1202.1240 [hep-ex].
- [260] C. Amole et al. “Improved dark matter search results from PICO-2L Run 2”. In: *Phys. Rev. D* 93.6 (2016), p. 061101. DOI: 10.1103/PhysRevD.93.061101. arXiv: 1601.03729 [astro-ph.CO].
- [261] C. Amole et al. “Dark Matter Search Results from the PICO-60 C<sub>3</sub>F<sub>8</sub> Bubble Chamber”. In: *Phys. Rev. Lett.* 118.25 (2017), p. 251301. DOI: 10.1103/PhysRevLett.118.251301. arXiv: 1702.07666 [astro-ph.CO].
- [262] Z. Ahmed et al. “Dark Matter Search Results from the CDMS II Experiment”. In: *Science* 327 (2010), pp. 1619–1621. DOI: 10.1126/science.1186112. arXiv: 0912.3592 [astro-ph.CO].
- [263] D. S. Akerib et al. “Limits on spin-dependent WIMP-nucleon cross section obtained from the complete LUX exposure”. In: *Phys. Rev. Lett.* 118.25 (2017), p. 251302. DOI: 10.1103/PhysRevLett.118.251302. arXiv: 1705.03380 [astro-ph.CO].
- [264] Jingkai Xia et al. “PandaX-II Constraints on Spin-Dependent WIMP-Nucleon Effective Interactions”. In: *Phys. Lett. B* 792 (2019), pp. 193–198. DOI: 10.1016/j.physletb.2019.02.043. arXiv: 1807.01936 [hep-ex].
- [265] E. Aprile et al. “XENON100 Dark Matter Results from a Combination of 477 Live Days”. In: *Phys. Rev. D* 94.12 (2016), p. 122001. DOI: 10.1103/PhysRevD.94.122001. arXiv: 1609.06154 [astro-ph.CO].
- [266] E. Aprile et al. “Search for Light Dark Matter Interactions Enhanced by the Migdal Effect Or Bremsstrahlung in Xenon1T”. In: *Phys. Rev. Lett.* 123.24 (2019), p. 241803. DOI: 10.1103/PhysRevLett.123.241803. arXiv: 1907.12771 [hep-ex].
- [267] E. Aprile et al. “Constraining the spin-dependent WIMP-nucleon cross sections with XENON1T”. In: *Phys. Rev. Lett.* 122.14 (2019), p. 141301. DOI: 10.1103/PhysRevLett.122.141301. arXiv: 1902.03234 [astro-ph.CO].

- [268] P. Adhikari et al. “First Direct Detection Constraints on Planck-Scale Mass Dark Matter with Multiple-Scatter Signatures Using the DEAP-3600 Detector”. In: *Phys. Rev. Lett.* 128.1 (2022), p. 011801. DOI: 10.1103/PhysRevLett.128.011801. arXiv: 2108.09405 [astro-ph.CO].
- [269] R. Bernabei et al. “Extended Limits on Neutral Strongly Interacting Massive Particles and Nuclearites from NaI(Tl) Scintillators”. In: *Phys. Rev. Lett.* 83.24 (Dec. 1999), pp. 4918–4921. DOI: 10.1103/PhysRevLett.83.4918. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.83.4918>.
- [270] Amit Bhoonah, Joseph Bramante, Brian Courtman, and Ningqiang Song. “Etched plastic searches for dark matter”. In: *Phys. Rev. D* 103.10 (2021), p. 103001. DOI: 10.1103/PhysRevD.103.103001. arXiv: 2012.13406 [hep-ph].
- [271] Amit Bhoonah, Joseph Bramante, Fatemeh Elahi, and Sarah Schon. “Galactic Center gas clouds and novel bounds on ultralight dark photon, vector portal, strongly interacting, composite, and super-heavy dark matter”. In: *Phys. Rev. D* 100.2 (2019), p. 023001. DOI: 10.1103/PhysRevD.100.023001. arXiv: 1812.10919 [hep-ph].
- [272] Amit Bhoonah, Joseph Bramante, Sarah Schon, and Ningqiang Song. “Detecting composite dark matter with long-range and contact interactions in gas clouds”. In: *Phys. Rev. D* 103.12 (2021), p. 123026. DOI: 10.1103/PhysRevD.103.123026. arXiv: 2010.07240 [hep-ph].
- [273] Bradley J. Kavanagh. “Earth-Scattering of super-heavy Dark Matter: updated constraints from detectors old and new”. In: *Phys. Rev. D* 97.12 (June 2018), p. 123013. DOI: 10.1103/PhysRevD.97.123013. URL: <http://arxiv.org/abs/1712.04901>.
- [274] Ivone F. M. Albuquerque and Laura Baudis. “Direct Detection Constraints on Superheavy Dark Matter”. In: *Phys. Rev. Lett.* 90 (2003), p. 221301. DOI: 10.1103/PhysRevLett.90.221301.
- [275] Ivone F. M. Albuquerque and Laura Baudis. “Erratum: Direct Detection Constraints on Superheavy Dark Matter [Phys. Rev. Lett. 90, 221301 (2003)]”. In: *Phys. Rev. Lett.* 91.22 (Nov. 2003), p. 229903. DOI: 10.1103/PhysRevLett.91.229903. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.91.229903>.
- [276] Christopher V. Cappiello, J. I. Collar, and John F. Beacom. “New Experimental Constraints in a New Landscape for Composite Dark Matter”. In: *Phys. Rev. D* 103.2 (Jan. 2021), p. 023019. DOI: 10.1103/PhysRevD.103.023019. URL: <http://arxiv.org/abs/2008.10646>.
- [277] Michael Clark, Amanda Depoian, Bahaa Elshimy, Abigail Kopec, Rafael F. Lang, and Juehang Qin. “Direct Detection Limits on Heavy Dark Matter”. In: *Phys. Rev. D* 102.12 (2020). and erratum [private communication, to be published], p. 123026. DOI: 10.1103/PhysRevD.102.123026. arXiv: 2009.07909 [hep-ph].
- [278] Javier F. Acevedo, Joseph Bramante, and Alan Goodman. “Old Rocks, New Limits: Excavated Ancient Mica Searches For Dark Matter”. In: *arXiv:2105.06473* (May 2021). URL: <http://arxiv.org/abs/2105.06473>.
- [279] Ivone F. M. Albuquerque and Carlos Pérez de los Heros. “Closing the Window on Strongly Interacting Dark Matter with IceCube”. In: *Phys. Rev. D* 81.6 (Mar. 2010), p. 063510. DOI: 10.1103/PhysRevD.81.063510. arXiv: 1001.1381. URL: <http://arxiv.org/abs/1001.1381>.
- [280] Adrienne L. Erickcek, Paul J. Steinhardt, Dan McCommon, and Patrick C. McGuire. “Constraints on the Interactions between Dark Matter and Baryons from the X-Ray Quantum Calorimetry Experiment”. In: *Phys. Rev. D* 76.4 (Aug. 2007), p. 042007. DOI: 10.1103/PhysRevD.76.042007. URL: <https://link.aps.org/doi/10.1103/PhysRevD.76.042007>.
- [281] Cora Dvorkin, Kfir Blum, and Marc Kamionkowski. “Constraining Dark Matter-Baryon Scattering with Linear Cosmology”. In: *Phys. Rev. D* 89.2 (2014), p. 023519. DOI: 10.1103/PhysRevD.89.023519. arXiv: 1311.2937 [astro-ph.CO].
- [282] Vera Gluscevic and Kimberly K. Boddy. “Constraints on Scattering of keV–TeV Dark Matter with Protons in the Early Universe”. In: *Phys. Rev. Lett.* 121.8 (2018), p. 081301. DOI: 10.1103/PhysRevLett.121.081301. arXiv: 1712.07133 [astro-ph.CO].
- [283] [https://pdf.gsfc.nasa.gov/pub/data/imp/imp8/documents/archived\\_website/project.html](https://pdf.gsfc.nasa.gov/pub/data/imp/imp8/documents/archived_website/project.html).

- [284] Joseph Bramante, Benjamin Broerman, Jason Kumar, Rafael F. Lang, Maxim Pospelov, and Nirmal Raj. “Foraging for dark matter in large volume liquid scintillator neutrino detectors with multiscatter events”. In: *Phys. Rev. D* 99.8 (2019), p. 083010. DOI: 10.1103/PhysRevD.99.083010. arXiv: 1812.09325 [hep-ph].
- [285] C. A. J. O’Hare et al. “Recoil imaging for dark matter, neutrinos, and physics beyond the Standard Model”. In: Mar. 2022. arXiv: 2203.05914 [physics.ins-det].
- [286] H. M. Araújo et al. “The MIGDAL experiment: Measuring a rare atomic process to aid the search for dark matter”. In: (July 2022). arXiv: 2207.08284 [hep-ex].
- [287] B.J. Mount et al. “Lux-Zeplin (Lz) Technical Design Report”. In: *arXiv:1703.09144* (2017). arXiv: 1703.09144 [physics.ins-det].
- [288] R. Bernabei et al. “First model independent results from DAMA/LIBRA-phase2”. In: *Nucl. Phys. At. Energy* 19 (2019), p. 307. DOI: 10.15407/jnpae2018.04.307.
- [289] R. Bernabei et al. “No role for neutrons, muons and solar neutrinos in the DAMA annual modulation results”. In: *Eur. Phys. J. C* 74.12 (2014), p. 3196. DOI: 10.1140/epjc/s10052-014-3196-5. arXiv: 1409.3516 [hep-ph].
- [290] J. Amaré et al. “First Results on Dark Matter Annual Modulation from the ANAIS-112 Experiment”. In: *Phys. Rev. Lett.* 123 (3 July 2019), p. 031302.
- [291] J. Amaré et al. “ANAIS-112 status: Two years results on annual modulation”. In: *J. Phys. Conf. Ser.* 1468 (2020), p. 012014.
- [292] J. Amaré et al. “Annual modulation results from three-year exposure of ANAIS-112”. In: *Phys. Rev. D* 103 (2021), p. 102005.
- [293] G. Adhikari et al. “Search for a Dark Matter-Induced Annual Modulation Signal in NaI(Tl) with the COSINE-100 Experiment”. In: *Phys. Rev. Lett.* 123 (3 July 2019), p. 031302.
- [294] G. Adhikari et al. “Three-year annual modulation search with COSINE-100”. In: (2021). arXiv: 2111.08863 [hep-ex].
- [295] Park B.J. et al. “Development of ultra-pure NaI(Tl) detectors for the COSINE-200 experiment”. In: *Eur. Phys. J. C* 80.814 (2014). DOI: 10.1140/epjc/s10052-014-3196-5.
- [296] Suerfu et al. “Growth of ultra-high purity NaI(Tl) crystals for dark matter searches”. In: *Phys. Rev. Research* 2 (1 Feb. 2020), p. 013223.
- [297] Fushimi K. et al. “Development of highly radiopure NaI(Tl) scintillator for PICOLON dark matter search project”. In: *Prog Theor Exp Phys* 2021 (1 2021), 043F01.
- [298] G. Angloher et al. “COSINUS: Cryogenic Calorimeters for the Direct Dark Matter Search with NaI Crystals”. In: *Journal of Low Temperature Physics* 200.5 (2020), pp. 428–436. DOI: 10.1007/s10909-020-02464-9. URL: <https://doi.org/10.1007/s10909-020-02464-9>.
- [299] Francis Froborg. “SABRE: WIMP modulation detection in the northern and southern hemisphere”. In: *14th International Conference on Topics in Astroparticle and Underground Physics (TAUP 2015) Torino, Italy, September 7-11, 2015*. 2016. arXiv: 1601.05307 [physics.ins-det]. URL: <https://inspirehep.net/record/1416177/files/arXiv:1601.05307.pdf>.
- [300] M. Antonello et al. “The SABRE project and the SABRE Proof-of-Principle”. In: *Eur. Phys. J. C* 79.4 (2019), p. 363. DOI: 10.1140/epjc/s10052-019-6860-y. arXiv: 1806.09340 [physics.ins-det].
- [301] E. Aprile et al. “Excess electronic recoil events in XENON1T”. In: *Phys. Rev. D* 102.7 (2020), p. 072004. DOI: 10.1103/PhysRevD.102.072004. arXiv: 2006.09721 [hep-ex].
- [302] E. Aprile et al. *Search for New Physics in Electronic Recoil Data from XENONnT*. 2022. DOI: 10.48550/ARXIV.2207.11330. URL: <https://arxiv.org/abs/2207.11330>.
- [303] A. Fuss, M. Kaznatcheeva, F. Reindl, and F. Wagner, eds. *EXCESS workshop: Descriptions of rising low-energy spectra*. Feb. 2022. arXiv: 2202.05097 [astro-ph.IM].
- [304] J. Aalbers et al. “A Next-Generation Liquid Xenon Observatory for Dark Matter and Neutrino Physics”. In: (Mar. 2022). arXiv: 2203.02309 [physics.ins-det].



- [305] J. Angle et al. “First Results from the XENON10 Dark Matter Experiment at the Gran Sasso National Laboratory”. In: *Phys. Rev. Lett.* 100 (2 Jan. 2008), p. 021303. DOI: 10.1103/PhysRevLett.100.021303. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.100.021303>.
- [306] E. Aprile et al. “XENON100 dark matter results from a combination of 477 live days”. In: *Phys. Rev. D* 94 (12 Dec. 2016), p. 122001. DOI: 10.1103/PhysRevD.94.122001. URL: <https://link.aps.org/doi/10.1103/PhysRevD.94.122001>.
- [307] D.Yu. Akimov et al. “WIMP-nucleon cross-section results from the second science run of ZEPLIN-III”. In: *Physics Letters B* 709.1 (2012), pp. 14–20. ISSN: 0370-2693. DOI: <https://doi.org/10.1016/j.physletb.2012.01.064>. URL: <https://www.sciencedirect.com/science/article/pii/S0370269312001050>.
- [308] D. S. Akerib et al. “Improved Limits on Scattering of Weakly Interacting Massive Particles from Reanalysis of 2013 LUX Data”. In: *Phys. Rev. Lett.* 116 (16 Apr. 2016), p. 161301. DOI: 10.1103/PhysRevLett.116.161301. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.116.161301>.
- [309] E. Aprile et al. “Dark Matter Search Results from a One Ton-Year Exposure of XENON1T”. In: *Phys. Rev. Lett.* 121.11 (2018), p. 111302. DOI: 10.1103/PhysRevLett.121.111302. arXiv: 1805.12562 [astro-ph.CO].
- [310] Hongguang Zhang et al. “Dark matter direct search sensitivity of the PandaX-4T experiment”. In: *Sci. China Phys. Mech. Astron.* 62.3 (2019), p. 31011. DOI: 10.1007/s11433-018-9259-0. arXiv: 1806.02229 [physics.ins-det].
- [311] D. S. Akerib et al. “Projected WIMP sensitivity of the LUX-ZEPLIN dark matter experiment”. In: *Phys. Rev. D* 101 (5 Mar. 2020), p. 052002. DOI: 10.1103/PhysRevD.101.052002. URL: <https://link.aps.org/doi/10.1103/PhysRevD.101.052002>.
- [312] E. Aprile et al. “Projected WIMP sensitivity of the XENONnT dark matter experiment”. In: *JCAP* 11 (2020), p. 031. DOI: 10.1088/1475-7516/2020/11/031. arXiv: 2007.08796 [physics.ins-det].
- [313] Nasim Fatemighomi. “DEAP-3600 dark matter experiment”. In: *35th International Symposium on Physics in Collision*. Sept. 2016. arXiv: 1609.07990 [physics.ins-det].
- [314] Jui-Jen Wang. “MiniCLEAN Dark Matter Experiment”. In: (Nov. 2017). arXiv: 1711.02117 [physics.ins-det].
- [315] Wei Mu. “Direct WIMPs Search with the ArDM Experiment and Preliminary Results from 1.43 Days of Physics Data”. en. PhD thesis. Zurich: ETH Zurich, 2019-03. DOI: 10.3929/ethz-b-000335024.
- [316] P. Benetti et al. “First results from a dark matter search with liquid argon at 87K in the Gran Sasso underground laboratory”. In: *Astroparticle Physics* 28.6 (2008), pp. 495–507. ISSN: 0927-6505. DOI: <https://doi.org/10.1016/j.astropartphys.2007.08.002>. URL: <https://www.sciencedirect.com/science/article/pii/S0927650507001016>.
- [317] Andrea Zani. “The WArP Experiment: A Double-Phase Argon Detector for Dark Matter Searches”. In: *Advances in High Energy Physics* 2014 (2014). ISSN: 205107. DOI: <https://doi.org/10.1155/2014/205107>.
- [318] Paolo Agnes et al. “DarkSide-50 532-day dark matter search with low-radioactivity argon”. English. In: *Phys. Rev. D* 98.10 (Nov. 2018), p. 102006. DOI: 10.1103/PhysRevD.98.102006. URL: <https://link.aps.org/doi/10.1103/PhysRevD.98.102006>.
- [319] *DARKSIDE-20K AND THE FUTURE LIQUID ARGON DARK MATTER*. URL: [https://indico.ific.uv.es/event/6178/contributions/15822/attachments/9314/12130/DarkSide-20k\\_and\\_the\\_Future\\_Liquid\\_Argon\\_Dark\\_Matter\\_Partic\\_E\\_TAUP\\_2021.pdf](https://indico.ific.uv.es/event/6178/contributions/15822/attachments/9314/12130/DarkSide-20k_and_the_Future_Liquid_Argon_Dark_Matter_Partic_E_TAUP_2021.pdf).
- [320] *Future Dark Matter Searches with Low-Radioactivity Argon*. URL: [https://indico.cern.ch/event/765096/contributions/3295671/attachments/1785196/2906164/DarkSide-Argo\\_ESPP\\_Dec\\_17\\_2017.pdf](https://indico.cern.ch/event/765096/contributions/3295671/attachments/1785196/2906164/DarkSide-Argo_ESPP_Dec_17_2017.pdf).
- [321] E. Aprile et al. “Light Dark Matter Search with Ionization Signals in XENON1T”. In: *Phys. Rev. Lett.* 123 (25 Dec. 2019), p. 251801. DOI: 10.1103/PhysRevLett.123.251801. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.123.251801>.

- [322] E. Aprile et al. “Search for Light Dark Matter Interactions Enhanced by the Migdal Effect or Bremsstrahlung in XENON1T”. In: *Phys. Rev. Lett.* 123 (24 Dec. 2019), p. 241803. DOI: 10.1103/PhysRevLett.123.241803. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.123.241803>.
- [323] J. Aalbers et al. “DARWIN: towards the ultimate dark matter detector”. In: *JCAP* 11 (2016), p. 017. DOI: 10.1088/1475-7516/2016/11/017. arXiv: 1606.07001 [astro-ph.IM].
- [324] LZ and XENON collaborations. *Leading Xenon Researchers unite to build next-generation Dark Matter Detector*. <https://www.sanfordlab.org/press-release/leading-xenon-researchers-unite-build-next-generation-dark-matter-detector>. 2021. (Visited on 07/20/2021).
- [325] Paolo Agnes et al. “First results from the DarkSide-50 dark matter experiment at Laboratori Nazionali del Gran Sasso”. English. In: *Phys. Lett. B* 743 (Apr. 2015), pp. 456–466. DOI: 10.1016/j.physletb.2015.03.012. URL: <http://linkinghub.elsevier.com/retrieve/pii/S0370269315001756>.
- [326] Paolo Agnes et al. “Results from the first use of low radioactivity argon in a dark matter search”. English. In: *Phys. Rev. D* 93.8 (Apr. 2016), p. 081101. DOI: 10.1103/PhysRevD.93.081101. URL: <http://link.aps.org/doi/10.1103/PhysRevD.93.081101>.
- [327] C M Nantais, B T Cleveland, and Mark G Boulay. “Radiopurity measurement of acrylic for DEAP-3600”. English. In: *AIP Conf. Proc.* (Aug. 2013), pp. 185–188. DOI: 10.1063/1.4818105. URL: <http://aip.scitation.org/doi/abs/10.1063/1.4818105>.
- [328] P A Amaudruz et al. “First Results from the DEAP-3600 Dark Matter Search with Argon at SNO-LAB”. English. In: *Phys. Rev. Lett.* 121.7 (Aug. 2018), p. 071801. DOI: 10.1103/PhysRevLett.121.071801. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.121.071801>.
- [329] R Ajaj et al. “Electromagnetic backgrounds and potassium-42 activity in the DEAP-3600 dark matter detector”. English. In: *Phys. Rev. D* 100.7 (Oct. 2019), p. 072009. DOI: 10.1103/PhysRevD.100.072009. URL: <https://link.aps.org/doi/10.1103/PhysRevD.100.072009>.
- [330] R Ajaj et al. “Search for dark matter with a 231-day exposure of liquid argon using DEAP-3600 at SNOLAB”. English. In: *Phys. Rev. D* 100.2 (July 2019), p. 022004. DOI: 10.1103/PhysRevD.100.022004. URL: <https://link.aps.org/doi/10.1103/PhysRevD.100.022004>.
- [331] P. Adhikari et al. “Pulse-shape discrimination against low-energy Ar-39 beta decays in liquid argon with 4.5 tonne-years of DEAP-3600 data”. In: *The European Physical Journal C* 81.9 (2021), p. 823. DOI: 10.1140/epjc/s10052-021-09514-w. URL: <https://doi.org/10.1140/epjc/s10052-021-09514-w>.
- [332] A. Avasthi et al. “Low Background kTon-Scale Liquid Argon Time Projection Chambers (Snowmass White Paper)”. 2022.
- [333] E. Church, C.M. Jackson, and R. Saldanha. “Dark matter detection capabilities of a large multipurpose Liquid Argon Time Projection Chamber”. In: *Journal of Instrumentation* 15.09 (Sept. 2020), P09026–P09026. DOI: 10.1088/1748-0221/15/09/p09026. URL: <https://doi.org/10.1088/1748-0221/15/09/p09026>.
- [334] C. Amole et al. “Data-Driven Modeling of Electron Recoil Nucleation in PICO C<sub>3</sub>F<sub>8</sub> Bubble Chambers”. In: *Phys. Rev. D* 100.8 (2019), p. 082006. DOI: 10.1103/PhysRevD.100.082006. arXiv: 1905.12522 [physics.ins-det].
- [335] C. Amole et al. “Dark Matter Search Results from the Complete Exposure of the PICO-60 C<sub>3</sub>F<sub>8</sub> Bubble Chamber”. In: *Phys. Rev. D* 100.2 (2019), p. 022001. DOI: 10.1103/PhysRevD.100.022001. arXiv: 1902.04031 [astro-ph.CO].
- [336] A Gando, Y Gando, T Hachiya, S Hayashida, K Hosokawa, H Ikeda, S Obara, H Ozaki, K Ueshima, and H Watanabe. “Inner balloon production for KamLAND-Zen 800”. In: *Journal of Physics: Conference Series* 1468.1 (Feb. 2020), p. 012145. DOI: 10.1088/1742-6596/1468/1/012145. URL: <https://doi.org/10.1088/1742-6596/1468/1/012145>.
- [337] R. Agnese et al. “Projected sensitivity of the SuperCDMS SNOLAB experiment”. In: *Phys. Rev. D* 95 (8 Apr. 2017), p. 082002. DOI: 10.1103/PhysRevD.95.082002. URL: <https://link.aps.org/doi/10.1103/PhysRevD.95.082002>.

- [338] SuperCDMS Collaboration. “A Strategy for Low-Mass Dark Matter Searches with Cryogenic Detectors in the SuperCDMS SNOLAB Facility”. 2022.
- [339] Daniel Durnford and Marie-Cécile Piro. “Nucleation efficiency of nuclear recoils in bubble chambers”. In: *JINST* 17.01 (2022), p. C01030. DOI: 10.1088/1748-0221/17/01/C01030. arXiv: 2111.01175 [astro-ph.IM].
- [340] Pietro Giampa. “The Scintillating Bubble Chamber (SBC) Experiment for Dark Matter and Reactor CEvNS”. In: *PoS ICHEP2020* (2021), p. 632. DOI: 10.22323/1.390.0632.
- [341] E. Alfonso-Pita et al. “Snowmass 2021 Scintillating Bubble Chambers: Liquid-noble Bubble Chambers for Dark Matter and CEvNS Detection”. In: *2022 Snowmass Summer Study*. July 2022. arXiv: 2207.12400 [physics.ins-det].
- [342] M. Szydagis et al. *Metastable Water: Breakthrough Technology for Dark Matter and Neutrinos*. Snowmass2021 LOI. 2020.
- [343] E. Aprile et al. “Emission of Single and Few Electrons in XENON1T and Limits on Light Dark Matter”. In: (Dec. 2021). arXiv: 2112.12116 [hep-ex].
- [344] P. Agnes et al. “Low-Mass Dark Matter Search with the DarkSide-50 Experiment”. In: *Phys. Rev. Lett.* 121 (8 Aug. 2018), p. 081307. DOI: 10.1103/PhysRevLett.121.081307. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.121.081307>.
- [345] D. S. Akerib et al. [LUX Collaboration]. “Investigation of background electron emission in the LUX detector”. In: *Phys. Rev. D* 102.9 (2020), p. 092004. DOI: 10.1103/PhysRevD.102.092004. arXiv: 2004.07791.
- [346] P. Agnes et al. “Sensitivity projections for a dual-phase argon TPC optimized for light dark matter searches through the ionization channel”. In: (Sept. 2022). arXiv: 2209.01177 [physics.ins-det].
- [347] A. Bernstein et al. “LBECA: A Low Background Electron Counting Apparatus for Sub-GeV Dark Matter Detection”. In: *J. Phys. Conf. Ser.* 1468.1 (2020). Ed. by Masayuki Nakahata, p. 012035. DOI: 10.1088/1742-6596/1468/1/012035. arXiv: 2001.09311 [physics.ins-det].
- [348] G. Giroux et al. *Search for Low Mass WIMPs with Spherical Proportional Counters*. Snowmass2021 LOI. 2020.
- [349] S. A. Hertel, A. Biekert, J. Lin, V. Velan, and D. N. McKinsey. “Direct detection of sub-GeV dark matter using a superfluid  $^4\text{He}$  target”. In: *Phys. Rev. D* 100 (9 Nov. 2019), p. 092007. DOI: 10.1103/PhysRevD.100.092007. URL: <https://link.aps.org/doi/10.1103/PhysRevD.100.092007>.
- [350] Scott Hertel et al. *Calorimetric readout of a superfluid  $^4\text{He}$  target mass*. Snowmass2021 LOI. 2020.
- [351] Junhui Liao, Yuanning Gao, Zhuo Liang, Zebang Ouyang, Chaohua Peng, Fengshou Zhang, Lei Zhang, Jian Zheng, and Jiangfeng Zhou. *Introduction to a low-mass dark matter project, ALETHEIA: A Liquid hELium Time projection cHambEr In dArk matter*. 2022. arXiv: 2203.07901 [astro-ph.IM].
- [352] A. Aguilar-Arevalo et al. “First Direct-Detection Constraints on eV-Scale Hidden-Photon Dark Matter with DAMIC at SNOLAB”. In: *Phys. Rev. Lett.* 118.14 (2017), p. 141803. DOI: 10.1103/PhysRevLett.118.141803. arXiv: 1611.03066 [astro-ph.CO].
- [353] Javier Tiffenberg, Miguel Sofo-Haro, Alex Drlica-Wagner, Rouven Essig, Yann Guardincerri, Steve Holland, Tomer Volansky, and Tien-Tien Yu. “Single-Electron and Single-Photon Sensitivity with a Silicon Skipper Ccd”. In: *Phys. Rev. Lett.* 119.13 (2017), p. 131802. DOI: 10.1103/PhysRevLett.119.131802. arXiv: 1706.00028 [physics.ins-det].
- [354] Michael Crisler, Rouven Essig, Juan Estrada, Guillermo Fernandez, Javier Tiffenberg, Miguel Sofo haro, Tomer Volansky, and Tien-Tien Yu. “Sensei: First Direct-Detection Constraints on Sub-GeV Dark Matter from a Surface Run”. In: *Phys. Rev. Lett.* 121.6 (2018), p. 061803. DOI: 10.1103/PhysRevLett.121.061803. arXiv: 1804.00088 [hep-ex].
- [355] Orr Abramoff et al. “Sensei: Direct-Detection Constraints on Sub-GeV Dark Matter from a Shallow Underground Run Using a Prototype Skipper-Ccd”. In: *Phys. Rev. Lett.* 122.16 (2019), p. 161801. DOI: 10.1103/PhysRevLett.122.161801. arXiv: 1901.10478 [hep-ex].

- [356] L. Barak *et al.* [SENSEI Collaboration]. “SENSEI: Direct-Detection Results on sub-GeV Dark Matter from a New Skipper-CCD”. In: *Phys. Rev. Lett.* 125.17 (2020), p. 171802. DOI: 10.1103/PhysRevLett.125.171802. arXiv: 2004.11378 [astro-ph.CO].
- [357] N. Castello-Mor. “Damic-M Experiment: Thick, Silicon Ccds to Search for Light Dark Matter”. In: (2020). DOI: 10.1016/j.nima.2019.162933. arXiv: 2001.01476 [physics.ins-det].
- [358] Alexis Aguilar-Arevalo *et al.* “The Oscura Experiment”. In: (Feb. 2022). arXiv: 2202.10518 [astro-ph.IM].
- [359] Q. Arnaud *et al.* “First germanium-based constraints on sub-MeV Dark Matter with the EDELWEISS experiment”. In: *Phys. Rev. Lett.* 125.14 (2020), p. 141301. DOI: 10.1103/PhysRevLett.125.141301. arXiv: 2003.01046 [astro-ph.GA].
- [360] A.H. Abdelhameed *et al.* “First results from the CRESST-III low-mass dark matter program”. In: *Phys. Rev. D* 100.10 (2019), p. 102002. DOI: 10.1103/PhysRevD.100.102002. arXiv: 1904.00498 [astro-ph.CO].
- [361] C. W. Fink *et al.* “Performance of a large area photon detector for rare event search applications”. In: *Appl. Phys. Lett.* 118.2 (2021), p. 022601. DOI: 10.1063/5.0032372. arXiv: 2009.14302 [physics.ins-det].
- [362] R. Ren *et al.* “Design and characterization of a phonon-mediated cryogenic particle detector with an eV-scale threshold and 100 keV-scale dynamic range”. In: *Phys. Rev. D* 104.3 (2021), p. 032010. DOI: 10.1103/PhysRevD.104.032010. arXiv: 2012.12430 [physics.ins-det].
- [363] I. Alkhatib *et al.* “Light Dark Matter Search with a High-Resolution Athermal Phonon Detector Operated Above Ground”. In: *Phys. Rev. Lett.* 127 (2021), p. 061801. DOI: 10.1103/PhysRevLett.127.061801. arXiv: 2007.14289 [hep-ex].
- [364] D. W. Amaral *et al.* “Constraints on low-mass, relic dark matter candidates from a surface-operated SuperCDMS single-charge sensitive detector”. In: *Phys. Rev. D* 102.9 (2020), p. 091101. DOI: 10.1103/PhysRevD.102.091101. arXiv: 2005.14067 [hep-ex].
- [365] C. W. Fink *et al.* “Characterizing TES Power Noise for Future Single Optical-Phonon and Infrared-Photon Detectors”. In: *AIP Adv.* 10.8 (2020), p. 085221. DOI: 10.1063/5.0011130. arXiv: 2004.10257 [physics.ins-det].
- [366] G. Angloher *et al.* “Results on MeV-scale dark matter from a gram-scale cryogenic calorimeter operated above ground”. In: *Eur. Phys. J. C* 77.9 (2017), p. 637. DOI: 10.1140/epjc/s10052-017-5223-9. arXiv: 1707.06749 [astro-ph.CO].
- [367] D. N. McKinsey *et al.* [TESSERACT Collaboration]. *The TESSERACT Dark Matter Project, SNOWMASS LOI*. Available [Online]. URL: [www.snowmass21.org/docs/files/summaries/CF/SNOWMASS21-CF1\\_CF2-IF1\\_IF8-120.pdf](http://www.snowmass21.org/docs/files/summaries/CF/SNOWMASS21-CF1_CF2-IF1_IF8-120.pdf).
- [368] Andrea Mitridate, Tanner Trickle, Zhengkang Zhang, and Kathryn M. Zurek. “Snowmass White Paper: Light Dark Matter Direct Detection at the Interface With Condensed Matter Physics”. In: *2022 Snowmass Summer Study*. Mar. 2022. arXiv: 2203.07492 [hep-ph].
- [369] Noah Alexander Kurinsky, To Chin Yu, Yonit Hochberg, and Blas Cabrera. “Diamond Detectors for Direct Detection of Sub-GeV Dark Matter”. In: *Phys. Rev. D* 99.12 (2019), p. 123005. DOI: 10.1103/PhysRevD.99.123005. arXiv: 1901.07569 [hep-ex].
- [370] Sinéad M. Griffin, Yonit Hochberg, Katherine Inzani, Noah Kurinsky, Tongyan Lin, and To Chin. “Silicon carbide detectors for sub-GeV dark matter”. In: *Phys. Rev. D* 103.7 (2021), p. 075002. DOI: 10.1103/PhysRevD.103.075002. arXiv: 2008.08560 [hep-ph].
- [371] Noah Kurinsky *et al.* *Cryogenic Carbon Detectors for Dark Matter Searches*. Snowmass2021 LOI. 2020.
- [372] L. Canonica *et al.* “Operation of a Diamond Cryogenic Detector for Low-Mass Dark Matter Searches”. In: *J. Low Temp. Phys.* 199.3-4 (2020), pp. 606–613. DOI: 10.1007/s10909-020-02350-4.
- [373] N. A. Kurinsky *et al.* [SPLENDOR Collaboration]. *Low-gap charge detection for fundamental physics searches, SNOWMASS LOI*. Available [Online]. URL: [https://www.snowmass21.org/docs/files/summaries/CF/SNOWMASS21-CF1\\_CF2-IF1\\_IF2\\_Kurinsky-029.pdf](https://www.snowmass21.org/docs/files/summaries/CF/SNOWMASS21-CF1_CF2-IF1_IF2_Kurinsky-029.pdf).

- [374] G. Wang, C. L. Chang, M. Lisovenko, V. Novosad, V. G. Yefremenko, and J. Zhang. “Light Dark Matter Detection with Hydrogen-rich Crystals and Low-Tc TES Detectors”. In: (Jan. 2022). arXiv: 2201.04219 [physics.ins-det].
- [375] Sunil Golwala et al. *Phonon-Mediated KID-Based Detectors for Low-Mass Dark Matter Detection and Coherent Elastic Neutrino-Nucleus Scattering*. Snowmass2021 LOI. 2020.
- [376] Geon-Bo Kim. “Self-absorption and Phonon Pulse Shape Discrimination in Scintillating Bolometers”. In: *Journal of Low Temperature Physics* 199.3 (2020), pp. 1004–1011.
- [377] D. Carney et al. “Mechanical Quantum Sensing in the Search for Dark Matter”. In: *Quantum Sci. Technol.* 6 (2021), p. 024002. DOI: 10.1088/2058-9565/abcfd. arXiv: 2008.06074 [physics.ins-det].
- [378] Fernando Monteiro, Gadi Afek, Daniel Carney, Gordan Krnjaic, Jiaxiang Wang, and David C. Moore. “Search for composite dark matter with optically levitated sensors”. In: *Phys. Rev. Lett.* 125.18 (2020), p. 181102. DOI: 10.1103/PhysRevLett.125.181102. arXiv: 2007.12067 [hep-ex].
- [379] Gadi Afek, Daniel Carney, and David C. Moore. “Coherent Scattering of Low Mass Dark Matter from Optically Trapped Sensors”. In: *Phys. Rev. Lett.* 128.10 (2022), p. 101301. DOI: 10.1103/PhysRevLett.128.101301. arXiv: 2111.03597 [physics.ins-det].
- [380] Akash V. Dixit, Srivatsan Chakram, Kevin He, Ankur Agrawal, Ravi K. Naik, David I. Schuster, and Aaron Chou. “Searching for Dark Matter with a Superconducting Qubit”. In: *Phys. Rev. Lett.* 126 (14 Apr. 2021), p. 141302. DOI: 10.1103/PhysRevLett.126.141302. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.126.141302>.
- [381] C. D. Wilen et al. “Correlated charge noise and relaxation errors in superconducting qubits”. In: *Nature* 594.7863 (2021), pp. 369–373.
- [382] P. M. Echternach, B. J. Pepper, T. Reck, and C. M. Bradford. “Single photon detection of 1.5 THz radiation with the quantum capacitance detector”. In: *Nature Astronomy* 2.1 (2018), pp. 90–97.
- [383] Yonit Hochberg, Ilya Charaev, Sae-Woo Nam, Varun Verma, Marco Colangelo, and Karl K. Berggren. “Detecting Sub-GeV Dark Matter with Superconducting Nanowires”. In: *Phys. Rev. Lett.* 123 (15 Oct. 2019), p. 151802. DOI: 10.1103/PhysRevLett.123.151802. URL: <https://link.aps.org/doi/10.1103/PhysRevLett.123.151802>.
- [384] Yonit Hochberg, Benjamin V. Lehmann, Ilya Charaev, Jeff Chiles, Marco Colangelo, Sae Woo Nam, and Karl K. Berggren. “New Constraints on Dark Matter from Superconducting Nanowires”. In: (Oct. 2021). arXiv: 2110.01586 [hep-ph].
- [385] Carlos Blanco, J. I. Collar, Yonatan Kahn, and Benjamin Lillard. “Dark Matter-Electron Scattering from Aromatic Organic Targets”. In: *Phys. Rev. D* 101.5 (2020), p. 056001. DOI: 10.1103/PhysRevD.101.056001. arXiv: 1912.02822 [hep-ph].
- [386] Carlos Blanco, Yonatan Kahn, Benjamin Lillard, and Samuel D. McDermott. “Dark Matter Daily Modulation With Anisotropic Organic Crystals”. In: *Phys. Rev. D* 104 (2021), p. 036011. DOI: 10.1103/PhysRevD.104.036011. arXiv: 2103.08601 [hep-ph].
- [387] Stephen Derenzo, Rouven Essig, Andrea Massari, Adrián Soto, and Tien-Tien Yu. “Direct Detection of sub-GeV Dark Matter with Scintillating Targets”. In: *Phys. Rev. D* 96.1 (2017), p. 016026. DOI: 10.1103/PhysRevD.96.016026. arXiv: 1607.01009 [hep-ph].
- [388] Stephen Derenzo, Edith Bourret, Christiane Frank-Rotsch, Stephen Hanrahan, and Maurice Garcia-Sciveresa. “How silicon and boron dopants govern the cryogenic scintillation properties of *N*-type GaAs”. In: *Nucl. Instrum. Meth. A* 989 (2021), p. 164957. DOI: 10.1016/j.nima.2020.164957. arXiv: 2012.07550 [cond-mat.mtrl-sci].
- [389] S. Derenzo, E. Bourret, S. Hanrahan, and G. Bizarri. “Cryogenic Scintillation Properties of *n*-Type GaAs for the Direct Detection of MeV/ $c^2$  Dark Matter”. In: *J. Appl. Phys.* 123.11 (2018), p. 114501. DOI: 10.1063/1.5018343. arXiv: 1802.09171 [physics.ins-det].
- [390] S. Vasiukov, F. Chiossi, C. Braggio, G. Carugno, F. Moretti, E. Bourret, and S. Derenzo. “GaAs as a bright cryogenic scintillator for the direct dark matter detection”. In: (Apr. 2019). arXiv: 1904.09362 [physics.ins-det].

- [391] S. E. Vahsen et al. *CYGNUS: Feasibility of a nuclear recoil observatory with directional sensitivity to dark matter and neutrinos*. 2020. DOI: 10.48550/ARXIV.2008.12587. URL: <https://arxiv.org/abs/2008.12587>.
- [392] C. A. J. O'Hare et al. *Recoil imaging for dark matter, neutrinos, and physics beyond the Standard Model*. 2022. DOI: 10.48550/ARXIV.2203.05914. URL: <https://arxiv.org/abs/2203.05914>.
- [393] Jeff Martoff. private communication. July 27, 2022.