

Asteroids for ultralight dark-photon dark-matter detection

Michael A. Fedderke^{✉*} and Anubhav Mathur^{✉†}

*The William H. Miller III Department of Physics and Astronomy,
The Johns Hopkins University, Baltimore, MD 21218, USA*

(Dated: October 19, 2022)

Gravitational-wave (GW) detectors that monitor fluctuations in the separation between inertial test masses (TMs) are sensitive to new forces acting on those TMs. Ultralight dark-photon dark matter (DPDM) coupled to $U(1)_B$ or $U(1)_{B-L}$ charges supplies one such force that oscillates with a frequency set by the DPDM mass. GW detectors operating in different frequency bands are thus sensitive to different DPDM mass ranges. A recent GW detection proposal based on monitoring the separation of certain asteroids in the inner Solar System would have sensitivity to μHz frequencies [Fedderke *et al.*, *Phys. Rev. D* **105**, 103018 (2022)]. In this paper, we show how that proposal would also enable access to new parameter space for DPDM coupled to B [respectively, $B-L$] charges in the mass range $4 [8] \times 10^{-21} \text{ eV} \lesssim m_{\text{DM}} \lesssim 2 \times 10^{-19} \text{ eV}$, with peak sensitivities about 3 [2] orders of magnitude beyond current best limits on $\varepsilon_B [\varepsilon_{B-L}]$ at $m_{\text{DM}} \sim 2 \times 10^{-19} \text{ eV}$. Sensitivity could be extended up to $m_{\text{DM}} \sim 3 \times 10^{-18} \text{ eV}$ only if noise issues associated with asteroid rotational motion could be overcome.

I. INTRODUCTION

Dark matter (DM) constitutes 26% of the energy budget of the Universe [1]. Despite decades of increasingly sensitive search efforts, its fundamental identity remains a mystery. Ultralight bosons are one interesting class of DM candidates. They admit a classical-field description that oscillates in time at a frequency set by the DM mass. In typical models, they are also very weakly coupled to the Standard Model (SM). This permits sensitive experimental approaches targeting narrowband time-varying phenomena to shed light on the nature of the DM.

A compelling new-physics scenario involves gauging either the $U(1)_B$ or $U(1)_{B-L}$ global symmetry of the SM, with the new gauge boson—the ‘dark’ or ‘hidden’ photon—coupling weakly to the associated current.¹ The static, Weak Equivalence Principle (EP) violating, fifth-force effects induced by such couplings have been stringently constrained [5–13].² Sufficiently feebly coupled dark photons can however additionally serve as an ultralight bosonic DM candidate. In this case, the oscillations of the dark-photon dark-matter (DPDM) field exert a minute oscillatory force on SM matter. In particular, such a force will cause the test masses (TMs) utilized in certain classes of gravitational-wave (GW) detectors to oscillate in a detectable fashion, allowing them to do double duty as DM detectors;³ the theory of this effect

has been thoroughly developed [18–25].⁴

In this paper, we evaluate the DPDM detection prospects for the future GW detector concept based on direct ranging between certain inner Solar System asteroids that was recently proposed in Ref. [26] and that would have μHz frequency sensitivity (see also Ref. [27] for a related noise study, and Refs. [28–32] for other recent work on μHz GW detection).

The rest of this paper is structured as follows: in Sec. II, we discuss the DPDM signal, and relate it to GW detector sensitivity. We present results, discuss them, and conclude in Sec. III. In Appendix A, we discuss some correction factors that are applied to published GW detector sensitivity curves in order to use them in this work.

II. SIGNAL AND SENSITIVITY

Consider gauging the SM $U(1)_S$ symmetry, where $S \in \{B, B-L\}$, with that symmetry broken so as to give rise to a (Stückelberg) mass m_V for the associated $U(1)_S$ gauge boson V_μ :

$$\mathcal{L} = \mathcal{L}_{\text{SM}} - \frac{1}{4} V_{\mu\nu} V^{\mu\nu} + \frac{1}{2} m_V^2 V_\mu V^\mu - \varepsilon_S e_{\text{EM}} V_\mu J_S^\mu, \quad (1)$$

where $V_{\mu\nu} \equiv \partial_\mu V_\nu - \partial_\nu V_\mu$; J_S^μ is the relevant SM current; $e_{\text{EM}} \equiv \sqrt{4\pi\alpha_{\text{EM}}}$ is the fundamental EM charge unit, with α_{EM} the electromagnetic (EM) fine-structure constant; and ε_S parameterizes the $U(1)_S$ coupling strength to the DM, normalized to that of EM for $\varepsilon_S = 1$. For $m_V \neq 0$, we necessarily have $\partial_\mu V^\mu = 0$.

The coupling $\varepsilon_S \neq 0$ gives rise to a force on a SM object moving at speed \mathbf{v} :

$$\mathbf{F} = \varepsilon_S e_{\text{EM}} Q_S \left[-\nabla V^0 - \partial_t \mathbf{V} + \mathbf{v} \times (\nabla \times \mathbf{V}) \right], \quad (2)$$

⁴ Note in particular Sec. V.A.4 in the published version of Ref. [19].

* mfedderke@jhu.edu

† a.mathur@jhu.edu

¹ A dark photon can also couple to the SM photon directly via the ‘vector portal’, in which case it is referred to as the kinetically mixed dark photon; see, e.g., Refs. [2–4].

² Yukawa modifications to the $1/r^2$ gravitational force law also supply constraints, but these are typically weaker than the best direct EP-violation constraints in the DM mass range of interest in this work; see, e.g., Ref. [7] and references therein.

³ Other DM candidates can also be searched for, in different ways: e.g., via the transient acceleration signals induced by supermassive DM states moving past the detector [14–17].

where Q_S is the $U(1)_S$ charge of the SM object.

If the V_μ gauge boson comprises all of the local, non-relativistic DM (speed $v_{\text{DM}} \sim 10^{-3}$), we write $V^\mu \equiv (\mathcal{V}^0, \mathbf{V}) \exp[-i\omega_{\text{DM}}t + i\mathbf{k}_{\text{DM}} \cdot \mathbf{x} + i\alpha]$ within a single coherence time/length,⁵ with α an arbitrary phase, $\omega_{\text{DM}} \approx m_{\text{DM}}\sqrt{1+v_{\text{DM}}^2} \approx m_{\text{DM}}$, and $|\mathbf{k}_{\text{DM}}| \approx m_{\text{DM}}v_{\text{DM}}$. Note that we have identified $m_V \equiv m_{\text{DM}}$. Now, $\partial_\mu V^\mu = 0$ implies that $|\mathcal{V}^0| \sim v_{\text{DM}}|\mathbf{V}|$. Moreover, we have $|\nabla \times \mathbf{V}| \sim m_{\text{DM}}v_{\text{DM}}|\mathbf{V}|$ and $|\nabla V^0| \sim m_{\text{DM}}v_{\text{DM}}|\mathcal{V}^0| \sim m_{\text{DM}}v_{\text{DM}}^2|\mathbf{V}|$, while $|\partial_t \mathbf{V}| \sim m_{\text{DM}}|\mathbf{V}|$. Since, by assumption, $T_V^{00} = \rho_{\text{DM}}$, it follows that⁶ $|\mathbf{V}| \sim \sqrt{2\rho_{\text{DM}}/m_{\text{DM}}}$.

Working in the Solar System rest frame, and considering gravitationally bound objects, we also have $|\mathbf{v}| \ll v_{\text{DM}}$. Therefore, the force can be written as

$$\mathbf{F} \approx i\varepsilon_S e_{\text{EM}} Q_S m_{\text{DM}} \mathbf{V} e^{-im_{\text{DM}}(t-\mathbf{v}_{\text{DM}} \cdot \mathbf{x}) + i\alpha} + \mathcal{O}(v_{\text{DM}}^2, v_{\text{DM}}|\mathbf{v}|) \times \varepsilon_S e_{\text{EM}} Q_S m_{\text{DM}} |\mathbf{V}|. \quad (3)$$

If the relevant SM object has mass M , and we drop the subleading corrections, this force causes an oscillatory acceleration of that object [19, 21, 24, 25]:

$$\mathbf{a} \approx 2\varepsilon_S \sqrt{2\pi\alpha_{\text{EM}}\rho_{\text{DM}}} \frac{Q_S}{M} e^{-im_{\text{DM}}(t-\mathbf{v}_{\text{DM}} \cdot \mathbf{x}) + i\phi} \hat{\mathbf{V}}, \quad (4)$$

where $\hat{\mathbf{V}}$ gives the polarization state of the DM ($\hat{\mathbf{V}} \cdot \hat{\mathbf{V}}^* = 1$), and we have absorbed a phase into ϕ .

Consider now a GW detector that operates by measuring fluctuations in the proper distance between two or more inertial test masses that define the endpoints of one or more detector baselines. The DM-induced acceleration Eq. (4) causes the TMs to oscillate, leading to a modulation of the proper length of the detector baseline(s) that manifests as an oscillatory strain component. There are two contributions to this strain: (1) a term arising from the finite light-travel time for a null signal propagating between the TMs, present even if the acceleration had no spatial dependence at all (i.e., $v_{\text{DM}} = 0$) [18–20, 22, 24, 25], and (2) a term arising from the spatial gradient of the acceleration [19, 21–25].

Averaged over time, DM field orientations with respect to the baseline, and DM momentum directions, and ignoring further corrections at $\mathcal{O}(v_{\text{DM}}^2)$, the mean square of the strain signal $h(t) \equiv \Delta t/(2L)$, where Δt is the change to the round-trip light travel time between the TMs, can

be written as [24]:⁷

$$\langle h^2 \rangle = \langle h_1^2 \rangle + \langle h_2^2 \rangle; \quad (5)$$

$$\langle h_1^2 \rangle \equiv 4c_1^{\text{geom}} \mathcal{H}^2 \times \sin^4\left(\frac{1}{2}m_{\text{DM}}L\right); \quad (6)$$

$$\langle h_2^2 \rangle \equiv \frac{1}{3}c_2^{\text{geom}} \mathcal{H}^2 \times (m_{\text{DM}}Lv_{\text{DM}})^2; \quad (7)$$

$$\mathcal{H}^2 \equiv \frac{8\pi}{3} \varepsilon_S^2 \alpha_{\text{EM}} \frac{\rho_{\text{DM}}}{m_{\text{DM}}^4 L^2} \left(\frac{Q_S}{M}\right)^2, \quad (8)$$

where c_j^{geom} are $\mathcal{O}(1)$ geometrical factors that depend on the baseline orientation, and L is the unperturbed baseline length. The baseline is assumed to be approximately fixed at least on the $\sim 2L$ round-trip light travel time between the TMs, but it can vary secularly both in length and orientation on longer timescales. The expression for $\langle h_2^2 \rangle$ at Eq. (7) is correct in the limit $m_{\text{DM}}Lv_{\text{DM}} \ll 1$; this is satisfied in all cases that we consider.

Note that $\langle h_2^2 \rangle / \langle h_1^2 \rangle \propto (m_{\text{DM}}Lv_{\text{DM}})^2 \text{cosec}^4(\frac{1}{2}m_{\text{DM}}L)$. Because $m_{\text{DM}}Lv_{\text{DM}} \ll 1$, the h_2 signal is only dominant when either (1) the baseline is much shorter than the DM Compton wavelength $m_{\text{DM}}L \lesssim v_{\text{DM}}$ (never the case for interesting mass ranges for the detectors we consider), or (2) in certain narrow mass ranges where the round-trip light travel time is such that the h_1 signal is nearly zero: $|m_{\text{DM}}L - 2\pi n| \sim 2\sqrt{m_{\text{DM}}Lv_{\text{DM}}}$ for $n = 1, 2, \dots$. The latter occurs only at frequencies above the peak sensitivity for every detector we consider.

The geometrical factors for a single-baseline detector are given by

$$c_1^{\text{geom}} = c_2^{\text{geom}} = \frac{1}{2}, \quad [\text{single baseline}] \quad (9)$$

while for a two-baseline detector with an opening angle between the baselines, they are given by [24]

$$c_1^{\text{geom}} = 1 - \cos\psi, \quad c_2^{\text{geom}} = 1 - \cos^2\psi. \quad (10)$$

For LIGO, $\cos\psi = 0$ (perpendicular arms), while for LISA, $\cos\psi \sim 1/2$ (equilateral triangle) [24].

It remains to relate the signal, Eqs. (5)–(8), to a search sensitivity. We work in the quasi-coherent, matched-filter approach of Ref. [24] and, at a signal-to-noise ratio (SNR) of 1, estimate sensitivity using⁸

$$\langle h^2 \rangle \sim \frac{k_{\text{det}}(f_{\text{DM}}) \times S_n(f_{\text{DM}})}{2 \times \min[T, \sqrt{T}T_{\text{coh}}]}, \quad (11)$$

⁵ The coherence time is $T_{\text{coh}} \sim 2\pi/(m_{\text{DM}}v_{\text{DM}}^2)$ and the coherence length is $\lambda_{\text{coh}} \sim 2\pi/(m_{\text{DM}}v_{\text{DM}})$ [i.e., the de Broglie wavelength].

⁶ Technically this is only true as an average statement over many coherence times of the DM field, as the field amplitude executes $\mathcal{O}(1)$ stochastic fluctuations from one coherence time to the next (see, e.g., Refs. [33–35]); nevertheless, it is a good figure of merit.

⁷ For detectors that are constructed with Fabry-Pérot (FP) cavities in the baseline arms, these expressions are referred to the input in the sense that the FP transfer function has been omitted. Published GW characteristic-strain curves for detectors with FP cavities are similarly referred to the GW input. Since the FP cavity transfer function is the same for a GW and the DPDM case that we consider in this work, no correction is required for this [24]; see also Ref. [36] for further discussion of FP cavities in GW detectors.

⁸ Some numerical and correction factors here differ from Eq. (20) of Ref. [24].

where T is the mission duration, $f_{\text{DM}} \equiv m_{\text{DM}}/(2\pi)$ is the frequency of the strain signal, $T_{\text{coh}} \sim 1/(f_{\text{DM}} v_{\text{DM}}^2)$ is the signal coherence time, and $\sqrt{f S_n(f)} \equiv h_c(f)$ relates the one-sided strain-noise power spectral density $S_n(f)$ to published characteristic-strain sensitivity curves $h_c(f)$. The factor $k_{\text{det}}(f)$ in Eq. (11) is a further detector-specific, frequency-dependent correction factor (see comments in Ref. [24]) that accounts for (1) factors necessary to avoid double-counting of geometrical averaging effects, and (2) the fact that $h_c(f)$ [or $S_n(f)$] curves are conventionally specified with respect to a GW waveform input, while Eqs. (5)–(8) are specified with respect to the detector strain response. We give detailed explanations and expressions for these factors in Appendix A. Substituting Eqs. (5)–(8) and either Eq. (9) or Eq. (10) into Eq. (11) gives the ε_S sensitivity for any detector of interest; we show these results in Sec. III.

Changes in baseline length and/or orientation induce sidebands in the detector strain response that are relevant for the details of how a signal search would be conducted. However, for our purposes, these effects can be ignored: the sensitivity curves that we employ do not vary much over a range $\Delta f \sim \Omega/(2\pi)$, where Ω is the orbital or rotational angular frequency of the baseline modulation. Moreover, orbital- or rotational-velocity corrections to the time-averaged quantities $\langle h_{1,2}^2 \rangle$ are smaller than those displayed at Eqs. (6) and (7): they would be at worst $\mathcal{O}(v_{\text{orbital}}^2)$, and $v_{\text{orbital}} \sim 0.1 v_{\text{DM}}$ for TMs located at distances $\sim \text{AU}$ from the Sun (rotational effects for, e.g., detectors on Earth are even smaller).

III. RESULTS AND DISCUSSION

In Fig. 1, we show ε_S sensitivity results (at SNR of 1) separately for $S \in \{B, B-L\}$, taking $Q_B/M \sim 1/\mu_a$ and $Q_{B-L}/M = (1-Z/A)/\mu_a \sim 1/(2\mu_a)$ with μ_a the atomic mass unit, and assuming the parameters and sensitivities exhibited in Tab. I. These results assume in each case that the relevant dark photon constitutes all of the local DM and we take $\rho_{\text{DM}} = 0.3 \text{ GeV}/\text{cm}^3$ and $v_{\text{DM}} \sim 220 \text{ km/s}$ [37]; sensitivity would degrade as $\varepsilon_S \propto \sqrt{\rho_{\text{DM}}/\rho_V}$ for sub-component DM with energy density $\rho_V \leq \rho_{\text{DM}}$.

Our main results are the ε_S sensitivity curves for the asteroid-ranging proposal of Ref. [26]. We show projected sensitivities for $f \lesssim 1/(5 \text{ hr})$ [$m_{\text{DM}} \lesssim 2 \times 10^{-19} \text{ eV}$] in solid red, and results at higher frequencies in dashed orange; the high-frequency projections are in the region where asteroid rotational motion is expected to severely inhibit that mission proposal [26]. The projected DPDM sensitivity for this mission indicates a significant reach into new parameter space at frequencies below the LISA [38] band for the $B-L$ case for DPDM in the mass range $8 \times 10^{-21} \text{ eV} \lesssim m_{\text{DM}} \lesssim 2 \times 10^{-19} \text{ eV}$ and for the B case for the DPDM mass range $4 \times 10^{-21} \text{ eV} \lesssim m_{\text{DM}} \lesssim 2 \times 10^{-19} \text{ eV}$. Peak sensitivities, at $m_{\text{DM}} \sim 2 \times 10^{-19} \text{ eV}$, exceed final MICROSCOPE bounds [13] by a factor of

Detector	L [m]	T [yr]	Sensitivity from
aLIGO	4×10^3	4	Ref. [39]
LISA	2.5×10^9	4	Ref. [38]; Eq. (114)
Asteroids	1.5×10^{11} ($\approx 1 \text{ AU}$)	10	Ref. [26]; ‘smoothed envelope 2’ curve from Fig. 9

TABLE I. Parameters assumed for the sensitivity curves shown in Fig. 1. L is the baseline length and T is the assumed total mission or observation duration. The ‘sensitivity from’ column gives the reference and location from which the relevant strain-sensitivity curve (or cognate) is taken.

$\sim 10^2$ for ε_{B-L} , and by a factor of $\sim 10^3$ for ε_B . Sensitivity to additional new parameter space not to be otherwise probed by LISA would be possible at higher masses, up to $m_{\text{DM}} \sim 3 \times 10^{-18} \text{ eV}$, only if noise issues arising from asteroid rotational motion could be overcome.

Our results for LISA and aLIGO [39], shown for comparative purposes, are in reasonable agreement with results of previous works that have considered one or both of those missions/facilities for this purpose [19, 21, 23–25]; see Ref. [24] for sensitivity projections for other future GW detectors operating between the LISA and aLIGO bands, and in the aLIGO band.

We also show in Fig. 1 existing 95%-confidence constraints from static EP tests. These bounds rely only on the existence of a massive $U(1)$ gauge boson weakly coupled to the relevant SM current; they do not need to assume that this dark photon is all (or indeed, any fraction) of the local DM. Constraints from the Eöt-Wash torsion-balance experiments [6] on ϵ_B are taken from graphical results in Ref. [7], and on ϵ_{B-L} from graphical results in Ref. [8] (which are slightly stronger and updated as compared to those in Ref. [7]). Also shown are recent Eöt-Wash results from Ref. [9] (we show their ‘field along Z ’ limits). The constraints from the MICROSCOPE mission in Fig. 1 are obtained as follows: we utilize the constraints on the Ti-Pt Eötvös parameter $\eta(\text{Ti}, \text{Pt})$ that are given in either Ref. [10] (‘initial’) or Ref. [13] (‘final’), and follow the procedures in Ref. [12] to recast these limits as constraints on ε_S . We opt to add statistical and systematic errors on $\eta \equiv \eta(\text{Ti}, \text{Pt})$ in quadrature, and we report exclusions at 2σ significance, accounting for the (signed) non-zero reported central values $\hat{\eta}$ given in Refs. [10, 13]; that is, we report a value of ε_S to be excluded if it results⁹ in $|\eta(\varepsilon) - \hat{\eta}| > 2\sigma_\eta$. To cross-check our recasting of the ‘initial’ results, we also separately looked at the corresponding constraints on the parameter $|\alpha_S| \equiv \varepsilon_S^2 \alpha_{\text{EM}}/(G_N \mu_a^2)$ defined in Ref. [12].¹⁰ We find here results that disagree mildly

⁹ Recall that $U(1)$ exchange creates a repulsive potential for like-sign charges, leading to $\alpha < 0$ in Eqs. (5) and (6) of Ref. [12].

¹⁰ For the initial MICROSCOPE results, $\hat{\eta}/(\sigma_\eta) \ll 1$, so limits

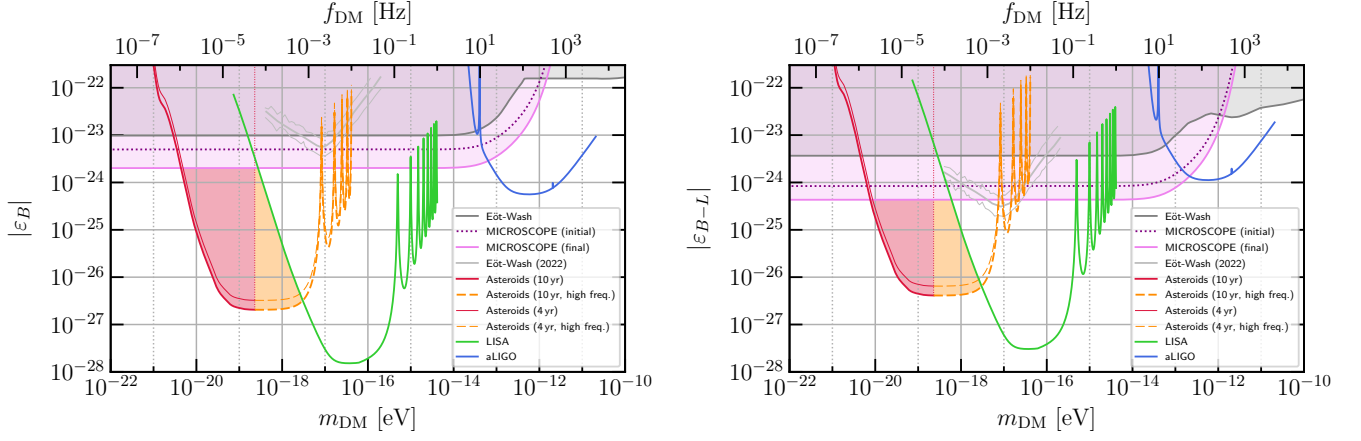


FIG. 1. Projected $|\varepsilon_B|$ [left panel] and $|\varepsilon_{B-L}|$ [right panel] sensitivity of various GW facilities/missions as labeled in the legends, assuming that the relevant dark photon is all of the local DM, $\rho_{\text{DM}} = 0.3 \text{ GeV/cm}^3$. Mission parameters and sensitivities are given in Tab. I. Our main result is the sensitivity of the asteroid-ranging proposal [26], shown (for SNR of 1) as a combination of solid red and dashed orange lines. The solid red part of the curves is for $f \lesssim 1/(5 \text{ hr})$, where asteroid rotational motion should not be inhibiting; the dashed orange part of the curves is for frequencies where asteroid rotational motion likely severely inhibits that proposal (see discussion in Ref. [26]). The red shaded region of parameter space could thus be accessed with the asteroid-ranging proposal (at SNR of 1), while the orange shaded region could only be accessed if noise issues associated with asteroid rotational motion could be overcome. We also show by the cognate thinner lines the sensitivity projections for a shorter, 4-year mission duration. The sensitivities we show for the LISA mission and the aLIGO facility (for comparative purposes and both also at SNR of 1) are in reasonable agreement with previous analyses [19, 21, 23–25], up to differences in assumed sensitivities and other mission/facility parameters. Also shown by solid medium-gray and violet lines and shaded regions, respectively, are the 95%-confidence static EP-test constraints (which do not depend on assuming the dark photon is all, or any, of the local dark matter) from the Eöt-Wash experiments [6–8] and from the final results of the MICROSCOPE mission [13] (re-cast using the method detailed in Ref. [12]; see discussion in text). The dotted purple line is the cognate limit obtained from the initial MICROSCOPE results [10]; see also Refs. [11, 24]. Recent Eöt-Wash results [labeled ‘Eöt-Wash (2022)’] from Ref. [9] (‘field along Z’ limits) are shown as light-gray lines, with the thick line representing the approximate exclusion limit averaged over nearby masses, and the limit at any specific mass fluctuating sharply within approximately the envelope denoted by the thin lines.

by overall factors with the graphical results shown in Ref. [12] itself: our limits are a factor of ~ 3 weaker for $|\alpha_B|$ and a factor of ~ 2 weaker for $|\alpha_{B-L}|$; in both cases, however, the functional form of the limits as $\lambda \equiv 1/m_{\text{DM}}$ changes is however reproduced exactly. The origin of these overall-factor discrepancies is not readily apparent to us (a small difference¹¹ in the treatment of the addition of statistical and systematic uncertainties cannot account for it). Moreover, our recasting agrees well with an independent recasting that was performed by Ref. [11] and also reported in Ref. [24]. We merely make the reader aware of this issue and point out that the limits on ε_S that we report for the initial MICROSCOPE results are more conservative by factors of ~ 1 – 2 than those that can be inferred from the graphical results of Ref. [12]. Per our recasting, the recently

released final MICROSCOPE results [13] imply limits on ε_S a factor of ~ 2 stronger than the initial results [10].

In this paper we have evaluated the sensitivity of the asteroid-ranging GW-detection proposal recently advanced in Ref. [26] to dark-photon dark matter that is coupled to the B or $B-L$ charges of the SM. Our results show that this GW detector could also probe significant new regions of parameter space for these DM candidates. This extends the science case for the development of this class of μHz GW detectors.

ACKNOWLEDGMENTS

We thank Peter W. Graham, David E. Kaplan, and Surjeet Rajendran for useful discussions.

This work was supported by the U.S. Department of Energy (DOE), Office of Science, National Quantum Information Science Research Centers, Superconducting Quantum Materials and Systems Center (SQMS) under Contract No. DE-AC02-07CH11359. This work was also supported by the Simons Investigator Award No. 827042 (P.I.: Surjeet Rajendran).

are nearly symmetric about $\alpha_S = 0$; this is not true for the final results, and we use the correctly signed value of α_S (here, negative) to extract limits on ε_S .

¹¹ Ref. [10] gives $\sigma_{\text{stat}}^{\eta} \approx \sigma_{\text{syst}}^{\eta} \approx 9 \times 10^{-15}$ with the statistical error given at 1σ . Ref. [12] quotes a combined 2σ uncertainty of $2\sigma_{\text{tot}}^{\eta} \approx 27 \times 10^{-15}$. We use a combined 2σ uncertainty of $2\sigma_{\text{tot}}^{\eta} \approx 25 \times 10^{-15}$, consistent with Ref. [11].

Appendix A: Detector correction factors $k_{\text{det}}(f)$

In this appendix, we specify the detector-specific correction factors $k_{\text{det}}(f)$ that we apply in Eq. (11).

For the asteroid-ranging proposal of Ref. [26], the detector strain response $h_{\text{GW}}(t)$ to a plane GW with frequency $f_{\text{GW}} = \omega_{\text{GW}}/(2\pi)$ and amplitude h_0 was in principle assumed to be that of an optimally oriented $L \sim 1$ AU single baseline:

$$h_{\text{GW}}(t) = \frac{h_0}{2} \text{sinc}(\omega_{\text{GW}}L) \cos[\omega_{\text{GW}}t + \beta], \quad (\text{A1})$$

where β is a phase. No averaging over baseline orientation, GW propagation direction, or GW polarization (hereinafter, ‘geometrical averaging’) was accounted for in Ref. [26]. The time average of the square of the optimally oriented $h_{\text{GW}}(t)$ is $\langle h_{\text{GW}}^2 \rangle = (1/8)h_0^2 \text{sinc}^2(\omega_{\text{GW}}L)$, and the characteristic-strain sensitivity $h_c(f)$ in Ref. [26] was expressed¹² such that a GW of amplitude $h_0 \sim h_c/\sqrt{f_{\text{GW}}T}$ is detectable at SNR of 1 given an observation time T . Therefore, the detectable amplitude of the mean-square detector-strain response (at SNR of 1) is

$$\langle h^2 \rangle = \frac{S_n(f)}{2T} \times \frac{1}{4} \text{sinc}^2(\omega_{\text{GW}}L), \quad (\text{A2})$$

where we used that $fS_n(f) \equiv [h_c(f)]^2$. By comparison with Eq. (11) [and noting that we have assumed $T_{\text{coh}} \rightarrow \infty$ in this discussion], we see that $k_{\text{det}}^{\text{ast}} = \text{sinc}^2(\omega_{\text{GW}}L)/4$. However, the sinc factor was treated only approximately in Ref. [26], with the h_c curve simply degraded by a factor f/f_* on $f \gtrsim f_* \equiv 1/(\pi L)$; for consistency, we must adopt the same approximation here. The correction factor to be applied to the results of Ref. [26] is thus

$$k_{\text{det}}^{\text{ast}} = \frac{1}{4} \times \begin{cases} 1 & f \leq 1/(\pi L) \\ (\pi f L)^{-2} & f > 1/(\pi L) \end{cases}. \quad (\text{A3})$$

Note that a high-frequency signal-response suppression factor cognate to the sinc factor in Eq. (A1) operates to parametrically suppress the $\langle h^2 \rangle$ signal for the DPDM case [Eq. (6)], but does not operate to parametrically suppress $\langle h^2 \rangle$ [Eq. (7)]; see also Ref. [24].

It was pointed out in Ref. [24], and we agree, that were a geometrical-averaging factor included in a GW detector sensitivity curve, a correction must be applied to remove that geometrical factor before employing that sensitivity

curve in Eq. (11); otherwise, a double counting of geometrical factors would be involved when comparing to the DPDM signal at Eqs. (5)–(8), which itself has been geometrically averaged over DPDM polarization states and propagation directions. As noted above, no geometrical averaging was performed for the asteroids detector, so no such correction is needed in that case.

Let us now discuss the aLIGO case. Conventionally, aLIGO reports strain-sensitivity curves with geometrical-averaging factors already removed (they are assigned instead to the source); see, e.g., discussions in Refs. [38, 40]. As such, no correction for geometrical averaging is required for aLIGO curves. Moreover, the cognate of the explicit factor of $1/2$ in Eq. (A1) is absent for aLIGO since, at optimum orientation, the strains in the two perpendicular baselines are of opposite sign and equal magnitude, and thus add in the difference signal. In principle, we should still make a correction for a high-frequency suppression factor $\sim \text{sinc}^2(\omega_{\text{GW}}L)$ [note: the transfer functions for the aLIGO FP cavities are present in both GW and DPDM cases, and require no additional correction [24]; see footnote 7]. However, aLIGO only accesses frequencies $f \lesssim 5$ kHz, where $\text{sinc}^2(\omega_{\text{GW}}L) \gtrsim 0.94$; already at $f \sim 5$ kHz, the correction is sub-percent. To the level of accuracy we work, and for the frequencies we consider, we therefore ignore any correction for this effect. As such, the aLIGO correction factor is taken to be

$$k_{\text{det}}^{\text{aLIGO}} = 1. \quad (\text{A4})$$

On the other hand, LISA sensitivity curves are conventionally degraded by a geometrical-averaging factor [38, 40]. Removing this degradation as required [24], while also accounting for an $\mathcal{O}(1)$ numerical factor related to LISA arm configurations, inserts a factor of $3/20$ in $k_{\text{det}}^{\text{LISA}}$ (see, e.g., the discussion below Eq. (84) in Ref. [38]). Finally, we use the LISA ‘SciRD’ sensitivity defined at Eq. (114) in Ref. [38] (see Tab. I), in which the high-frequency detector-response suppression is captured entirely by the factor defined there as $R(f) \equiv 1 + [f/(25 \text{ mHz})]^2$; to correct for this, we include a factor of $[R(f)]^{-1}$ in $k_{\text{det}}^{\text{LISA}}$. Overall, the LISA correction factor taken to be

$$k_{\text{det}}^{\text{LISA}} = \frac{3}{20(1 + [f/(25 \text{ mHz})]^2)}. \quad (\text{A5})$$

[1] PLANCK COLLABORATION, N. Aghanim et al., *Planck 2018 results. VI. Cosmological parameters*, *Astron. Astrophys.* **641** (2020) A6 [arXiv:1807.06209].

[2] B. Holdom, *Two $U(1)$ ’s and Epsilon Charge Shifts*, *Phys. Lett. B* **166** (1986) 196–198.

[3] A. E. Nelson and J. Scholtz, *Dark Light, Dark Matter and the Misalignment Mechanism*, *Phys. Rev. D* **84** (2011) 103501 [arXiv:1105.2812].

[4] P. Arias, D. Cadamuro, M. Goodsell, J. Jaeckel, J. Redondo and A. Ringwald, *WISPy Cold Dark Matter*, *JCAP* **06** (2012) 013 [arXiv:1201.5902].

¹² In Ref. [26], see, e.g., Eq. (5), footnote 9, and Eqs. (87) and (88) as well as the discussion that follows the latter.

- [5] G. L. Smith, C. D. Hoyle, J. H. Gundlach, E. G. Adelberger, B. R. Heckel and H. E. Swanson, *Short range tests of the equivalence principle*, *Phys. Rev. D* **61** (2000) 022001.
- [6] S. Schlamminger, K. Y. Choi, T. A. Wagner, J. H. Gundlach and E. G. Adelberger, *Test of the equivalence principle using a rotating torsion balance*, *Phys. Rev. Lett.* **100** (2008) 041101 [[arXiv:0712.0607](#)].
- [7] E. Adelberger, J. Gundlach, B. Heckel, S. Hoedl and S. Schlamminger, *Torsion balance experiments: A low-energy frontier of particle physics*, *Prog. Part. Nucl. Phys.* **62** (2009) 102–134.
- [8] T. A. Wagner, S. Schlamminger, J. H. Gundlach and E. G. Adelberger, *Torsion-balance tests of the weak equivalence principle*, *Class. Quant. Grav.* **29** (2012) 184002 [[arXiv:1207.2442](#)].
- [9] E. A. Shaw, M. P. Ross, C. A. Hagedorn, E. G. Adelberger and J. H. Gundlach, *Torsion-balance search for ultralow-mass bosonic dark matter*, *Phys. Rev. D* **105** (2022) 042007 [[arXiv:2109.08822](#)].
- [10] P. Touboul et al., *MICROSCOPE Mission: First Results of a Space Test of the Equivalence Principle*, *Phys. Rev. Lett.* **119** (2017) 231101 [[arXiv:1712.01176](#)].
- [11] P. Fayet, *MICROSCOPE limits for new long-range forces and implications for unified theories*, *Phys. Rev. D* **97** (2018) 055039 [[arXiv:1712.00856](#)].
- [12] J. Bergé, P. Brax, G. Métris, M. Pernot-Borràs, P. Touboul and J.-P. Uzan, *MICROSCOPE Mission: First Constraints on the Violation of the Weak Equivalence Principle by a Light Scalar Dilaton*, *Phys. Rev. Lett.* **120** (2018) 141101 [[arXiv:1712.00483](#)].
- [13] P. Touboul, G. Métris, M. Rodrigues, J. Bergé, A. Robert, Q. Baghi et al., *MICROSCOPE Mission: Final Results of the Test of the Equivalence Principle*, *Phys. Rev. Lett.* **129** (2022) 121102.
- [14] N. Seto and A. Cooray, *Search for small-mass black hole dark matter with space-based gravitational wave detectors*, *Phys. Rev. D* **70** (2004) 063512 [[arXiv:astro-ph/0405216](#)].
- [15] A. W. Adams and J. S. Bloom, *Direct detection of dark matter with space-based laser interferometers*, [arXiv:astro-ph/0405266](#).
- [16] E. D. Hall, R. X. Adhikari, V. V. Frolov, H. Müller, M. Pospelov and R. X. Adhikari, *Laser Interferometers as Dark Matter Detectors*, *Phys. Rev. D* **98** (2018) 083019 [[arXiv:1605.01103](#)].
- [17] S. Baum, M. A. Fedderke and P. W. Graham, *Searching for dark clumps with gravitational-wave detectors*, *Phys. Rev. D* **106** (2022) 063015 [[arXiv:2206.14832](#)].
- [18] A. Arvanitaki, J. Huang and K. Van Tilburg, *Searching for dilaton dark matter with atomic clocks*, *Phys. Rev. D* **91** (2015) 015015 [[arXiv:1405.2925](#)].
- [19] P. W. Graham, D. E. Kaplan, J. Mardon, S. Rajendran and W. A. Terrano, *Dark Matter Direct Detection with Accelerometers*, *Phys. Rev. D* **93** (2016) 075029 [[arXiv:1512.06165](#)].
- [20] A. Arvanitaki, P. W. Graham, J. M. Hogan, S. Rajendran and K. Van Tilburg, *Search for light scalar dark matter with atomic gravitational wave detectors*, *Phys. Rev. D* **97** (2018) 075020 [[arXiv:1606.04541](#)].
- [21] A. Pierce, K. Riles and Y. Zhao, *Searching for Dark Photon Dark Matter with Gravitational Wave Detectors*, *Phys. Rev. Lett.* **121** (2018) 061102 [[arXiv:1801.10161](#)].
- [22] S. Morisaki and T. Suyama, *Detectability of ultralight scalar field dark matter with gravitational-wave detectors*, *Phys. Rev. D* **100** (2019) 123512 [[arXiv:1811.05003](#)].
- [23] H.-K. Guo, K. Riles, F.-W. Yang and Y. Zhao, *Searching for Dark Photon Dark Matter in LIGO O1 Data*, *Commun. Phys.* **2** (2019) 155 [[arXiv:1905.04316](#)].
- [24] S. Morisaki, T. Fujita, Y. Michimura, H. Nakatsuka and I. Obata, *Improved sensitivity of interferometric gravitational wave detectors to ultralight vector dark matter from the finite light-traveling time*, *Phys. Rev. D* **103** (2021) L051702 [[arXiv:2011.03589](#)].
- [25] LIGO SCIENTIFIC COLLABORATION, VIRGO COLLABORATION, AND KAGRA COLLABORATION, R. Abbott et al., *Constraints on dark photon dark matter using data from LIGO’s and Virgo’s third observing run*, *Phys. Rev. D* **105** (2022) 063030 [[arXiv:2105.13085](#)].
- [26] M. A. Fedderke, P. W. Graham and S. Rajendran, *Asteroids for μ Hz gravitational-wave detection*, *Phys. Rev. D* **105** (2022) 103018 [[arXiv:2112.11431](#)].
- [27] M. A. Fedderke, P. W. Graham and S. Rajendran, *Gravity gradient noise from asteroids*, *Phys. Rev. D* **103** (2021) 103017 [[arXiv:2011.13833](#)].
- [28] A. Sesana et al., *Unveiling the Gravitational Universe at μ -Hz Frequencies*, *Exp. Astron.* **51** (2021) 1333–1383 [[arXiv:1908.11391](#)].
- [29] M. J. Bustamante-Rosell, J. Meyers, N. Pearson, C. Trendafilova and A. Zimmerman, *Gravitational wave timing array*, *Phys. Rev. D* **105** (2022) 044005 [[arXiv:2107.02788](#)].
- [30] D. Blas and A. C. Jenkins, *Detecting stochastic gravitational waves with binary resonance*, *Phys. Rev. D* **105** (2022) 064021 [[arXiv:2107.04063](#)].
- [31] D. Blas and A. C. Jenkins, *Bridging the μ Hz Gap in the Gravitational-Wave Landscape with Binary Resonances*, *Phys. Rev. Lett.* **128** (2022) 101103 [[arXiv:2107.04601](#)].
- [32] M. A. Fedderke, P. W. Graham, B. Macintosh and S. Rajendran, *Astrometric gravitational-wave detection via stellar interferometry*, *Phys. Rev. D* **106** (2022) 023002 [[arXiv:2204.07677](#)].
- [33] J. W. Foster, N. L. Rodd and B. R. Safdi, *Revealing the Dark Matter Halo with Axion Direct Detection*, *Phys. Rev. D* **97** (2018) 123006 [[arXiv:1711.10489](#)].
- [34] G. P. Centers et al., *Stochastic fluctuations of bosonic dark matter*, *Nat. Commun.* **12** (2021) 7321 [[arXiv:1905.13650](#)].
- [35] M. A. Fedderke, P. W. Graham, D. F. J. Kimball and S. Kalia, *Earth as a transducer for dark-photon dark-matter detection*, *Phys. Rev. D* **104** (2021) 075023 [[arXiv:2106.00022](#)].
- [36] M. Maggiore, *Gravitational Waves. Volume 1: Theory and Experiments*. Oxford University Press, Oxford, 2008.
- [37] N. W. Evans, C. A. J. O’Hare and C. McCabe, *Refinement of the standard halo model for dark matter searches in light of the Gaia Sausage*, *Phys. Rev. D* **99** (2019) 023012 [[arXiv:1810.11468](#)].
- [38] S. Babak, A. Petiteau and M. Hewitson, *LISA Sensitivity and SNR Calculations*, [arXiv:2108.01167](#).
- [39] L. Barsotti, S. Gras, M. Evans and P. Fritschel, *The updated Advanced LIGO design curve*, Technical Note LIGO-T1800044-v5, LIGO COLLABORATION, 2018.
- [40] T. Robson, N. J. Cornish and C. Liu, *The construction and use of LISA sensitivity curves*, *Class. Quant. Grav.* **36** (2019) 105011 [[arXiv:1803.01944](#)].